KING TONY

BUILT-ON TRUST

40th

2025-26

CATALOGUE

KING TONY

New Products	N1
Tools Storage & Tools System Sets	01
Hand Sockets & Accessories	129
Impact Sockets & Accessories	225
Pneumatic Tools	257
Torque Control & Multipliers	281
Wrenches	307
Pliers	339
Pipe Tools	353
Screwdrivers & L-wrenches & Bits	363
VDE Insulated Tools	415
Electronic & Electrical	427
Hammers & Striking Tools	461
Workshop Tools	469
Lighting	493
Automotive Tools	515
ST Series Tools	601

Company Profile

In 1976, amidst a lack of capital and technology in Taiwan, Mr. Charles Lai & Mr. Tony Lin founded a hot forge factory specializing in making hand tools for the DIY market. Eight years later, many other companies had followed their lead and although the market grew quickly, quality suffered. With pricing, costs and quality nearing a state of chaos it became clear to KING TONY's founders that they needed to seek a new direction.

Mr. Lai & Mr. Lin found their new direction; making professional quality hand tools built to compete with the best in the world. They set their standards high and in the years since, have consistently exceeded the requirements of the world's toughest standards. KING TONY tools don't just meet the DIN (German) standard and the ANSI (U.S.A.) standard, they routinely exceed them. In fact, we test every torque make to a standard 30% higher than that prescribed by DIN and our pneumatic impact tools to a 50% higher standard. That's true commitment to quality!

To further underscore our determination to compete with the best in the world we have achieved certification with ISO on three separate standards. First, in January 1998, ISO 9002, followed by ISO 9001 and more recently we have qualified for the environmental safety standard, ISO 14001. We believe that is our responsibility to the world and we will always dedicate to reduce the harm to the earth during our manufacturing process in the future.

You might sense that King Tony Tools is about much more than a world-class tool. The ideals of KING TONY's management are fulfilled daily by our hundreds of employee's at our branches and offices around the world. You will find KING TONY Tools and its branches in: France, Spain, Belgium, Mexico, China. Each of our local branch offices is tasked with insuring that you, our customer, are happy not just with our quality but with the experience of being a KING TONY customer.

VISION

KING TONY engaged in supplying professional tools for more than 40 years, we always focus on supplying quality tools to our customers to make sure the quality satisfies the working requirement. To finish a professional job is a dream and target for every mechanic, and to finish it more easily and perfectly is even a better achievement. Thus, every mechanic can really enjoy their work. From this motive we have a goal that is to make every mechanic know, when they use KING TONY professional tools, they will quickly, perfectly and easily finish their work. They may feel more of confidence and enjoy what they do. To achieve this goal, we will continue to supply tools that is easy to take, easy to use, save time and strength. Our future vision is to tell every mechanic who uses KING TONY tools "enjoy your work", which contains the meaning to use good tools to do good jobs and have real enjoyment in the process. Why not find your enjoyment from your job, take KING TONY professional tools and you will start to experience it.

Distribution

Branches :

- **France :**
  3 Rue des imprimeurs, ZI République Nord,86000 Poitiers, France
- **Spain :**
  Calle Valderribas, 14, Local Comercial Modo,28007 Madrid, España
- **Belgium :**
  Avenue Louise 143, Boîte 4, 1050 Bruxelles
- **Mexico :**
  Av San Jose No. 15-A,Col. , Zona Industrial La Presa, C.P. 54187 Tiainepantia, Edo. De **Mexico**
- **China :**
  No. 3 Building,No.285 Jingmao Rd.,
  Industrial Park of Suzhou, Suzhou, Jiangsu, China

TAIWAN SUPERIOR BRANDS

NATIONAL BRAND YUSHAN AWARD

BUSINESS MERIT AWARD
NATIONAL QUALITY AWARD

ISO 14001

TAIWAN EXCELLENCE

iF DESIGN AWARD 2016

KING TONY

Intellectual Property

New Registered Trademark

Please recognize KING TONY's Offical registered trademark

Europe

Austria, Belarus, Belgium, Bulgaria, Croatia, Czech, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Italy, Ireland, Latvia, Lithuania, Luxembourg, Malta, Moldova, Netherlands, Norway Portugal, Poland, România, Russian Federation, Serbia, Slovakia, Slovenia , Spain, Sweden, Switzerland, Turkey, Ukraine, United Kingdom

Africa

Algeria, Angola, Bénin, Botswana, Burkina Faso, Cameroon, Central, Congo Republic, Chad African Republic, Egypt, Ethiopia, Equatorial Guinea, Gabon, Ghana, Guinea-Bissau, Ivory Coast, Kenya, Libya, Mauritius, Mali, Mauritanica, Morocco, Mozambique, Namibia, Niger, Nigeria, South Africa, Somalia, Sénégal, Sierra Leone, Swaziland, Tanzania, Togo, Tunisia Zambia

Asia

Bangladesh, Cambodia, China, India, Indonesia, Japan, Kazakhstan, Laos, Malaysia, Myanmar, North Korea, Pakistan, Singapore, South Korea, Taiwan, Thailand, Vietnam

Middle East

Bahrain, Cyprus, Iran, Israel, Jordan, Kuwait, Lebanon, Oman, Qatar, Saudi Arabia, Syria, U.A.E., Yemen

North / South America

U.S.A,Brazil, Bolivia, Colombia, Costa Rica, Chile, Dominican, Ecuador, El Salvador Panama, Guatemala,Mexico, Peru

Metric size

Imperial size

Trademark Worldwide Registration

Inspection Equipment

01 Spectrometer
Metal material elements analysis

02 Gauge measurement
Measure the screw tap to meet LEVEL I tolerance of DIN standard

03 Rockwell hardness tester
Test the product's hardness to meet KING TONY quality standard

05 Torque tester
Fracture test to check the max. torque to ensure excess of DIN standard

06 Precise cutting machine
Cut for a smooth section

10 Environmental simulation test of temperature & humidity
Simulate temperature from 70 °C ~ - 20°C to test product reaction and durability while obvious change of temperature

11 Tension tester
Test pulling force of product especially for joint workpiece according to DIN standard

12 Hammering tester
Test the lifetime of striking hammer and security of the joint of hammer& wooden shaft

16 Micro- torque tester
Test products with smaller torque such as bits for their durability

17 Vision measuring machine
Measure parts for difficult angle or in the narrow space

04 Salt-water spray tester

48 HRs environmental simulation test to check product's durability from being rusty

05 Thickness test of plating

Apply special chemical to check thickness of plating and ensure it reaches KING TONY 's standard

07 Mounting press machine

In order to fix tiny and multilateral workpiece

08 Grinding & polishing machine

Make surface of workpiece smoother and clearer for further observation

09 Micro- hardness tester

Analyze the change of metallography after heat treatment and the difference of hardness between surface and central location

13 Pliers class measure tester

Test the cutting force and durability

14 Torque wrench tester

Follow the DIN ISO & ASME standard to test torque tolerance by 3 points of the lowest point, 60%, and 100% of max. scale

18 Carton busting strength tester

Test the strength of carton in order to assure good packing quality

19 Insulated tester

Ensure products are insulated under the voltage 1000V

Production Process

01 Hot forge
Heat to take shape and complete fibers to improve durability

02 Lathing
Control sockets external diameter and the roundness

03 Drilling
Drilling pin hole on the groove to offer socket safety operation

06 Punching & Broaching
Make accurate dimension for the spanner

07 Marking
Stamp dimensions, material and manufacturer

11 Grinding
Remove oxide layer and ensure sockets roundness for follow process precision

12 Plating
Nickel-chrome plated to protect product from corrosion and improve finish

13 Phosphate sunk
Increase impact sockets wear resistant and prevent corrosion to improve the durability

04 Machining (CNC)

Finish complicated process to ensure the precision of product

05 De-burring

Remove the burrs and chamfer on square hole

08 Heat treatment

Enhance product performance to achieve max. hardness

09 Vibrating

Remove oxide layer and burrs for surface coating

10 Sand blast

Remove oxide layer and burrs for surface coating

14 Silk printing

The unique bi-colors silk printing design and is easy to distinguish metric and imperial dimension

15 Rubber stripe assembly

The unique bi-colors rubber stripe design and is easy to distinguish metric and imperial dimension

Sponsor & Partnership

KING TONY

KING TONY

TOOL TROLLEYS

KING TONY is very devoted to developing professional tools that meet user needs. In order to create a better storage for your professional tools, we have developed a new series of work station. From tool trolley to workbench, they are all the necessities for a professional mechanic

From industry, auto repair to general repair channel, we have visited countless users to hear their aspirations for tool storage. The purpose is to design the best meet needs product. It's consistent with our brand vision, "To provide professional tools to make customers feel comfortable and to help them with their work"

Just as our new series of tool trolley, the birth of this professional tool trolley series are to fulfill the needs of tool storage
Each model contain it's own characters for various of circumstances.
The ultimate purpose is to have them become your trustiest backup and support in your garage

NEW

Load bearing

KG

- Overall supporting weight for tool trolley at a safety level

KG

- Overall supporting weight for drawers at a safety level

Robustness

One piece steel

- Body frame are constructed with one-piece steel sheet for integral strength

Reinforcement

- The bottom of the drawers are stamped in order to strengthen effectively

Convenient

Lock

- Convenient and safety with Central lock system

100%

- 100% drawer opening, does not interfere with the removal of tools

- 360º swivel wheel with brake function

mmxmm

- The size of the drawer conforms to TCS, and the tool set can be purchased freely according to the demand

Protection

Bumper

- Protection bumpers are for to avoid collisions and to protect object during maneuver

RFS

- Risk Free System (RFS) allows open one drawer at a time which prevents the loss of center of gravity from tilting and unstability

Safety lock

- Press to open drawer is a safe and reliable system

SQUAD

For time being, KING TONY has reached to another level of making tools trolley, in this year, we have invested a whole new direction for your satisfication. Newly from concept to final product, from structure to finishing and even from top to bottom, we strive all our best into them

Start from the series name "SQUAD", it comes from the gaming industries, we believe this trolley can be extended to other business, and gaming is one of the potential market. This wording means a professional team which is us at KING TONY
This series have 4 models, Model D, Model D+, Model Dx, Model SW.
Each model size are differ, storage space are not the same, it depends on your demand. Certainly one of them would fulfill your garage
This series of tools trolley is a milestone for KING TONY

- Shape and outline of bumpers correspond to the lid, which makes a connection in between,with cut through pattern shows more energetic outlook
- ABS corner protection bumper

- keylock usually in front or in the middle or side of the drawers, The reason we place in the corner is we have noticed that the keys will swing around while trolley was moving and scratched the surface of the trolley plus it altered the outlook



Normal way of using handle



Ergonomic way of using handle which more convenience for steering just like steering a car

- Extra-large ergonomic handle

NEW

Model D



Model D^{x}

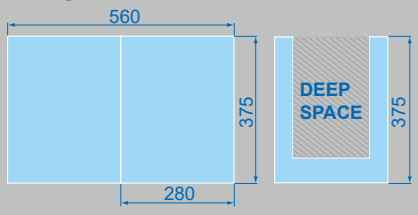

Model D^{+}

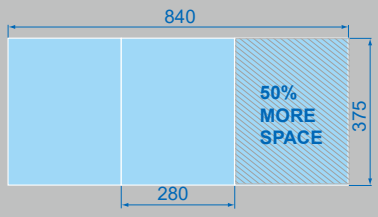

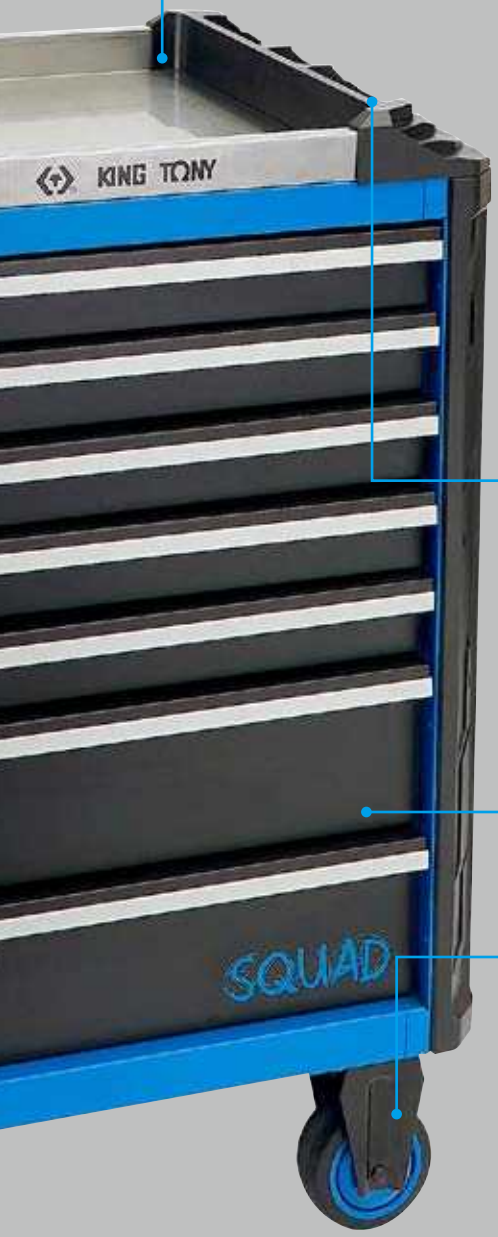

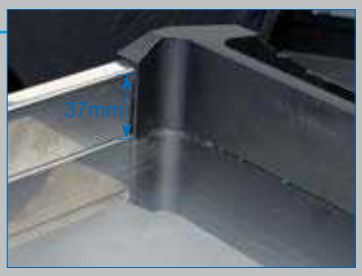

- Worktop depth has increased than previous models, parts are less likely to roll out

- Two models come in different size worktop

- Trapezoidal-shape storage space, easy to reach stuff

Dual colors
With brake systems

Aluminum drawer strip, easy to pull out
The drawer is with auto closure function

Features

- Dynamic top cover
- Stainless steel worktop
- Structure strengthen
- Stylish bumpers
- Additional space for accessories
- Aluminum drawer handle
- RFS locking system (one drawer at a time)
- 5"x2" TPR high performance casters
- Central key lock
- 100% pull out drawer with auto-return

Top Tool Chest

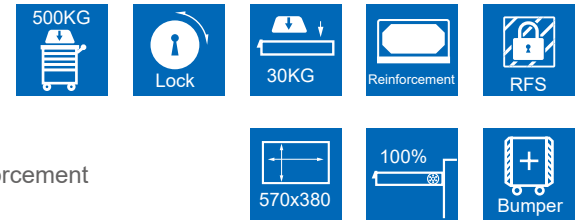

87SQ11

- 4 drawers + 1 storage platform for ample storage space Reinforcement
- Optional SQUAD accessories for added functionality



- Big storage space 710 x 460 mm

- Dual hydraulic rod slow descent design, effectively cushioning the opening of the cover. Safe and quiet

- Dual side handles, allowing for secure lifting and placement on the top tool chest



- Double support pillars with external wrapping for reinforced structure Sturdy and reliable

- Compatible with SQUAD series accessories.

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Static load	Kg	CUFT
87SQ11-4B-BK	Overall	720 x 472 x 515	300 kg	37.5	9.56
	4 Drawers	570 x 380 x 70			
	Square space	650 x 460 x 120			

NEW

Model D

87SQ31

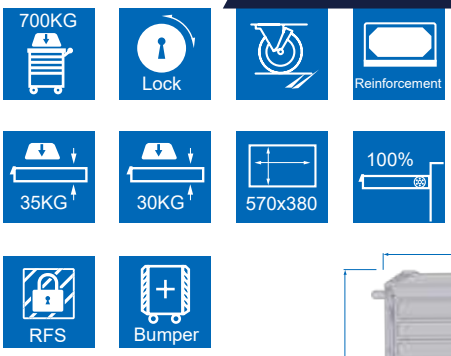

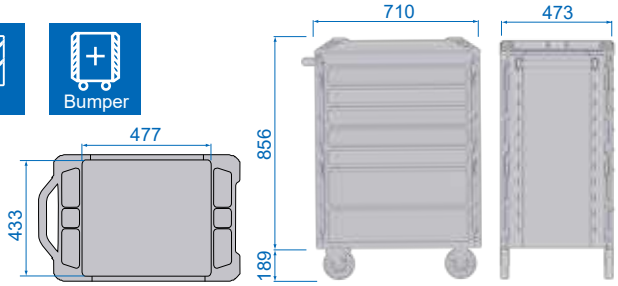

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87SQ31-6B-BK	3 Drawers	570 x 380 x 70	5"x2"	700	63.00	14.30
	3 Drawers	570 x 380 x150				
87SQ31-7B-BK	5 Drawers	570 x 380 x 70			66.00	
	2 Drawers	570 x 380 x150				
87SQ31-8B-BK	7 Drawers	570 x 380 x 70			69.00	
	1 Drawers	570 x 380 x150				

Model D^{x}

87SQ32

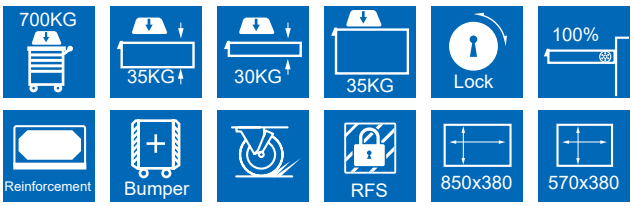

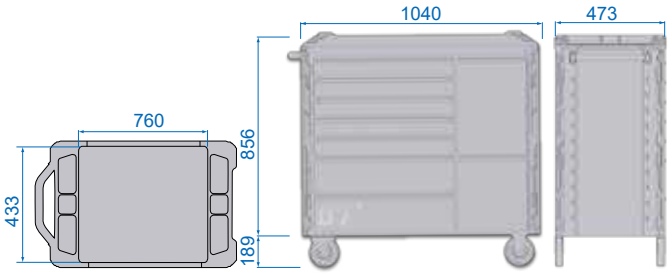

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87SQ32-6B-BK	1 Drawers	850 x 380 x 80	5"x2"	700	82.00	22.85
	2 Drawers	570 x 380 x 70				
	3 Drawers	570 x 380 x 150				
	Square space	295 x 455 x 635				
87SQ32-7B-BK	1 Drawers	850 x 380 x 80			85.00	
	4 Drawers	570 x 380 x 70				
	2 Drawers	570 x 380 x 150				
	Square space	295 x 455 x 635				
87SQ32-8B-BK	3 Drawers	570 x 380 x 70			90.00	
	3 Drawers	570 x 380 x 150				
	Square Drawer	270 x 380 x 280				
	Bulk Square Drawer	270 x 380 x 380				
87SQ32-9B-BK	5 Drawers	570 x 380 x 70			92.00	
	2 Drawers	570 x 380 x 150				
	Square Drawer	270 x 380 x 280				
	Bulk Square Drawer	270 x 380 x 380				
87SQ32-10B-BK	7 Drawers	570 x 380 x 70			94.50	
	1 Drawers	570 x 380 x 150				
	Square Drawer	270 x 380 x 280				
	Bulk Square Drawer	270 x 380 x 380				

Model D+

87SQ33

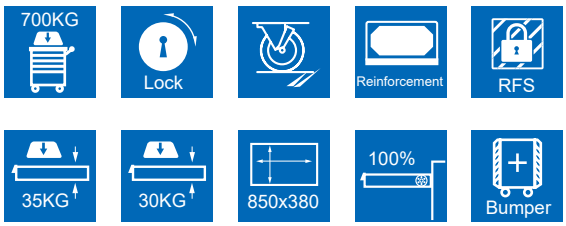

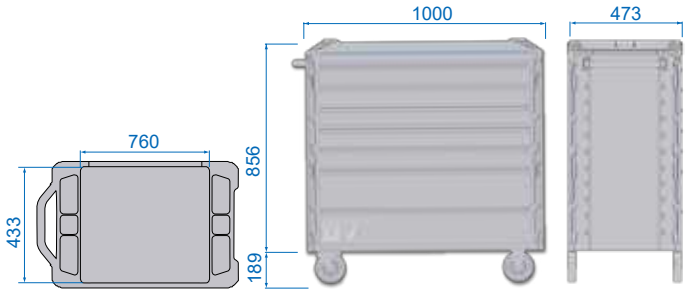

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87SQ33-6B-BK	3 Drawers	850 x 380 x 70	5"x2"	700	81.00	22.03
	3 Drawers	850 x 380 x 150				
87SQ33-7B-BK	5 Drawers	850 x 380 x 70			86.00	
	2 Drawers	850 x 380 x 150				
87SQ33-8B-BK	7 Drawers	850 x 380x 70			91.00	
	1 Drawers	850 x 380 x 150				

SUPERB WORKBENCH

Within this series, we are delighted to introduce new Superb workbench
An advanced model that absolutely would be no miss in your garage

Every inch of space can be used in this trolley, It has enormous amount of storage space equipped with 10 standard drawers, 1 peg board drawer, 3 cabinets with lock Besides, unlike what you have seen in market, each side of this trolley are functionable Would be ideal for a team of professionals to share this tank and of course solitary is also suitable Furthermore, extra large and thickness working wooden top allows you to study your products in details and longer durations without damaging body of the trolley 1 meter in height suits most people at a comfortable position This highly functionable super tank are made for professional

- Doors cabinet with key lock for valuable electonic products
- Internal size : 654x376x205mm

- Able to fit other common accessories
  Size 435x501mm

- Paper roll trash bin or could be can/bottle holder
- Paper roll holder
  Size 435x501mm

- Additional storage space

- Vertical wrenches peg board drawer for hanging wrenches vertically
- Internal size : 385mm x 378mm

NEW

Superb Workbench

87SQ34-10B-BK

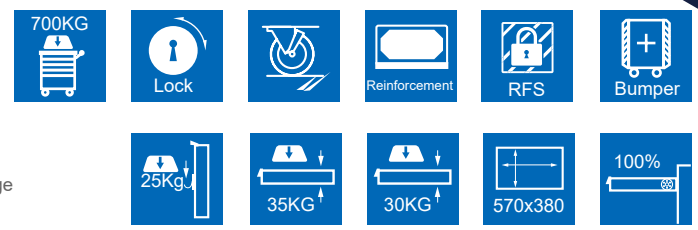

- Wide work top given 1235mm x 800mm space
- High end extra thick wood top
- Extra long metal handle bar for easy maneuver
- 10 drawers, plus 1 wrench hanging drawer
- 3 storage cabinets, from large to small for different storage purposes, all with key locks
- Able to fit other common accessories
- Absolute rectangular shape which fits every corner

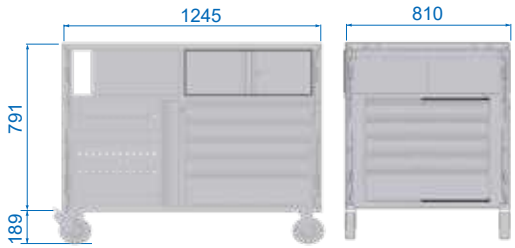

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87SQ34-10B-BK	8 Drawers	570 x 380 x 70	5"x2"	700	130.00	41.63
	2 Drawers	570 x 380 x 150				

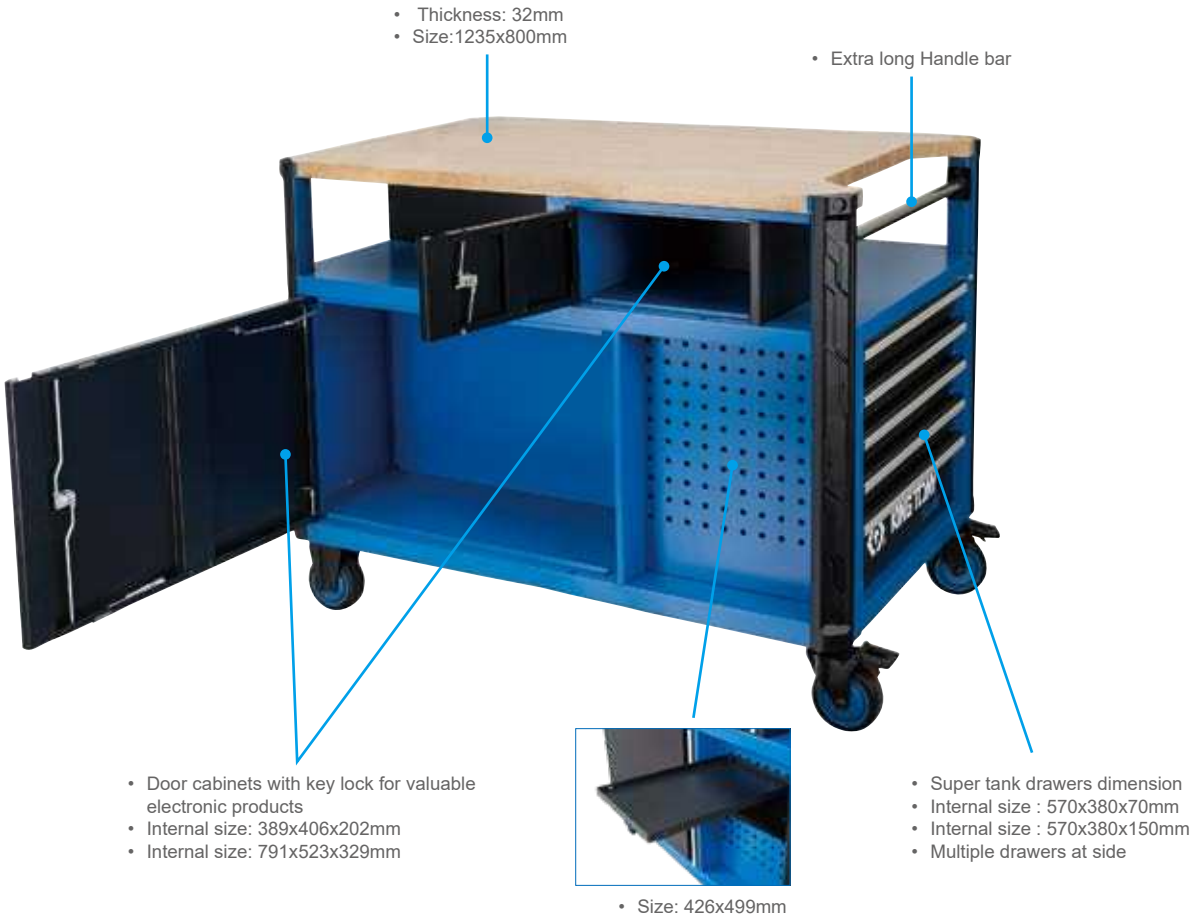

3 Shelf Tool Trolley Cart

87SQ41



- Large work platform measuring 710x470mm
- Reinforced structure for overall stability
- Optional SQUAD accessories for additional functionality

- Four-sided expandable extension version (87SQ41-11/87SQ41-12)



- Enlarged Brushed Steel Handle with Comfortable Grip

- 4" x 1" TPR Dual-color heavy-duty casters

- 10mm x 1pc.+3mm x 2pc. Cutting mat

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	kg	CUFT
87SQ41-B	Overall	770 x 480 x 805	4" x 1"	200 kg	24.00	4.39
	Overall + 4 Casters	770 x 480 x 955				

Extended Panel

87SQ41-11

- Extended short panel (W)266 x(H)251

87SQ41-12

- Extended long panel (W)587 x(H)251

NEW

Accessories

87SQ3-11



Hook type

- Side pegboard
- If the right side of trolley do not have enough sufficient space, you might as well bought additional peg board for accessories
  (W)325 x(H)683

87SQ3-12



Hook type

- Document holder
  (W)325 x(H)260 x(D)34

87SQ3-22



Hook type

- Bottle holder
  (W)320 x(H)101 x(D)74

87SQ3-13

- Shelf pegboard
  (W)640 x(H)540

87SQ3-32

- Phone holder
  (W)200 x(H)52

87SQ3-31

- Laptop or ipad holder
  (W)378 x(D)285 x(H)79



- 3 angles of adjustment are available,20o/45o/60o
- Can be turned left or right 360o
- Underneath the rack has a drawer for stationery storage

87SQ3-23



- Power tools holder
  (W)285 x(D)172 x(H)71
- Left side of holder has three slots that are able to hang tools, hose or wrenches etc
- Right side of holder has 3 hooks for cleaning cloths, gloves, wires etc

87SQ3-33



- Folding shelf
  (W)398 x(D)280 x(H)179

87SQ3-41



- Trash bin
  (W)275 x(D)150 x(H)136

87SQ3-23

- Trash bin-25 Liters
  (W)363 x(D)232 x(H)411
- handle slots on the side

87SQ3-33

- Paper holder
  (W)280 x(D)308
- For paper roll within 280mm wide

- Another strength of the accessories is that the paper roll can be inserted on top of the trash bin, which can be used both at the same time at the same place, it can also be used seperately. This combination makes more user friendly and unique for this trolley

NEW

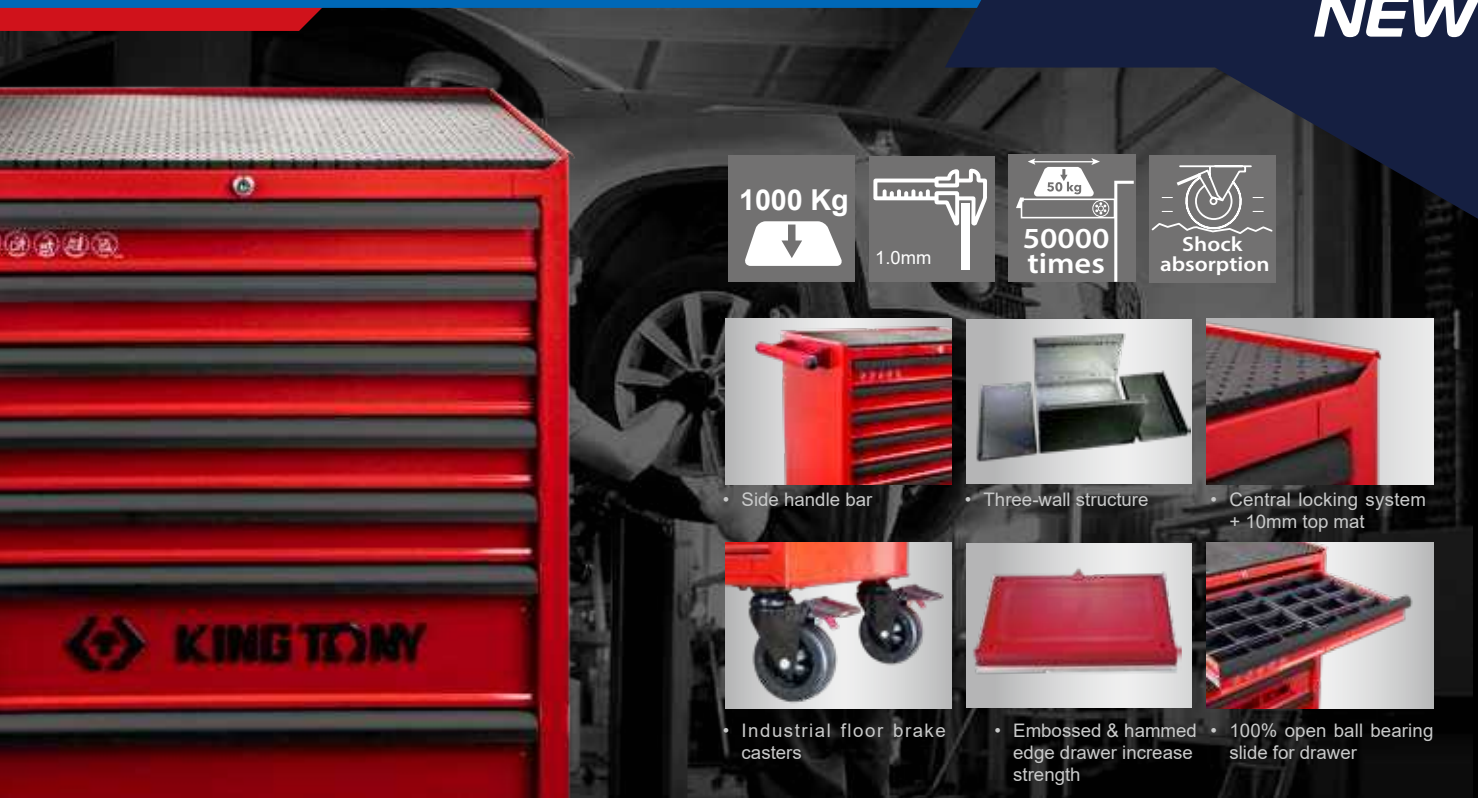

Classic Tool Trolley

New

8743U

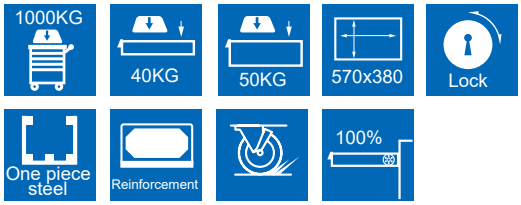

- 5/7/8 drawer tool trolley"Classic" roller cabinet red
- Total storage capacity: 150 Litres
- 100% pull out ball bearing drawer
- 50,000 loading cycle test for drawer slides
- Heavy duty Ø125mm casters, including 2 swivel with step down lock
- Secure central locking system with 10mm top mat
- Shock absorption design
- Powder coating for high protection
- 670(W) x 460(D) x 960(H)mmL

87434-7U

87437-8U

87432-5U

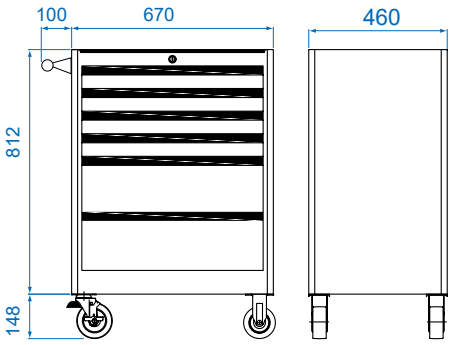

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87432-5U	4 Drawer	576 x 380 x 75	5" x 2"	1,000 Kg	56	12.44
	1 Drawer	576 x 380 x 154				
	Bulk Drawer	603 x 404 x 234				
87434-7U	5 Drawer	576 x 380 x 75	5" x 2"	1,000 Kg	64	12.24
	2 Drawer	576 x 380 x 154				
87437-8U	7 Drawer	576 x 380 x 75	5" x 2"	1,000 Kg	74	12.24
	1Drawer	576 x 380 x 154				

Tool Trolley Contents

9SQ-011MRV-BK

325 PC.

T.C.S.

Contents No. 934-011MRVD + 87SQ31-7B-BK 99.1 CUFT 18.36

9-3544MRV #9 P.79 | 9-4537MRV #9 P.80

9-2565MRV #7 P.76
9-4143FRV #7 P.77
9-1112MRV #9 P.82

9-90119MRV #9 P.82 | 9-1220MRV #9 P.81

9-31124MRV #6 P.75

9-40104GPV #10 P.88 | 9-40113GPV #10 P.88 | 9-90135MRV #10 P.88 | 9-90118PRV #10 P.89

9-90413TQV #6 P.75

7962-04
P.478

9DC23
P.597



2121-18 P.605

7963-04
P.478

14210212 P.376
14226512 P.376



9-44214GPV #10 P.88 | 9-22108MRV #9 P.83

NEW

Adjustable Height Roller Seat

87H32-B

- Material: PVC leather + foam padding + PP plastic base
- 4 removable plastic chassis: 185 x 212 x 34 mm (One of which is magnetic)

KT NO.	Dimension(mm) Width x Depth x Height	Kg		CUFT
87H32-B	430 x 425 x 410	4.8	1 / 1	0.86

- One of which is magnetic

- Features removable plastic chassis for holding small tools and parts handy

- Adjustable seat height from 410-540 mm there's no need to bend, kneel or squat anymore

- Soft touch, thickness up to 50mm, waterproof synthetic leather

- Four 2.5-inch 360° swivel wheels

Creeper and Seat

87C26-B

- Designed with comfortable sponge cushion
- 6 swivel castors for full mobility
- Long size Vinyl-covered foam pad brings more comfortable while working
- All steel construction frame makes it more strong and durable

KT NO.	Capacity(T) Width x Depth x Height		CUFT
87C26-B	1020 x 430 x 135 (40")	1 / 1	2.10



- The wheel can rotate 360 degrees, allowing for rotation without any dead angles

- The seat cushion is made of thickened foam, soft and comfortable, preventing fatigue even after long periods of sitting

- Easily converts in sanp

Tap Holder Set

39104M

1/4" 3/8" 1/2"

4 PC.

- Used with reversible ratchet and T-handle
- Chuck mechanism hold compatible tap drills
- Used for metal working screw thread
- DIN352



KT NO.	Drive	S(mm) min.	S(mm) max.	Reference dimensionsmm Tap (mm)	D1 mm	D2 mm	L mm	Kg	
39122008M	1/4"	2.5	5.0	M3-M8	14.5	20.3	30.5	52	20 / 200
39123010M	3/8"	2.0	6.0	M1-M10	23.0	34.5	53.0	221	4 / 64
39124012M	1/2"	6.0	12.0	M10-M20	25.3	38.5	52.4	265	4 / 64
39124016M	1/2"	12.0	17.0	M20-M27	34.0	48.3	52.3	280	1 / 48

Insert Adapter Set

9403PP

CR-MO 300G

- Ideal for where space is limited or a regular adapter is not suitable
- Additional magnets help ensure the adapters stay attached to the sockets
- Includes 1/4", 3/8", 1/2" female to male drive adapters
- Use only with hand tools

Kg 0.15 6 / 120

3 PC.

Contents	Spec.	L mm	Max. torque N·m
2883	1/4"F x 3/8"M	14.5	90
3884	3/8"F x 1/2"M	19	300
4886	1/2"F x 3/4"M	28	760



- Magnet Retention Device

- Space-saving



- Slim Design

2 in 1 Slide T-handle Wrench

577302

- Available for use with 1/4 DR. socket or 1/4″ hex bit
- Aluminum sleeve for fast spin
- Slide T-handle design, flexible to use in many occasions

KT NO.	inch	mm	mm	g	
577302	1 / 4	150	250	218	12 / 120

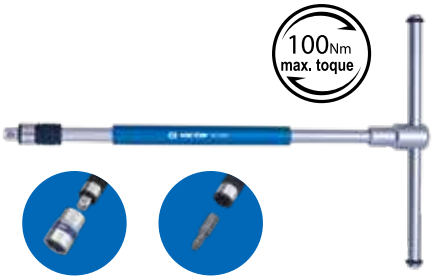

Available for use with 1/4"DR. socket and 1/4" hex bit

NEW

Compact Magnetizer / Demagnetizer

《76MBH》 《76MBH-S2》

- Use to catch the screw with a strong magnet power
- Hold screwdriver bit 4 ~ 6.35mm round or hex shank
- Mini length 24mmL
- Function as magnetizer / demagnetizer / storage
- Demagnetize by slide outer shallow groove
- X30 powerful magnet compare to wearing magnet tip

KT NO.	PC	Size(mm)	g	
76MBH	1	24 x 14 x 13	25	12 / 144
76MBH-S2	2	24 x 14 x 13	50	60 / 360

1 PC.

76MBH

2 PC.

76MBH-S2

79B1-01

Size -95%

76MBH

- Compact size: Only 5% size of 79B1-01

X 30

Strong Magnet

- Magnet powert est (Unit: Gz)

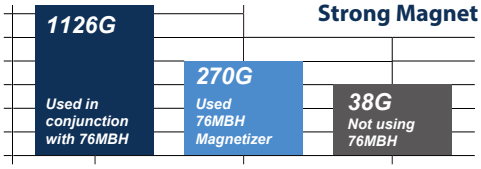



- Applicable size: 4.0~6.35mm can be adjusted by tools size

- High efficiency ❶ Spare screws can be placed on the magnetic attractor for convenient retrieval and to prevent loss





- High efficiency ❷ The front-end is designed with a screw fixation groove to prevent screws from falling

Functions Combined

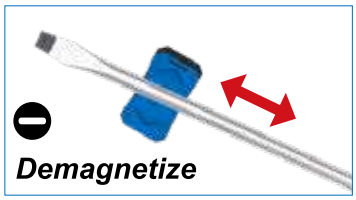

- Fast demagnetize: Side groove to demagnetize the tools

- Fast magnetize:Put in to magnetize the tools

- Suitable for various tool combinations, such as screwdrivers, hex wrenches, Power Bits, and more

- Easy storage:
- The magnetic attraction feature allows the screwdriver to be stored on a metal surface, effortlessly solving the screwdriver storage issue

VDE Insulated Cable Knife With Straight Blade

7939VE-01

- IEC DIN EN 60900
- Straight blade design
- Ergonomically shaped insulating handle for more comfortable grip
- With blade protection sheath, more convenient to store and carry
- The blade is made of 420 stainless steel material
- TPR handle material

- Suitable for stripping thick wires and cables

KT NO.	Blade length mm	L mm	g	
7939VE-01	50	200	106	10/50

VDE Insulated Cable Knife With Hooked Blade

7939VE-07

- IEC DIN EN 60900
- Hook type, sickle shaped blade design
- Ergonomically shaped insulating handle for more comfortable grip
- With blade protection sheath, more convenient to store and carry.
- The blade is made of 420 stainless steel material
- TPR handle material

- Suitable for stripping thick wires and cables

- Elliptical Streamline, No Damage to the inner core of the wire

KT NO.	Blade length mm	L mm	g	
7939VE-07	45	190	117	10/50

VDE Insulated Electricians Scissors

6AB13VE-06

- IEC DIN EN 60900
- High hardness blades and anti-slip serrated edge for making precise cuts
- Ergonomically shaped insulating handle for more comfortable grip
- The blade is made of 420 stainless steel material with serrated edges
- TPR handle material

- Strip notch in the blade for effective wire and cable stripping

KT NO.	Overall length mm		Cutting Length mm	g	
	inch	mm			
6AB13VE-06	6"	160	45	100	6/48

NEW

Insulated Screwdriver Set

30618MR

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip
- Testing Screwdriver

8 PC.

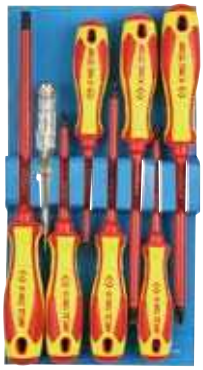

	Contents			
14710104	⊕	PH1 x 100	0.85	1 / 15
14710204	⊕	PH2 x100		
14710306	⊕	PH3 x150		
14720404	⊖	4 x 100		
14725505	⊖	5.5 x 125		
14726506	⊖	6.5 x 150		
14720807	⊖	8 x 175		
6CB02		100~250V(testingrange)		

Multi-Bit Stubby Screwdriver Set

32503MR

1/4" S2

4 PC.

Contents			Tip thickness mm		
⊕ ⊕	1360012P	PH1, PH2		0.08	4/64
⊕ ⊖	1360703P	PH3, SL7	1.2		
⊛ ⊖	1360552Z	PZ2, SL5.5	1.0		
	91237				

Ratcheting Gear Puller

7963C

- A dual-use ratcheting gear puller can be self-adjusted to 2 or 3 jaws according to usage
- The ratchet-style claw structure enables quicker and more convenient jaws replacement operation
- The ratchet-style jaw structure allows for swift adjustment of the range of use
- Reversible jaws can be used for internal and external gears, axles, bearings, etc

KT NO.	Capacity (Tons)	Jaws (leg)	Spread A(mm)	Reach B(mm)	HEX (mm)	kg	
7963C-03	3T	3	50~76	45	13	0.45	1 / 36
7963C-05	5T	3	101~127	75	17	1.50	1 / 12
7963C-08	8T	2&3	127~200	172	17	2.89	1 / 6

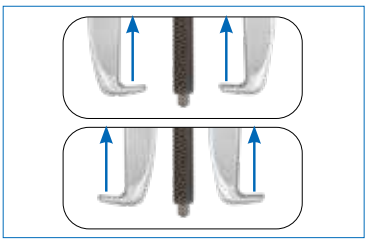

- Quick and easy replacement with ratchet-style jaw structure

6W COB LED & 1W SMD LED Rechargeable Inspection Light

9TA271 9TA271-S

600 Lumen | 6W | 3-12h | CE | Type-C USB | Li-ion 2600mAh 3.7V | 2.5h | IP 65 IK09 | RoHS | 40°C -10

- 6W COB LED & 1W SMD LED
- White light color, Kelvin:6500K
- Switch mode:
- Top light/Main light(low-high)/Off
- Material: Durable ABS+PC+TPE
- Rechargeable battery:3.7V 2600mAh Li-ion battery
- Charging time:3.5hours
- IP54 protection rating
- IK07 vandalproof
- EN62471 Photobiological safety
- Working temperature: -10° C to + 40° C

Switch mode	Lumen	Operating hours
Toplight	120 lm	12h
Main light-low	250 lm	6h
Main light-high	600 lm	3h

KT NO.	L mm	g	
9TA271	260	290	1 / 24
9TA271-S	-	2750	1 / 4

9TA271A

9TA271AS

- Battery indicator

- Top light

- Ergonomic Handle

- Strong bottom magnet with two functional hooks



- Top light180° swivel base with 6 positions

NEW

10W COB LED Work Lamp

9TA331

- Light: 10W COB LED, white light, color temperature: 5300K
- Mode Switching: Dimming knob 80-1200lm
- Material: Impact-resistant ABS+PU+TPU
- Battery: Rechargeable high-quality 3.7V 4000mAh lithium battery
- Accessories: Type-C USB 5V1A charging cable
- Charging Time: 5 hours
- Features: 180° magnetic rotating base, 360° handle rotation, two 360° hooks
- Certifications: IP44 dust and waterproof test certification
- Operating Temperature: -10° C to +40° C

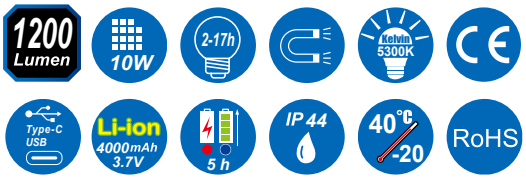

Switch mode	Lumen	Operating hours
Low light	80 lm	17h
High light	1200 lm	2h

KT NO.	L mm	g	
9TA331	520	488	1 / 20

- Two strong magnetic base+ 360° hook

- 180° magnetic rotating base

- 360° rotating handle

- Battery indicator

3000 Lumen Wired SMD LED Site Light (30W)

9TA421A

- Light: 30W SMD LED
- White light. Color temperature: 6500K
- Mode switch: 50%-100%-Off
- Material: ABS + Aluminum alloy casing Equipped with a 1.8-meter H07RN-F 3G 1.0mm electrical cable
- Slim shell with 360° adjustable design
- Option to wall mount or tripod stand at work sites
- (Adjustable Tripod for Site Light: 87162)
- IP54 dustproof and waterproof
- IK08 impact resistance
- Operating temperature: -20° C to +50° C

Switch mode	Lumen
Mid light	1500 lm
High light	3000 lm

(Does not include a light stand)

KT NO.	Applicable area	L x H xW mm	g		
9TA421A	Europe	240 x 270 x 55	1393	1/8	

Contents

3000 Lumen Wired SMD LED Site Light (30W)		x 1 PC.

- Actual operating conditions

- Actual operating conditions

- Actual operating conditions

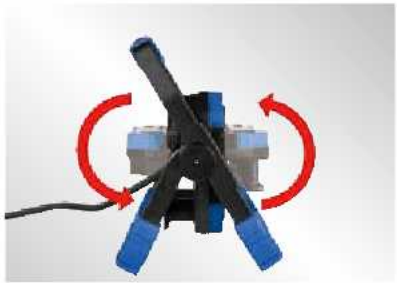

- 360° rotating stand for full-angle, shadow-free lighting

- Retractable design enhances protection and prevents cable bending

- Non-slip handle
- for improved grip and safety

- Compatible with tripod (recommended with model 87162)

- Thicker cable diameter enhances transmission efficiency, safety, and durability

- Aluminum alloy's quick heat dissipation ensures efficient operation

NEW

1600 Lumen Clamp Work Light

9TA471

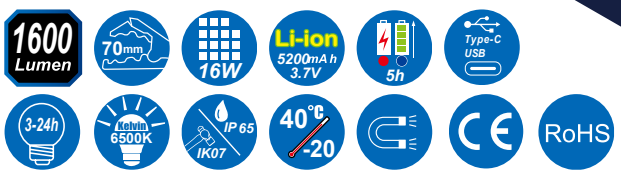

- 16W COB
- White light, Color temperature: 6500K
- Top light - Main light (Eco - Low - Medium - High) - Off
- Battery capacity: 3.7V - 5200mAh lithium battery
- Charging time: 5 hours
- Material: Nylon + TPE
- Accessories: Type-C USB charging cable
- Features: 360° rotation + 270° vertical rotation lighting + magnetic non-slip base + clamping range up to 70mm
- IP65 dustproof and waterproof
- IK07 impact resistance
- Operating temperature: -20° C to +40° C

KT NO.	L x H x W mm	g	
9TA471	176 x 105 x 95	625	1 /8

Contents

1600 Lumen Clamp Work Light		x 1 PC.
Type-C USB cable		x 1 PC.

Switch mode	Lumen	Operationg hours
Eco light	100 lm	24h
Low light	300 lm	8h
Mid light	700 lm	5h
High light	1600 lm	3h

- Can be magnetically attached to metal objects

- Can be clipped anywhere

- Can be stably placed on a tabletop

- 300° rotation +270° vertical rotation

- Power indicator light & Type-C port

- Large-area magnetic design on the back

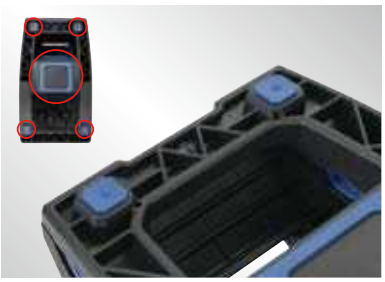

- Non-slip pads on the bottom ensure stability, reduce wobbling, and protect surfaces

- Enlarged button for easy pressing and improved convenience

- Special clamp design securely holds onto various objects and in different environments

60W Adjustable Colours tripod Stand Light

9TA491A

- Lamp: High Quality SMD LEDs, Ra>80
- Color temperature switching: 2700K / 3500K / 4500K / 5500K / 6500K
- Mode/lumen switching: 600lm / 1200lm / 2400lm / 6000lm
- Material: ABS + Nylon + Aluminum
- Battery: Rechargeable high-quality 14.8V 5200mAh lithium battery pack
- Charging time: 4.5 hours
- IP65 dustproof and waterproof
- IK07 impact resistance
- Operating temperature: -10° C to +40° C
- Multi-color temperature/light output adjustment with memory function, one lamp for any demand scenario



Switch mode	Lumen	Operating hours
Light - I	600 lm	16h
Light - II	1200 lm	8h
Light - III	2400 lm	4h
Light - IV	6000 lm	2h

KT NO.	L x Ø mm	Kg	
9TA491A	142 x 142 x1200	4.4	1/2

Contents		
60W Adjustable Colours tripod Stand Light		x 1 PC.
AC 100-240V to DC 20V 1.1A Charging cable		x 1 PC.

- Actual operating conditions

- Actual operating conditions

- Middle handle for easy carrying

- Central control for multi-color temperature/light output adjustment, with 5-level battery indicator

- 90° adjustable multi-angle illumination area

- 330° adjustable lamp head angle

- Three-stage quick release structure, adjusts to use position in 5 seconds

- Handle located in the middle for lightweight and convenient carrying

- Aluminum tube with pneumatic cushioning retract function to prevent accidental injury

NEW

Telescopic Magnetic Pickup LED Light

79834

- Light: 1W SMD LED
- White light. Color temperature: 6000K
- Mode switch: 50%-100%-Off
- Material: Body made of nylon + fiber / Telescopic tube made of stainless steel
- Battery: High-quality rechargeable 3.7V 180mAh lithium battery
- Charging time: 2.5 hours
- IP65 dustproof and waterproof
- IK09 impact resistance
- Operating temperature: -10° C to +40° C
- Four-in-one function: rechargeable flashlight,
- magnetic attraction, telescopic extension,
- 360° swiveling head

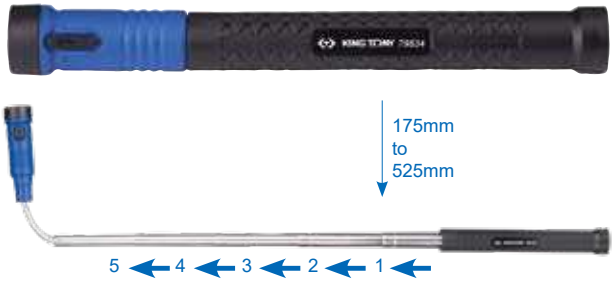

Switch mode	Lumen	Operating hours
light-low	30 lm	6h
light-high	100 lm	2h

KT NO.	L x Ø mm	g	
79834	175 x 21	89	1 /48

Contents		
Telescopic Magnetic Pickup LED Light		x 1 PC.
Type-C USB cable		x 1 PC.

- Multi-angle illumination

- Base with magnetic function

- Magnetically pick up screws in narrow spaces

- High-brightness 1W SMD

- Magnetic attraction up to 1.2Kg

- 360° swivel head

- Enlarged and sturdy pen clip, does not scratch hands

- Type-C charging port

Universal Torque Converter Set

3488B03MP

- Suitable for heavy vehicles such as trucks and buses.
- With less effort, it can achieve enough torque to easily remove screws.
- It has two adjustable gear ratios (1:64) and (1:4.2).
- The adjustable support stand provides convenience for users.

- Includes 8835M socket

32 mm　　33 mm

I	Pull out	1 : 64
II	Push in	1 : 4.2

- Built-in with two gear ratios to enhance efficiency

- The axle can also be removed to function as a 1:1 transmission device

- The support stand can be adjusted forward and backward to secure various objects

NEW

Power Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic 1/4" Hex size shank driver

1004H 1/4"

- For Hexagon head screws
- DIN ISO 2351-3
- Short neck (9.5mm) type

6 PC.

KT NO.	PC.	Overall length (mm)		Contents	Kg	
1004A6HQ	6	50	7150H	H2, H2.5, H3, H4, H5, H6	0.09	10 / 120
1004B6HQ	6	70	7170H	H2, H2.5, H3, H4, H5, H6	0.09	10 / 120
1004C6HQ	6	110	7111H	H2, H2.5, H3, H4, H5, H6	0.15	10 / 120
1004D6HQ	6	150	7115H	H2, H2.5, H3, H4, H5, H6	0.20	6 / 72

1004T 1/4"

- For TORX head screws
- Short neck (9.5mm) type

6 PC.

KT NO.	PC.	Overall length (mm)		Contents	Kg	
1004A6TQ	6	50	7150T	T15, T20, T25, T27, T30, T40	0.09	10 / 120
1004B6TQ	6	70	7170T	T15, T20, T25, T27, T30, T40	0.09	10 / 120
1004C6TQ	6	110	7111T	T15, T20, T25, T27, T30, T40	0.15	10 / 120
1004D6TQ	6	150	7115T	T15, T20, T25, T27, T30, T40	0.20	6 / 72

1004U 1/4"

- For Tamper Resistant TORX head screws
- Short neck (9.5mm) type

6 PC.

KT NO.	PC.	Overall length (mm)		Contents	Kg	
1004A6UQ	6	50	7150U	T10H, T15H, T20H, T25H, T27H, T30H	0.09	10 / 120
1004B6UQ	6	70	7170U	T10H, T15H, T20H, T25H, T27H, T30H	0.09	10 / 120
1004C6UQ	6	110	7111U	T10H, T15H, T20H, T25H, T27H, T30H	0.15	10 / 120
1004D6UQ	6	150	7115U	T10H, T15H, T20H, T25H, T27H, T30H	0.20	6 / 72

Corner Display Stand

87306C

- Requires pairing with 87306 for extended use
- Lightbox height adjustment range: 2200-2500mm

- Shelve load 25kg

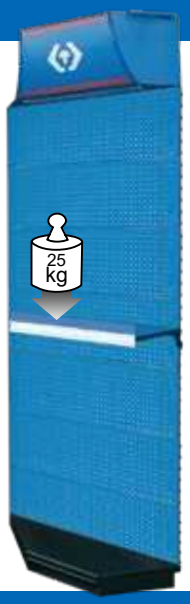

KT NO.	Applicable area	L mm	kg	
87306CA	Europe	965 x 304 x 2200	31	1 / 1
87306CB	America & Asia			
87306CD	Australia & New Zealand			

Display Stand Cabinet

87306-04

- Can be used in 87306/87307 series

KT NO.	L mm	kg	
87306-04	1000 x 400 x 400	14	1 / 1

- Two hooks are attached to the back, making it easy to secure to a display rack

- Lockable

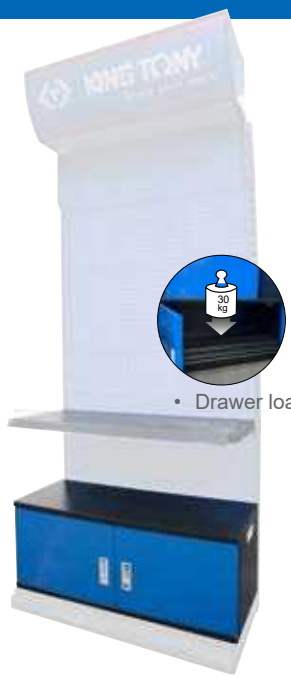

- Drawer load 30kg

Movable Display Stand

87309W

KT NO.	L mm	kg	
87309W	500 x 450 x 1732	21	1 / 1

- Double-sided hanging board use



- Can be moved to any location within the store

- Shelve load 20kg

- All four wheels have brakes

NEW

Main Double-sided Island Display Stand

87308A

KT NO.	L mm	kg	
87308A	1000 x 840 x 1300	37	1 / 1

Sub Double-sided Island Display Stand

87308B

- Sub island display stand must be attached with main island display stand, it can't be used individually

KT NO.	L mm	kg	
87308B	980 x 840 x 1300	33	1 / 1

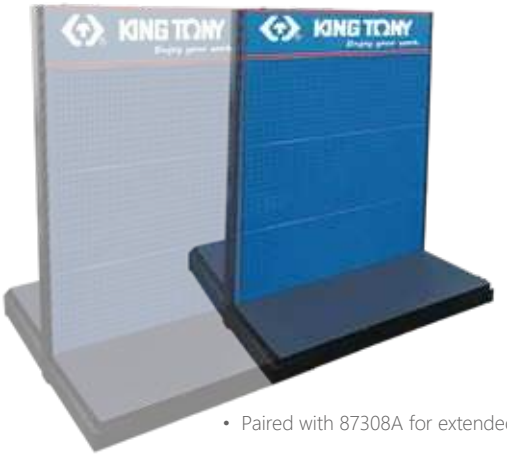

- Paired with 87308A for extended use

Side Display Stand

87308C

KT NO.	L mm	kg	
87308C	840 x 450 x 1300	19	1 / 1

Mesh Display Panel

87308-7

KT NO.	L mm	kg	
87308-7	840 x 30 x 1280	10	1 / 1

TOOLS STORAGE & TOOLS SYSTEM SETS

KING TONY
SQUAD

Object-Oriented Organization

5 Flexible / adjustable shelves

Ball bearing slides



Steel panel for tool storage

Concealed handle

Hidden knob

Double volume

Front centralized locks

Stainless steel work surface

Cupboard with gas spring

The drawer with capacity 30kg

Object-Oriented Organization

87D11X01SA-KG

Overall: 4885 x 460 x 2000 mm

462.23 CUFT 116.75

87D11X01SA-KB

Overall: 4885 x 460 x 2000 mm

462.23 CUFT 116.75

Object-Oriented Organization

87D11X02SA-KG

Overall: 4235 x 460 x 2000 mm

400.87 CUFT 100.23

87D11X02SA-KB

Overall: 4235 x 460 x 2000 mm

400.87 CUFT 100.23

Object-Oriented Organization

87D11X03A-KG

Overall: 2955 x 460 x 2000 mm

262.26 CUFT 71.39



87D11X03SA-KB

Overall: 2955 x 460 x 2000 mm

262.26 CUFT 71.39



Object-Oriented Organization

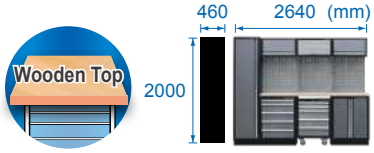

87D11X04A-KG

Overall: 2640 x 460 x 2000 mm

248.60 CUFT 64.91

87D11X04A-KB

Overall: 4235 x 460 x 2000 mm

400.87 CUFT 100.23

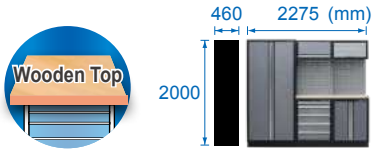

87D11X05A-KG

Overall: 2275 x 460 x 2000 mm

202.50 CUFT 51.83

87D11X05A-KB

Overall: 2275 x 460 x 2000 mm

202.50 CUFT 51.83

Object-Oriented Organization

87D11A-KG

Overall: 2955 x 460 x 2000 mm

262.26 CUFT 71.39



87D11A-KB

Overall: 2955 x 460 x 2000 mm

262.26 CUFT 71.39



Object-Oriented Organization Accessories

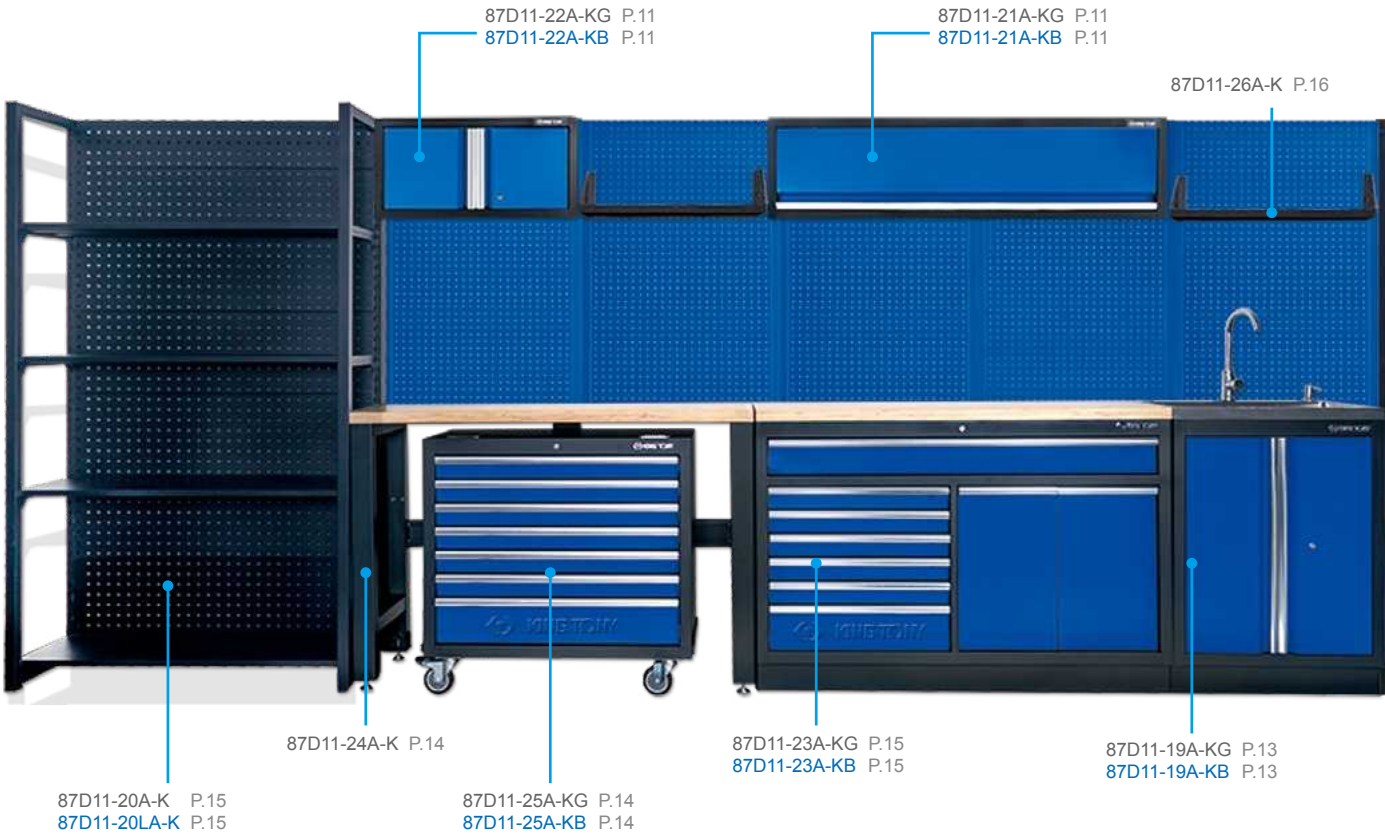

Tall Cabinet

87D11-02A-KG

87D11-02A-KG

87D11-02A-KB

87D11-02A-KB

KT NO.	Overall (mm)	Kg	CUFT
87D11-02A-KG	600 x 460 x 2000	53	9.28
87D11-02A-KB			



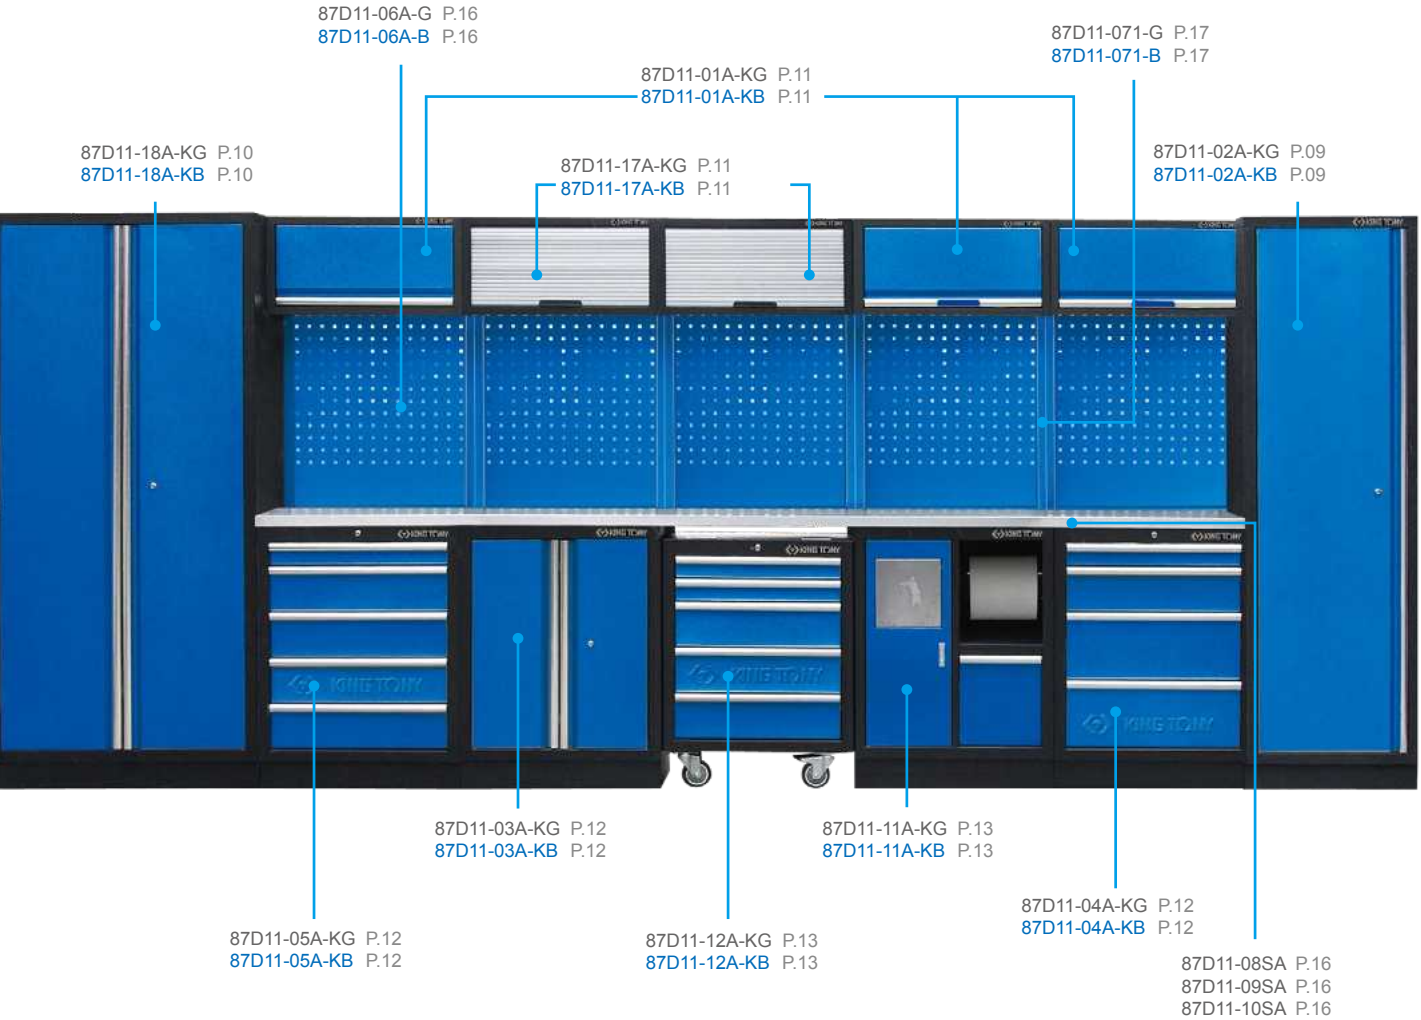

Tall Cabinet

87D11-18A-KG

87D11-18A-KG

87D11-18A-KB

87D11-18A-KB

KT NO.	Overall (mm)	Kg	CUFT
87D11-18A-KG	915 x 460 x 2000	78	12.72
87D11-18A-KB			



Extra Wide Wall Cabinet

87D11-21A-KG

87D11-21A-KG

KT NO.	Overall (mm)	Kg	CUFT
87D11-21A-KG **87D11-21A-KB**	1360 x 281 x 350	17	7.24

87D11-21A-KB

87D11-21A-KB

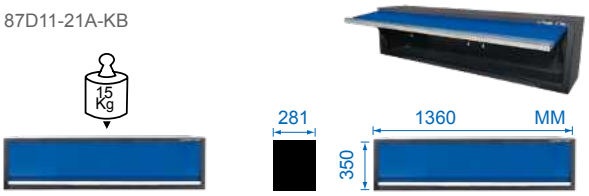

Wall Cabinet

87D11-01A-KG

87D11-17A-KG

87D11-22A-KG

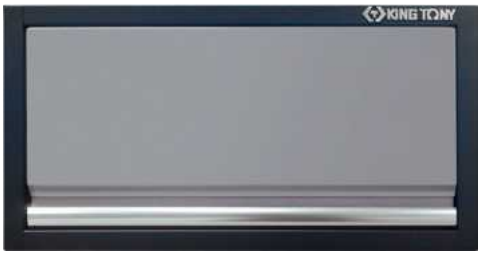

87D11-01A-KG

87D11-17A-KG

87D11-22A-KG

KT NO.	Overall (mm)	Kg	CUFT
87D11-01A-KG	680 x 280 x 350	10.0	3.73
87D11-01A-KB			
87D11-17A-KG		8.4	
87D11-17A-KB			
87D11-22A-KG		9	
87D11-22A-KB			

Rolling Shutter

87D11-01A-KB

87D11-17A-KB

87D11-22A-KB

87D11-01A-KB

87D11-17A-KB

87D11-22A-KB

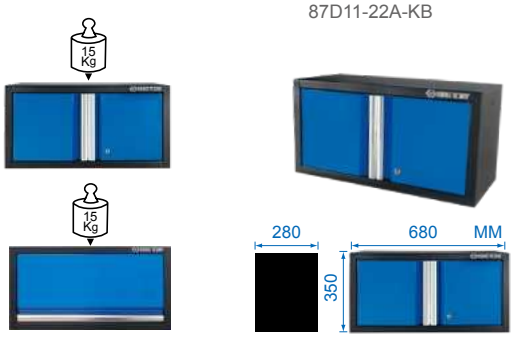

Opened Door Cabinet

87D11-03A-KG

87D11-03A-KG

87D11-03A-KB

87D11-03A-KB



KT NO.	Overall (mm)	Kg	CUFT
87D11-03A-KG	680 x 460 x 910	28.5	13.58
87D11-03A-KB			

Drawer Cabinet

87D11-04A-KG

87D11-04A-KB

87D11-04A-KG

87D11-04A-KB

87D11-05A-KG

87D11-05A-KB

87D11-05A-KG

87D11-05A-KB

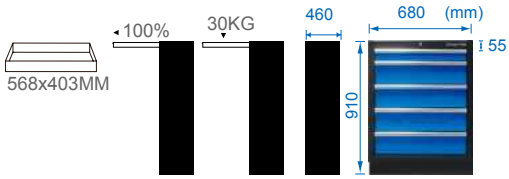

KT NO.	Spec.	Overall (mm)	Kg	CUFT
87D11-04A-KG	4 Drawer	680 x 460 x 910	46.70	13.58
87D11-04A-KB				
87D11-05A-KG	5 Drawer		49.30	
87D11-05A-KB				

Trash Bin With Paper Holder

87D11-11A-KG

87D11-11A-KB

87D11-11A-KG

87D11-11A-KB

KT NO.	Overall (mm)	Kg	CUFT
87D11-11A-KG **87D11-11A-KB**	680 x 460 x 910	35.20	13.58

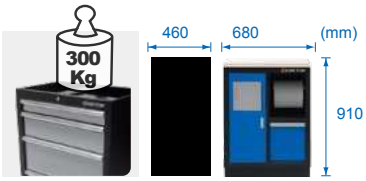

5 Drawers Cabinet

87D11-12A-KG

87D11-12A-KB

- Four swivel casters(one is with brake mechanism)

87D11-12A-KG

87D11-12A-KB

KT NO.	Spec.	Overall (mm)	Kg	CUFT
87D11-12A-KG **87D11-12A-KB**	5 Drawer	650 x 460 x 862	46	10.41

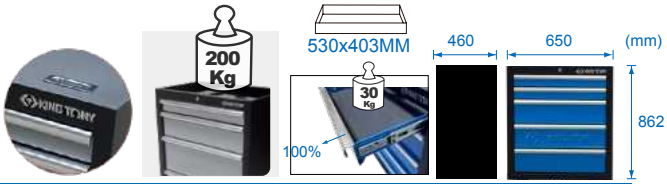

Washbasin Cabinet

87D11-19A-KG

- Water tap & Stainless steel sink, easy to clean
- Convenient two door cabinet

87D11-19A-KG

87D11-19A-KG

87D11-19A-KB

KT NO.	Overall (mm)	Kg	CUFT
87D11-19A-KG **87D11-19A-KB**	680 x 464 x 948	33	14.23



Workbench Frame

87D11-24A-K

- Workbench frame is able to combine with tool cabinet 87D11-25A-KG
- Suitable for use with workbench table(87D11-08A)

✕ The workbench table is not included

KT NO.	Overall (mm)	Kg	CUFT
87D11-24A-K	1361 x 458 x 910	19.5	4.22

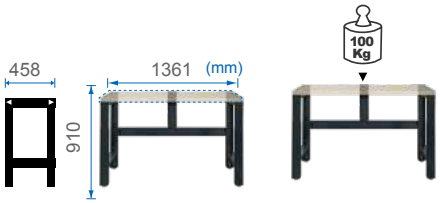

7 Drawer Tool Cabinet With Casters

87D11-25A-KG

- Suitable for use with workbench 87D11-24A-K
- 35in wide drawer, increasing the storage space
- Four swivel casters(one is with brake mechanism)

87D11-25A-KG

KT NO.	Spec.	Overall (mm)	Kg	CUFT
87D11-25A-KG **87D11-25A-KB**	Overall	895 x 460 x 732	65	14.07
	1 Drawer	785 x 403 x 137		
	6 Drawer	785 x 403 x 58		



87D11-25A-KB

87D11-25A-KB

- The groove design is easy to pull out the cabinet

9 Drawer Bottom Cabinet

87D11-23A-KG

87D11-23A-KB

- 53 inch wide cabinet, with one wide drawer, six drawers, two big drawer
- Content with garage bin & storage box*18 PC.

87D11-23A-KG

87D11-23A-KB



- Storage box

- Garage bin



- Safety mechanism

KT NO.	Spec.	Overall (mm)	Kg	CUFT
87D11-23A-KG **87D11-23A-KB**	Overall	1360 x 465 x 948	112	29.77
	1 Drawer	1272 x 403 x 84		
	5 Drawers	783 x 403 x 58		
	1 Drawer	783 x 403 x 137		
	2 door	284 x 371 x 531		

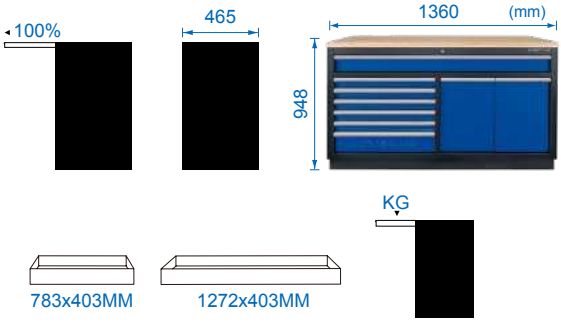

Storage Shelves

87D11-20A-K

87D11-20LA-K

- Multi-layer to storage
- Suitable for combine with 87D11 tool cabinet system

KT NO.	Overall (mm)	Kg	CUFT
87D11-20A-K	680 x 458 x 2000	41	5.94
87D11-20LA-K	1200 x 458 x 2000	55	5.94

87D11-20A-K

87D11-20LA-K

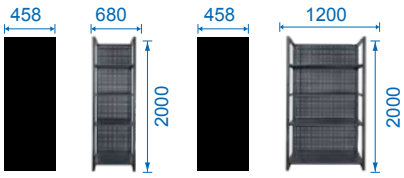

Storage Shelves

87D11-26A-K

- Wall tray for back panel, easy to storage

KT NO.	Overall (mm)	Kg		CUFT
87D11-26A-K	602 x 281 x 178	2.6	1 / 4	1.71

Pressed Wooden Board

87D11-08A

87D11-09A

87D11-10A

KT NO.	Overall (mm)	Kg	CUFT
87D11-08A	1360 x 465 x 38	12.5	1.61
87D11-09A	2042 x 465 x 38	19.0	2.39
87D11-10A	681 x 463 x 38	6.0	0.81

Stainless Board

87D11-08SA

87D11-09SA

87D11-10SA

KT NO.	Overall (mm)	Kg	CUFT
87D11-08SA	1360 x 465 x 38	21.0	1.61
87D11-09SA	2042 x 465 x 38	31.80	2.39
87D11-10SA	681 x 463 x 38	10.50	0.81

Back Panel

87D11-06A-G

87D11-06A-B

KT NO.	Overall (mm)	Kg	CUFT
87D11-06A-G	615 x 25 x 1052	5.3	1.13
87D11-06A-B			



87D11-06A-G

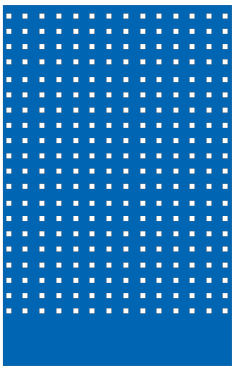

87D11-06A-B

Pillar

87D11-071A-G

87D11-071A-B

KT NO.	Overall (mm)	Kg	CUFT
87D11-071A-G	33 x 30 x 1420	1.5	0.13
87D11-071A-B			

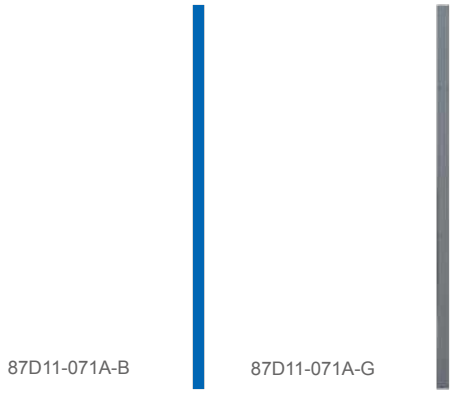

Optional accessories

87D11X06SA-KG

87D11X06A-KG

87D11X06SA-KB

87D11X06A-KB

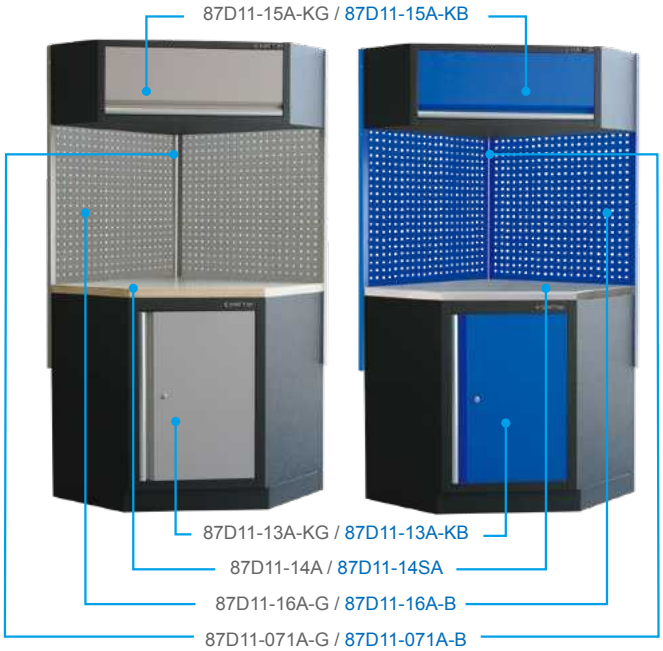

Corner Bottom Cabinet

87D11-13A-KG

87D11-13A-KB

KT NO.	Overall (mm)	Kg	CUFT
87D11-13A-KG	865 x 865 x 910	42	7.06
87D11-13A-KB			



Corner Wall Cabinet

87D11-15A-KG

87D11-15A-KB

KT NO.	Overall (mm)	Kg	CUFT
87D11-15A-KG	865 x 865 x 350	21	12.70
87D11-15A-KB			

Stainless Steel Board

87D11-14SA



KT NO.	Overall (mm)	Kg	CUFT
87D11-14SA	865 x 865 x 38	19	1.94

Pressed Wooden Board

87D11-14A



KT NO.	Overall (mm)	Kg	CUFT
87D11-14A	865 x 865 x 38	13	1.94

Corner Back Panel

87D11-16A-G

KT NO.	Overall (mm)	Kg	CUFT
87D11-16A-G	800 x 25 x 1052	6.95	1.45
87D11-16A-B			



Adjusting Feet

KT NO.	Contents		Kg
87D11-05A-10		Pack by 4 PC.	700

Hook

KT NO.		Contents	Kg
87E02-051A		1" Single hook Pack by 10 PC.	20
87E02-053A		3" extra long single hook Pack by 10 PC.	30
87E02-061A		1" Double hook Pack by 10 PC.	50
87E02-063A		3" extra long double hook Pack by 10 PC.	68

Tools Storage & Tools System Sets

01 SQUAD

Unique and vibrant design with multiple accessories allows for trolley modularization.

- 87SQ31
- 87SQ32
- 87SQ33
- 87SQ34

02 CLASSIC

Professional, industrial-level quality with King Tony's classic red and exceptional craftsmanship.

- 87432-5U
- 87434-7U
- 87437-8U
- 87432-5G
- 87434-7G
- 87634-7B
- 87435-13B

03 ECONOMIC

The best choice for basic functions, offering an affordable price and reliable service.

- 87G38

04 TOOL CARTS

King Tony tool carts offer high mobility and excellent efficiency.

- 87438-3B
- 87446-3B
- 87441-B

05 WORK BENCHES

Extended storage and functionality for garage repairs, workshops, woodworking projects, or other tasks, with excellent quality.

- 87502
- 87512

06 TOOL CHESTS

Offering a large capacity for storage and meticulously designed organizational functions, it pairs perfectly with CLASSIC trolleys.

- 87411-6B
- 87411-9B
- 87421-3B
- 87419-5B
- 87417-10B
- 87422-3B

07 TOOL BOXES

Portable design to meet the need: accessing tools anytime, anywhere.

- 87401-2
- 87401-3
- 87401-3H
- 87402
- 87408
- 87A05
- 87A051
- 87404
- 87407
- 87A08

08 TOOL BAGS

Lightweight and distinctive design that displays both professionalism and energy in the workplace.

- 8714101B
- 87711C
- 87721B
- 87722B
- 87723B
- 87732D
- 87724D
- 87733D
- 87731D

09 MODULES

Expandable tool modules can be used independently or stacked together, allowing users to create their own tool storage system.

- 87405-1
- 87405-2
- 87405-3
- 87405-9

SQUAD

KT NO.	Static load	Casters	Drawers	Work top	100% Open	Risk-free	Bumper	Auto-return	Spec
87SQ31-6B-BK	700	5" x 2"	6	Stainless	●	●	●	●	L
87SQ31-7B-BK	700	5" x 2"	7	Stainless	●	●	●	●	L
87SQ31-8B-BK	700	5" x 2"	8	Stainless	●	●	●	●	L
87SQ32-8B-BK	700	5" x 2"	8	Stainless	●	●	●	●	XL
87SQ32-9B-BK	700	5" x 2"	9	Stainless	●	●	●	●	XL
87SQ32-10B-BK	700	5" x 2"	10	Stainless	●	●	●	●	XL
87SQ33-6B-BK	700	5" x 2"	6 Plus	Stainless	●	●	●	●	XL
87SQ33-7B-BK	700	5" x 2"	7 Plus	Stainless	●	●	●	●	XL
87SQ33-8B-BK	700	5" x 2"	8 Plus	Stainless	●	●	●	●	XL
87SQ34-10B-BK	700	5" x 2"	10	Wooden	●	●	●	●	XXL

Load bearing

- Overall supporting weight for tool trolley at a safety level

- Overall supporting weight for drawers at a safety level

Robustness

- Body frame are constructed with one-piece steel sheet for integral strength

- The bottom of the drawers are stamped in order to strengthen effectively

Convenient

- Convenient and safety with Central lock system



- 100% drawer opening, does not interfere with the removal of tools

- 360° swivel wheel with brake function

- The size of the drawer conforms to TCS, and the tool set can be purchased freely according to the demand

Protection

- Protection bumpers are for to avoid collisions and to protect object during maneuver

- Risk Free System (RFS) allows open one drawer at a time which prevents the loss of center of gravity from tilting and unstability

- Press to open drawer is a safe and reliable system

Features

- Dynamic top cover
- Stainless steel worktop
- Structure strengthen
- Stylish bumpers
- Additional space for accessories
- Aluminum drawer handle
- RFS locking system (one drawer at a time)
- 5"x2" TPR high performance casters
- Central key lock
- 100% pull out drawer with auto-return

Top Tool Chest

87SQ11

- 4 drawers + 1 storage platform for ample storage space Reinforcement
- Optional SQUAD accessories for added functionality

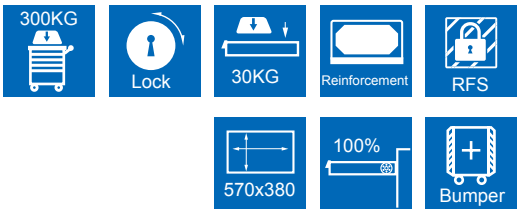



- Big storage space 710 x 460 mm



- Dual hydraulic rod slow descent design, effectively cushioning the opening of the cover. Safe and quiet

- Dual side handles, allowing for secure lifting and placement on the top tool chest



- Double support pillars with external wrapping for reinforced structure Sturdy and reliable

- Compatible with SQUAD series accessories.

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Static load	Kg	CUFT
87SQ11-4B-BK	Overall	720 x 472 x 515	300 kg	37.5	9.56
	4 Drawers	570 x 380 x 70			
	Square space	650 x 460 x 120			

Model D

New

87SQ31

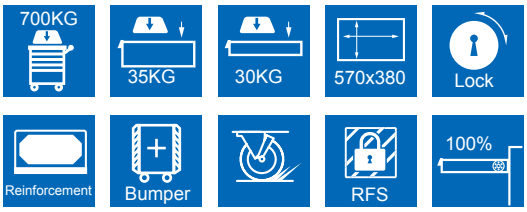

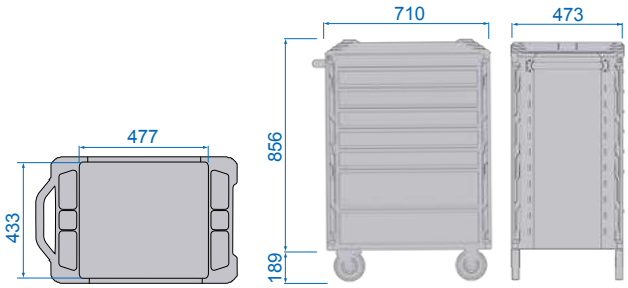

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87SQ31-6B-BK	3 Drawers	570 x 380 x 70	5" x 2"	700	63.00	14.30
	3 Drawers	570 x 380 x150				
87SQ31-7B-BK	5 Drawers	570 x 380 x 70			66.00	
	2 Drawers	570 x 380 x150				
87SQ31-8B-BK	7 Drawers	570 x 380 x 70			69.00	
	1 Drawers	570 x 380 x150				

Model D^{x}

New

87SQ32

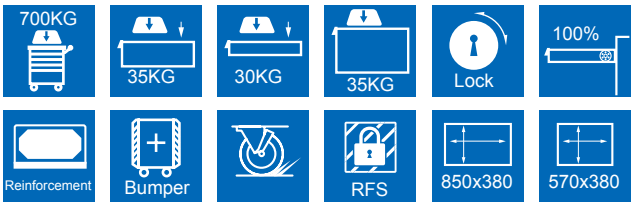

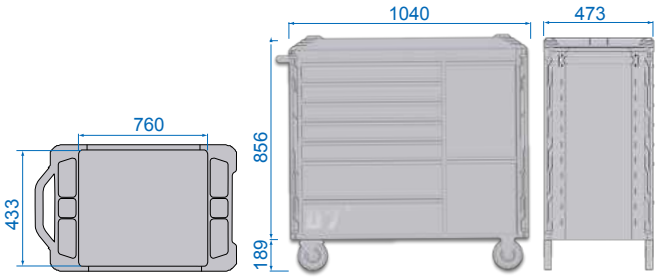

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87SQ32-6B-BK	1 Drawers	850 x 380 x 80	5" x 2"	700	82.00	22.85
	2 Drawers	570 x 380 x 70				
	3 Drawers	570 x 380 x 150				
	Square space	295 x 455 x 635				
87SQ32-7B-BK	1 Drawers	850 x 380 x 80			85.00	
	4 Drawers	570 x 380 x 70				
	2 Drawers	570 x 380 x 150				
	Square space	295 x 455 x 635				
87SQ32-8B-BK	3 Drawers	570 x 380 x 70			90.00	
	3 Drawers	570 x 380 x 150				
	Square Drawer	270 x 380 x 280				
	Bulk Square Drawer	270 x 380 x 380				
87SQ32-9B-BK	5 Drawers	570 x 380 x 70			92.00	
	2 Drawers	570 x 380 x 150				
	Square Drawer	270 x 380 x 280				
	Bulk Square Drawer	270 x 380 x 380				
87SQ32-10B-BK	7 Drawers	570 x 380 x 70			94.50	
	1 Drawers	570 x 380 x 150				
	Square Drawer	270 x 380 x 280				
	Bulk Square Drawer	270 x 380 x 380				

Model D+

New

87SQ33

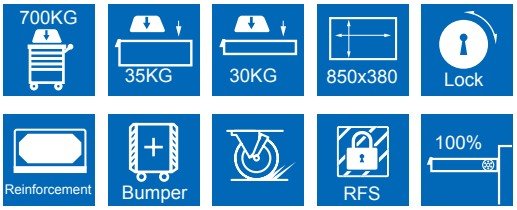

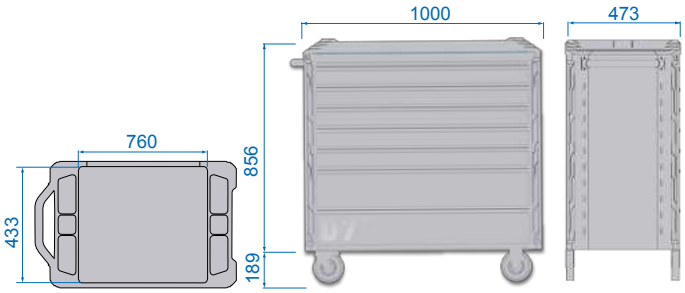

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87SQ33-6B-BK	3 Drawers	850 x 380 x 70	5" x 2"	700	81.00	22.03
	3 Drawers	850 x 380 x 150				
87SQ33-7B-BK	5 Drawers	850 x 380 x 70			86.00	
	2 Drawers	850 x 380 x 150				
87SQ33-8B-BK	7 Drawers	850 x 380x 70			91.00	
	1 Drawers	850 x 380 x 150				

Superb Workbench

New

87SQ34-10B-BK

- Wide work top given 1235mm x 800mm space
- High end extra thick wood top
- Extra long metal handle bar for easy maneuver
- 10 drawers, plus 1 wrench hanging drawer
- 3 storage cabinets, from large to small for different storage purposes, all with key locks
- Able to fit other common accessories
- Absolute rectangular shape which fits every corner

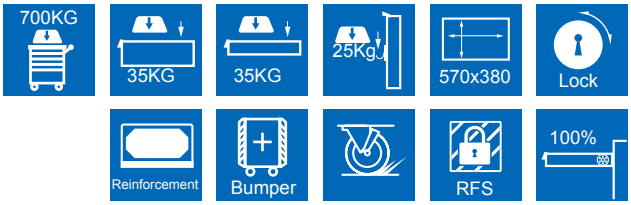

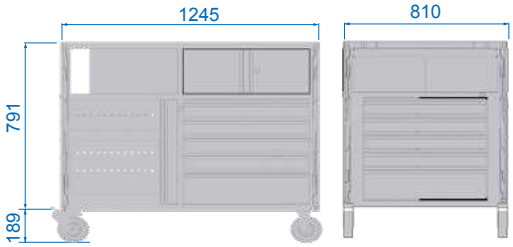

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87SQ34-10B-BK	8 Drawers	570 x 380 x 70	5" x 2"	700	130.00	41.63
	2 Drawers	570 x 380 x 150				

3 Shelf Tool Cart

New

87SQ41

- Large work platform measuring 710 x 470mm
- Reinforced structure for overall stability
- Optional SQUAD accessories for additional functionality

- Four-sided expandable extension version (87SQ41-11/87SQ41-12)

- Enlarged Brushed Steel Handle with Comfortable Grip

- 4" x 1" TPR Dual-color heavy-duty casters

- 10mm x 1pc.+3mm x 2pc. Cutting mat

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87SQ41A-B	Overall	770 x 480 x 805	4" x 1"	200 kg	24.00	4.39
	Overall + 4 Casters	770 x 480 x 955				

Extended Panel

87SQ41-11

- Extended short panel (W)266 x(H)251

87SQ41-12

- Extended long panel (W)587 x(H)251

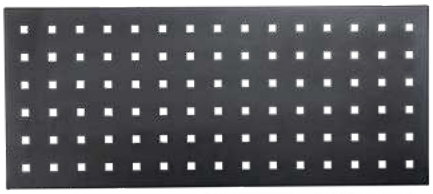

KING TONY
KING TONY
D7
SQUAD
TONY
SQUAD

Accessories

87SQ3-11

- Side pegboard
- If the right side of trolley do not have enough sufficient space, you might as well bought additional peg board for accessories
  (W)325 x(H)683

87SQ3-12

- Document holder
  (W)325 x(H)260 x(D)34

87SQ3-22

- Bottle holder
  (W)320 x(H)101 x(D)74

Hook type

87SQ3-13

- Shelf pegboard
  (W)640 x(H)540

87SQ3-32

- Phone holder
  (W)200 x(H)52

87SQ3-31

- Laptop or ipad holder
  (W)378 x(D)285 x(H)79

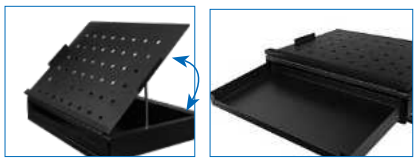

- 3 angles of adjustment are available,20o/45o/60o
- Can be turned left or right 360o
- Underneath the rack has a drawer for stationery storage

87SQ3-23

- Power tools holder
  (W)285 x(D)172 x(H)71
- Left side of holder has three slots that are able to hang tools, hose or wrenches etc
- Right side of holder has 3 hooks for cleaning cloths, gloves, wires etc

87SQ3-33

- Folding shelf
  (W)398 x(D)280 x(H)179

87SQ3-41

- Trash bin
  (W)275 x(D)150 x(H)136

87SQ3-51

- Trash bin-25 Liters
  (W)363 x(D)232 x(H)411
- handle slots on the side

87SQ3-42

- Paper holder
  (W)280 x(D)308
- For paper roll within 280mm wide

- Another strength of the accessories is that the paper roll can be inserted on top of the trash bin, which can be used both at the same time at the same place, it can also be used seperately. This combination makes more user friendly and unique for this trolley

CLASSIC

KT NO.	Static load	Casters	Drawers	Work top	100% Open	Risk-free	Bumper	Auto-return	Spec
87432-5U	1000	5" x 2"	5	Cutting mat	●				L
87434-7U	1000	5" x 2"	7	Cutting mat	●				L
87437-8U	1000	5" x 2"	8	Cutting mat	●				L
87432-5G	680	5" x 2"	5	Cutting mat	●	●		●	L
87434-7G	680	5" x 2"	7	Cutting mat	●	●		●	L
87634-7B	600	5" x 1-1/4"	7	Cutting mat	●		●		L
87435-13B	1200	6" x 2"	13	Cutting mat	●				XXL

Load bearing

KG

- Overall supporting weight for tool trolley at a safety level

KG

- Overall supporting weight for drawers at a safety level

Robustness

One piece steel

- Body frame are constructed with one-piece steel sheet for integral strength

Reinforcement

- The bottom of the drawers are stamped in order to strengthen effectively

Convenient

Lock

- Convenient and safety with Central lock system

100%

- 100% drawer opening, does not interfere with the removal of tools

- 360° swivel wheel with brake function

mmxmm

- The size of the drawer conforms to TCS, and the tool set can be purchased freely according to the demand

Protection

Bumper

- Protection bumpers are for to avoid collisions and to protect object during maneuver

RFS

- Risk Free System (RFS) allows open one drawer at a time which prevents the loss of center of gravity from tilting and unstability

Safety lock

- Press to open drawer is a safe and reliable system

Classic Tool Trolley

New

8743U

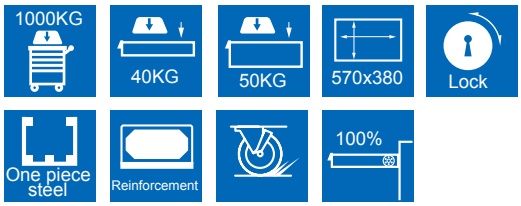

- 5/7/8 drawer tool trolley"Classic" roller cabinet red
- Total storage capacity: 150 Litres
- 100% pull out ball bearing drawer
- 50,000 loading cycle test for drawer slides
- Heavy duty Ø125mm casters, including 2 swivel with step down lock
- Secure central locking system with 10mm top mat
- Shock absorption design
- Powder coating for high protection
- 670(W) x 460(D) x 960(H)mmL

87434-7U

87437-8U

87432-5U

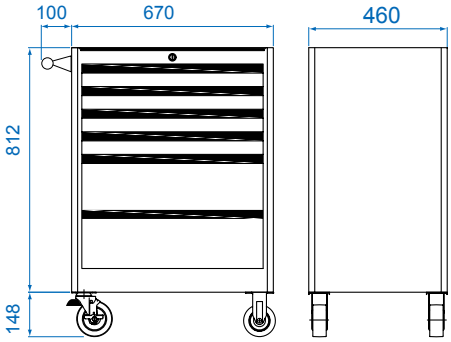

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87432-5U	4 Drawer	576 x 380 x 75	5" x 2"	1,000 Kg	56	12.44
	1 Drawer	576 x 380 x 154				
	Bulk Drawer	603 x 404 x 234				
87434-7U	5 Drawer	576 x 380 x 75	5" x 2"	1,000 Kg	64	12.24
	2 Drawer	576 x 380 x 154				
87437-8U	7 Drawer	576 x 380 x 75	5" x 2"	1,000 Kg	74	12.24
	1Drawer	576 x 380 x 154				

Risk-Free Tool Trolley

87432-5G

- Only open one drawer to prevent tilting risk
- Risk-Free System (RFS) allows only one drawer to be opened at a time, which prevents the loss of the center of gravity, tilting, and instability.

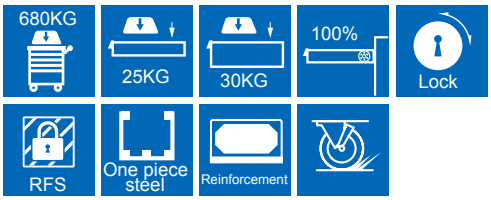



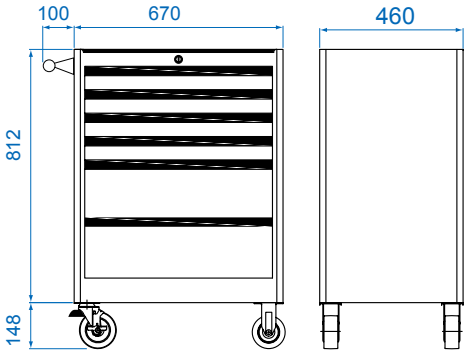

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87432-5G	2 Drawer	576 x 380 x 75	5" x 2"	680 Kg	56	12.44
	2 Drawer	576 x 380 x 154				
	1 Drawer	603 x 404 x 234				

87434-7G

- Only open one drawer to prevent tilting risk
- Risk-Free System (RFS) allows only one drawer to be opened at a time, which prevents the loss of the center of gravity, tilting, and instability.

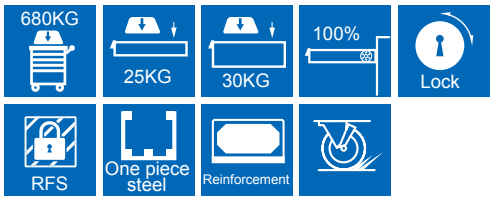



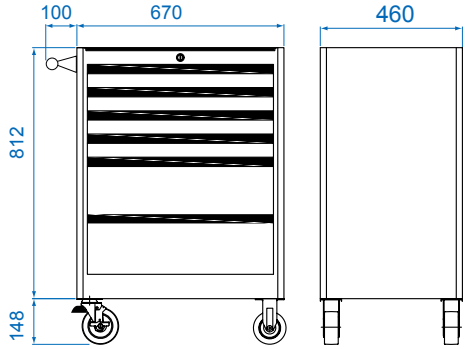

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87434-7G	5 Drawer	576 x 380 x 75	5" x 2"	680 Kg	64	12.24
	2 Drawer	576 x 380 x 154				

Bumper Tool Trolley

87634-7B

- Soft bumpers each side avoids scratch or damage vehicle
- More space for bottles & hanging

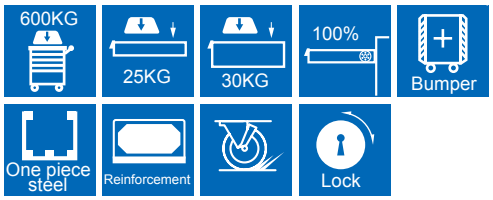

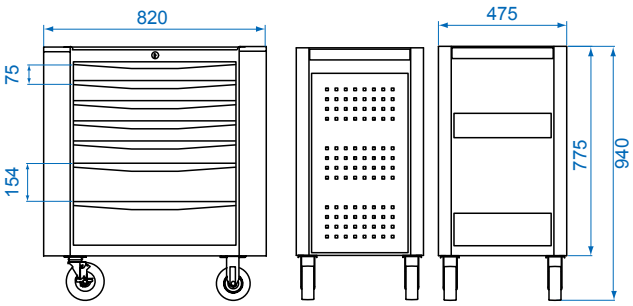

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87634-7B	5 Drawer	576 x 380 x 75	5" x 1-1/4"	600 Kg	64.14	15.64
	2 Drawer	576 x 380 x 154				

XXL Tool Trolley

87435-13B

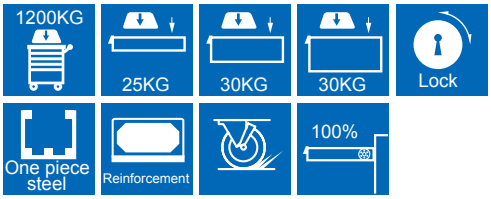

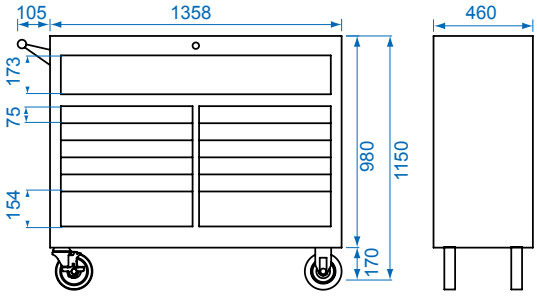

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87435-13B	10 Drawer	576 x 380 x 75	6" x 2"	1200 Kg	166	31.54
	2 Drawer	576 x 380 x 154				
	1 Drawer	1215 x 390 x 173				

Accessories

87432-15

- Plastic top mat
- Size : 920(W) x 490(D) x 50(H)mm

87432-32

- Can holder

87432-31

- Side handle bar
- Size : (Ø)38.5 x 457(L) mm

87432-52

- Paper holder
- Size(H x L x D) : 45 x 290 x 65 mm

87432-17

- Flat side panel
- Size : 456 x 370mm

87432-23



87432-24

KT NO.	Dimension(mm) Width x Depth x Height	Material	Divider Size (mm)
87432-23	574 x 358 x 40	Steel	Long: 560 x 40(2PC.)
			Short: 368 x 40(2PC.)
87432-24	-	Plastic	Long: 570 x 40(3PC.)
			Short: 375 x 40(3PC.)

87432-33

- Magnetic tool holder
- Size : 458 x 52 x 17mm

87432-34

- Bottle side holder

87432-41

- Work panel
- Size : 656(W) x 500(H) x 30(D) mm

CAUTION

Can' t install side tray(87432-32) at the same time

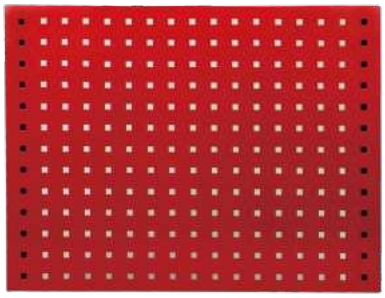

KING TONY
5m

Features

- Side compartment

- Trash can hook

- Multi-functional working top

- Industrial TPR floor swivel casters

ECONOMIC

KT NO.	Static load	Casters	Drawers	Work top	100% Open	Risk-free	Bumper	Auto-return	Spec
87G38-7B-K	400	5" x 2"	5	Cutting mat	-	-	-	-	L

Tool Trolley

87G38-7B-K

- Each drawer is designed with a safety lock.
- Extra side compartment
- Multi-functional working top
- Side locking system

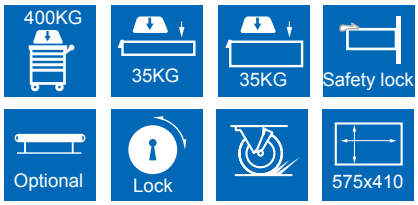

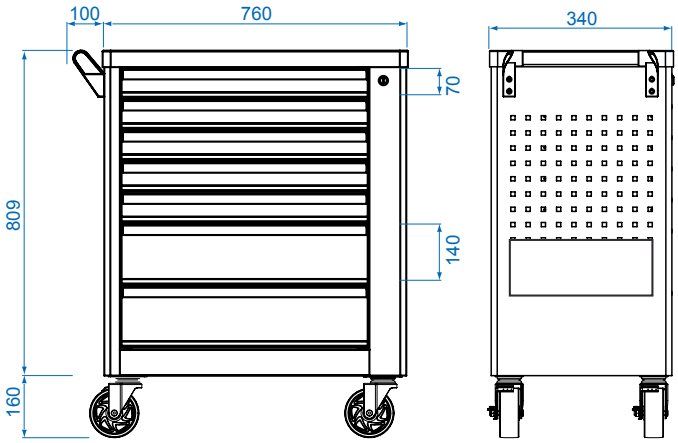

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87G38-7B-K	Overall	752 x 450 x 807	5" x 2"	400 Kg	58	13.19
	Overall+4 Casters	752 x 450 x 982				
	5 Drawers	570 x 380 x 70				
	2 Drawer	570 x 380 x 140				

TOOL CART

KT NO.	Static load	Casters	Drawers	Work top	100% Open	Risk-free	Bumper	Auto-return	Spec
87438-3B	600	5 x 1-1/4"	3	Cutting mat	●				L
87446-3B	600	5 x 1-1/4"	3	Cutting mat	●				SV
87441-1B	540	4 x 1-1/4"	1		●				
87441-3B	540	4 x 1-1/4"	3		●				

87446-3B-KR

- 3 drawers tool cart
- 2 PC. protective mat for top and bottom shelves
- 3 PC. protective drawer liners

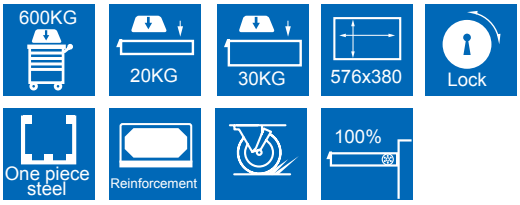

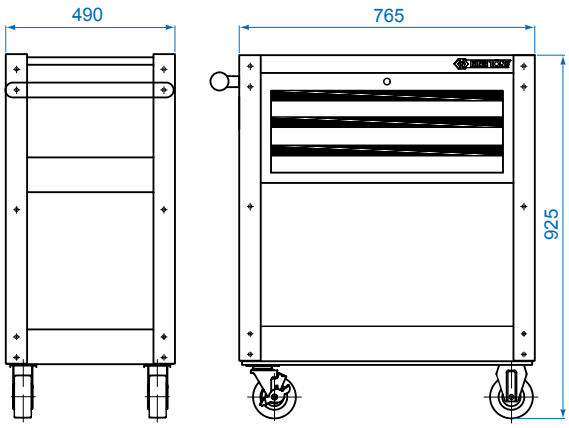

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87446-3B-KR	overall	765 x 490 x 760	5" x 1-1/4"	600 Kg	38	13
	overall + 5"x1-1/4" Casters	765 x 490 x 925				
	3 Drawer	576 x 380 x 75				

3 Drawers & 2 Doors Tool Trolley

87438-3B

- 26 inch roll-wagon (with bulk storage compartment)
- Frame constructed with one piece steel sheet for integral strength
- Useful tool tray / special side handle for easy moving tool trolley
- Grooved full width drawer pulls add strength and offer to list contents of drawers
- Drawer slides type - ball bearing
- Central locking system
- 10mm top mat
- Powder coating finish

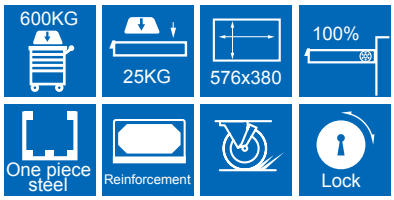

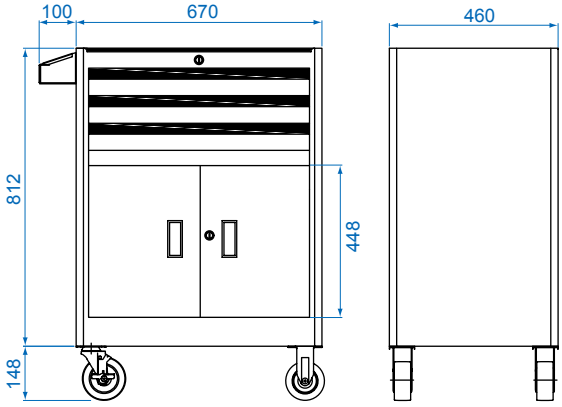

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87438-3B	3 Drawer	576 x 380 x 75	5" x 1-1/4"	360 Kg	47.2	12.24
	2 Door	550 x 380 x 420				

Shelf Tool Cart

87441-1B

- 1 drawer tool cart
- Two 3.5" deep trays are positioned for convenience

87441-3B

- 3 drawer tool cart
- 2 PC. protective mat for top and bottom shelves
- 3 PC. protective drawer liners

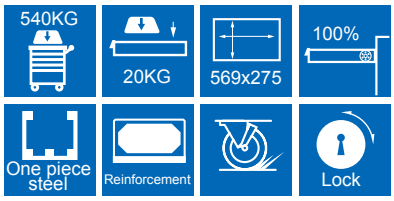

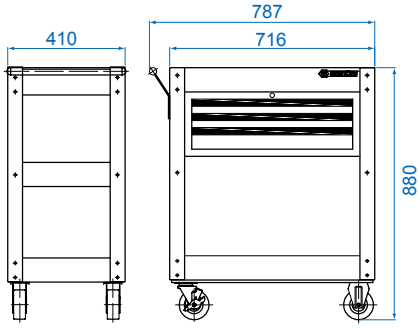

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87441-1B	overall	716 x 410 x 750	4" x 1-1/4"	540 Kg	23.2	2.7
	overall + 4" x 1-1/4" Casters	716 x 410 x 880				
	1 Drawer	569 x 275 x 75				
87441-3B	overall	716 x 410 x 750	4" x 1-1/4"	540 Kg	33.0	4.95
	overall + 4" x 1-1/4" Casters	716 x 410 x 880				
	1 Drawer	569 x 275 x 75				
	2 Drawer	569 x 275 x 50				

Roller Seat

87452C-B

- Material: PVC leather + foam cushion + finishing powder coating steel
- Two Open Storage Areas
- Four 360° swivel Casters

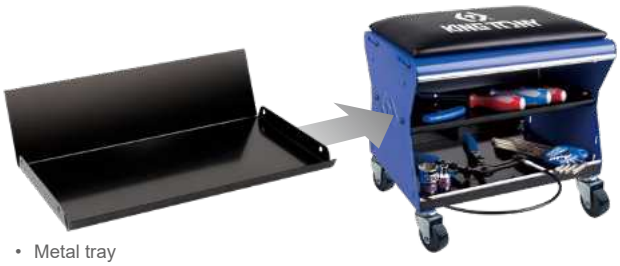

- Metal tray

KT NO.	Dimension(mm) Width x Depth x Height	Kg		CUFT
87452C-B	350 x 260 x 240	6.3	1 / 1	0.49

Adjustable Height Roller Seat

New

87H32-B

- Roller work seat with 3 portable trays 1 magnetic tray
- Seat height adjustable 425~550mm
- Ideal for working on wheels and brakes in workshop
- Padded seat for comfort
- Four swivel casters for smooth and easy moving

- Features removable plastic chassis for holding small tools and parts handy
- One of which is magnetic

- Adjustable seat height from 400-540 mm there's no need to bend, kneel or squat anymore

- Four 2.5-inch 360° swivel wheels

- Soft touch, thickness up to 50mm, waterproof synthetic leather

KT NO.	Dimension(mm) Width x Depth x Height	Kg		CUFT
87H32-B	430 x 430 x 400	4.8	1 / 1	0.86

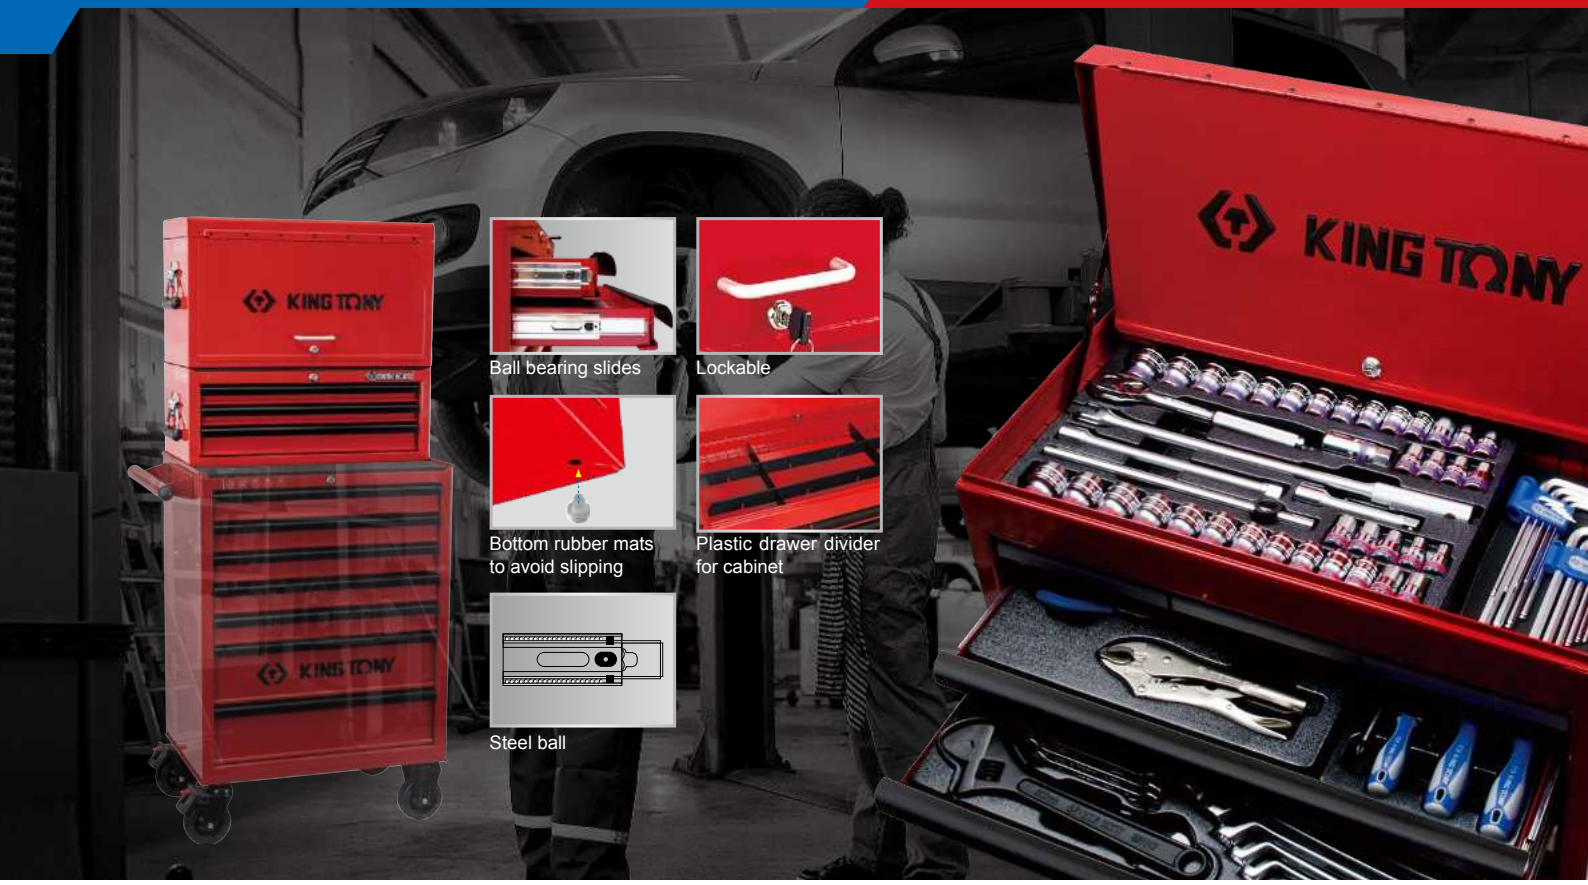

Tool Chests

87411-6B | 87411-9B | 87419-5B | 87417-10B

- Powder coating
- Ball bearing slide
- Central locking system
- Hemmed edge design to improve strength and safety
- Drawer quick release and detent design

87411-6B

87411-9B

87419-5B
(Extra deep)

87417-10B
(Extra deep)

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	kg	CUFT
87411-6B	Overall	660 x 307 x 374	25.40	3.97
	Top	646 x 290 x 60		
	3 Drawer	170 x 275 x 50		
	2 Drawer	569 x 275 x 50		
	1 Drawer	569 x 275 x 75		
87411-9B	Overall	660 x 307 x 427	30.20	4.3
	Top	646 x 290 x 60		
	6 Drawer	170 x 275 x 50		
	2 Drawer	569 x 275 x 50		
	1 Drawer	569 x 275 x 75		
87419-5B	Overall	660 x 455 x 483	40.00	8.58
	Top	646 x 420 x 70		
	2 Drawer	576 x 410 x 48.5		
	3 Drawer	576 x 410 x 75		
87417-10B	Overall	660 x 455 x 483	51.20	8.58
	Top	646 x 420 x 70		
	6 Drawer	169 x 410 x 48.5		
	1 Drawer	169 x 410 x 154		
	2 Drawer	576 x 410 x 48.5		
	1 Drawer	576 x 410 x 75		

Tool Chests

87421-3B

- Grooved full width drawer pulls add strength and offer to list contents of drawers
- 4 pins on the middle chest corners to tie in with top chest for extra security.
- Overall size (mm) : 660(W) x 307(D) x 251(H)
- Drawer slides type-ball bearing
- Central locking system
- Powder coating finish
- 3 drawers chest
- Intermediate type
- Heavy gauge steel
- 10mm Top mat



- Ball bearing slides



- Steel ball

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	kg	CUFT
87421-3B	Overall	660 x 307 x 251	13.00	2.7
	2 Drawer	569 x 275 x 50		
	1 Drawer	569 x 275 x 75		

87422-3B

- Grooved full width drawer pulls add strength and offer to list contents of drawers
- 4 pins on the middle chest corners to tie in with top chest for extra security.
- Overall size (mm) : 660(W) x 455(D) x 254(H)
- Drawer slides type-ball bearing
- Central locking system
- Powder coating finish
- 3 drawers chest
- Intermediate type
- Heavy gauge steel
- 10mm Top mat

- Extra deep



- Ball bearing slides



- Steel ball

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	kg	CUFT
87422-3B	Overall	660 x 455 x 254	24.8	5
	2 Drawer	576 x 410 x 48.5		
	1 Drawer	576 x 410 x 75		

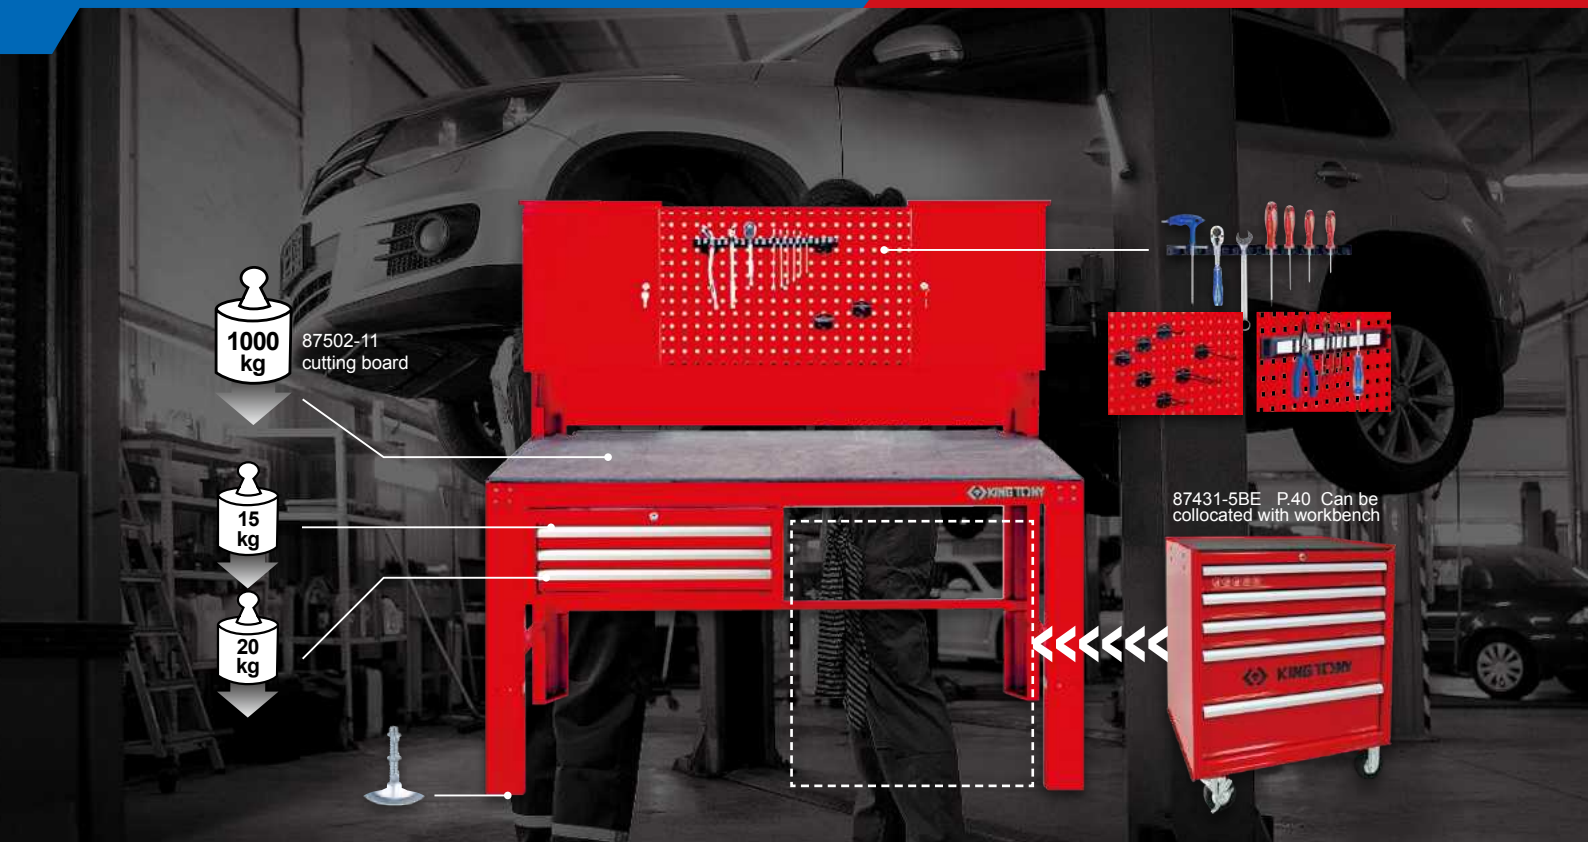

Workbench

87502P02

- Drawer chest for workbench

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87502P02	Overall	660 x 307 x 251	13.00	2.7
	2 Drawer	569 x 275 x 50		
	1 Drawer	569 x 275 x 75		

87502P03

- 2 PC. wall cabinets

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87502P03	Overall	400 x 200 x 500	14.00	4.5

87431-5BE

- Four swivel casters(one is with brake mechanism)

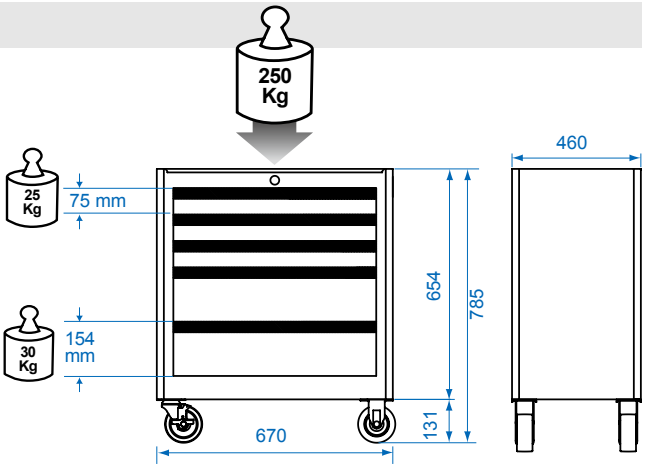

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87431-5BE	3 Drawer	576 x 380 x 75	4" x 1-1/4"	250 Kg	50	10.03
	2 Drawer	576 x 380 x 154				

Wall Mounted Type Tool Cabinet

87502

- Workbench excludes cutting board & tool holder
- 3 drawer chest-ball bearing slide
- 2 wall cabinets

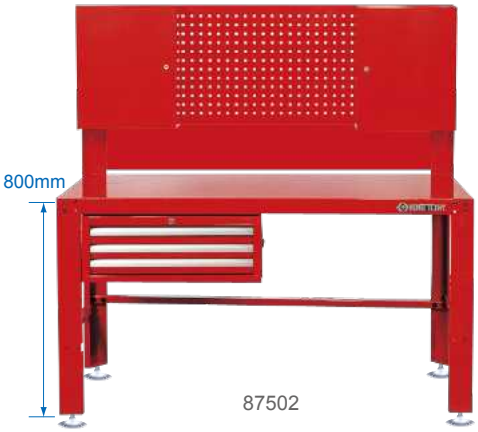

87502

87502P012

87502P011

87502P01

KT NO.		Spec.	Dimension(mm) Width x Depth x Height	kg	CUFT
87201	3 drawer chest-ball bearing slide 2 wall cabinets	Overall	1525 x 700 x 1520	86.00	13.4
		3 Drawer chest	660 x 307 x 251		
		2 Drawer	569 x 275 x 50		
		1 Drawer	569 x 275 x 75		
		Wall cabinet	400 x 200 x 500		
87502P01	Workbench with back panel	Overall	1525 x 700 x 1520	59.00	6.5
87502P011	Workbench	Overall	1525 x 700 x 800	48.00	6.5
87502P012	Back panel	Overall	1525 x 20 x 700	13.50	2.7

87512

- Workbench excludes cutting board & tool holder
- 3 drawer chest ball bearing slide
- 1 wall cabinet

KT NO.		Spec.	Dimension(mm) Width x Depth x Height	kg	CUFT
87512	3 drawer chest ball bearing slide 1 wall cabinet	Overall	1565 x 766 x 1403	130.10	21.19
		3 Drawer chest	668 x 313 x 270		
		2 Drawer	568 x 262 x 50		
		1 Drawer	568 x 262 x 75		
		Wall cabinet	1565 x 203 x 603		

Wall Mounted Type Tool Cabinet

87201

- With 20 PC. hooks
  - 5 PC. U shape hook (87502-050)
  - 10 PC. 1" single hook (87502-051)
  - 5 PC. 1" double hook (87502-061)
- Heavy duty design for storage heavy duty tool
- Powder coating finishing
- Full opened door with 2 aluminum alloy handles
- 4 holes on the back of cabinet to be fixed on the wall
- Double wall door panel design, peg hole at inside wall of door



Steel thickness: (body)1.0 mm

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	kg	CUFT
87201	Overall	820 x 250 x 900	24.00	8

87502-050

87502-051

87502-061

Accessory

KT NO.		Contents
87502-01		Tool holder 500mmL
87502-02		Magnetic tool holder for workbench backpanel Size : 458 x 52 x 17mm
87502-050		U Shape hook
87502-051		1" Shape hook
87502-054		4" Shape hook
87502-058		8" Shape hook
87502-061		1" Double hook
87502-064		4" Double hook
87502-068		8" Double hook
87502-11		Cutting board Oil-resistant, acid-resistant, moisture-resistant and anti-static 10mm PP foaming board
87502-12		4 PC. Adjusting device Includes adjustable bolt & adjustable pad

Tool Boxes

87401-2

- Heavy gauge steel plus flange reinforced design
- Cover closing synchronously locks all of the drawers
- Powder coating
- Overall size (mm) - 535(W) x 220(D) x 287(H)

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87401-2	2 Drawer	504 x 195 x 79	8.80	2.05

87401-3

- Heavy gauge steel plus flange reinforced design
- Cover closing synchronously locks all of the drawers
- Powder coating
- Overall size (mm) - 535(W) x 220(D) x 290(H)

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87401-3	3 Drawer	504 x 195 x 52	10.20	2.05

87401-3H

- Internal Lock
- Heavy gauge steel plus flange reinforced design
- Cover closing synchronously locks all of the drawers
- Powder coating
- Overall size (mm) - 535(W) x 220(D) x 287(H)

- Internal lock system

- Ball bearing slides



- Steel ball

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87401-3H	3 Drawer	504 x 195 x 52	11.20	2.05

Tool Boxes

87402

- 3 section fold up type and adjustable
- Tubular handle, curved hinge
- Shaped pressing on flat surface to reinforced steel strength

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	kg	CUFT
87402	5 compartments	470 x 220 x 260	5.60	1.22
87408		530 x 220 x 260	6.70	1.3

87408

87A05

87A05-KB

87A051

87A051-KB

- 3 section fold up type and adjustable
- Tubular handle, curved hinge
- Shaped pressing on flat surface to reinforced steel strength

87A05

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	kg	CUFT
87A05	5 compartments	470 x 220 x 260	5.10	1.41
87A05-KB				
87A051		530 x 220 x 260	6.80	1.48
87A051-KB				

87A05-KB

87A08

- Material : PP + Metal
- Shock-resistant reinforced polypropylene shell with metal cover
- Impact resistant and sturdy bumper at corners
- 30kgs load on top and stackable design
- V groove on top for sawing or placement
- Easy to use with grip handle for carry
- Portable tote tray take tools or small parts
- Lockable allow use padlock for security
- Metal double clasp

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	kg	CUFT
87A08	2 compartments	470 x 210 x 207	2.0	0.91

87404

- Meterial : PP
- Multi-function box, extra space for tools and parts
- Lightweight
- Durable design for tool storage

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	kg	CUFT
87404	2 compartments	560 x 278 x 270	2.40	1.75

87407

- Meterial : PP
- Multi-function box, extra space for tools and parts
- Lightweight
- Durable design for tool storage

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	kg	CUFT
87407	2 compartments	445 x 240 x 206	1.74	0.79

Parts Box

87137

- Parts box
- Material : PP

KT NO.	Dimension(mm) Width x Depth x Height	g
87137	180 x 39 x 96	109

- PP plastic storage box for spare parts

Portable Storage Box

8714101B

- Adjustable compartment is suitable for arranging different size of parts and accessories
- Transparent cover make it easy to find the parts you need
- The box is stackable design, you can combine two boxes together easily
- Durable material, easy to carry



- Adjustable compartment

- Suitable for arranging parts & accessories

- Stackable design

- Slide to lock

KT NO.	Dimension(mm) Width x Depth x Height	g	
8714101B	376 x 290 x 67	790	1 / 16

Fabric Tool Bag

87711C

- Waterproof 600D Oxford
- Lightweight stainless bar & comfortable EVA handle
- Velcro cover for easy access & quickly take out tools
- Adjustable ambi-bag with soft padded shoulder strap
- 39 inner pockets for multiple-tools storage
- 50% less weight than metal box

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87711C	510 x 255 x 345	3.00	1 / 1

87721B

- Heavy duty 600D Oxford
- Wide opening at top with zipper for easy access and security
- Removable shoulder strap
- Removable compartment for greater organization
- External and internal side pockets

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87721B	360 x 200 x 260	0.95	1 / 1

Fabric Tool Bag

87722B

- Waterproof, reinforced rubber base protects tools
- 600D Oxford
- Internal and external storage pockets
- Zip fastening and rubber comfort grip handles
- Removable padded shoulder strap for comfortable carry

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87722B	380 x 230 x 350	1.80	1 / 5

87723B

- Material: 600D polyester
- Max Load: 20 kg
- Includes 14 pockets
- A water-proof and wear-resistant PVC base
- The main bag has a large capacity for easy access to tools. Multiple pockets can hold various tools within the backpack

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87723B	350 x 210 x 490	1.75	4

- The pads on the back of the product can absorb vibrations and increase breathability, making it more comfortable to carry

Modules

- Expandable tool modules can be used independently or stacked together, allowing users to create their own tool storage system.

- For better clarity you can attach labels to either the front or the sides of the case to optimize your workflow



- I-Locking the 90° twist system is also extremely practical since you can open it just using one hand

- With four swivel casters of which two are braked by an integrated brake

- Fixing boxes in pallet truck

Modules

87405

- Heavy duty 600D Oxford
- Wide opening at top with zipper for easy access and security
- Removable shoulder strap
- Removable compartment for greater organization
- External and internal side pockets

S

87405-1

M

87405-2

L

87405-3

87405-9

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87405-1	456 x 372 x 115	2.1	1 / 1
87405-2	456 x 372 x 155	2.4	1 / 1
87405-3	456 x 372 x 262	3	1 / 1
87405-9	655 x 490 x 170	3.1	1 / 1

- The sturdy and ergonomic handles on the lid and in the front can be easily carried according to your requirement

- The double-layer tool pouch can adjust the space through the buckle to facilitate the user take the tools

Tool Box Set

37 PC.

9052-001MRV

- Plastic case size (mm) :
  456 x 372 x 155 (0.93 cuft)

6 PC.

Pouch 1

21 PC.

Pouch 2

EVA foam(9-90110GPV)

10 PC.

Pouch 1

Contents

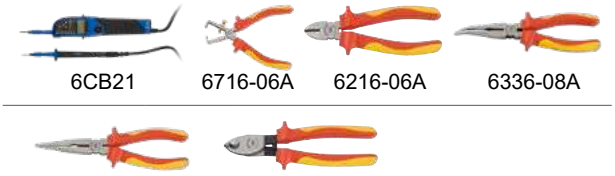

6CB21 | 6716-06A | 6216-06A | 6336-08A

6318-08A | 6146-08A

Pouch 2

Contents

	1471	PH0 x 75, PH1 x 100, PH2 x 100
	1472	3 x 75, 4 x 100, 5.5 x 125, 6.5 X 150
	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
	20002UB	5 x 6mm, 8 x 10mm

6CB02 | 3611VE-08 | 79095-05M

EVA foam(9-90110GPV)

Contents | kg 8.69 | CUFT 1.16

6511-10 | 3611-10R | 76223-08 | 76210-10

7821-50 | 67B3-55 | 9CJ1120 | 6AG11-20

6311-08 | 67A1-07

Tool Box Set

9052-002MRV

112 PC.

- Plastic case size (mm) :
  456 x 372 x 155 (0.93 cuft)

Pouch 1 — 13 PC.

Pouch 2 — 7 PC.

EVA foam(9-7592MPV) — 92 PC.

Pouch 1

Contents

1062	8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22
9TA281	

Pouch 2

Contents

3611-10R	6AB31-75	6211-06	6111-07
6311-08	6511-10	79095-05M	

EVA foam(9-7592MPV)

Contents — kg 10.46 CUFT 1.16

2335MR	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
4335MR	10, 13, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
1147PR	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H,T50H
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
20002UB	5 x 6mm, 8 x 10mm

1032CQ	1005APR	2792 4791R	4251-10R	2179DF
7821-30	4773-10GS	2759-55G	2142	

Handy Case

- The outside of handy case can afford high load capacity, and great crash-resistance. There are four different sizes with the conception of T.C.S mod. Therefore, its design is based on the user perspective , easy to carry and store, make every user enjoying their work.

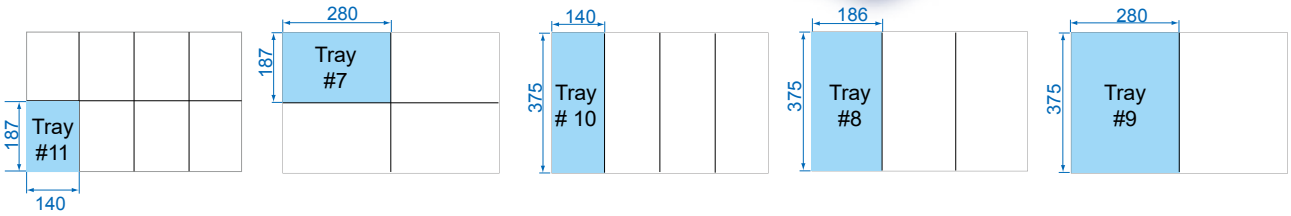

#11

820005
199 x 171 x 50mm

#7

820001
294 x 231 x 66mm

#10

820002
389 x 184 x 66mm

#8

820003
389 x 229 x 66mm

#9

820011
422 x 372 x 92mm

Handy Case

820011

- Made of shockproof PE-HD for heavy duty contents
- Ideal for tool storage & tool box system
- Easy to pile and store
- Anti-collision
- Case for Eva foam / tray

- Steel buckle provides security & strength

- Foam protection against collisions

- Hexagon overlap in 4 corners, easy to file up

- Extra space for thumb taking out

KT NO.	Size mm	EVA / Tray	g	
820011	422 x 372 x 92	#9	1417	1 / 4

82000

- Easy to pile and store
- Case for Eva foam / tray
- Tool case made of sturdy ABS material
- Ideal for tool storage & tool box system

- Easy and quick to lock

- Extra space for thumb taking out

- 180˚ swivel handle easy to carry

- Foam protection against collisions

- Hexagon overlap in 4 corners, easy to pile up

- Plastic padding for better stable storage
- The hinge construction makes box more durable

KT NO.	Size mm	EVA / Tray	g	
820001	294 x 231 x 66	# 7	641	1 /6
820002	389 x 184 x 66	#10	651	1 / 5
820003	389 x 229 x 66	# 8	793	1 / 4
820005	199 x 171 x 50	#11	293	1 / 8

Multi-Storage Case

827011

- Heavy duty plastic blow case with foam padded internal
- High impact polystyrene with dividers make 12 spaces
- Easy to carry tools from trolley & store bolts, nuts
- Mini case (278 x 87 x 42 mm)



Blow case size (mm) :
422 x 372 x 92 (0.51 Cuft)

KT NO.	Contents	kg	
827011	84700011B x4	2.19	1 / 4

Plastic Tray

847000

- For accessories, parts and consumables
- Easily combine the parts box sizes depending on the handy case
- Easy to carry and segment

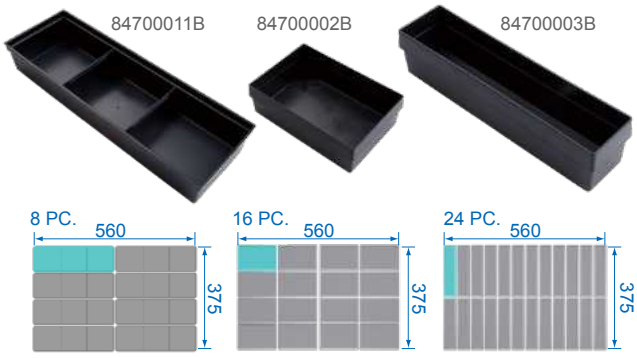

KT NO.	Size	g	
84700011B	283 x 93 x 43	150	8 / 72
84700002B	140 x 93 x 43	75	16 / 144
84700003B	187 x 47 x 43	50	24 / 216

Tools Control & Security Storage System

- How to complete your tool trolley set and tool chest set

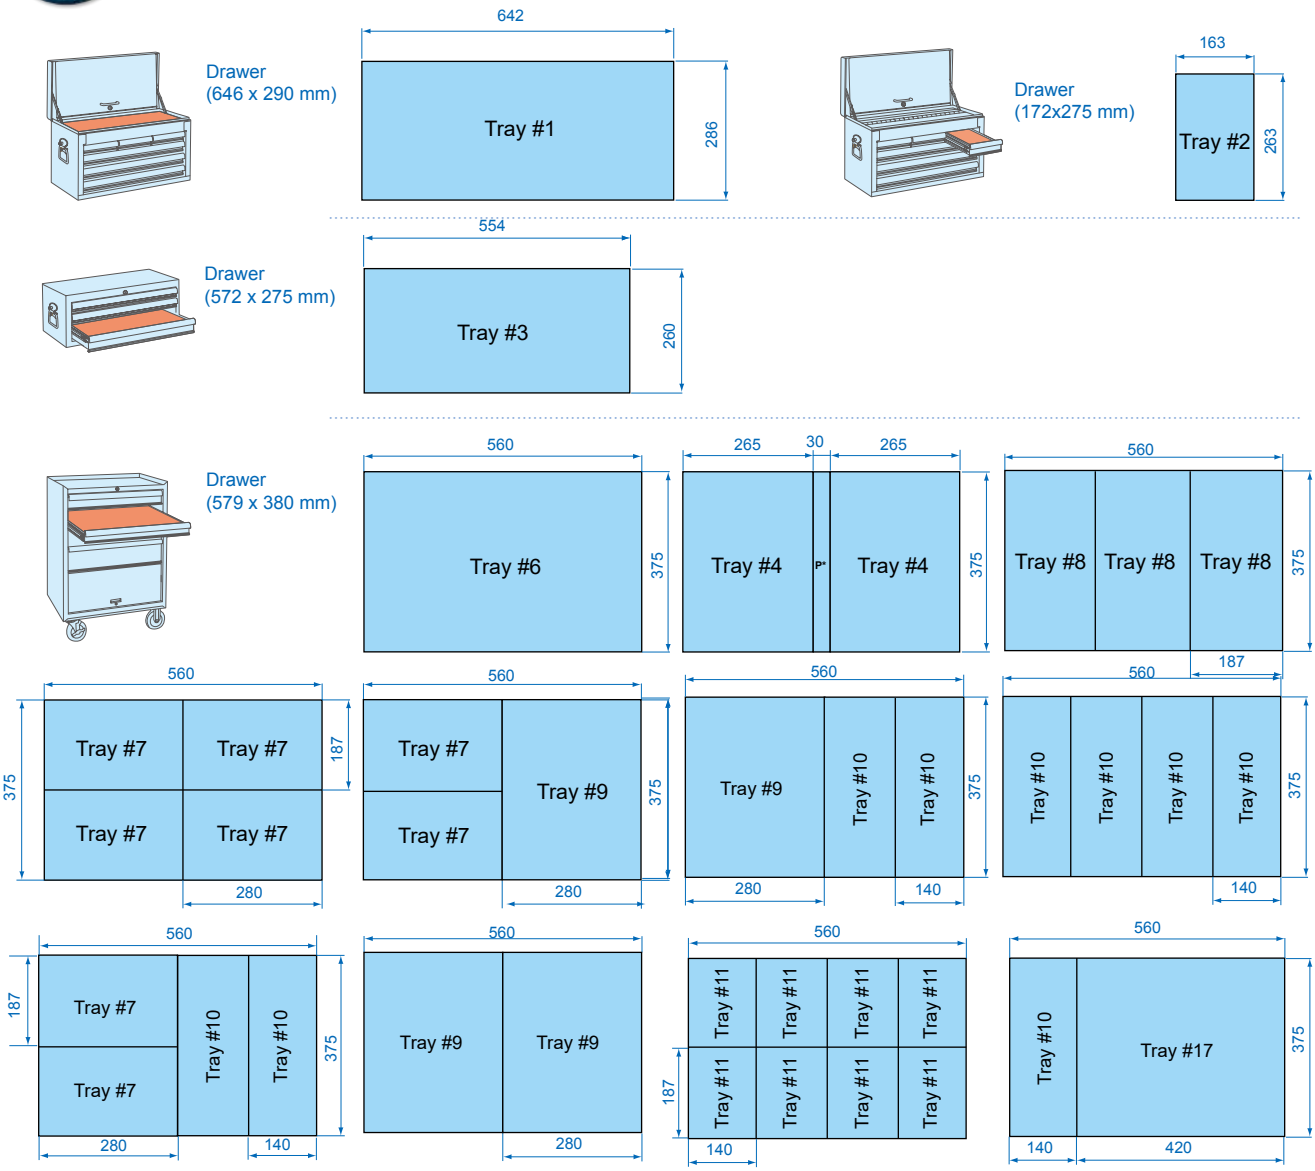

Drawer (896 x 379 mm)

- for 87462-7G-KB

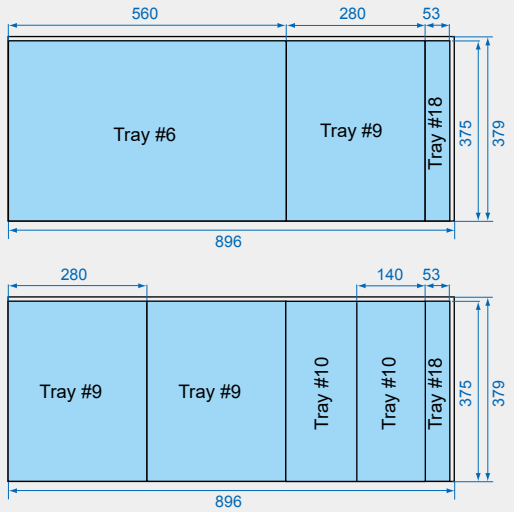



Three-colors fabrication



waterproof

Laser marking

Missing tools detected

- Security : Separate spaces for each tools to prevent them being left in dangerous areas
- Benefit : Tools are quickly located and immediately returned after use to avoid loss 3 colors EVA foam offers convenient identification of use with sustained sizes and mark
- Efficiency : A quick glance helps for missing tools Durable material prevents being dirty for easy maintenance

TOOLS STORAGE & TOOLS SYSTEM SETS

Tool Trolley Contents

Contents No. 934-235MRVD

24.15 CUFT 2.62

235 PC.

- Special tool set for Automobile, suitable for VOLKSWAGEN-GROUP, MERCEDES-BENZ, OPEL, BMW & Japanese passenger car

9-4537MRV #9 P.74 | 9-2565MRV #7 P.70 | 9-4129PRV #7 P.70

9-4147PRV #10 P.82 | 9-90135MRV #10 P.82 | 9-1220MRV #9 P.75

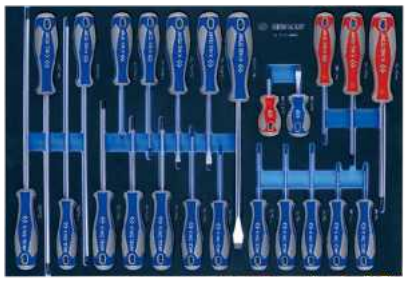

9-31124MRV #6 P.69

9-90119MRV #9 P.76 | 9-40104GPV #10 P.82 | 9-40113GPV #10 P.82

9-44214GPV #10 P.82 | 9-90118PRV #10 P.83

Tool Trolley Set

235 PC.

7 — 88.15 Kg, CUFT 14.86

934-235MRV (87434-7U P.30)

934-235MRV-G (87434-7U-G P.30)

7 — 90.29 Kg, CUFT 18.26

9634-235MRV (87634-7B P.32)

9634-235MRV-G (87634-7B-G P.32)

9634-235MRV-B (87634-7B-B P.32)

Tool Trolley Contents

Contents No. 934-010MRVD

28.1 Kg CUFT 2.51

- Special tool set for automobile, suitable for VOLKSWAGEN-GROUP, MERCEDES-BENZ, OPEL, BMW & Japanese passenger car

286 PC.

9-3544MRV #9 P.73

9-4537MRV #9 P.74

9-4147PRV #10 P.82 | 9-4401MPV #10 P.82

9-2565MRV #7 P.70
9-4129PRV #7 P.70

9-90119MRV #9 P.76

9-1220MRV #9 P.75

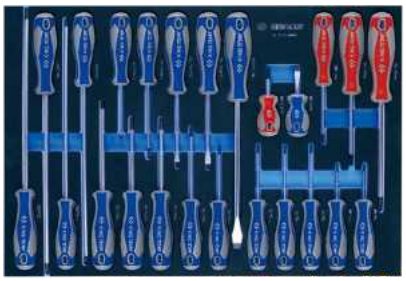

9-31124MRV #6 P.69

9-40104GPV #10 P.82 | 9-40113GPV #10 P.82 | 9-90135MRV #10 P.82 | 9-90118PRV #10 P.83

Tool Trolley Set

286 PC.

7 — 92.10 Kg, CUFT 15.03

934-010MRV (87434-7U P.30)

934-010MRV-G (87434-7U-G P.30)

7 — 94.24 Kg, CUFT 18.43

9634-010MRV (87634-7B P.32)

9634-010MRV-G (87634-7B-G P.32

9634-010MRV-B (87634-7B-B P.32)

Tool Trolley Contents

Contents No. 934-011MRVD

33.14 CUFT 3.75

325 PC.

9-3544MRV #9 P.73 | 9-4537MRV #9 P.74

9-2565MRV #7 P.70
9-4143FRV #7 P.71
9-1112MRV #9 P.76

9-90119MRV #9 P.76 | 9-1220MRV #9 P.75

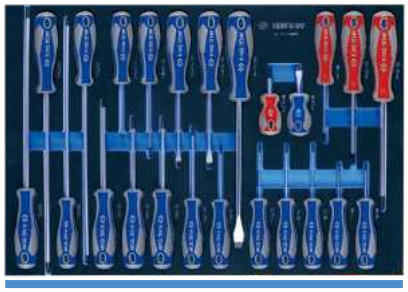

9-31124MRV #6 P.69

9-40104GPV #10 P.82 | 9-40113GPV #10 P.82 | 9-90135MRV #10 P.82 | 9-90118PRV #10 P.83

9-90413TQV #6 P.69

7962-04
P.470

9DC23
P.583

2121-18 P.591

7963-04
P.470

14210212 P.365
14226512 P.365

9-44214GPV #10 P.82 | 9-22108MRV #9 P.77

Tool Trolley Set

325 PC.

7 | 97.14 CUFT 15.99

934-011MRV (87434-7U P.30)

934-011MRV-G (87434-7U-G P.30)

7 | 99.28 CUFT 19.39

9634-011MRV (87634-7B P.32)

9634-011MRV-G (87634-7B-G P.32)

9634-011MRV-B (87634-7B-B P.32)

7 | 99.10 CUFT 18.36

9SQ-011MRV-BK (87SQ31-7B-BK P.23)

Tool Trolley Contents

Contents No. 934-019MRVD 56.68 CUFT4.6

327 PC.

9-9003MRV01 #6 P.66

9-6314MRV #6 P.66

9-99430MFV #6 P.66

9-30208MRV #9 P.77 9-1220MRV #9 P.75

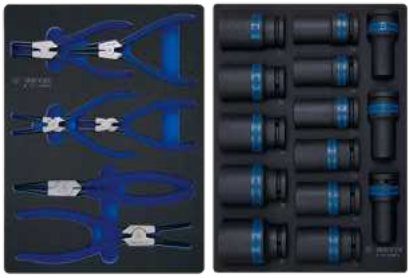

9-42116GPV #9 P.76 9-6414MPV #9 P.75

9-40104GPV #10 P.82 9-40113GPV #10 P.82 9-4147PRV #10 P.82 9-90118PRV #10 P.83

9-10112MRV #7 P.71
9-4143FRV #7 P.71
9-1044CQV #10 P.83
9-21-20-07MRV #10 P.83

Tool Trolley Set

327 PC.

7 120.68 CUFT 16.84

934-019MRV (87434-7U P.30)

934-019MRV-G (87434-7U-G P.30)

7 122.82 CUFT 20.24

9634-019MRV (87634-7B P.32)

9634-019MRV-G (87634-7B-G P.32)

9634-019MRV-B (87634-7B-B P.32)

Tool Set Content *New*

Contents No. 934-086MRVD

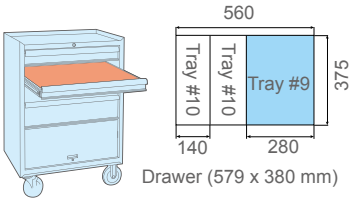

86 PC.

9-12FVE15MRV #9 P.78

9-12FVG15MRV #9 P.78

9-40606GPV #9 P.79

9-55VE01MRV #9 P.78

9-30612MRV #9 P.79

Tool Trolley Contents

Contents No. 935-525CRVD 68.08 CUFT 6.51

525 PC.

9-9003MRV01 #6 P.66

9-6314MRV #6 P.66

9-9040SRV #9 P.74 9-4129PRV #7 P.70
9-3612MR #7 P.122

9-4147PRV 9-4401MPV 9-4435MP #9 P.124
#10 P.82 #10 P.82

9-1112MRV #9 P.76 9-1220MRV #9 P.75

9-90119MRV #9 P.76 9-91190CRV #9 P.77

9-91124MRV #6 P.69

9-90217GRV #6 P.68

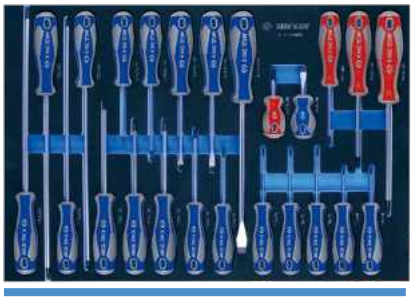

9-31124MRV #6 P.69

9-22108MRV #9 P.77 9-4143FRV #7 P.71
9-30904AY #7 P.72

9-90413TQV #6 P.69

74010
P.486

74020
P.486

74060
P.486

7861-16
P.462

7811-12
P.462

7851-16
P.463

7911-12
P.488

21-20-101
P.473

6532-14
P.358

79094-08C
P.475

Tool Trolley Set XXL

525 PC.

13

234.08
CUFT 38.05

935-525CRV
(87435-13B P.32)

Tool Chest Set

911-004CRV

47.38 CUFT 6.51

T.C.S.

187 PC.

9-9077CRV #1 P.63

9-42102GPV #2 P.64 | 9-40122GPV #2 P.64 | 9-40112GPV #2 P.64

9-91131MRV #3 P.65

9-91126SRV #3 P.65

9-90145CRV #3 P.65

79093-05C
P.475

7811-16
P.462

87411-6B
P.39

Tool Chest Set

911-000CRV

48.27 CUFT 6.10

T.C.S.

219 PC.

9-7069CRV #1 P.63

9-42114GPV #2 P.64 | 9-40102GPV #2 P.64 | 9-2548CRV #2 P.64

9-90129CRV #3 P.65

9-90128SR #3 P.106

9-90138CR #3 P.112

7911-12
P.488

87411-6B
P.39

Tool Chest Set

919-001CRV

66.01 CUFT 11.05

T.C.S. 306 PC.

9-9003MRV01 #6 P.66

9-9040SRV #9 P.74 | 9-1220MRV #9 P.75

9-90217GRV #6 P.68

9-31110MRV #9 P.78 | 9-91190CRV #9 P.77

9-91124MRV #6 P.69

79094-08C
P.475

7911-12
P.488

87419-5B
P.39

Tool Set Content

9-7069CRV

Tray category #1 (642 x 286mm)

Drawer (646x290 mm)



70 PC.

Contents — 66.01 Kg — 1 / 2

3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22
3330S	3/8, 7/16, 1/2, 9/16, 5/8, 11 /16, 3/4, 13 /16
4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32
4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11 /16, 3/4, 13 /16, 7/8, 15/16, 1
463516RC	463521RC, 3792
4791R	3779-08G, 4779-10GR
3452-08F	4452-15FR, 3812
3571-08	4572-10, 4813
3221-03, 3221-06	4251-05R, 4251-10R, 7911-12

7911-12

9-9077CRV

Tray category #1 (642 x 286mm)

77 PC.

Contents — 7.95 Kg — 1 / 2

2330M	4, 5, 6, 7, 8, 9, 10
2330S	3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8
3330M	10, 11, 12, 13, 14, 15, 17, 19
3330S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16
4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32
4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4
463021RC	2792, 3792, 4791R
2779-55G	3779-08G, 3814
4779-10GR	2221-04, 3221-06
4251-10R	3452-08F, 4452-15FR
4572-12	

Tool Set Content

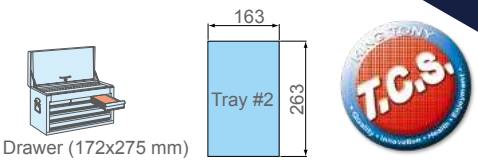

9-2548CRV

Tray category #2 (263 x 163mm)

48 PC.

Contents — 1.28 Kg — 1 / 10

2235M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
2792	
2813	
2779-55G	
2221-02 2221-04	

9-40102GPV

Tray category #2 (263 x 163mm)

2 PC.

Contents — 1.00 Kg — 1 / 10

6011-10 6511-10

9-40112GPV

Tray category #2 (263 x 163mm)

2 PC.

Contents — 0.69 Kg — 1 / 10

6231-08 6311-08

9-40122GPV

Tray category #2 (263 x 163mm)

2 PC.

Contents — 0.95 Kg — 1 / 10

6111-08 6011-10

9-42102GPV

Tray category #2 (263 x 163mm)

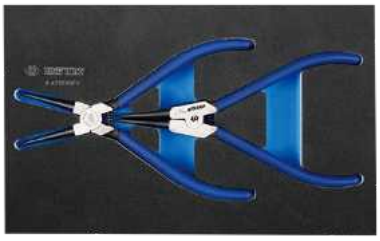

2 PC.

Contents — 0.32 Kg — 1 / 10

68HS-07 68SS-07

9-42114GPV

Tray category #2 (263 x 163mm)

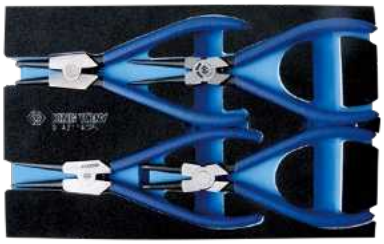

4 PC.

Contents — 0.60 Kg — 1 / 10

68HS-07 68SS-07

68HB-07 68SB-07

Tool Set Content





9-91126SRV

Tray category #3 (554 x 260mm)

Contents	3.28 Kg	1 / 3
5060	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1	
5930	5/16 x 3/8, 3/8 x 7/16, 1/2 x 9/16, 9/16 x 5/8	
1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	
3611R	6, 12	

26 PC.

9-91131MRV

Tray category #3 (554 x 260mm)

Contents	2.98 Kg	1 / 4
1930	8x10, 10x12, 11x13, 14x17	
1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24	
1125MR	H1.5, H2.5, H2, H3, H4, H5, H6, H8, H10	

31 PC.

9-90145CRV

Tray category #3 (554 x 260mm)

Contents	4.04 Kg	1 / 3
1060	27, 30, 32	
5060	1-1/16, 1-1/8, 1-1/4	
1481	PH1x75, PH2x100, PH3x150	
1482	5.5x75, 6.5x100, 8x150	
1025S	3.0, 4.0, 5.0, 6.0	
1025P	PH1, PH2 x 2, PH3	
1025Z	PZ1, PZ2 x 2, PZ3	
1025T	T10, T15, T20, T25, T27, T30, T40	
1025H	H3, H4, H5, H6	
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H	
7702-25	753-63	2141

45 PC.

9-90129CRV

Tray category #3 (554 x 260mm)

Contents	2.5 Kg	1 / 4
1421	PH0 x 60, PH1 x 80, PH2 x 38, PH2 x 100, PH3 x 150	
1422	3 x 75, 6.5 x 38, 6.5 x 100, 6.5 x 150, 8 x 175	
1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	
6111-07	6231-07	
6311-06		

29 PC.

Tool Set Content



9-6314MRV

Tray category #6 (560 x 375mm)

Contents — 9.96 kg — 1 / 2

6335M	33, 34, 35, 36, 38, 41, 46, 50
6572-20	6779-20F
6251-04 6251-08 6251-16	6814

14 PC.

9-9003MRV01

Tray category #6 (560 x 375mm)

Contents — 7.30 kg — 1 / 3

2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
3023	T10,T15,T20,T25,T27,T30,T40,T45,T50
3025	H3,H4,H5,H6,H8,H10,H12
3235M	10,12,13,14,15,16,17,18,19,21
3330M	8,10,11,12,13,14,15,16,17,18,19,20,21,22
4330MR	10,12,13,14,15,16,17,18,19,20,21,22,23,24,27,28,30,32
7702-50	7703-50
2792	3792
4791R	
363516	363521
36A014	

103 PC.

2813 3812 4813

2221-02 2221-04 3221-03 3221-10 4251-05R 4251-10R

2771-55G 3771-08G

4771-10GR 4462-18F

9-99430MFV

30 PC.

9-99430MFV

Contents — 12.38 kg — 1 / 2

8435M	27, 30, 32, 33, 36
6575M	E24, E26, E28, E30, E32
3375M	E4, E5, E6, E7, E8, E11
4375M	E10, E12, E14, E16, E18, E20, E22
4025	H14, H17, H19
8866P	7823-20
320560	9DC22

9-99430MFV01

Tray category #6 (560 x 375mm)

31 PC.

9-99430MFV01

Contents — 12.38 kg — 1 / 2

8435M	27, 30, 32, 33, 36
6575M	E24, E26, E28, E30, E32
3375M	E4, E5, E6, E7, E8, E11
4375M	E10, E12, E14, E16, E18, E20, E22
4025	H14, H17, H19
4866P	8866P 7823-20
320560	9DC22

Tool Set Content



9-44803AMPV

9-44803AMPV01

Tray category #6 (560 x 375mm)

41 PC.

9-44803AMPV

9-44803AMPV01

9.50 | 1 / 2

KT NO.		Contents
9-44803AMPV	33481-095	4945M: 17, 19, 21 4435M: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 4535M: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32
9-44803AMPV01	33411-050	

79900-10
34423-1A
4797P
4260-03P
4260-05P
SY-211M x2
33411-71

9-44805AMPV

Tray category #6 (560 x 375mm)

41 PC.

Contents

9.76 | 1 / 2

4945M	17, 19, 21
4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32
33481-095	37435-075 33411-71
34423-1A	SY-211M x2
4797P	4260-03P 4260-05P

9-94437MRV

Tray category #6 (560 x 375mm)

37 PC.

Contents

4.61 | 1 / 2

1060	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24
3731M	8, 10, 11, 12, 13, 14, 15
4435M	17, 19, 21
1836P	PH2, PH3
1836S	9, 11
1880P	PH2, PH3
1880S	8, 10
4112	414810S

9-91215MRV

Tray category #6 (560 x 375mm)

New

- Blow case size (mm) : 422 x 360 x 90 (0.48 cuft)

15 PC.

Contents

4.61 | 1 / 2

1062	27, 28, 29, 30, 32
373A	8, 10, 11, 13, 17, 19, 22, 24
3611-12R	6011-10

Tool Set Content



9-90217GRV

Tray category #6 (560 x 375mm)

Contents — 3.89 Kg — 1 / 6

764	3,4,5,6
76105-06	76717-05
7811-16	6011-10
6111-08	6231-07
6311-08	6314-05
68HB-07	68HS-07
68SB-07	68SS-07
6511-10C	

17 PC.

9-91122MRV

Tray category #6 (560 x 375mm)

Contents — 3.18 Kg — 1 / 5

1060	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24
115HM	H6, H7, H8, H9, H10, H11, H12, H13

22 PC.

9-22124MRV50

Tray category #6 (560 x 375mm)

Contents — 2.18 Kg — 1 / 5

115HM	H7, H8, H10, H11, H12, H13
ST20109MR	ST20419PR

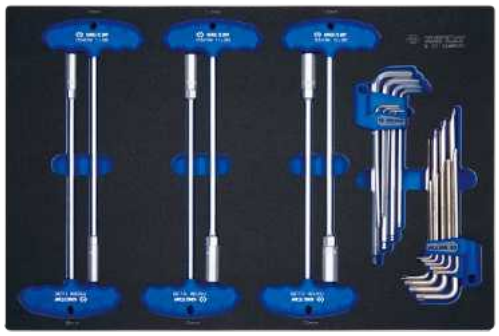

24 PC.

9-31920MRV

Tray category #6 (560 x 375mm)

Contents — 2.01 Kg — 1 / 2

1421	PH0 x 60, PH2 x 38, PH2 x 300
1422	3 x 75, 6.5 x 38, 6.5 x 300
1427	T8H x 75, T10H x 75, T15Hx 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125,
1461	PH2 x 100, PH3 x 150
1462	6.5 x 100, 8 x 150
43280212	48280180
2121-18	

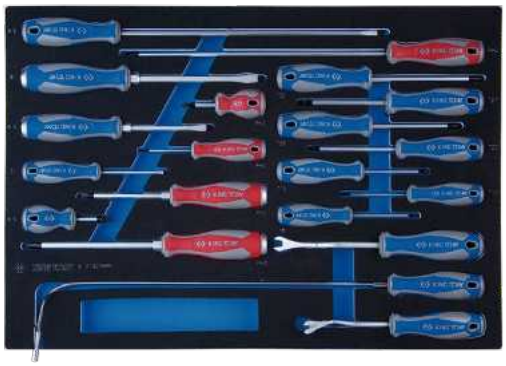

20 PC.

Tool Set Content



9-31124MRV

Tray category #6 (560 x 375mm)

Contents — 2.41 Kg — 1 / 5

	1421	PH2x38, PH1x80, PH2x100, PH3x150
	1422	3x75, 4x100, 5.5x100, 6.5x100, 10x200, 6.5x38
	1423	T6x48, T7x48, T8x75, T9x75, T10x75, T15x75, T15x250, T20x100, T20x250, T25x100, T25x250, T27x100, T30x125, T30x250

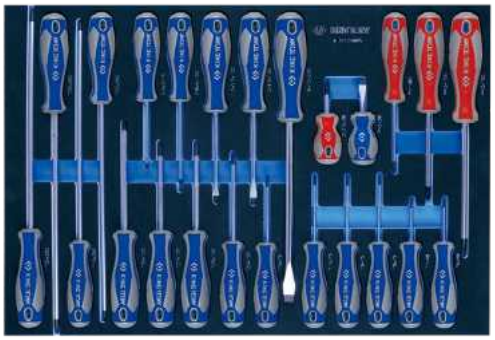

24 PC.

9-91124MRV

Tray category #6 (560 x 375mm)

Contents — 4.12 Kg — 1 / 5

	3731	10, 12, 13, 14, 17, 18, 19	
	1421	PH2 x 300	
	1422	5 x 300	
	74030		6615-11
	3611-10R 3611-12R		9TK118
	79063-12		11409SQ05

11409SQ05

24 PC.

9-90413TQV

Tray category #6 (560 x 375mm)

Contents — 2.49 Kg — 1 / 5

	15HM	8, 10, 13	
	9CZ101		115345R
	48280180		43280212
	43240115Y		75102-08G
	75202-08G		75302-08G
	75402-08G		75502-08G

13 PC.

9-91217MRV

Tray category #6 (560 x 375mm)

Contents — 6.11 Kg — 1 / 2

	1421	PH1 x 80, PH2 x 100
	1422	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175
	1423	T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125
	48280180	9CF220
	7823-10 7823-20	7821-30

17 PC.

Tool Set Content





Drawer (579 x 380 mm)

9-2331SRV

Tray category #7 (280 x 187mm)

Contents — 0.97 Kg / 1 / 10

2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16
2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16
2771-55G	2571-45 / 2142
2221-02, 2221-04, 2221-06	2792 / 2178DF

31 PC.

9-2534MRV

Tray category #7 (280 x 187mm)

Contents — 1.11 Kg / 1 / 10

2335M	4, 4.5, 5 ,5.5 , 6 , 7 , 8 , 9 , 10 , 11 , 12 , 13, 14
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2771-55G	2571-45
2792	2178DF / 2142
2221-02, 2221-04, 2221-06	

34 PC.

9-2565MRV

Tray category #7 (280 x 187mm)

Contents — 1.38 Kg / 1 / 10

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2375M	E4, E5, E6, E7, E8
2013X	T8, T9, T10, T15, T20, T25, T27, T30, T40
2015X	H3, H4, H5, H6, H8
2018X	PZ1, PZ2
2011X	PH1, PH2
2012X	3.5, 5.5, 8
1025T	T6, T7
1025M	M4, M5, M6, M8, M10

65 PC.

Contents

2792 / 2813 / 276A-04G

2221-02, 2221-04, 2221-06

9-4138PRV

Tray category #7 (280 x 187mm)

Contents — 1.85 Kg / 1 / 10

4033	T20, T25, T27, T30, T40, T45, T50, T55, T60
4035	H4, H5, H6, H7, H8, H10, H12, H14, H17

18 PC.

9-4129PRV

Tray category #7 (280 x 187mm)

Contents — 2.07 Kg / 1 / 10

4025	H3, H4, H5, H6, H7, H8, H10, H12, H14, H17, H19
4026	M5, M6, M8, M10, M12, M14
402B	M16, M18

19 PC.

Tool Set Content



280	280	
Tray #7	Tray #7	187
Tray #7	Tray #7	187

Drawer (579 x 380 mm)

9-7128PRV

Tray category #7 (280 x 187mm)

Contents — 1.30 kg / 1 / 10

	3023	T15, T20, T25, T27, T30, T40, T45, T50
	3025	H3, H4, H5, H6, H7, H8 H10, H12
	3375	E8, E10, E12, E14, E16, E18
	4375	E10, E12, E14, E16, E18, E20

28 PC.

9-4429MPV

Tray category #7 (280 x 187mm)

Contents — 2.75 kg / 1 / 4

	4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32, 33, 34, 36

19 PC.

9-10112MRV

Tray category #7 (280 x 187mm)

Contents — 1.13 kg / 1 / 10

	3731	10, 11, 12, 13, 14, 15, 16, 17, 19
	373202R	373203R 373204R

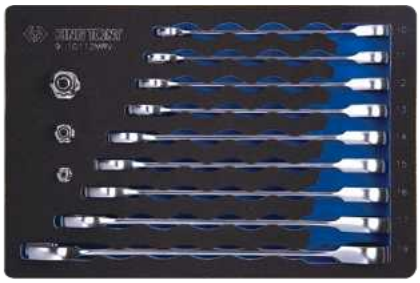

12 PC.

9-4143FRV

Tray category #7 (280 x 187mm)

Contents — 1.63 kg / 1 / 8

	1636H	H5, H6, H7, H8, H10, H12
	1636M	M6, M8, M10, M12
	1636T	T30, T40, T45, T50, T55, T60
	1832H	H3, H4, H5, H6, H7, H8, H10, H12
	1832T	T15, T20, T25, T27, T30, T40, T45, T50
	1836P	PH2, PH3
	1836S	9 x 1.6, 11 x 2
	1880P	PH2, PH3

43 PC.

Contents

	1880S	8 x 1.2, 10 x 1.6
	414810M, 414810S	4112

9-25VE01MRV

Tray category #7 (280 x 187mm)

Contents — 1.30 kg / 1 / 10

	2335VE	5, 6, 7, 8, 9, 10, 11, 12, 13, 14,
	2035VE	H3, H4, H5, H6
	2221VE	4, 6
	2771VE-55	2178VE-05

18 PC.

Tool Set Content

9-30904AYV

Tray category #7 (280 x 187mm)



4 PC.

Contents — 0.45 Kg — 1 / 10

43250115Y	43270115Y
43260115Y	43290115Y

Tool Set Content

9-35VE01MRV

Tray category #8 (375 x 187mm)



14 PC.

Contents — 2.16 Kg — 1 / 6

3335VE	10, 11, 12, 13, 14, 17, 19	
3025VE	H5, H6, H8	
3221VE	6, 10,	
3771VE-08		3178VE-08

9-45VE01MRV

Tray category #8 (375 x 187mm)

16 PC.

Contents — 3.22 Kg — 1 / 6

4335VE	8, 10, 12, 13, 14, 17, 19, 21, 22, 24	
4025VE	H8, H10	
4251VE	5, 10	
4771VE-10		4178VE-08

9-2550MRV

Tray category #8 (375 x 187mm)

50 PC.

Contents — 1.37 Kg — 1 / 15

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2375M	E4, E5, E6, E7, E8
2031	PH1, PH2, PH3, PH4
2032	4, 5.5, 6.5, 8, 10
2033	T8, T9, T10, T15, T20, T25, T27, T30, T40
2035	H3, H4, H5, H6, H7, H8, H10

Contents

2771-55G	2178DF
2792	2571-45
2293-04 2293-06	2221-02

Tool Set Content

9-30909AYV

Tray category #8 (375 x 187mm)

- Use for scribing, alignment, installing and removing O rings, seals, cotter pins and washers
- Use for removing old gaskets more easily and quickly



Drawer (579 x 380 mm)

Tray category #8 (375 x 187mm)

9 PC.

Contents — 0.89 / 1 / 12

43250115Y	43350175Y
43260115Y	43360175Y
43270115Y	43370175Y
43290115Y	43390175Y
43240115Y	

Tool Set Content

9-3544MRV

Tray category #9 (375 x 280mm)

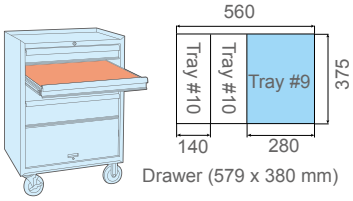

Drawer (579 x 380 mm)

44 PC.

Contents — 3.19 / 1 / 5

3335M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22
3375M	E7, E8, E10, E11, E12
3230M	8, 10, 11, 12, 13, 14, 16, 17, 19
3750M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19

3812, 3814, 3223-14, 3779-08G, 3221-03, 3221-06, 3221-10

9-4221MRV

Tray category #9 (375 x 280mm)

21 PC.

Contents — 3.97 / 1 / 5

4230	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32, 33, 34, 36

9-4526MRV05

Tray category #9 (375 x 280mm)

24 PC.

Contents — 5.05 / 1 / 4

4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32

4779-10FR, 4572-12, 4452-15FR, 4791R, 4251-05R, 4251-10R

Tool Set Content

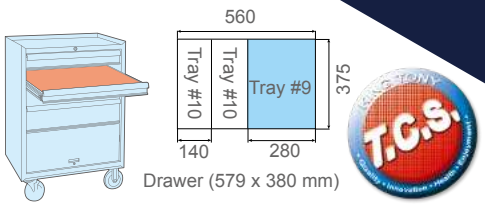

9-4527MRV02

Tray category #9 (375 x 280mm)

Contents — 4.72 — 1 / 5

4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 29, 30, 32
4771-10GR	4791R
4572-12	4251-05R 4251-10R
4452-15FR	4581-10

27 PC.

9-4537MRV

Tray category #9 (375 x 280mm)

Contents — 4.39 — 1 / 5

4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 26, 27, 28, 30, 32
4375M	E10, E12, E14, E16, E18, E20, E22, E24
4779-10GR	4293-02
4251-05R 4251-10R	463516RC 463521RC
4791R	463014RC

37 PC.

9-9040SRV

Tray category #9 (375 x 280mm)

Contents — 3.02 — 1 / 5

2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
3330S	3/8, 7/16, 1/2, 9/16, 5/8
4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-1/4,
5060	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 7/8, 15/16, 1

40 PC.

9-7560MRV01

Tray category #9 (375 x 280mm)

Contents — 6.24 — 1 / 2

2335M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
4335MR	10, 11, 13, 14, 15, 16,17, 18, 19, 20, 21, 22, 24, 27, 30, 32
1025S	3, 4.5, 5, 6.5, 8
1025P	PH0, PH1, PH2, PH3
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1025Z	PZ1, PZ2, PZ3
276A-04G	4771-10GR
4452-15FR	4572-12 / 2745
213312DF	2792 / 4791R
2223-02 2223-04	4251-05R 4251-10R / 2813

60 PC.

Tool Set Content

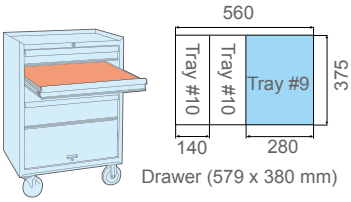

9-4419MPV

Tray category #9 (375 x 280mm)

Contents		5.6	1 / 2
	4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32, 33, 34, 36	

19 PC.

9-6414MPV

Tray category #9 (375 x 280mm)

Contents		10.08	1 / 2
	6435M	19, 21, 22, 24, 26, 27, 29, 30, 32, 33, 35, 36, 38, 41	

14 PC.

9-1220MRV

Tray category #9 (375 x 280mm)

Contents		3.49	1 / 4
	1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	

20 PC.

9-12D20MRV

Tray category #9 (375 x 280mm)

Contents		3.45	1 / 4
	1062	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	

20 PC.

Tool Set Content

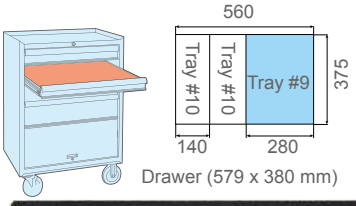

9-12A1MRV

Tray category #9 (375 x 280mm)

Contents — 1.75 Kg — 1 / 10

	1061	8, 10, 12, 13, 14, 16, 17, 18, 19, 22, 24

11 PC.

9-1112MRV

Tray category #9 (375 x 280mm)

Contents — 2.34 Kg — 1 / 4

	1900	6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x27, 25x28, 30x32

12 PC.

9-90119MRV

Tray category #9 (375 x 280mm)

Contents — 3.04 Kg — 1 / 4

	1970	6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 24x27, 30x32
	1143	T10, T15, T20, T25, T27,T30, T40, T45, T50

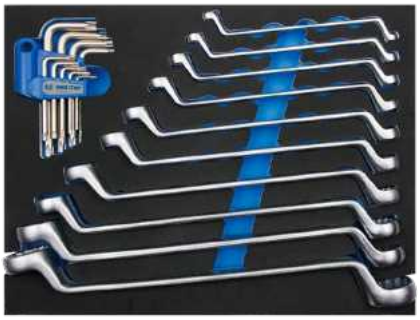

19 PC.

9-42116GPV

Tray category #9 (375 x 280mm)

Contents — 1.54 Kg — 1 / 5

68SB-07	68HS-07	68SS-07
68HB-07	68HS-10	68SS-10

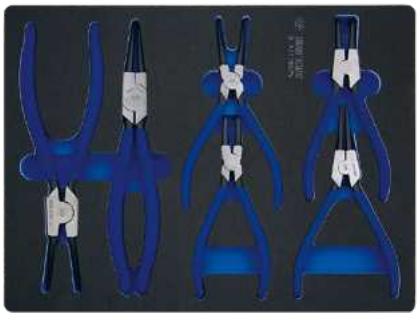

6 PC.

Tool Set Content

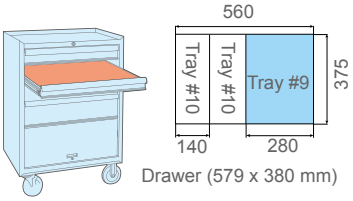

9-91190CRV

Tray category #9 (375 x 280mm)

Contents — 2.22 Kg / 1 / 10

	1025S	3.0, 4.0, 5.0, 6.0
	1025P	PH1, PH2 x 2, PH3
	1025Z	PZ1, PZ2 x 2, PZ3
	1025T	T10, T15, T20, T25, T27, T30, T40
	1025H	H3, H4, H5, H6
	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
	1025R	RB2
	7702-25	753-63
	10D0	10,12,13,14,17,18,19
	1130MR	H2.5, H3, H4, H5, H6, H8, H10

90 PC.

	1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8
	1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H
	3611-06R 3611-08R	77328-26
	276A-04G	

9-22108MRV

Tray category #9 (375 x 280mm)

Contents — 0.89 Kg / 1 / 5

	1160MR	H2, H2.5, H3, H4, H5, H6, H8, H10

8 PC.

9-22308TRV

Tray category #9 (375 x 280mm)

Contents — 0.71 Kg / 1 / 10

	1163TR	T10, T15, T20, T25, T30, T40, T45, T50

8 PC.

9-30208MRV

Tray category #9 (375 x 280mm)

Contents — 1.41 Kg / 1 / 5

	1461	PH1 x 75, PH2 x 100, PH3 x 150
	1462	5.5 x 100, 6.5 x 100, 6.5 x 150, 8 x 150, 8 x 175

8 PC.

Tool Set Content

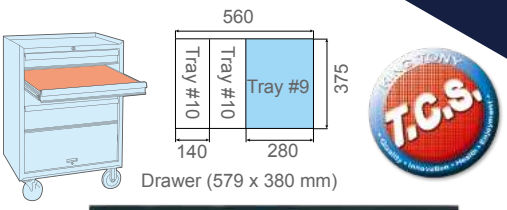

9-31110MRV

Tray category #9 (375 x 280mm)

Contents — 2.46 | 1 / 5

	1421	PH1 x 80, PH2 x100, PH3 x 150, PH2 x 38
	1422	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 38, 6.5 x 150, 8 x 175

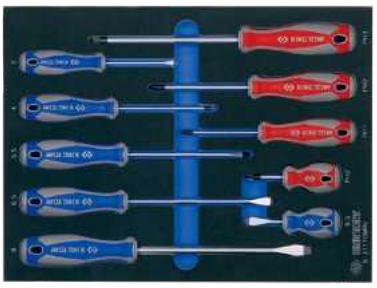

10 PC.

9-55VE01MRV

Tray category #9 (375 x 280mm)

Contents — 2.34 | 1 / 5

	2335VE	5, 6, 7, 8, 9, 10, 11, 12, 13, 14,
	2035VE	H3, H4, H5, H6
	2221VE	4, 6
	3335VE	10, 11, 12, 13, 14, 15, 16, 17, 18, 19
	3235VE	8, 10, 12, 14
	3025VE	H8, H10
	3221VE	6, 10
	2771VE-55	2178VE-05
	3771VE-08	3178VE-08

38 PC.

9-12FVE15MRV

Tray category #9 (375 x 280mm)

Contents — 1.96 | 1 / 10

	10F0	7, 8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24

15 PC.

9-12FVG15MRV

Tray category #9 (375 x 280mm)

Contents — 2.86 | 1 / 5

	10G0	7, 8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24

15 PC.

Tool Set Content

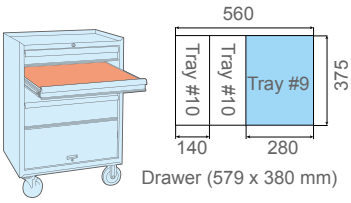

9-30612MRV

Tray category #9 (375 x 280mm)

12 PC.

Contents — 1.30 Kg — 1 / 10

⊕	1471	PH0 x 75, PH1 x 100, PH2 x 100, PH3 x 150
⊖	1472	3 x 75, 4 x 100, 3.5 x 100, 5.5 x 125, 6.5 x 150, 8 x 175
▣	1474	1 x 125, 2 x 150

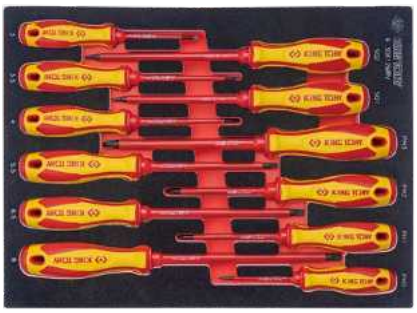

9-40606GPV

Tray category #9 (375 x 280mm)

6 PC.

Contents — 1.88 Kg — 1 / 10

6216-06A	6116-07A
6318-08A	6336-08A
6716-06A	6146-08A

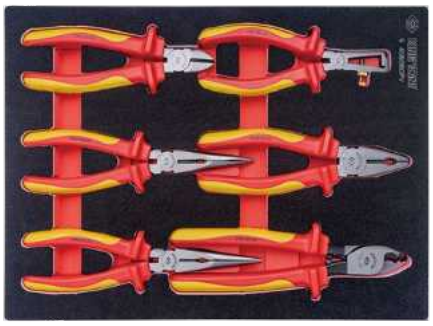

9-35VE02MRV

Tray category #9 (375 x 280mm) **New**

22 PC.

Contents — 1.52 Kg — 1 / 10

○	3335VE	06, 07, 08, 09, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19
	10F0VE	7, 8, 10, 12, 14
	3221VE	6, 10,
	3771VE-08	

9-90VE09CRV

Tray category #9 (375 x 280mm) **New**

9 PC.

Contents — 1.52 Kg — 1 / 10

⊖	1471	VDE PH1 x 100, PH2 x 100
⊕	1472	VDE 3 x 75, 4 x 100, 5.5 x 125
	6116-07A	6216-06A
	6318-08A	6CB02

Tool Set Content

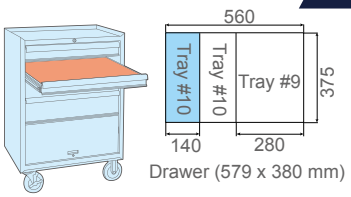

9-2544SRV

9-2044SRV

Tray category #10 (375 x 140mm)

9-2544SRV

9-2044SRV

44 PC.

KT NO. | Contents | 0.92 | 1 / 6

KT NO.			Contents	
9-2544SRV	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2	2235S: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2 1025S: 3, 4.5, 5, 6.5, 8 1025P: PH0, PH1, PH2, PH3 5025H: H3/64, H1/16, H5/64, H3/32, H7/64, H1/8, H9/64, H5/32	2752-06G 2178DF 2792 2223-02 2223-04 2142
9-2044SRV	2330S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2		

9-2548MRV

9-2048MRV

Tray category #10 (375 x 140mm)

9-2548MRV

9-2048MRV

48 PC.

KT NO. | Contents | 1.09 | 1 / 6

KT NO.			Contents	
9-2548MRV	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	2235M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 1025S: 3, 4.5, 5, 6.5, 8 1025P: PH0, PH1, PH2, PH3 1025H: H3, H4, H5, H6, H7, H8, H10	2752-06G 2178DF 2792 2223-02 2223-04 2142
9-2048MRV	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		

Tool Set Content



9-2553MRV

Tray category #10 (375 x 140mm)

Contents — 0.98 Kg — 1 / 6

○	2335M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
⬢	1025H	H3, H4, H5, H6, H7, H8, H10
⊖	1025S	3, 4.5, 5, 6.5, 8
⊕	1025P	PH0, PH1, PH2, PH3
✡	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
✳	1025Z	PZ1, PZ2, PZ3
★	1025T	T10, T15, T20, T25, T27, T30, T40

53 PC.

Contents

7702-25	2792	2813
276A-04G	213312DF	
2223-02 2223-04	2745	

9-2553MRV01

Tray category #10 (375 x 140mm)

Contents — 0.97 Kg — 1 / 6

○	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
⬢	1025H	H3, H4, H5, H6, H7,H8, H10
★	1025T	T10, T15, T20, T25, T27, T30, T40
✡	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
⊕	1025P	PH1, PH2, PH3
✳	1025Z	PZ1, PZ2, PZ3
⊖	1025S	3, 4.5, 5, 6.5, 8

55 PC.

Contents

7702-25	276A-04G		
2571-45	213312DF		
2221-02 2221-04 2221-06	2745	2792	2142

9-3523MRV10

Tray category #10 (375 x 140mm)

Contents — 1.73 Kg — 1 / 6

○	3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 23, 24
	3771-08G	3792
	3571-08	3452-08F
	3293-03 3293-06	

23 PC.

9-3523MRV11

9-3023MRV11

Tray category #10 (375 x 140mm)

KT NO.	Contents		1.09 Kg — 1 / 6
9-3523MRV11	○ 3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	3771-08G 3293-03 3293-06 3453-08 3571-08 3792
9-3023MRV11	○ 3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	

9-3523MRV11

9-3023MRV11

23 PC.

Tool Set Content



9-4147PRV

Tray category #10 (375 x 140mm)

Contents — 1.81 Kg — 1 / 5

	40D0	H6, H8, H10
	4066	M8, M9, M10, M12, M14
	4023	T20, T25, T27, T30, T40 T45, T50, T55, T60

17 PC.

9-4401MPV

Tray category #10 (375 x 140mm)

Contents — 2.23 Kg — 1 / 6

	4945M	17, 19, 21
	4535M	17, 19, 32, 34, 36
	4415M	17, 19, 21

11 PC.

9-90135MRV

Tray category #10 (375 x 140mm)

Contents — 1.81 Kg — 1 / 6

	1930	8x10, 10x12, 11x13, 12x14, 17x19, 19x22
	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

15 PC.

9-90135SRV

Tray category #10 (375 x 140mm)

Contents — 1.28 Kg — 1 / 6

	5930	5/16 x 3/8, 3/8 x 7/16, 1/2 x 9/16, 9/16 x 5/8, 11/16 x 3/4, 3/4 x 7/8
	1125SR	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8

15 PC.

9-40104GPV

Tray category #10 (375 x 140mm)

Contents — 1.08 Kg — 1 / 8

	6311-08		6111-06
	6231-07		6319-11C

4 PC.

9-40113GPV

Tray category #10 (375 x 140mm)

Contents — 1.12 Kg — 1 / 8

6011-10	6516-10C	6314-05

3 PC.

9-44214GPV

Tray category #10 (375 x 140mm)

Contents — 1.08 Kg — 1 / 8

67HS-07	67HB-07	68SS-07	68SB-07

4 PC.

Tool Set Content

9-30216MRV

Tray category #10 (375 x 140mm)



Contents — 0.71 kg — 1 / 6

⊕	1461	PH2 x 100, PH3 X 150
⊖	1462	5.5 X 100, 6.5 X 150
⊕	1411	PH2 x 38
⊖	1412	6.5 x 38

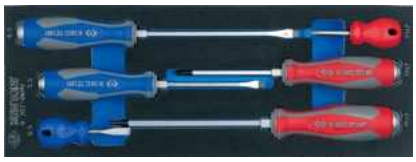

6 PC.

9-1044CQV

Tray category #10 (375 x 140mm)

Contents — 1.75 kg — 1 / 6

●	1636H	H4, H5, H6, H7, H8, H10, H12
●	1680H	H4, H5, H6, H7, H8, H10, H12
●	1636M	M5, M6, M8, M10, M12
●	1680M	M5, M6, M8, M10, M12
★	1636T	T20, T25, T27, T30, T40, T45, T50, T55, T60

44 PC.

Contents

★	1680T	T20, T25, T27, T30, T40, T45, T50, T55, T60
	314810M	414810M

9-90118PRV

Tray category #10 (375 x 140mm)

Contents — 1.28 kg — 1 / 6

76104-05	7821-30
76217-06 76220-07	76403-06 76404-06 76405-65 76406-07

8 PC.

9-90305TQV

9-90305TQV

5 PC.

9-90305TQV01

Tray category #10 (375 x 140mm)

9-90305TQV01

9 PC.

Contents — 0.91 kg — 1 / 6

KT NO.		Contents	
9-90305TQV	9BM120	7971-07	77142-061
9-90305TQV01	11205SQ	77335-25	79093-05C

9-21-20-07MRV

Tray category #10 (375 x 140mm)

Contents — 0.91 kg — 1 / 6

4 x 8 mm	4 x 10 mm	x 20
4 x 8 mm	4 x 10 mm	
4.8 x 8 mm	4.8 x 10 mm	
21-20-101		x 1

121 PC.

Tool Set Content

9-2516MRV03

Tray category #11 (187 x 140mm)

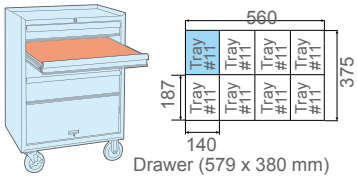

Contents — 0.47 Kg — 1 / 12

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2771-55G	2571-45
2221-06	2792

17 PC.

9-2524MRV

Tray category #11 (187 x 140mm)

Contents — 0.63 Kg — 1 / 12

2335M	4, 4.5, 5 , 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2771-55G	2571-45 2142
2221-02 2221-04 2221-06	2792 2178DF

21 PC.

9-2528MRV

Tray category #11 (187 x 140mm)

Contents — 0.48 Kg — 1 / 12

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11,12, 13, 14
1025H	H3, H4, H5, H6
1025S	4, 5
1025T	T10, T15, T20, T30
1025P	PH1, PH2
276A-04G	2792
2221-06	2142

29 PC.

9-91113SRV

Tray category #17 (375 x 420mm)



Contents — 3.65 Kg — 1 / 5

5970	1/4 x 5/16, 3/8 x 7/16 1/2 x 9/16, 5/8 x 11/16 3/4 x 7/8, 15/16 x1 1-1/16 x 1-1/8, 1-1/8 x 1-1/4 1-3/16 x 1-5/16
3812 2813 3814 4813	

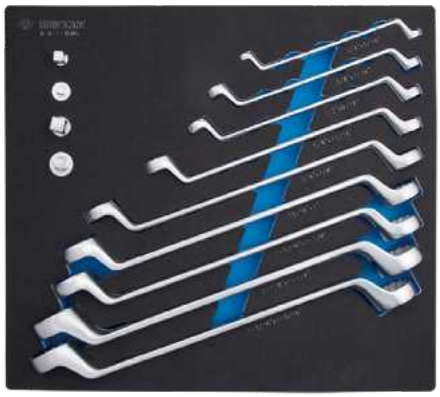

13 PC.

Tool Set Content

9-45VE02MRV

Tray category #17 (375 x 420mm)



Contents 3.96 1 / 4

	4335VE	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
	4025VE	H4, H5, H6, H8, H10
	4035VE	H4, H5, H6, H8, H10
	4251VE	5, 10
	4771VE-10	4178VE-08

32 PC.

KING TONY
KING TONY
KING TONY
KINGTONY
KINGTONY

Fill Your Drawer

How to complete your tool trolley set and tool chest set
The drawer of tool chest includes one top drawer and different size

CAUTION

- Do not move the box / trolley unit unless you have closed the cover and locked the drawers
- Never open more than one loaded drawer at the same time
- Watch for sharp edges, we suggest to put on gloves before you lift the unit

Drawer (646x290 mm)



Drawer (172x275 mm)





Drawer (572x275 mm)









Drawer (579x380 mm)

























Drawer (504 x 195 mm)









87402 Drawer (470 x 220 mm) #14
87408 Drawer (530 x 220 mm) #15









Tool Trolley Contents

101 PC.

Contents No. 932-009MRD02

19.80 CUFT 2.41

9-4333MR #4 P.109

9-4120PR #5 P.118
9-4119PR #5 P.118

84700612B

9-1219MR01 #4 P.111

9-1711MR #4 P.113

84700612B

9-90106SR02 #4 P.116

9-40103GP #5 P.119

84700612B

1110MR P.317

34423-1A P.297

Tool Trolley Set

101 PC.

5

75.8
CUFT 14.65

932-009MR02
(87432-5U P.30)

Tool Trolley Contents

144 PC.

Contents No. 932-010MRD02

17.50 CUFT 1.86

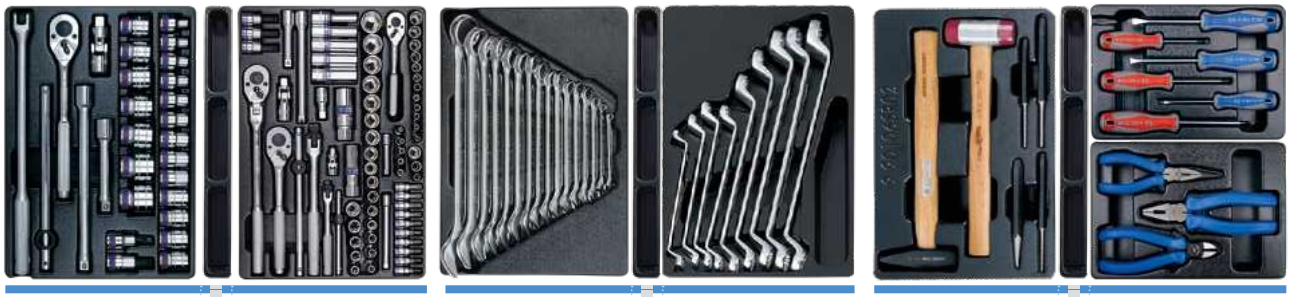

9-4328MR #4 P.109 | 9-5575MR #4 P.110 | 9-1216MR01 #4 P.111 | 9-1709MR #4 P.112 | 9-90106SR02 #4 P.116 | 9-31106MR #5 P.119 | 9-40103GP #5 P.119

84700612B | 84700612B | 84700612B

34423-1A P.297

Tool Trolley Set

144 PC.

5

75.8
CUFT 14.65

932-010MR02
(87432-5U P.30)

Tool Trolley Contents

170 PC.

Contents No. 941-101MRD

24.80 CUFT 2.54



9-4026MR02 #1 P.105

9-3023MR01 #4 P.109

9-2526MR #5 P.118

9-22308TR #4 P.116

9-31106MR #5 P.119

9-4120PR #5 P.118

9-4119PR #5 P.118

9-1303MR #5 P.118



9-1711MR #4 P.113

9-1216MR #4 P.111

84700612B

9-90103RR #4 P.116

9-20110MR #5 P.119
9-40103GP #5 P.119

84700612B

9-4128FR #5 P.119

1010PR P.465

Tool Trolley Set

170 PC.

5 106.2 CUFT 18.31

941-101MR

(87411-6B P.39)
(87432-5U P.30)

7 125.2 CUFT 19.21

9644-101MR

(87411-6B P.39)
(87634-7B P.32)

Tool Trolley Contents

173 PC.

Contents No. 932-000MRD

24.70 CUFT 2.10

9-4333MR #4 P.109 | 9-7540MR #4 P.110 | 9-1216MR01 #4 P.111 | 9-1711MR #4 P.113 | 9-90131MR #4 P.111 | 9-31110MR #4 P.117

84700612B | 84700612B | 84700612B

9-22108MR #4 P.116 | 9-22308TR #4 P.116 | 9-90103PP #4 P.116 | 9-40207GP #4 P.115 | 1006PR #4 P.465

84700612B | av84700612B

Tool Trolley Set

173 PC.

5

80.70
CUFT 14.34

932-000MR

(87432-5U P.30)

Tool Trolley Contents

179 PC.

Contents No. 932-008MRD

20.52 CUFT 2.41

9-4522MR #4 P.108 | 9-3523MR #4 P.109 | 9-1219MR01 #4 P.111 | 9-90315MR #4 P.113 | 9-91120MR #4 P.114 | 9-31909PR #4 P.117

84700612B | 84700612B | 84700612B

9-90103PP01 #4 P.116 | 9-40207GP #4 P.115 | 9-4120PR #5 P.118 | 9-4119PR #5 P.118 | 9-31106MR #5 P.119 | 9-2526MR #5 P.118 | 1010PR #4 P.465 | 9DC23 P.583

84700612B | 84700612B

Tool Trolley Set

179 PC.

5

76.52
CUFT 14.65

932-008MR

(87432-5U P.30)

Tool Trolley Contents

197 PC.

Contents No. 934-001MRD04

28.70 CUFT 3.70

9-90408TQ #6 P.120

9-4516MR #4 P.108 | 9-5575MR #4 P.110

84700612B

9-1711MR #4 P.113 | 9-1218MR #4 P.111

84700612B

9-22108MR #4 P.116 | 9-31909PR #4 P.117

84700612B

9-90310MR #4 P.117 | 9-90106SR02 #4 P.116

84700612B

9-90205GN01 #4 P.115 | 9-4128FR #5 P.119 | 9-40103GP #5 P.119

84700612B

7962-04 P.470

9DC23 P.583

42114GP P.347

2121-18 P.591

7963-04 P.470

14210212 P.365
14226512 P.365

1108MR P.317

Tool Trolley Set

197 PC.

7 | 92.7 | CUFT 15.94

934-001MR04
(87434-7U P.30)

7 | 94.84 | CUFT 15.94

9634-001MR04
(87634-7B P.32)

Tool Chest Set

69 PC.

901-068MR

18.80 CUFT 2.05

9-4338MR01 #11 P.125 (901-068MR use)

9-90121MR #12 P.125

9-90104GP #12 P.125

87401-3 P.43

9-31006MR #12 P.126

Tool Chest Set

74 PC.

901-073MR

19.50 CUFT 2.05

9-4338MR03 #11 P.125

9-90126MR #12 P.125

9-90104GP #12 P.125

87401-3 P.43

9-31006MR #12 P.126

Tool Chest Set

219 PC.

911-000CR

50.50 CUFT 6.10

9-7069CR #1 P.105 (911-000CR use)

911-000CR02

50.80 CUFT 6.10

9-7069CR01 #1 P.105 (911-000CR02 use)

9-90129CR #3 P.107

9-90138CR #3 P.107

87411-6B P.39

9-2548CR #2 P.106 (911-000CR use)

9-2548CR01 #2 P.106 (911-000CR02 use)

9-42114GP #2 P.106

9-40102GP #2 P.106

9-90128SR #3 P.106

Tool Chest Set

107 PC.

911-002CR

40.50 CUFT 5.12

4042CR #476 x 282mm P.195

20107SR P.404

20109MR P.404

9-42144GP #4 P.115

9-31106MR #5 P.119

9-90138CR #3 P.107

87411-6B P.39

7811-16 P.462

Tool Chest Set

235 PC.

911-003CR

46.16 CUFT 6.10

911-003CR01

46.16 CUFT 6.10

9-7078CR #1 P.105 (911-003CR use)

9-7078CR01 #1 P.105 (911-003CR01 use)

9-90220MR #3 P.107 (911-003CR use)

9-90220MR01 #3 P.107 (911-003CR01 use)

9-90154CR #3 P.108 (911-003CR use)

9-90154CR01 #3 P.108 (911-003CR01 use)

87411-6B P.39

9-90329CR #3 P.107

9-2548CR01 #2 P.106 (911-003CR use)

9-2548CR #2 P.106 (911-003CR01 use)

9-42114GP #2 P.106

9-40102GP #2 P.106

Tool Box Contents

62 PC.

Contents No. 902-062MRD

8.80 CUFT 1.22

9-4116FR #14 P.127

9-30206MR #14 P.127

9-1217MR #14 P.127

9-4319MR #14 P.126

9-90120MR #14 P.127

9-40203GP #14 P.127

Tool Box Set

62 PC.

14.4 CUFT 1.22

902-062MR (87402 P.44)

13.9 CUFT 1.22

9A05-062MR (87A05 P.44)

9A05-062MR-KB (87A05-KB P.44)

Tool Box Contents

63 PC.

Contents No. 902-164MRD

10.20 CUFT 1.22

9-4116FR #14 P.127

9-4219MR #14 P.126

1060 P.313 8, 10, 12, 13, 14, 17, 19, 21, 22, 24

1120MR P.404 H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

1421 P.365 PH1 x 80, PH2 x 38, PH3 x 150

1422 P.365 5.5 x 100, 6.5 x 38, 8 x 175

6111-07 P.342

6311-06 P.343

6511-10 P.345

3611-08R P.332

76104-05 P.463

76217-06 P.464
76223-08 P.464

76403-05 P.464
76404-06 P.464
76405-65 P.464
76406-07 P.464

7811-16 P.462

Tool Box Set

63 PC.

15.8 CUFT 1.22

902-164MR (87402 P.44)

15.3 CUFT 1.22

9A05-164MR (87A05 P.44)

9A05-164MR-KB (87A05-KB P.44)

Tool Box Contents

65 PC.

Contents No. 902-065MRD

9.10 CUFT 1.22

9-4116FR #14 P.127

9-4319MR #14 P.126

9-90115MR #14 P.127

9-1716MR #14 P.127

- 1421 P.365 PH1 x 80, PH2 x 38, PH3 x 150
- 1422 P.365 5.5 x 100, 6.5 x 38, 8 x 175

- 6111-07 P.342
- 6311-06 P.343
- 6511-10 P.345
- 3611-08P P.332
- 76104-05 P.463
- 76217-06 P.464
- 76223-08 P.464
- 76403-05 P.464
- 76404-06 P.464
- 76405-65 P.464
- 76406-07 P.464
- 7811-16 P.462

Tool Box Set

65 PC.

14.7 CUFT 1.22

902-065MR (87402 P.44)

14.2 CUFT 1.22

9A05-065MR (87A05 P.44)

9A05-065MR-KB (87A05-KB P.44)

Tool Box Contents

68 PC.

Contents No. 902-068MRD

10.30 CUFT 1.22

9-4116FR #14 P.127

9-4319MR01 #14 P.126

- 1060 P.313 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
- 1120MR P.404 H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
- 1421 P.365 PH1 x 80, PH2 x 38, PH3 x 150
- 1422 P.365 5.5 x 100, 6.5 x 38, 8 x 175

- 6111-07 P.342
- 6311-06 P.343
- 6511-10 P.345
- 3611-12P P.332
- 76104-05 P.463
- 7911-12 P.488
- 76217-06 P.464
- 76223-08 P.464
- 76403-05 P.464
- 76404-06 P.464
- 76405-65 P.464
- 76406-07 P.464
- 7821-30 P.462

Tool Box Set

68 PC.

15.9 CUFT 1.22

902-068MR (87402 P.44)

15.4 CUFT 1.22

9A05-068MR (87A05 P.44)

9A05-068MR-KB (87A05-KB P.44)

Tool Box Contents

81 PC.

Contents No. 902-084MRD01

13.60 CUFT 1.22

9-4116FR03 #14 P.127

9-4219MR07 #14 P.126

1215MR P.314

- 4230M P.173 16, 17, 18, 19, 20, 21, 22, 24, 25, 26
- 1421 P.365 PH1 x 100, PH2 x 150, PH3 x 150
- 1422 P.365 6.5 x 100, 6.5 x 150, 8 x 150
- 6231-07 P.342
- 6311-06 P.343
- 6463-08C P.344
- 6516-10C P.344
- 6031-07 P.350
- 3611-08R P.332
- 3611-12R P.332
- 20218MR P.402
- 7851-16 P.463
- 7811-16 P.462
- 76104-05 P.463
- 76105-06 P.463
- 76213-04 P.464
- 76215-05 P.464
- 76220-07 P.464
- 76306-05 P.463
- 76403-05 P.464
- 76404-06 P.464

Tool Box Set

81 PC.

19.24 CUFT 1.22

902-084MR01 (87402 P.44)

18.74 CUFT 1.22

9A05-084MR01 (87A05 P.44)

9A05-084MR01-KB (87A05-KB P.44)

Tool Box Contents

84 PC.

Contents No. 902-084SRD

15.90 CUFT 1.22

9-4116FR03 #14 P.127

9-4219SR08 #14 P.126

1216SR P.314

- 4230S P.173 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4
- 1421 P.365 PH1 x 100, PH2 x 150, PH3 x 150
- 1422 P.365 6.5 x 100, 6.5 x 150, 8 x 150
- 6231-07 P.342
- 6311-06 P.343
- 6463-08C P.344
- 6516-10C P.344
- 20107SR P.404
- 6031-07 P.350
- 3611-08R P.332
- 3611-12R P.332
- 7811-16 P.462
- 7851-16 P.463
- 76104-05 P.463
- 76105-06 P.463
- 76213-04 P.464
- 76215-05 P.464
- 76220-07 P.464
- 76306-05 P.463
- 76403-05 P.464
- 76404-06 P.464

Tool Box Set

84 PC.

21.55 CUFT 1.22

902-084SR (87402 P.44)

21.0 CUFT 1.22

9A05-084SR (87A05 P.44)

9A05-084SR-KB (87A05-KB P.44)

Tool Box Contents

88 PC.

Contents No. 902-089MRD01

13.90 CUFT 1.22

9-4116FR #14 P.127

9-4319MR01 #14 P.126

1812MR P.331

1060 P.313	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24
1900 P.317	6 x 7, 8 x 10, 11 x 13, 12 x 13, 17x19, 22 x 24
1120MR P.404	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
1147R P.406	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1421 P.365	PH2 x 38, PH3 x 150
1422 P.365	3 x 75, 5 x 100
6111-07 P.342	
6311-06 P.343	
6516-10C P.344	
3611-08R P.332	
7911-12 P.488	
7821-80 P.462	

Tool Box Set

88 PC.

19.5 CUFT 1.22

902-089MR01 (87402 P.44)

19.0 CUFT 1.22

9A05-089MR01 (87A05 P.44)

9A05-089MR01-KB (87A05-KB P.44)

Tool Box Contents

103 PC.

Contents No. 902-103MRD

19.20 CUFT 1.22

9-4116FR #14 P.127

9-4319MR01 #14 P.126

1812MR P.331

1060 P.313	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32
1120MR P.404	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
1147R P.406	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1421 P.365	PH0 x 60, PH1 x 100, PH2 x 100, PH3 x 150
1422 P.365	3 x 75, 4 x 100, 5 x 75, 5.5 x 125, 6.5 x 150, 8 x 175
6111-07 P.342	
6311-06 P.343	
6516-10C P.344	
6231-07 P.342	
6431-10 P.344	
6011-10 P.349	
3611-12R P.332	
79093-03C P.475	
7911-12 P.488	
7821-80 P.462	
76220-07 P.464	
76226-12 P.464	
76402-45 P.464	
76403-05 P.464	
76404-06 P.464	
76405-65 P.464	
76406-07 P.464	
76408-08 P.464	
76412-09 P.464	
76414-10 P.464	

Tool Box Set

103 PC.

24.8 CUFT 1.22

902-103MR (87402 P.44)

18.74 CUFT 1.22

9A05-103MR (87A05 P.44)

9A05-103MR-KB (87A05-KB P.44)

Tool Box Contents

109 PC.

Contents No. 902-109MRD

19.40 CUFT 1.22

9-4116FR #14 P.127

9-4319MR01 #14 P.126

1812MR P.331

1306MR P.322

1060 P.313	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32
1120MR P.404	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
1147R P.406	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1421 P.365	PH0 x 60, PH1 x 100, PH2 x 100, PH3 x 150
1422 P.365	3 x 75, 4 x 100, 5 x 75, 5.5 x 125, 6.5 x 150, 8 x 175

6111-07 P.342
6311-06 P.343
6516-10C P.344
6232-08 P.342
6431-10 P.344
6011-10 P.349
3611-12R P.332
79093-05C P.475

7911-12 P.488
7811-16 P.462
76220-07 P.464
76226-12 P.464
76402-45 P.464
76403-05 P.464
76404-06 P.464
76405-65 P.464
76406-07 P.464
76408-08 P.464
76412-09 P.464
76414-10 P.464

Tool Box Set

109 PC.

24.99 CUFT 1.22

902-109MR (87402 P.44)

24.5 CUFT1.22

9A05-109MR (87A05 P.44)

9A05-109MR-KB (87A05-KB P.44)

Tool Box Contents

132 PC.

Contents No. 902-132CRD

24.50 CUFT 1.51

9-4116FR #14 P.127

9-4319MR01 #14 P.126

1812MR P.331

1226MR P.314

1005GQ P.489

30617MR P.424

20208MR01
20208SR01
P.403

11205SQ
P.482

1421 P.365	PH0 x 60, PH1 x 100, PH2 x 100, PH3 x 150
1422 P.365	3 x 75, 4 x 100, 5 x 75, 5.5 x 125, 6.5 x 150, 8 x 175

6111-07 P.342
6311-06 P.343
6516-10C P.344
6231-07 P.342
6721-10 P.457
6711-06 P.344
3611-08P P.332
3611-12P P.332
20419PR P.407

7911-12 P.488
7811-12 P.462
76104-05 P.463
76220-07 P.464
6011-10 P.349
2121-18 P.591
7971-07 P.450
79093-03C P.475

Tool Box Set

132 PC.

30.1 CUFT 2.73

902-132CR (87402 P.44)

29.1 CUFT2.92

9A05-132CR (87A05 P.44)

9A05-132CR-KB (87A05-KB P.44)

Tool Box Contents

77 PC.

Contents No. 908-077CRD

19.80 CUFT 0.99

9-4029CR #15 P.128

9-90111MR #15 P.128

9-4156PR #15 P.128

9-30206MR #14 P.127

9-1215MR03 #16 P.128

9-6010MR #16 P.128

Tool Box Set

77 PC.

26.52
CUFT 2.29

908-077CR
(87408 P.44)

Tool Box Contents

25 PC.

Contents No. 41026MRD

3.96 CUFT 0.78

- 4330MR P.172 — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32
- 463021RC P.176
- 4791R P.185
- 4452-15FR P.183
- 4768-10F P.180
- 4572-12 P.184
- 4251-05R P.183
- 4251-10R P.183

Tool Box Set

25 PC.

5.7
CUFT 0.78

41026MR
(87407 P.44)

Tool Box Contents

25 PC.

Contents No. 41526MRD

3.96 CUFT 0.78

- 4335MR P.172 — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32
- 463521RC P.176
- 4791R P.185
- 4452-15FR P.183
- 4768-10F P.180
- 4572-12 P.184
- 4251-05R P.183
- 4251-10R P.183

Tool Box Set

25 PC.

5.7
CUFT 0.78

41526MR
(87407 P.44)

Tool Box Contents

17 PC.

Contents No. 41517MRVD

2.26 CUFT 0.91

- 4335MR P.172 10, 11, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
- 4771-10GR P.180
- 4791R P.185
- 4251-05R P.183
- 3611-08R P.332
- 6111-06 P.342

Tool Box Set

17 PC.

4.26
CUFT 0.91

41517MRV
(87A08 P.44)

Tool Box Contents

42 PC.

Contents No. 41542MRVD

4.65 CUFT 0.91

- 4335MR P.172 10, 11, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
- 1421 P.365 PH0 x 60, PH1 x 80, PH2 x 100
- 1422 P.365 3 x 75, 5.5 x 100, 6.5 x 150
- 1130MR P.404 H2.5, H3, H4, H5, H6, H8, H10
- 1062 P.311 8, 9, 10, 11, 12, 13, 14, 17, 18, 19, 22, 24
- 4251-05R P.183
- 3611-08R P.332
- 6111-06 P.342
- 4771-10GR P.180
- 4791R P.185

Tool Box Set

42 PC.

6.65
CUFT 0.91

41542MRV
(87A08 P.44)

Tool Set Content



9-4526MR

9-4026MR02

Tray category #1 (642 x 286mm)

24 PC.

9-4526MR

9-4026MR02

KT NO. | Contents | 4.6 | 1 / 5

KT NO.			Contents	
9-4526MR	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	463521RC, 4768-10F	4572-12, 4251-05R, 4251-10R
9-4026MR02	4330MR		463021RC, 4768-10P	4452-15FR

9-7069CR

9-7069CR01

Tray category #1 (642 x 286mm)

70 PC.

9-7069CR

9-7069CR01

7911-12

KT NO. | Contents | 8.8 | 1 / 5

KT NO.				
9-7069CR	3779-08G, 4779-10GR	3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22	463521RC, 463516RC, 3571-08
		3330S	3/8, 7/16, 1/2, 9/16, 5/8, 11 /16, 3/4, 13 /16	3452-08F, 4452-15FR, 4251-05R, 4251-10R
9-7069CR01	3769-08P, 4768-10P	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4572-10, 3221-03, 3221-06, 7911-12
		4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11 /16, 3/4, 13 /16, 7/8, 15/16, 1	3792, 4791R, 3812, 4813

9-7078CR

9-7078CR01

Tray category #1 (642 x 286mm)

78 PC.

9-7078CR

9-7078CR01

KT NO. | Contents | 8.67 | 1 / 2

KT NO.				
9-7078CR	3769-08P, 4768-10P	3330M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22	3235M, 363516
		3330S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16	4462-18F, 3221-03, 3221-10, 4251-05R, 4251-10R
9-7078CR01	3779-08G, 4779-10GR	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 28, 30, 32	3792, 4791R, 3812, 4813
		4330SR	3/8, 7/16,1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-1/4	

Tool Set Content



9-2548CR

9-2548CR01

Tray category #2 (263 x 163mm)

48 PC.

9-2548CR

9-2548CR01

KT NO.		Contents (1.28 kg, 1 / 10)	
9-2548CR	2779-55G	2235M: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 2235S: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 2335S: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
9-2548CR01	2769-55P	2792, 2813, 2221-02, 2221-04	

9-40102GP

2 PC.

Contents (1.0 kg, 1 / 10)

6011-10, 6511-10

9-42114GP

Tray category #2 (263 x 163mm)

4 PC.

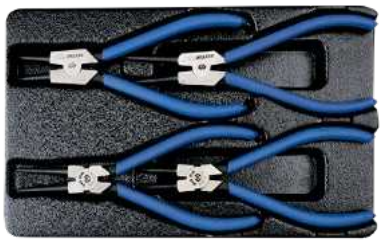

Contents (0.6 kg, 1 / 10)

68HS-07, 68SS-07, 68HB-07, 68SB-07





9-90128SR

Tray category #3 (554 x 260mm)

Contents (4.8 kg, 1 / 4)

5060	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 1
5970	1/4 x 5/16, 3/8 x 7/16, 1/2 x 9/16, 5/8 x 11/16, 3/4 x 7/8, 15/16 x 1, 1-1/16 x 1-1/8
76105-06, 7811-16	
76215-05, 76217-06, 76220-07, 76224-10, 76404-06, 76406-07, 76408-08	

28 PC.

Tool Set Content



9-90138CR

Tray category #3 (554 x 260mm)

38 PC.

Contents		4.8 kg	1 / 4
1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21		
1900	8 x 9, 10 x 11, 12 x 13, 14 x 15, 18 x 19		
1970	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19		
1930	10 x 11, 12 x 14, 14 x 17		
5900	1/4 x 5/16, 3/8 x 7/16, 7/16 x 1/2, 9/16 x 5/8, 11/16 x 3/4, 13/16 x 7/8		
3611P	8, 12		

9-90329CR

Tray category #3 (554 x 260mm)

29 PC.

Contents		3.37 kg	1 / 4
1060	6, 7, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21		
5060	7/16, 1/2, 9/16, 5/8, 11/16, 3/4		
10D0	10, 12, 13, 14, 17, 18, 19		
3611R	6, 8		

9-90129CR

Tray category #3 (554 x 260mm)

29 PC.

Contents		2.5 kg	1 / 4
1421	PH0 x 60, PH1 x 80, PH2 x 38, PH2 x 100, PH3 x 150		
1422	3 x 75, 6.5 x 38, 6.5 x 100, 6.5 x 150, 8 x 175		
1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8		
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10		
6111-07	6231-07		
6311-06			

9-90220MR

9-90220MR

9-90220MR01

Tray category #3 (554 x 260mm)

20 PC.

9-90220MR01

KT NO.	Contents			2.51 kg	1 / 4
9-90220MR	14280204 14240206	3025 H3, H4, H5, H6, H8, H10, H12 3023 T30, T40	1421 PH1x80, PH2x100 1422 4x100, 5.5x125, 6.5x150, 8x175		
9-90220MR01	14232004 14232504	6111-08 6232-08 6311-08			

Tool Set Content



9-90154CR

KT NO.	PC.	Contents	2.86 / 1 / 4
9-90154CR	54	1032CQ01	1130MR H2.5, H3, H4, H5, H6, H8, H10 1130SR 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8 7811-16 74030 76717-05 761 Ø 4 x 120 764 Ø 3 x 125 Ø 4 x 150 Ø 5 x 165
9-90154CR01	53	1032CQ	

9-90154CR01

Tray category #3 (554 x 260mm)

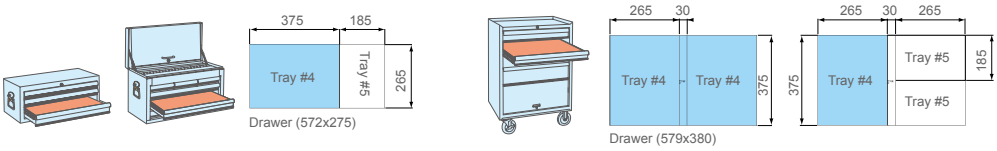

9-4516MR

Tray category #4 (375 x 265mm)

Contents	3.12 / 1 / 10
4335MR	8, 10, 11, 12, 13, 14, 17, 19, 21, 23, 24
4791R 4768-10F 4452-15FR	
4251-05R 4251-10R	

16 PC.

9-4522MR

Tray category #4 (375 x 265mm)

Contents	2.96 / 1 / 10
4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24
463521RC 463516RC 4791R	
4768-10F 4251-03R, 4251-05R, 4251-10R	

22 PC.

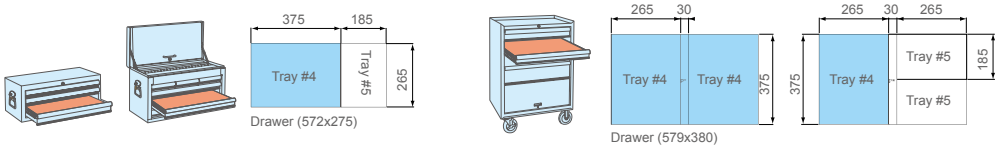

Tool Set Content

9-3523MR

9-3023MR01

Tray category #4 (375 x 265mm)

22 PC.

9-3523MR

9-3023MR01

1.38 | 1 / 10

KT NO.	Contents					
9-3523MR	3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22	3769-08F	3221-03 3221-06	3452-08F	
9-3023MR01	3330M		3769-08P	3792	3571-08	

9-4328MR

Tray category #4 (375 x 265mm)

Contents | 4.6 | 1 / 6

4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 29, 32	
4027	T55H, T60H	
4791R	4768-10F	4452-15FR
4572-10	4251-05R 4251-10R	

28 PC.

9-4333MR

9-4333MR03

Tray category #4 (375 x 265mm)

33 PC.

9-4333MR

9-4333MR03

5.4 | 1 / 6

KT NO.	Contents						
9-4333MR	4759-10G	4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32				
9-4333MR03	4779-10GR	463521RC	463516RC	4791R	4572-12	4452-15FR	4251-03R 4251-05R 4251-10R





Drawer (572x275)



Drawer (579x380)



Tool Set Content

9-5575MR

Tray category #4 (375 x 265mm)

Contents — 4.15 kg — 1 / 6

○	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
○	2335S	1/4, 3/8, 1/2
○	3235M	8, 10, 12, 14, 17
○	3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22
✪	2375M	E4, E5, E6, E7, E8
✪	3375M	E10, E12, E14, E16, E18
✡	2037	T10H, T15H, T20H, T25H, T27H, T30H
✱	2033	T20, T25, T30, T40
✡	3027	T40H, T45H, T50H

75 PC.

Contents

○ 366516	○ 366521	3221-16
2769-55F	3769-08F	3781-11F
2221-02 2221-04	3221-03 3221-06	2571-45
2452-05F	3452-08F	3571-08
2792	3792	

9-7537MR

Tray category #4 (375 x 265mm)

Contents — 2.28 kg — 1 / 6

○	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
✱	4023	T20, T25, T27, T30, T40, T45, T50, T55, T60
●	4025	H3, H4, H5, H6, H7, H8, H10, H12, H14

2779-55G	2571-45	2792
2452-05F	2221-02 2221-04	2141

37 PC.

9-7540MR

Tray category #4 (375 x 265mm)

Contents — 3.50 kg — 1 / 5

○	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
✪	2375M	E4, E5, E6, E7, E8
✪	4375M	E10, E12, E14, E16, E18, E20
○	4435M	10, 11, 12, 13, 14, 17, 19, 21, 22, 24

2792	2759-55G	2571-45
2221-02 2221-04	2177DF	2452-05F

40 PC.

9-93523MR

Tray category #4 (375 x 265mm)

Contents — 2.63 kg — 1 / 6

○	3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22
●	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

3792	3769-08F	3452-08F	3571-08	3221-03 3221-06

31 PC.



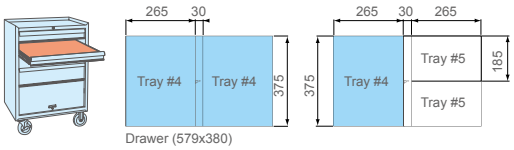

Tool Set Content

9-90131MR

Tray category #4 (375 x 265mm)

Contents — 3.1 kg — 1 / 10

4033	T20, T25, T27, T30, T40, T45, T50, T55, T60
4035	H4, H5, H6, H7, H8, H10, H12, H14, H17
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
1930	10 x 11, 12 x 14, 14 x 17
3204 (Ø 60 ~ 140)	

31 PC.

9-1205MR

Tray category #4 (375 x 265mm)

Contents — 2.70 kg — 1 / 6

1060	27, 28, 29, 30, 32

5 PC.

9-1216MR

9-1216MR01

9-1216MR03

Tray category #4 (375 x 265mm)

3.20 kg — 1 / 6

KT NO.	Contents	
9-1216MR	1060	6, 8, 10, 12, 13, 14, 16, 17, 19, 21, 22, 24, 26, 27, 29, 32
9-1216MR01		6, 8, 10, 11, 13, 14, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32
9-1216MR03		8, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32

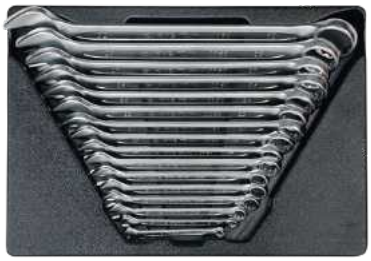

16 PC.

9-1219MR01

Tray category #4 (375 x 265mm)

Contents — 2.25 kg — 1 / 6

1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24

19 PC.

9-1218MR

Tray category #4 (375 x 265mm)

Contents — 2.12 kg — 1 / 6

1060	6, 7, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
1930	8 x 10, 9 x 11

18 PC.

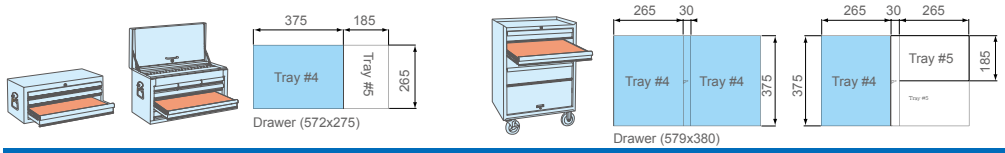

Tool Set Content

9-1282MR

Tray category #4 (375 x 265mm)

Contents — 1.05 kg — 1 / 10

	10D0	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19

12 PC.

9-1272MR

Tray category #4 (375 x 265mm)

Contents — 1.45 kg — 1 / 5

	1067	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22

12 PC.

9-1608MR

Tray category #4 (375 x 265mm)

Contents — 1.5 kg — 1 / 6

	1960	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22

8 PC.

9-1609MR

Tray category #4 (375 x 265mm)

Contents — 1.93 kg — 1 / 6

	1960	8 x 9, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 22 x 24, 23 x 26

9 PC.

9-1709MR

Tray category #4 (375 x 265mm)

Contents — 2.18 kg — 1 / 6

	1970	8 x 9, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 22 x 24, 23 x 26

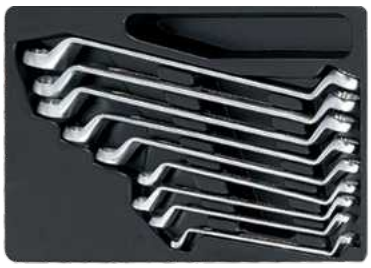

9 PC.

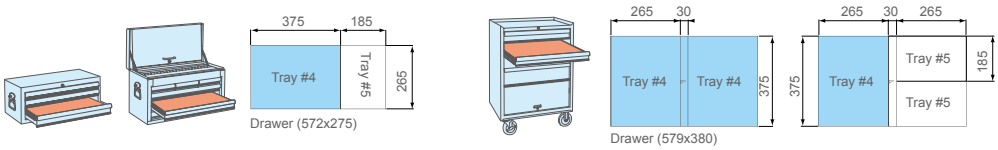

Tool Set Content

9-1711MR

Tray category #4 (375 x 265mm)

Contents — 2.80 kg — 1 / 6

	1970	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27, 30 x 32

11 PC.

9-90315MR

Tray category #4 (375 x 265mm)

Contents — 2.6 kg — 1 / 6

	1900	8 x 10, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 21 x 23, 22 x 24
	1970	8 x 10, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 21 x 23, 22 x 24
	79093-05C	

15 PC.

9-1812MR

9-1912MR

Tray category #4 (375 x 265mm)

KT NO.	Contents		3.69 kg — 1 / 6
9-1812MR	○	1080	8, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22, 24
9-1912MR	○	1081	

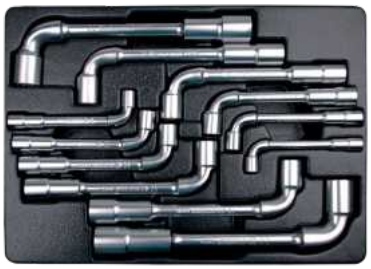

12 PC.

9-1838MR

Tray category #4 (375 x 265mm)

Contents — 2.57 kg — 1 / 6

○	1084	8, 10, 11, 12, 13, 15, 17, 19

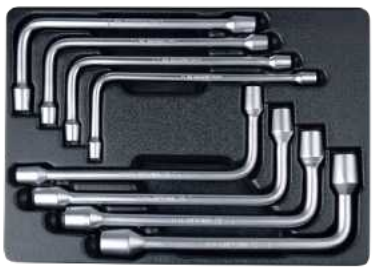

8 PC.

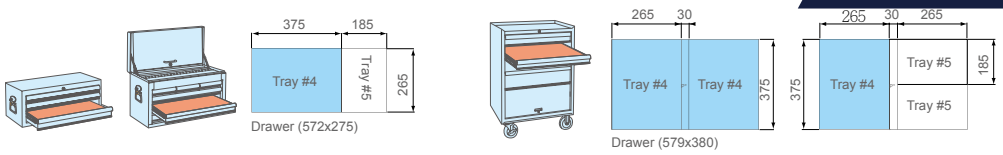

Tool Set Content

9-1C08MR

Tray category #4 (375 x 265mm)

Contents — 0.91 kg — 1 / 10

19C0	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22

8 PC.

9-10115MR

KT NO.	Contents		
		1.9 kg	1 / 10
9-10115MR	3731M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 22	373202R 373203R 373204R
9-102A15MR	373AM		

9-102A15MR

Tray category #4 (375 x 265mm)

15 PC.

9-12120MR

Tray category #4 (375 x 265mm)

Contents — 1.27 kg — 1 / 6

3731M	8, 10, 12, 13, 14, 15, 17, 19
373204R	373203R

10 PC.

9-90109MN

Tray category #4 (375 x 265mm)

Contents — 2.28 kg — 1 / 6

1970	8 x 10, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 17 x 19
6011-10	3611-12R

8 PC.

9-91120MR

Tray category #4 (375 x 265mm)

Contents — 2.40 kg — 1 / 6

1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
1930	8 x 10, 10 x 12, 11 x 13, 14 x 17
3731M	8, 10, 12, 13, 14
6011-10	3611-12R

20 PC.



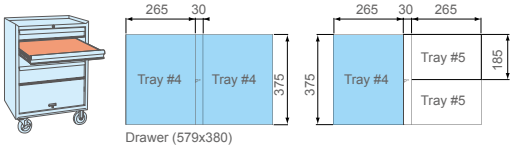

Tool Set Content

9-40207GP

9-40207GP01

Tray category #4 (375 x 265mm)

7 PC.

9-40207GP

9-40207GP01

KT NO.	Contents							kg	
9-40207GP	6111-08	6211-06	6311-06	68HS-07	68HB-07	68SS-07	68SB-07	1.5	1 / 10
9-40207GP01	6463-08C	6211-06	6311-06	67HS-07	67HB-07	67SS-07	67SB-07		1 / 6

9-40604GP

Tray category #4 (375 x 265mm)

4 PC.

Contents — 1.98 kg — 1 / 6

6116-07A	6216-06A
6318-08A	6516-10A

9-42144GP

Tray category #4 (375 x 265mm)

4 PC.

Contents — 1.63 kg — 1 / 8

6011-10	6111-08
6211-06	6311-06

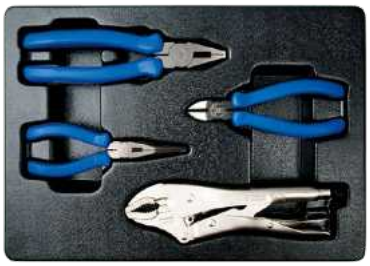

9-90205GN

9-90205GN01

Tray category #4 (375 x 265mm)

5 PC.

9-90205GN

9-90205GN01

Contents — 1.98 kg — 1 / 6

9-90205GN	6313-06	6011-10	6111-07	6463-08C	74410
9-90205GN01	6311-06				



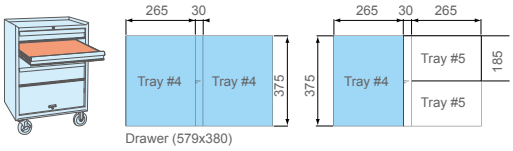

Tool Set Content

9-90103PP | 9-90103PP01 | 9-90103PP02

Tray category #4 (375 x 265mm)

3 PC.

9-90103PP

9-90103PP01

9-90103PP02

KT NO.	Contents			kg	
9-90103PP	3611-12P	6511-10	7821-30	2.30	1 / 5
9-90103PP01			7811-16		
9-90103PP02			7821-80	2.51	1 / 10

9-90103RR

Tray category #4 (375 x 265mm)

Contents — 2.3 kg — 1 / 5

3611-12R | 6511-10 | 7821-30

3 PC.

9-90106SR02

Tray category #4 (375 x 265mm)

Contents — 2.05 kg — 1 / 4

76404-06
76405-65
76406-07
76105-06
7821-30
7842-35

6 PC.

9-22108MR

Tray category #4 (375 x 265mm)

Contents — 1.10 kg — 1 / 10

1160MR H2, H2.5, H3, H4, H5, H6, H8, H10

8 PC.

9-22308TR

Tray category #4 (375 x 265mm)

Contents — 1.10 kg — 1 / 10

1163TR T10, T15, T20, T25, T30, T40, T45, T50

8 PC.

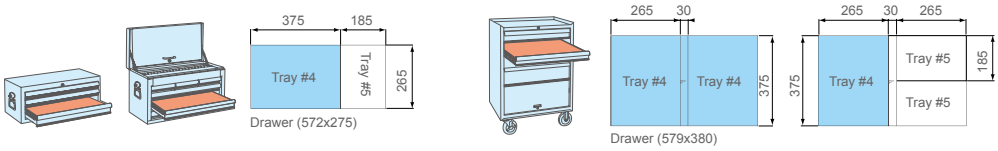

Tool Set Content

9-30110CR

Tray category #4 (375 x 265mm)

Contents — 1.4 kg — 1 / 6

	1450	6, 7, 8, 9, 10, 11, 12, 13
	5450	1/4, 5/16

10 PC.

9-31110MR

Tray category #4 (375 x 265mm)

Contents — 1.0 kg — 1 / 10

⊕	1421	PH1 x 80, PH2 x 38, PH2 x 100, PH3 x 150
⊖	1422	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 38, 6.5 x 150, 8 x 175

10 PC.

9-31909PR

Tray category #4 (375 x 265mm)

Contents — 0.65 kg — 1 / 6

	1427	T8H x 75, T9H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150

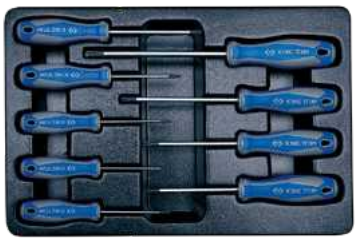

9 PC.

9-90310MR

Tray category #4 (375 x 265mm)

Contents — 1.08 kg — 1 / 6

⊕	1411	PH1 x 100, PH2 x 100, PH3 x 150
⊖	1412	5.5 x 100, 6.5 x 100, 8.0 x 150

76220-07 9CJ2120 14324003 24110214

10 PC.

9-34128FR

Tray category #4 (375 x 265mm)

Contents — 1.98 kg — 1 / 6

⊕	1836P	PH2, PH3
⊖	1836S	9, 11
⊕	1880P	PH2, PH3
⊖	1880S	8, 10
	1930	8 x 10, 11 x13, 12 x 14

4112 414810S 3204

14 PC.

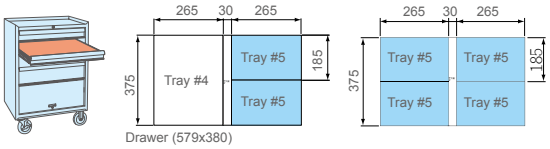

Tool Set Content

9-2526MR

Tray category #5 (265 x 185mm)

Contents — 0.90 kg — 1 / 10

	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 13
	2235M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 13
	2779-55G	2813
	2221-02 2221-04	2792

26 PC.

9-4119PR

Tray category #5 (265 x 185mm)

Contents — 1.10 kg — 1 / 10

	4033	T20, T25, T27, T30, T40, T45, T50, T55, T60

9 PC.

9-4120PR

Tray category #5 (265 x 185mm)

Contents — 1.30 kg — 1 / 10

	4035	H4, H5, H6, H7, H8, H10, H12, H14, H17

9 PC.

9-91026PR

Tray category #5 (265 x 185mm)

Contents — 1.30 kg — 1 / 10

	1143R	T10, T15, T20, T25, T27, T30, T40, T45, T50
	1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H
	4023	T30, T40, T45, T50, T55
	4375M	E10, E12, E14, E16, E18

26 PC.

9-1303MR

Tray category #5 (265 x 185mm)

Contents — 0.50 kg — 1 / 10

	1930	10 x 11, 12 x 14, 14 x 17

3 PC.

9-1905MR

Tray category #5 (265 x 185mm)

Contents — 0.82 kg — 1 / 10

	1950	10 x 12, 11 x 13, 14 x 17, 16 x 18, 19 x 22

5 PC.



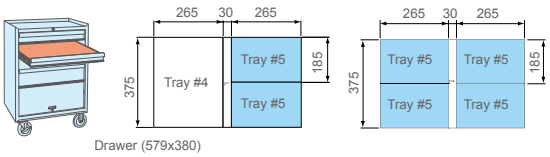

Tool Set Content

9-10112MR

KT NO.	Contents		1.22 kg / 1 / 10
9-10112MR	3731M	10, 11, 12, 13, 14, 15, 16, 17, 19	373202R
			373203R
9-102A12MR	373AM		373204R

9-102A12MR

Tray category #5 (265 x 185mm)

12 PC.

9-40103GP

Tray category #5 (265 x 185mm)

Contents		0.83 kg / 1 / 10
6111-07	6211-06	
6311-06		

3 PC.

9-31106MR

Tray category #5 (265 x 185mm)

Contents		0.60 kg / 1 / 10
⊕	1421	PH0 x 60, PH1 x 80, PH2 x 100
⊖	1422	3 x 75, 5.5 x 100, 6.5 x 150

6 PC.

9-4128FR

Tray category #5 (265 x 185mm)

Contents			1.70 kg / 1 / 10
⊕	1836P	PH2, PH3	
⊖	1836S	9, 11	
⊕	1880P	PH2, PH3	
⊖	1880S	8, 10	
	4112	414810S	

10 PC.

9-20110MR

Tray category #5 (265 x 185mm)

Contents		1.10 kg / 1 / 10
◉	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
		3204 (Ø 60 ~ 140)

10 PC.

Tool Set Content



9-7576MR

Tray category #6 (560 x 375mm)

Contents — 7.69 kg — 1 / 3

3335M	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22, 24
3235M	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24
4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32
4235M	10, 12, 13, 14, 17, 19, 21, 22, 24
9TD403	12, 13, 14, 17, 19
321510M 321512M	366516 366521
3792	
3452-08F	3769-08P
4311-16F	
4768-10P	4452-18FR
4573-10	

76 PC.

Contents

4251-03R 4251-05R 4251-10R	3221-03 3221-06 3221-10

9-94435MP

Tray category #6 (560 x 375mm)

Contents — 6.49 kg — 1 / 3

4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 24, 26, 29, 32
4535M	10, 12, 13, 14, 17, 19, 21, 24
4415M	17, 19, 21, 22
4797P	68SS-07
68HS-07	
6011-10	6211-06
6311-08	
6463-08C	74030

35 PC.

9-31919MR

Tray category #6 (560 x 375mm)

Contents — 2.67 kg — 1 / 5

1411	PH0 x 75, PH2 x 38
1412	3 x 75, 6.5 x 38
1421	PH2 x 300
1422	6.5 x 300
1481	PH2 x 100, PH3 x 150
1482	6.5 x 100, 8 x150
1427	T8H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125
43280212	2121-18

19 PC.

9-90408TQ

Tray category #6 (560 x 375mm)

Contents — 2.06 kg — 1 / 5

75102-08G	75202-08G
75302-08G	75402-08G
75502-08G	79063-12
79093-05C	7911-12

8 PC.

Tool Set Content



9-4057MR

Tray category #7 (280 x 187mm)

Contents — 3.63 kg — 1 / 4

○	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 36

27 PC.

9-4557MR

Tray category #7 (280 x 187mm)

Contents — 3.63 kg — 1 / 4

○	4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 36

27 PC.

9-4138PR

Tray category #7 (280 x 187mm)

Contents — 1.9 kg — 1 / 10

✱	4033	T20, T25, T27, T30, T40, T45, T50, T55, T60
●	4035	H4, H5, H6, H7, H8, H10, H12, H14, H17

18 PC.

9-7128PR

Tray category #7 (280 x 187mm)

Contents — 1.20 kg — 1 / 10

●	3025	H3, H4, H5, H6, H7, H8, H10, H12
✱	3023	T15, T20, T25, T27, T30, T40, T45, T50
⬡	3375M	E8, E10, E12, E14, E16, E18
⬡	4375M	E10, E12, E14, E16, E18, E20

28 PC.

9-4427MP

Tray category #7 (280 x 187mm)

Contents — 4.09 kg — 1 / 4

○	4535M	8, 9, 10, 11, 12, 13, 14, 15,16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 36

27 PC.

9-4827MP

Tray category #7 (280 x 187mm)

Contents — 4.09 kg — 1 / 4

○	4530M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 36

27 PC.

Tool Set Content



9-12C7MR

Tray category #7 (280 x 187mm)

Contents	0.78	1 / 10
1061	8, 10, 11, 13, 14, 17, 19	

7 PC.

9-3612MR

Tray category #7 (280 x 187mm)

Contents	1.27	1 / 10
3351MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	

12 PC.

9-30904AY

Tray category #7 (280 x 187mm)

- Use for scribing, aligning, installing and removing O rings, seals and washers stainless

Contents	0.43	1 / 10
43250115Y	43270115Y	
43260115Y	43290115Y	

4 PC.

Tool Set Content



9-30909AY

Tray category #8 (375 x 187mm)

Contents	0.69	1 / 12
43250115Y	43350175Y	
43260115Y	43360175Y	
43270115Y	43370175Y	
43290115Y	43390175Y	
43240115Y		

9 PC.

Tool Set Content



9-12110MR

Tray category #8 (375 x 187mm)

Contents	1.89 kg	1 / 12
3731M	8, 10, 12, 13, 14, 17, 19, 21, 22, 24	

10 PC.

9-90114MR

Tray category #8 (375 x 187mm)

Contents	1.75 kg	1 / 12
1930	8 x 10, 10 x 11, 12 x 14, 14 x 17, 17 x 19	
1060	8, 10, 12, 14, 17, 19, 21, 22, 24	

14 PC.

9-40618GP

Tray category #8 (375 x 187mm)

Contents	1.89 kg	1 / 12
1471	PH1 x 100, PH2 x 100	
1472	4 x 100, 5.5 x 125	
6CB02	100~500V	
6318-08A	6116-07A	6216-06A

8 PC.

9-1011GP

Tray category #8 (375 x 187mm)

Contents	1.15 kg	1 / 12
761G	ø6x185mm	
763G	ø4x185mm, ø5x185mm ø6x185mm, ø8x185mm	
764G	ø2x140mm, ø3x150mm, ø4x180mm, ø5x200mm, ø6x210mm, ø8x220mm	

11 PC.

9-91016MR

Tray category #8 (375 x 187mm)

Contents	1.15 kg	1 / 12
3730M	8, 10, 12, 13, 14, 17, 19	
1123R	T10, T15, T20, T25, T27, T30, T40, T45, T50	

16 PC.

Tool Set Content



9-4335MR

KT NO.	Contents		5.01	1 / 2
9-4335MR		4235M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 36	
9-4235MR		4230M		

9-4235MR

Tray category #9 (375 x 280mm)

25 PC.

9-4435MP

Tray category #9 (375 x 280mm)

Contents		7.3	1 / 2
	4435M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 36	

25 PC.

9-6414MP

9-6414SP

Tray category #9 (375 x 280mm)

9-6414MP

9-6414SP

14 PC.

KT NO.		Contents	10.9	1 / 2
9-6414MP	6435M	19, 21, 22, 24, 26, 27, 29, 30, 32, 33, 35, 36, 38, 41		
9-6414SP	6435S	3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-5/8		

9-12A1MR

Tray category #9 (375 x 280mm)

Contents		1.91	1 / 4
	1061	8, 10, 12, 13, 14, 16, 17, 18, 19, 22, 24	

11 PC.

Tool Chest Set Content

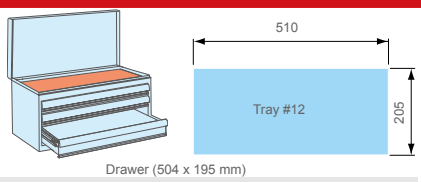

9-4338MR | 9-4338MR01 | 9-4338MR03

Tray category #12 (510 x 205mm)

- For Top drawer of 87401-2 / 87401-3 / 87401-3H P.43

38 PC.

9-4338MR

9-4338MR01 / 9-4338MR03

5.96 | 1 / 5

KT NO.	Contents					
9-4338MR	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4768-10F	4021 PH2, PH3	4251-05R 4251-10R	
9-4338MR01			4759-10G	4022 8, 10	4572-12	
				4023 T25, T27, T30, T40	4791R	
9-4338MR03		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	4759-10G	4025 H4, H5, H6, H8, H10, H12	463521RC	

- for 87401-2 / 87401-3 / 87401-3H P.43

Tool Chest Set Content

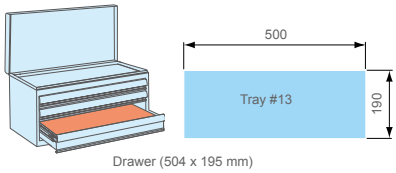

9-90121MR

Tray category #13 (500 x 190mm)

Contents		2.1	1 / 5
	1900	6 x 7, 8 x 10, 11 x 13, 12 x 13, 17 x 19, 22 x 24	
	1970	8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19	
	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	

21 PC.

9-90126MR

Tray category #13 (500 x 190mm)

Contents		2.38	1 / 5
	1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22	
	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	

26 PC.

9-90104GP

Tray category #13 (500 x 190mm)

Contents		1.36	1 / 5
3611-08P		6511-10	
6111-07		6311-06	

4 PC.

• for 87401-2 / 87401-3 / 87401-3H P.43

Tool Chest Set Content

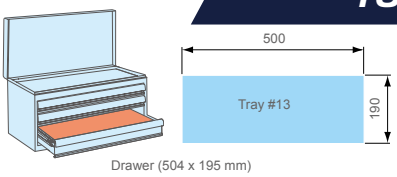

9-31006MR

Tray category #13 (500 x 190mm)

Contents — 0.74 kg — 1 / 5

⊕	1421	PH1 x 80, PH2 x 38, PH3 x 150
⊖	1422	6.5 x 38, 5.5 x 100, 8 x 175

6 PC.

9-90113MA

Tray category #13 (500 x 190mm)

Contents — 2.98 kg — 1 / 5

	4023	T45	
	4025	H8, H12	
	402B	M16	
	3204	401408M	9AE42
	112005MR 112006MR	9AE2-6606 9AE2-7608	9AE2-7614 9AE2-9315

13 PC.

Tool Box Set Content

For 87402 / 87A05 P.44



9-4219MR
9-4219MR07
9-4219SR08
9-4319MR
9-4319MR01
9-4319MR02
9-4319MR05

Tray category #14 (460 x 105mm)

20 PC.

2.5 kg — 1 / 8

KT NO.	Contents			
9-4219MR	4768-10F	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4791R
9-4219MR07	4762-10F	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27	
9-4219SR08		4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4	
9-4319MR	4768-10F	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	
9-4319MR01	4759-10G			
9-4319MR02	4779-10FR			
9-4319MR05	4768-10F		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	

• For 87402 / 87A05 P.44

Tool Box Set Content



9-4116FR

9-4116FR03

Tray category #14 (460 x 105mm)

6 PC.

2.2 | 1 / 8

KT NO.	Contents		
9-4116FR	463521RC	4251-05R 4251-10R	4572-12
9-4116FR03	463021RC	4452-18FR	4223-02R

9-1217MR

Tray category #14 (460 x 105mm)

7 PC.

Contents | 1.5 | 1 / 8

1060	17, 18, 19, 20, 21, 22, 24

9-90115MR

Tray category #14 (460 x 105mm)

15 PC.

Contents | 1.2 | 1 / 8

1900	6 x 7, 8 x 10, 11 x 13, 12 x 13, 17 x 19, 22 x 24
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

9-90120MR

Tray category #14 (460 x 105mm)

20 PC.

Contents | 1.5 | 1 / 8

1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

9-90125MR

Tray category #14 (460 x 105mm)

15 PC.

Contents | 1.2 | 1 / 8

1900	8 x 10 , 10 x 12 , 12 x 14 , 14 x 17 , 17 x 19 , 22 x 24
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

9-1606MR

9-1606MR01

Tray category #14 (460 x 105mm)

6 PC.

KT NO. | Contents | 1.1 | 1 / 8

9-1606MR	1960	10 x 12, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 23 x 26
9-1606MR01		8 x 10, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 22 x 24

9-1716MR

Tray category #14 (460 x 105mm)

6 PC.

Contents | 1.1 | 1 / 8

1970	8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19

9-40203GP

Tray category #14 (460 x 105mm)

3 PC.

Contents | 0.8 | 1 / 8

6111-07	6211-06
6311-06	

9-30106MR

Tray category #14 (460 x 105mm)

6 PC.

Contents | 0.8 | 1 / 8

1421	PH1 x 80, PH2 x 100, PH3 x 150
1422	5.5 x 100, 6.5 x 150, 8 x 175

9-30206MR

Tray category #14 (460 x 105mm)

6 PC.

Contents | 1.18 | 1 / 8

1461	PH1 x 75, PH2 x 100, PH3 x 150
1462	5.5 x 100, 6.5 x 150, 8 x 175

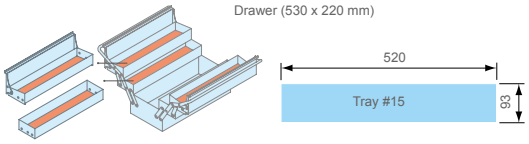

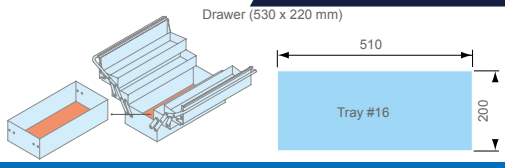

Tool Box Set Content

For 87408 only P.44

9-4029CR

Tray category #15 (520 x 93mm)

29 PC.

Contents		2.67 kg	1 / 5
4025	H5, H6, H8, H10, H12, H14		
4330MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 23, 24, 26, 27, 28, 30, 32		
4330SR	7/16, 9/16, 7/8		
463521RC			

9-6010MR

Tray category #16 (510 x 200mm)

9-6010MR01

10 PC.

KT NO.	Contents				
9-6010MR	6330M	33, 36, 38, 41, 46, 50	6779-20F 6251-08 6251-16 6572-20	9.70	1 / 2
9-6010MR01		30, 32, 36, 41, 46, 50		9.50	

9-4156PR

Tray category #15 (520 x 93mm)

6 PC.

Contents		1.99 kg	1 / 5
4779-10GR	4572-12		
4251-03R 4251-05R 4251-10R	4791R		

9-1215MR03

Tray category #16 (510 x 200mm)

15 PC.

Contents		3.12 kg	1 / 2
1060	8, 10, 11, 12, 13, 14, 17, 18, 19, 21, 22, 24, 27, 30, 32		

9-90111MR

Tray category #15 (520 x 93mm)

11 PC.

Contents		1.25 kg	1 / 5
1145MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10		
3611-10P	6511-10C		

HAND SOCKETS & ACCESSORIES

KING TONY
389GEW

Socket Made

Precision forging Technology

Other brand (not good)

King Tony brand (good)

In forging process, metal moved while it is still in the solid state. King Tony specialized in forging technology to create better metal configuration. Non-straight grain flow and non-sharp corners can extend lifetime and durability of socket. Torque is transmitted for powerful tightening under safety.

Conventional heat treatment and microstructural



Other brand:
Over of Troostite (Zn,Mn) element will bring weak point. (not good)



King Tony brand:
Well spread (Fe) element will bring better strength. (good)

Heat treatment involves the use of heating or chilling experience and time control. King Tony controls heat treatment system to ensure the right hardness without the brittleness. From microstructural picture you can see elements are well- distributed.

Professional production & quality control

KING TONY hand socket reach 30% higher than DIN international standard.

Quality control also ensure that a sufficient level of production output. King Tony uses advance technology to inspect tiny difference on each step. Our hand socket, ratchet, extension bar, and power handle is 30% higher than international DIN standards. Impact socket reach 50% higher torque than DIN standards.

Finest material for tools

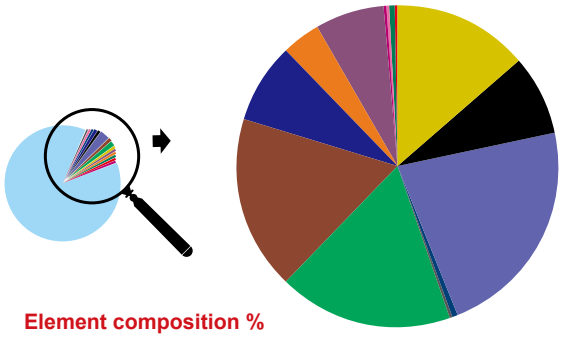

Element composition %

• Fe 97.1025%	• Mo 0.2325%	• P 0.0125%
• Mn 0.6485%	• Si 0.2301%	• S 0.0104%
• Ni 0.5089%	• Cu 0.1970%	• Co 0.0092%
• Cr 0.5058%	• V 0.1130%	• W 0.0088%
• C 0.4000%	• Al 0.0196%	• B 0.0012%

Tools are made to extend hand work. King Tony selects different material depends on its difference of nature for tightening, power impacting, cutting, rotating, and locking. Choose qualified material to meet required lifetime for professional use and consumption.

Extremely hard-wearing performance

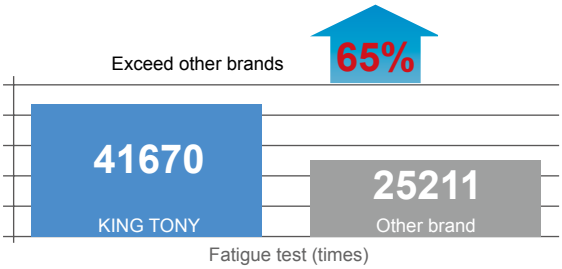

Fatigue test (times)

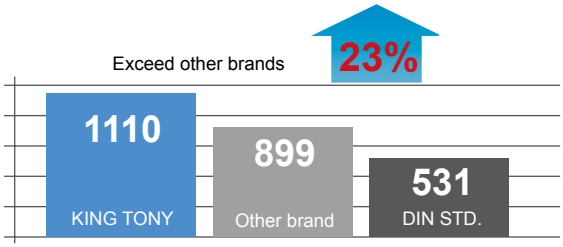

Fracture test (Nm)
1/2DR. 19mm hand socket (433519MR)

King Tony offers reliable tools for professional users, strictly controls its quality to ensure achievement of required performance. From “fracture & fatigue test”, you will know the difference we have when compare to others.

Standard Socket

KT No. & D1

2330M / 2330S 1/4"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI/ASME B107.1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
233004M	4	6.8	11.8	4	24	9	20 / 600
233045M	4.5	7.4	11.8	5	24	9	20 / 600
233005M	5	8.0	11.8	6	24	9	20 / 600
233055M	5.5	8.7	11.8	6	24	11	20 / 600
233006M	6	9.2	11.8	7	24	11	20 / 600
233007M	7	10.3	11.8	7	24	10	20 / 600
233008M	8	11.4	11.8	8	24	12	20 / 600
233009M	9	12.8	12.0	8	24	12	20 / 600
233010M	10	14.3	13.0	9	24	13	12 / 360
233011M	11	15.8	14.2	9	24	18	12 / 360
233012M	12	16.8	15.5	9	24	21	12 / 360
233013M	13	17.8	16.5	9	24	23	12 / 360
233014M	14	19.6	18.5	9	24	31	10 / 360

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
233005S	5/32	6.8	11.8	4	24	9	20 / 600
233006S	3/16	7.9	11.8	6	24	9	20 / 600
233007S	7/32	8.7	11.8	6	24	10	20 / 600
233008S	1/4	9.5	11.8	7	24	10	20 / 600
233009S	9/32	10.3	11.8	7	24	10	20 / 600
233010S	5/16	11.4	11.8	8	24	10	20 / 600
233011S	11/32	13.7	12.2	8	24	12	20 / 600
233012S	3/8	14.2	13.0	8	24	14	12 / 360
233014S	7/16	15.8	14.2	9	24	18	12 / 360
233015S	15/32	16.8	15.5	9	24	21	12 / 360
233016S	1/2	17.6	16.5	9	24	24	12 / 360

2335M / 2335S 1/4"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI/ASME B107.1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
233532M	3.2	5.7	11.8	3.5	24	9	20 / 600
233504M	4	6.8	11.8	4	24	9	20 / 600
233545M	4.5	7.4	11.8	5	24	10	20 / 600
233505M	5	8.0	11.8	6	24	10	20 / 600
233555M	5.5	8.7	11.8	6	24	10	20 / 600
233506M	6	9.2	11.8	7	24	10	20 / 600
233507M	7	10.3	11.8	7	24	11	20 / 600
233508M	8	11.4	11.8	8	24	11	20 / 600
233509M	9	12.8	12.0	8	24	13	20 / 600
233510M	10	14.3	13.0	9	24	14	12 / 360
233511M	11	15.8	14.2	9	24	19	12 / 360
233512M	12	16.8	15.5	9	24	22	12 / 360
233513M	13	17.8	16.5	9	24	25	12 / 360
233514M	14	19.6	18.5	9	24	32	10 / 300
233515M	15	20.9	19.3	12	24	39	10 / 300

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
233505S	5/32	6.8	11.8	4	24	9	20 / 600
233506S	3/16	7.9	11.8	6	24	11	20 / 600
233507S	7/32	8.7	11.8	6	24	11	20 / 600
233508S	1/4	9.5	11.8	7	24	11	20 / 600
233509S	9/32	10.3	11.8	7	24	11	20 / 600
233510S	5/16	11.4	11.8	8	24	11	20 / 600
233511S	11/32	13.7	12.2	8	24	12	20 / 600
233512S	3/8	14.2	13.0	8	24	14	12 / 360
233514S	7/16	15.8	14.2	9	24	19	12 / 360
233515S	15/32	16.8	15.5	9	24	22	12 / 360
233516S	1/2	17.6	16.5	9	24	24	12 / 360
233518S	9/16	19.6	18.5	9	24	31	10 / 300

Deep Socket

2235M 1/4"

- DIN 3124, ISO 2725-1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
223504M	4	6.9	11.6	6	49.5	18	20 / 320
223545M	4.5	7.5	11.6	6	49.5	20	20 / 320
223505M	5	8.0	11.6	7	49.5	21	20 / 320
223555M	5.5	8.8	11.6	7	49.5	21	20 / 320
223506M	6	9.5	11.6	8	49.5	22	20 / 320
223507M	7	10.5	11.6	12	49.5	23	20 / 320
223508M	8	11.8	11.8	15	50	24	20 / 320
223509M	9	13.0	13.0	15	50	30	15 / 240
223510M	10	14.5	14.5	15	50	38	15 / 240
223511M	11	15.8	15.8	21	50	43	15 / 240
223512M	12	16.8	16.8	21	50	48	15 / 240
223513M	13	17.8	17.8	21	50	52	15 / 240
223514M	14	19.8	19.8	21	50	69	15 / 240
223515M	15	20.9	20.9	25	50	71	12 / 240

2235S 1/4"

- Inch-ANSI/ASME B107.1



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
223505S	5/32	6.8	11.8	6	50	19	20 / 320
223506S	3/16	7.9	11.8	7	50	20	20 / 320
223507S	7/32	8.7	11.8	9	50	21	20 / 320
223508S	1/4	9.5	11.8	9	50	23	20 / 320
223509S	9/32	10.3	11.8	15	50	24	20 / 320
223510S	5/16	11.8	11.8	15	50	25	20 / 320
223511S	11/32	13.0	13.0	15	50	32	15 / 240
223512S	3/8	14.5	14.5	15	50	41	15 / 240
223514S	7/16	15.8	15.8	21	50	47	15 / 240
223516S	1/2	17.6	17.6	21	50	54	15 / 300
223518S	9/16	19.6	19.6	21	50	71	15 / 270

Deep Socket

2230M — 1/4"

- DIN 3124, ISO 2725-1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
223004M	4	6.8	11.8	6	50	20	20 / 320
223045M	4.5	7.4	11.8	7	50	20	20 / 320
223005M	5	8.0	11.8	7	50	20	20 / 320
223055M	5.5	8.7	11.8	9	50	20	20 / 320
223006M	6	9.2	11.8	9	50	21	20 / 320
223007M	7	10.3	11.8	15	50	22	20 / 320
223008M	8	11.8	11.8	15	50	25	20 / 320
223009M	9	13.0	13.0	15	50	28	15 / 240
223010M	10	14.5	14.5	15	50	36	15 / 240
223011M	11	15.8	15.8	21	50	41	15 / 240
223012M	12	16.8	16.8	21	50	47	15 / 240
223013M	13	17.8	17.8	21	50	49	15 / 240
223014M	14	19.8	19.8	21	50	66	15 / 240

Double Square Socket

2310M — 2310S — 1/4"

- Metric-DIN 3120
- Inch-ANSI / ASME B107.1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
231008M	8	13.8	13.0	9	24	16	12 / 360
231010M	10	16.8	15.4	9	24	22	12 / 360

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
231010S	5/16	13.8	13.0	9	24	15	12 / 360
231012S	3/8	16.8	15.4	9	24	24	12 / 360

Star Socket

2375M — 1/4"

- DIN 3120



KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
237504M	E4	6.0	11.8	3.6	24	9	20 / 600
237505M	E5	7.0	11.8	4.0	24	10	20 / 600
237506M	E6	8.0	11.8	6.0	24	10	20 / 600
237507M	E7	8.5	11.8	7.0	24	11	20 / 600
237508M	E8	9.8	11.8	8.0	24	11	20 / 600
237510M	E10	11.8	11.8	9.0	24	13	20 / 600

Star Socket

2275M — 1/4"

- DIN 3120



KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
227504M	E4	6.0	11.8	3.6	50	21	20 / 320
227505M	E5	7.0	11.8	4.0	50	22	20 / 320
227506M	E6	8.0	11.8	6.0	50	24	20 / 320
227507M	E7	8.5	11.8	7.0	50	24	20 / 320
227508M	E8	9.8	11.8	8.0	50	26	20 / 320

Bit Socket

CAUTION

In order to get normal life of bit socket, always use within limited torque to bit.

2011X — 1/4"

- Phillips head
- DIN ISO 8764-1



KT NO.	No.	L mm	g	
201101X	PH1	25	9	20 / 600
201102X	PH2	25	9	20 / 600
201103X	PH3	25	10	20 / 600
201104X	PH4	25	12	20 / 600

2012X — 1/4"

- Slotted head
- DIN ISO 2380-1



KT NO.	Tip width mm	Tip thickness mm	L mm	g	
201235X	3.5	0.6	25	8	20 / 600
201255X	5.5	1.0	25	9	20 / 600
201208X	8	1.2	25	10	20 / 600

2015X — 1/4"

- Hexagon head
- DIN ISO 2380-1



KT NO.	mm	L mm	g	
201503MX	H3	25	8	20 / 600
201504MX	H4	25	9	20 / 600
201505MX	H5	25	10	20 / 600
201506MX	H6	25	10	20 / 600
201508MX	H8	25	13	20 / 600
201510MX	H10	25	15	20 / 600
201506SX	3/16	25	9	20 / 600
201508SX	1/4	25	10	20 / 600

Bit Socket

KT No. & D1

2013X

1/4"

- For torx internal screw

KT NO.	Size	L mm	g	
201308X	T8	25	8	20 / 600
201309X	T9	25	8	20 / 600
201310X	T10	25	8	20 / 600
201315X	T15	25	8	20 / 600
201320X	T20	25	9	20 / 600
201325X	T25	25	9	20 / 600
201327X	T27	25	9	20 / 600
201330X	T30	25	10	20 / 600
201340X	T40	25	11	20 / 600

2018X

1/4"

- Pozidriv head
- DIN ISO 8764-1

KT NO.	No.	L mm	g	
201801X	PZ1	25	9	20 / 600
201802X	PZ2	25	9	20 / 600
201803X	PZ3	25	10	20 / 600
201804X	PZ4	25	11	20 / 600

2031

1/4"

- Phillips head
- DIN ISO 8764-1

KT NO.	No.	L mm	g	
203101	PH1	37	15	20 / 600
203102	PH2	37	15	20 / 600
203103	PH3	37	15	20 / 600
203104	PH4	37	16	20 / 600

2032

1/4"

- Slotted head
- DIN ISO 8764-1

KT NO.	Tip width mm	Tip thickness mm	L mm	g	
203235	3.5	0.5	37	15	20 / 600
203204	4	0.8	37	14	20 / 600
203255	5.5	1.0	37	15	20 / 600
203265	6.5	1.2	37	15	20 / 600
203207	7	1.2	37	15	20 / 600
203208	8	1.2	37	16	20 / 600
203210	10	1.6	37	20	20 / 600

2035 / 2035S

1/4"

- Hexagon head
- DIN 7422 / 3120

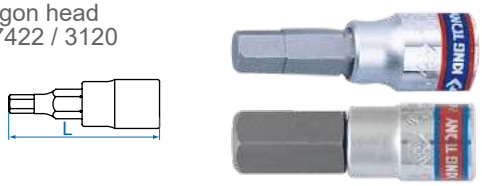

KT NO.	mm	L mm	g	
203503	H3	37	15	20 / 600
203504	H4	37	15	20 / 600
203505	H5	37	15	20 / 600
203506	H6	37	16	20 / 600
203507	H7	37	18	20 / 600
203508	H8	37	19	20 / 600
203510	H10	37	23	20 / 600

KT NO.	inch	L mm	g	
203504S	H1/8	37	15	20 / 600
203505S	H5/32	37	15	20 / 600
203506S	H3/16	37	16	20 / 600
203507S	H7/32	37	17	20 / 600
203508S	H1/4	37	18	20 / 600
203510S	H5/16	37	19	20 / 600
203512S	H3/8	37	22	20 / 600

2033

1/4"

- For torx internal screw
- DIN 3120



KT NO.	Size	L mm	g	
203308	T8	37	14	20 / 600
203309	T9	37	14	20 / 600
203310	T10	37	14	20 / 600
203315	T15	37	14	20 / 600
203320	T20	37	15	20 / 600
203325	T25	37	15	20 / 600
203327	T27	37	15	20 / 600
203330	T30	37	16	20 / 600
203340	T40	37	16	20 / 600

2037

1/4"

- For tamper resistant torx screw
- DIN 3120



KT NO.	Size	L mm	g	
203708	T8H	37	14	20 / 600
203709	T9H	37	14	20 / 600
203710	T10H	37	14	20 / 600
203715	T15H	37	14	20 / 600
203720	T20H	37	15	20 / 600
203725	T25H	37	15	20 / 600
203727	T27H	37	15	20 / 600
203730	T30H	37	15	20 / 600
203740	T40H	37	16	20 / 600

2038

1/4"

- Pozidriv head
- DIN 3120



KT NO.	No.	L mm	g	
203801	PZ1	37	15	20 / 600
203802	PZ2	37	15	20 / 600
203803	PZ3	37	15	20 / 600

90 Teeth Dustproof Ratchet PAT.

2773-55GS

1/4"

IP 51

- 1/4" DR. 90 teeth reversible ratchet
- 90 teeth ratchet mechanism, allowing ratchet action in very tight spaces
- IP51, dustproof design

2773DK

1 New slimline I-Beam shank offers superior strength with less effort



2 Dustproof - Double Sealing gasket

3 Screwless design - Easy to repair

Material
- chrome vanadium alloy steel handle
- chrome molybdenum steel (gear) driver

- Finishipolished, chrome plated
- black driver by phosphate sunk

KT NO.	Square DR.	Overall length inch	mm	g	
2773-55GS	1/4"	5-1/2"	140	110	1 / 100
2773DK			renewal kits		

Mini Bit Ratchet PAT.

276B-0225

- Reversible ratchet
- 6° gear action degree (60 teeth)
- Quick release design, convenient for users to quickly replace bit
- BIT-holder 12-PT design for quick bit replacement
- Reduced head size and shape of waist can be used quickly and conveniently in narrow spaces

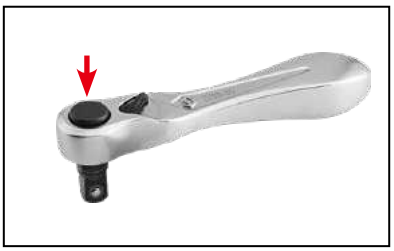

- Quick release Design

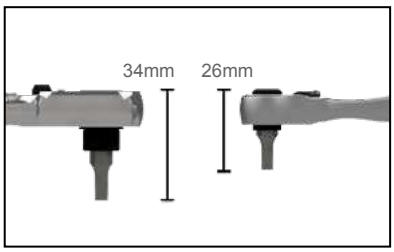

- Operating space 30% thinner

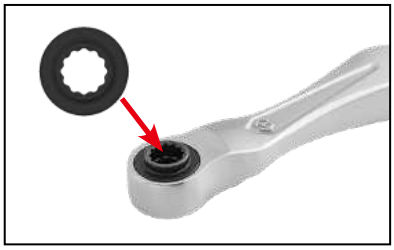

- D-head 12 PT design for quick bit replacement

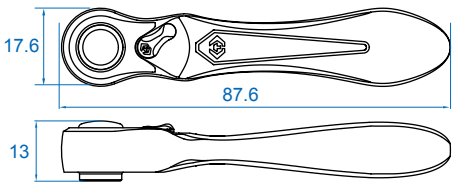

Work efficiency increased by 2.5 times

Contents	g 80	1 / 36
7702-25		
276B-35		

Ratchet

2725

FINE GEAR 1/4"

- Reversible ratchet
- 8° gear action degree (45 teeth)

KT NO.	Overall length inch	Overall length mm	g	
2725-55F	5-1/2	140	156	5 / 90
2725-55G	5-1/2	140	168	5 / 90
2725DK	renewal kits		-	-

2725DK

2725-55G

2725-55F

2759

FINE GEAR 1/4"

- Reversible ratchet
- 5° gear ac tion degree (72 teeth)
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
2759-55G	5-1/2	144	113	5 / 90
2759DK	renewal kits		-	-

2759DK

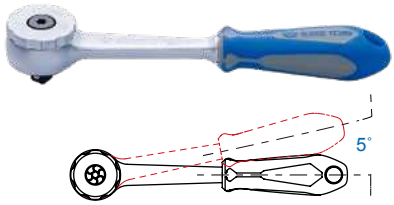

2752

QUICK RELEASE FINE GEAR 1/4"

- Quick release swivel reversible ratchet
- 5° gear action degree (72 teeth)
- Multi-angle design for difficult-to-reach fasteners

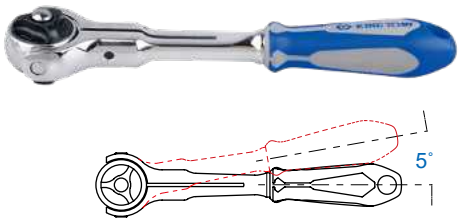

KT NO.	Overall length inch	Overall length mm	g	
2752-06G	6	150	128	6 / 108
2752DK	renewal kits		-	-

2752DK

2752-45G

QUICK RELEASE FINE GEAR 1/4"

- Quick release swivel reversible ratchet
- 5° gear action degree (72 teeth)
- Multi-angle design for difficult-to-reach fasteners
- Application: T-handle ratchet / screwdriver ratchet

KT NO.	Overall length inch	Overall length mm	g	
2752-45G	4-1/2	114	128	6 / 108
2752DK	renewal kits			

2752DK



2761

QUICK RELEASE 1/4"

- Quick release reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
2761-55F	5-1/2	140	164	6 / 108
2761-55P	5-1/2	140	156	6 / 108
2761DK	renewal kits		-	-

2761DK

2761-55F

2761-55P

Ratchet

KT No. & D1

2769 — 1/4"

- Reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

2769-55F

2769-55P

KT NO.	Overall length inch	Overall length mm	g	
2769-55F	5-1/2	140	167	6 / 108
2769-55P	5-1/2	140	159	6 / 108
2769DK	renewal kits		-	-

2769DK

2771 — QUICK RELEASE 1/4"

- Quick release reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

2771-55F

2771-55G

KT NO.	Overall length inch	Overall length mm	g	
2771-55F	5-1/8	130	142	6 / 108
2771-55G	5-1/8	134	110	6 / 108
2771DK	renewal kits		-	-

2771DK

2773 — 1/4"

- Quick release reversible ratchet
- 4° gear action degree (90 teeth)
- DIN 3122

2773DK

IP 51 · 90T 4° · 20kN · PAT.

KT NO.	Overall length inch	Overall length mm	g	
2773-55GS	5-1/2	140	110	1 / 100
2773DK	renewal kits		-	-

2774 — 1/4"

- Universal joint reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122





2774-55F

2774-55G

KT NO.	Overall length inch	Overall length mm	g	
2774-55F	5-1/8	130	146	6 / 108
2774-55G	5-1/8	134	114	6 / 108
2774DK	renewal kits		-	-

2774DK

2779 — 1/4"

- Reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

2779-55F

2779-55G

KT NO.	Overall length inch	Overall length mm	g	
2779-55F	5-1/8	130	145	6 / 108
2779-55G	5-1/8	134	113	6 / 108
2779DK	renewal kits		-	-

2779DK

Ratchet

KT No. & D1

2781

QUICK RELEASE 1/4"

- Quick release flexible and reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
2781-06P	6	150	156	6 / 108
2781DK	renewal kits		-	-

2781DK

2760

MINI RATCHET 1/4"

- Mini reversible ratchet
- 5° gear action degree (72 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
2760-04	4	100	95	8 / 128
2760DK01	renewal kits		-	-

2760DK01

276A

FINE GEAR MINI RATCHET 1/4"

- Mini bit holder ratchet
- 5° gear action degree (72 teeth)
- Two teeth pawl action

KT NO.	A mm	D mm	L mm	H mm	g	
276A-04G	23	26	111	20	101	6 / 108
276ADK		renewal kits			-	-

276ADK



magnet

276A-04G (top, side, back)

Mini Ratchet Set

2515MR 1/4"

- Mini ratchet set
- 5° gear action degree (72 teeth)
- Two teeth pawl action

15 PC.

Contents		0.26 kg	6 / 36
2335M	5, 5.5, 6, 7, 8		
1025P	PH1, PH2		
1025T	T10, T15, T20		
1025H	H3, H4, H5, H6		
276A-04G			

2501MR 1/4"

- 5° gear action degree (72 teeth)
- Two teeth pawl action

21 PC.

Contents		0.36 kg	4 / 48
2335M	4, 5, 6, 7, 8, 9, 10, 11, 12, 13		
1025P	PH1, PH2, PH3		
1025T	T10, T20, T30		
1025H	H4, H6		
1025S	5.5x1.0, 6.5x1.2		
276A-04G			

Accessory

2745 1/4"

- Palm ratchet bit holder
- Non-toothed palm ratchet is designed for any angle of degree
- 3 position of forward / lock / reverse
- Suitable for narrow space where a standard wrench cannot attain
- Anodized aluminum alloy body & chrome vanadium alloy steel bit holder



KT NO.	Ø1 mm	H	g	
2745	46	26.5	103	12 / 144

2747 1/4"

- 72-teeth ratcheting mechanism gives a 5° ratcheting arc allowing you to quickly tighten or loosen fasteners.
- Anodized aluminum finish for protection and easy wipe down

2747DR

2747

- The special gyroscope-like structure allows you to loosen or lock objects with various angles

KT NO.	Ø (mm)	H (mm)	Teeth	g	
○ **2747**	50	25	72	88	12 / 72
■ **2747DR**	50	25	72	90	12 / 72

Accessory

- Material - chrome vanadium alloy steel
- Finishing - polished, chrome plated

KT No. & D1

2221 1/4"

- Extension bar
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
2221-02	2	55	27	30 / 480
2221-03	3	75	36	20 / 400
2221-04	4	100	44	15 / 240
2221-06	6	150	67	15 / 240
2221-10	10	254	107	15 / 240
2221-12	12	305	130	15 / 240

2293 1/4"

- Multi-function extension bar andoffset extension bar, wobble extension bar
- Hex key is applicable to the hex shank
- Max. torque : 35 N·m
- DIN 3123

KT NO.	Overall length inch	Overall length mm	g	
2293-02	2	55	24	30 / 480
2293-03	3	75	34	20 / 400
2293-04	4	100	44	15 / 240
2293-06	6	150	65	15 / 300

KT No. & D1

2311 1/4"

- Flexible extension bar

KT NO.	Overall length inch	Overall length mm	g	
2311-06	6	150	65	12 / 240
2311-12	12	300	89	12 / 120
2311-18	18	450	112	20 / 200

KT No. & D1

2312 1/4"

- Flexible extension bar

KT NO.	Overall length inch	Overall length mm	g	
2312-06	6	150	59	12 / 240

CAUTION

In order to get normal life of bit socket, Always use within limited torque to bit.

3893EW 1/4" & 3/8"

- Extension wrench
- Length extension drive bar enables easier works in confined spaces
- Provided with two square drive adapters in 1/4″ and 3/8″
- Chain-driven mechanism enhances working durability and smoothness
- Max torque allowed: 130 N m / 96 ft lb

3/8" 3893EW-01

1/4" 3893EW-02

KT NO.	Drive	Overall length inch	Overall length mm	Capcity	g	
3893EW		13.4	340	300	410	20 / 40
3893EW-01	3/8"	-	-		20	10 / 160
3893EW-02	1/4"	-	-		20	10 / 160

2223 1/4"

- Offset extension bar, wobble extension bar
- Max. torque:35 Nm
- DIN 3123

KT NO.	Overall length inch	Overall length mm	g	
2223-02	2	55	24	30 / 480
2223-04	4	100	44	15 / 240

2792 1/4"

- Universal joint
- DIN 3123

KT NO.	Overall length inch	Overall length mm	g	
2792	1 - 1/2	36	22	24 / 384

Accessory

2793 1/4"

- Universal joint
- Ball point type universal joint & with hex locking design
- Short pattern design enables greater access in confined spaces



KT NO.	Overall length inch	Overall length mm	g	
2793	1-1/4	31	18	20 / 600

9113PR 1/4" 3/8" 1/2"

- Universal joint
- Ball point type universal joint & with hex locking design
- Short pattern design enables greater access in confined spaces

3 PC.

Contents			0.20 kg	6 / 108
	2793	31mm		
	3793	43mm		
	4793	59mm		

2813 1/4"

- Adapter
- Convert to 3/8" drive
- DIN 3123

3/8" drive (M) ← 1/4" drive (F)

KT NO.	Spec.	g	
2813	1/4" F x 3/8"M	20	12 / 360

213312DF 1/4"

- Magnetic screwdriver handle
- DIN 3126

KT NO.	Overall length inch	Overall length mm	g	
213312DF	12	300	132	2 / 40

2176DF 1/4"

- 2 in 1 design Spinner handle + Bit holder
- NF ISO 3315, ISO 3315, DIN 3122, ASME B107.10

- Attached with 1/4" bit

- Attached with 1/4"DR. socket

- Easy to switch



- Attached with 1/4"DR. ratchet, compact size & easy to use

KT NO.	Overall length inch	Overall length mm	g	
2176DF	6	150	105	6 / 60

2177DF 1/4"

- Spinner handle
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
2177DF	12-1/4	310	126	6 / 60

2178DF 2179DF 1/4"

- Spinner handle
- DIN 3122

2178DF (PP + TPR)

2179DF (PP)

KT NO.	Overall length inch	Overall length mm	g	
2178DF	6	150	76	6 / 120
2179DF	6	150	90	12 / 192

2178TG 1/4"

- Spinner handle
- DIN 3122



KT NO.	■	mm	mm	g	
2178TG	1/4	115	154	94	6 / 96

2452 1/4"

- Flexible handle
- Action degree -180°
- DIN 3122

2452DK

KT NO.	Overall length inch	Overall length mm	g	
2452-05F	5	130	86	15 / 270
2452DK	renewal kits		-	-

Accessory

KT No. & D1

- Material - chrome vanadium alloy steel
- Finishing - polished, chrome plated & black phosphate sunk

2453 — 1/4"

- Flexible handle
- Action degree -180°
- New pattern design added in firm and powerful elements
- New forge technologies I-Beam shank offers 15% lightweight
- DIN 3122

2452DK

KT NO.	Overall length inch	Overall length mm	g	
2453-05F	5	130	71	15 / 270
2452DK	renewal kits		-	-

2571 — 1/4"

- Sliding T-handle
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
2571-45	4-1/2	115	44	12 / 192

2141 / 2142 — 1/4"

- Bit holder
- DIN 3122

METAL SPRING

2141

MAGNET

2142

KT NO.	Size inch	Overall length mm	g	
2141	1/4	25	14.0	20 / 320
2142	1/4	25	15	20 / 320

Socket Rail Set

2509MR — 1/4"

- Socket rail 150mmL

9 PC.

Contents — kg 0.17 — 4 / 48

2335M	4, 5, 6, 7, 8, 9, 10, 11, 13
8720609	

2509SR — 1/4"

- Socket rail 150mmL

9 PC.

Contents — kg 0.17 — 4 / 48

2335S	5/32, 3/16, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
8720609	

Socket Rail Set

2513MR — 1/4"

- Socket rail 240 mmL

13 PC.

Contents — kg 0.23 — 6 / 60

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
8721114	

2513MRD1 — 1/4"

- Socket rail 508 mmL

13 PC.

Contents — kg 0.34 — 50

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
8720813D1	

2311MR — 1/4"

- Socket rail 240 mmL

13 PC.

Contents — kg 0.46 — 6/60

2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13,14
8721114	

2127PR — 1/4"

- Socket rail 130mmL
- For hex head screw
- H : 37mm

7 PC.

Contents — kg 0.15 — 4/32

2035	H3, H4, H5, H6, H7, H8, H10
8720507	

2127SR — 1/4"

- Socket rail 130mmL
- For hex head screw
- H : 37mm

7 PC.

Contents — kg 0.15 — 4/32

2035S	H1/8, H5/32, H3/16, H7/32, H1/4, H5/16, H3/8
8720507	

Socket Rail Set

2109PR 1/4"

- Socket rail 150mmL
- For torx head screw
- H : 37mm

9 PC.

Contents 0.12 kg 4/32

2033	T8, T9, T10, T15, T20, T25, T27, T30, T40
8720609	

2114TR 1/4"

- Socket rail 150mmL
- For torx head screw
- H : 37mm

14 PC.

Contents 0.30 kg 6/72

2033	T8, T9, T10, T15, T20, T25, T27, T30, T40
2275M	E4, E5, E6, E7, E8
8721114	

2107PR 1/4"

- Socket rail 130mmL
- For tamper resistant torx head screw
- H : 37mm

7 PC.

Contents 0.12 kg 4/32

2037	T10H, T15H, T20H, T25H, T27H, T30H, T40H
8720507	

2119PR 1/4"

- Socket rail 150mmL
- For tamper resistant torx head screw
- H : 37mm

9 PC.

Contents 0.12 kg 4/32

2037	T8H, T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H
8720609	

872 1/4"

- Rail length from 160 mm to 560 mm

KT NO.	L (mm)
870406	160
870208	200
870422	560
8720	-

8720813D1 1/4"

- Socket rail carrier with retaining clip
- 446mm roller cabinet

KT NO.	Square drive	Clip	L (mm)
8720813D1	1/4"	13	508

Extension Bar Set

2104PR 1/4"

4 PC.

Contents 0.17 kg 1/80

2221	2", 3", 4", 6"

Socket Set

2313MR 1/4"

13 PC.

Contents 0.42 kg 1 / 32

2335M	4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2766-55G	2221-04

2510SR 1/4"

- Metal case size (mm) :
- 223 x 65 x 32 (0.016 cuft)

10 PC.

Contents 0.62 kg 1 / 30

	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2

2511MR 1/4"

- Metal case size (mm) :
- 223 x 65 x 32 (0.016 cuft)

11 PC.

Contents 0.67 kg 1 / 30

2235M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13

Socket Set

2516MR

- Metal case size (mm) :
- 244 x 118 x 37 (0.038 cuft)

2516SR 1/4"

16 PC.

2516MR

2516SR

KT NO.		Contents		
			1.10	1 / 18
2516MR	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 13	2779-55G, 2571-45, 2179DF, 2221-04, 2792	
2516SR	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2		

2518MR

- Metal case size (mm) :
- 198 x 105 x 32 (0.023cuft)

2518SR

2518MR01 1/4"

18 PC.

2518MR/2518MR01

2518SR

KT NO.		Contents		
			0.96	1 / 20
2518MR	2335M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12	2310M 8, 10	2452-05F, 2571-45, 2725-55F, 2792, 2221-02, 2221-04
2518SR	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	2310S 5/16, 3/8	
2518MR01	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		

2019MR

- Metal case size (mm) :
- 198 x 105 x 32 (0.023 cuft)

2019SR

2519MR

2519SR 1/4"

18 PC.

2019MR/2519MR

2019SR/2519SR

KT NO.		Contents		
			0.92	1 / 20
2019MR	2330M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12	2310M 8, 10	2769-55P, 2452-05F, 2221-02, 2221-04, 2571-45, 2792
2519MR	2335M			
2019SR	2330S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	2310S 5/16, 3/8	
2519SR	2335S			

Socket Set

2021MR

- Metal case size (mm) :
- 198 x 105 x 32 (0.023 cuft)

0.87 | 1 / 20

KT NO.	Contents		
2021MR	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	2779-55G, 2221-02, 2221-04, 2452-05F, 2571-45, 2792, 2141
2521MR	2335M		

2521MR 1/4"

19 PC.

2526MR

- Metal case size (mm) :
- 244 x 118 x 37 (0.038 cuft)

2526MR

2526SR 1/4"

26 PC.

2526SR

1.30 | 1 / 18

KT NO.		Contents
2526MR	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 13
	2235M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 13
2526SR	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2
	2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2

2779-55G, 2221-02, 2221-04, 2792, 2813

2031MR

- Metal case size (mm) :
- 280 x 130 x 41 (0.053 cuft)

1.60 | 1 / 15

KT NO.	Contents		
2031MR	2330M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12, 13	2033 T8, T9, T10, T15, T20, T25, T27, T30; 2035 H3, H4, H5, H6, H8, H10; 2779-55G, 2221-03, 2221-06, 2179DF, 2571-45, 2792
2531MR	2335M		

2531MR 1/4"

31 PC.

2030CR

- Metal case size (mm) :
- 244 x 118 x 37 (0.038 cuft)

1.30 | 1 / 18

KT NO.	Contents	
2030CR	2330M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12
	2330S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
2530CR	2335M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12
	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2

2310M 8, 10; 2310S 5/16, 3/8; 2769-55F, 2792, 2571-45, 2221-02, 2221-04, 2452-05F

2530CR 1/4"

30 PC.

Socket Set

2540MR 1/4"

- Metal case size (mm):
- 316 x 104 x 40 (0.047 cuft)

39 PC.

Contents 1.52 1 / 12

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
1025S	4, 5.5, 7
1025P	PH0, PH1, PH2, PH3
1025H	H3, H4, H5, H6, H7, H8
1025T	T10, T15, T20, T25, T30, T40

2779-55G, 213312DF, 2792, 2141, 2571-45, 2452-05F, 2221-02, 2221-06

2539MR 1/4"

- Metal case size (mm) :
- 280 x 130 x 41 (0.053 cuft)

39 PC.

Contents 1.61 1 / 15

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
2375M	E4, E5, E6, E7, E8
2033	T8, T9, T10, T15, T20, T25, T27, T30, T40
2035	H3, H4, H5, H6, H7, H8, H10

2779-55G, 2179DF, 2571-45, 2221-02, 2221-04, 2792

2575MR 1/4"

- Metal case size (mm):
- 244 x 118 x 37 (0.038 cuft)

45 PC.

Contents 1.24 1 / 18

2335M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
1025S	4, 6.5, 7, 8
1025P	PH1, PH2, PH3
1025H	H2.5, H3, H4, H5, H6, H7, H8, H10
1025U	T8H, T9H, T10H, T15H, T20H, T25H, T27H,T30H, T40H
1025Z	PZ1, PZ2, PZ3

2755-55G, 2223-02, 2792, 2311-06, 2179DF, 2142

2551MR

- Metal case size (mm):
- 244 x 118 x 37 (0.038 cuft)

2551MR01 1/4"

51 PC.

2551MR

2551MR01

KT NO. Contents 1.30 1 / 18

KT NO.		Contents			
2551MR	2759-55G	2335M: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 1025S: 3, 4, 5, 6 1025P: PH1, PH2 x2, PH3 1025H: H3, H4, H5, H6	1025U: T10H, T15H, T20H, T25H, T27H, T30H, T40H 1025Z: PZ1, PZ2 x2, PZ3 1025T: T10, T15, T20, T25, T27, T30, T40	2813, 2142, 2792 7702-25, 753-63 2223-02, 2223-04, 2178DF	
2551MR01	2761-55F				

Atom Series

PAT.

2539MR-AM

- Plastic case size (mm) :
- 170 x 95 x 51(0.029 cuft)

39 PC.



Easy to pick up

Push mechanism

- Automatic raising bit rack



- Built-in rotation axis design

Contents 0.86 1 / 24

2335M	5, 5.5, 6, 7, 8, 9, 10 ,11, 12, 13, 14	1025U	T10H, T15H, T20H, T25H, T27H,T30H, T40H
1025P	PH1, PH2, PH3	1025S	4.0, 5.0, 6.0
102512P		1025H	H2.5, H3, H4, H5, H6
1025Z	PZ1, PZ2, PZ3	2773-55GS	2176DF
2141	2793	2221-02 2221-04	

Socket Set

2525MRE

1/4"

- Blow case size (mm) :
- 203 x 93 x 43(0.028cuft)

Contents 0.54 1 / 20

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
1025P	PH2 x2
1025H	H5, H6
1025T	T10, T15, T20, T25, T30, T40
2771-55G	2221-04 2142

25 PC.

Socket Set

2027MRE 1/4"

- Blow case size (mm) :
- 203 x 93 x 43(0.028cuft)

2527MRE 1/4"

27 PC.

KT NO.	Contents			0.60 / 1 / 20
2027MRE	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 12, 13, 14	1025P PH1, PH2 1025H H3, H4, H5 1025T T10, T15, T20, T25, T30, T40	2221-04 276A-04G 2142 2792
2527MRE	2335M			

2516MRV03

Tray category #11 (187 x 140mm) 1/4"

- Plastic case size (mm) :
- 199 x 161 x 56 (0.063 Cuft)

17 PC.

Contents	0.75 / 1/16	
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
2771-55G	2571-45	
2221-06	2792	

2524MRV

Tray category #11 (187 x 140mm) 1/4"

- Plastic case size (mm) :
- 199 x 161 x 56 (0.063 Cuft)

21 PC.

Contents	0.9 / 1/16	
2335M	4, 4.5, 5 , 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
2771-55G	2571-45	2142
2221-02 2221-04 2221-06	2178DF	2792

2528MRV

Tray category #11 (187 x 140mm) 1/4"

- Plastic case size (mm) :
- 199x 161 x 56 (0.063 Cuft)

29 PC.

Contents	0.76 / 1 / 18
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11,12, 13, 14
1025H	H3, H4, H5, H6
1025S	4, 5
1025T	T10, T15, T20, T30
1025P	PH1, PH2
276A-04G 2792 2221-06 2142	

Socket Set

2331SRV

Tray category #7 (280 x 187mm) 1/4"

- Plastic case size (mm) :
- 289 x 230 x 66 (0.154Cuft)

31 PC.

Contents		1.63	1 / 6
2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16		
2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16		
2771-55G	2571-45	2142	
2221-02 2221-04 2221-06	2792	2178DF	

2534MRV

Tray category #7 (280 x 187mm) 1/4"

- Plastic case size (mm) :
- 289 x 230 x 66 (0.154Cuft)

34 PC.

Contents		1.76	1 / 6
2335M	4, 4.5, 5 ,5.5 , 6 , 7 , 8 , 9 , 10 , 11 ,12 , 13, 14		
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2771-55G	2571-45	2142	
2221-02 2221-04 2221-06	2178DF	2792	

2565MRV

Tray category #7 (280 x 187mm) 1/4"

- Plastic case size (mm):
- 289 x 230 x 66 (0.154 cuft)

65 PC.

Contents		2.67	1 / 6
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2375M	E4, E5, E6, E7, E8		
2013X	T8, T9, T10, T15, T20, T25, T27, T30, T40		
2015X	3, 4, 5, 6, 8		
2018X	PZ1, PZ2		
2011X	PH1, PH2		
2012X	3.5, 5.5, 8		
1025T	T6, T7		
1025M	M4, M5, M6, M8, M10		
2792	2813	276A-04G	2221-02 2221-04 2221-06

Socket Set

2044SRV

- Plastic case size (mm) :
- 389 x 185 x 66 (0.168 Cuft)

2544SRV

Tray category #10 (375 x 140mm) 1/4"

44 PC.

2044SRV

2544SRV

KT NO.			Contents			1.62	1 / 10
2044SRV	2330S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2	2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2		2142	
			1025S	3, 4.5, 5, 6.5, 8		2792	
2544SRV	2335S		1025P	PH0, PH1, PH2, PH3		2223-02 2223-04	
			5025H	H3/64, H1/16, H5/64, H3/32, H7/64, H1/8, H9/64, H5/32		2752-06G	
						2178DF	

2048MRV

- Plastic case size (mm) :
- 389 x 185 x 66 (0.168 Cuft)

2548MRV

Tray category #10 (375 x 140mm) 1/4"

48 PC.

2048MRV

2548MRV

KT NO.			Contents			1.79	1 / 10
2048MRV	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		2142	
			1025S	3, 4.5, 5, 6.5, 8		2792	
2548MRV	2335M		1025P	PH0, PH1, PH2, PH3		2223-02 2223-04	
			1025H	H3, H4, H5, H6, H7, H8, H10		2178DF	
						2752-06G	

2553MRV

Tray category #10 (375 x 140mm) 1/4"

- Plastic case size (mm) :
- 389 x 185 x 66 (0.168 Cuft)

53 PC.

Contents 1.67 1 / 6

2335M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
1025H	H3, H4, H5, H6, H7, H8, H10
1025S	3, 4.5, 5, 6.5, 8
1025P	PH0, PH1, PH2, PH3
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1025Z	PZ1, PZ2, PZ3
1025T	T10, T15, T20, T25, T27, T30, T40
7702-25	2792 2813
276A-04G	213312DF
2223-02 2223-04	2745

Socket Set

2553MRV01

Tray category #10 (375 x 140mm) 1/4"

- Plastic case size (mm) :
- 389 x 185 x 66 (0.168 Cuft)

Contents — 1.87 kg — 1 / 10

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
1025H	H3, H4, H5, H6, H7,H8, H10
1025T	T10, T15, T20, T25, T27, T30, T40
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1025P	PH1, PH2, PH3
1025Z	PZ1, PZ2, PZ3
1025S	3, 4.5, 5, 6.5, 8
7702-25	276A-04G
2571-45	213312DF
2221-02 2221-04 2221-06	2745 2792 2142

55 PC.

2550MRV

Tray category #8 (375 x 187mm) 1/4"

- Plastic case size (mm) :
- 389 x 230 x 66 (0.208 Cuft)

Contents — 2.2 kg — 1 / 6

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2375M	E4, E5, E6, E7, E8
2031	PH1, PH2, PH3, PH4
2032	4, 5.5, 6.5, 8, 10
2033	T8, T9, T10, T15, T20, T25, T27, T30, T40
2035	H3, H4, H5, H6, H7, H8, H10
2771-55G	2178DF
2571-45	2792
2293-04 2293-06	2221-02

50 PC.

2549MR-EB

Contents — 1.28 kg — 1 / 12

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10 x2, 11, 12, 13, 14
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2275M	E4, E5, E6, E7, E8
2375M	E4, E5, E6, E7, E8, E10
2031	PH1, PH2
2032	4, 5.5
2035	H3, H4, H5, H6, H8
2221-02	

49 PC.



Standard Socket

3330M 3330S 3/8"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI / ASME B107.1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
333006M	6	9.9	17.8	7.0	27	25	12 / 360
333007M	7	10.8	17.8	7.0	27	24	12 / 360
333008M	8	12.0	17.8	7.0	27	25	12 / 360
333009M	9	13.2	17.8	7.0	27	25	12 / 360
333010M	10	14.5	17.8	9.0	27	26	12 / 360
333011M	11	15.8	17.8	9.0	27	27	12 / 360
333012M	12	16.8	17.8	9.0	27	26	12 / 360
333013M	13	17.8	16.8	9.0	27	25	12 / 360
333014M	14	19.7	18.0	11.0	29	33	10 / 300
333015M	15	20.8	18.0	11.0	29	35	10 / 300
333016M	16	21.8	20.0	11.0	29	45	10 / 300
333017M	17	23.8	20.0	11.0	29	48	10 / 200
333018M	18	24.7	21.0	13.0	29	50	10 / 200
333019M	19	25.8	21.0	13.0	29	51	10 / 200
333020M	20	27.1	25.0	13.0	32	83	10 / 160
333021M	21	27.8	25.0	13.0	32	80	10 / 160
333022M	22	29.7	26.0	15.0	32	86	10 / 160
333023M	23	29.7	26.0	15.0	32	80	10 / 160
333024M	24	31.8	26.0	17.0	32	89	8 / 160

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
333008S	1/4	10.0	17.8	7.0	27	24	12 / 360
333010S	5/16	12.0	17.8	7.0	27	24	12 / 360
333011S	11/32	13.2	17.8	7.0	27	25	12 / 360
333012S	3/8	14.0	17.8	9.0	27	26	12 / 360
333014S	7/16	15.8	17.8	9.0	27	26	12 / 360
333015S	15/32	16.8	17.8	9.0	27	27	12 / 360
333016S	1/2	17.8	16.8	9.0	27	26	12 / 360
333018S	9/16	19.7	18.0	11.0	29	33	10 / 300
333019S	19/32	20.8	18.0	11.0	29	35	10 / 300
333020S	5/8	21.8	20.0	11.0	29	42	10 / 300
333022S	11/16	23.8	20.0	11.0	29	46	10 / 200
333024S	3/4	25.8	21.0	13.0	29	50	10 / 200
333026S	13/16	27.8	25.0	13.0	32	80	10 / 160
333028S	7/8	29.7	26.0	15.0	32	83	10 / 160
333030S	15/16	31.8	26.0	17.0	34	83	8 / 160
333032S	1	33.8	26.0	17.0	34	96	8 / 160

3335M 3335S 3/8"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI / ASME B107.1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
333506M	6	9.9	17.8	7.0	27	25	12 / 360
333507M	7	10.8	17.8	7.0	27	24	12 / 360
333508M	8	12.0	17.8	7.0	27	26	12 / 360
333509M	9	13.2	17.8	7.0	27	25	12 / 360
333510M	10	14.5	17.8	9.0	27	28	12 / 360
333511M	11	15.8	17.8	9.0	27	27	12 / 360
333512M	12	16.8	17.8	9.0	27	28	12 / 360
333513M	13	17.8	16.8	9.0	27	26	12 / 360
333514M	14	19.7	18.0	11.0	29	35	10 / 300
333515M	15	20.8	18.0	11.0	29	39	10 / 300
333516M	16	21.8	20.0	11.0	29	43	10 / 300
333517M	17	23.8	20.0	11.0	29	50	10 / 200
333518M	18	24.7	21.0	13.0	29	51	10 / 200
333519M	19	25.8	21.0	13.0	29	53	10 / 200
333520M	20	27.1	25.0	13.0	32	87	10 / 160
333521M	21	27.8	25.0	13.0	32	82	10 / 160
333522M	22	29.7	26.0	15.0	32	89	10 / 160
333523M	23	29.7	26.0	15.0	32	84	10 / 160
333524M	24	31.8	26.0	17.0	32	94	8 / 160

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
333508S	1/4	10.0	17.8	7.0	27	24	12 / 360
333510S	5/16	12.0	17.8	7.0	27	25	12 / 360
333511S	11/32	13.2	17.8	7.0	27	24	12 / 360
333512S	3/8	14.0	17.8	9.0	27	25	12 / 360
333514S	7/16	15.8	17.8	9.0	27	25	12 / 360
333515S	15/32	16.8	17.8	9.0	27	27	12 / 360
333516S	1/2	17.8	16.8	9.0	27	26	12 / 360
333518S	9/16	19.7	18.0	11.0	29	32	10 / 300
333519S	19/32	20.8	18.0	11.0	29	35	10 / 300
333520S	5/8	21.8	20.0	11.0	29	43	10 / 300
333522S	11/16	23.8	20.0	11.0	29	48	10 / 200
333524S	3/4	25.7	21.0	13.0	29	51	10 / 200
333526S	13/16	27.8	25.0	13.0	32	83	10 / 160
333528S	7/8	29.6	26.0	15.0	32	89	10 / 160
333530S	15/16	31.8	26.0	17.0	34	86	8 / 160
333532S	1	33.8	26.0	17.0	34	101	8 / 160

Thin Wall Deep Socket

3215M 3/8"

- Specifically for heat plug, glow plug

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
321510M	10	13.0	17.8	12.0	65	49	20 / 240
321512M	12	15.0	17.8	15.0	65	49	20 / 240



Thin walled design (D1)

Deep Socket

3230M

3230S 3/8"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI / ASME B107.1



KT NO.	mm	D1 mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
323007M	7	10.8	17.8	10.0	63	55	20 / 320
323008M	8	12.0	17.8	12.0	63	49	18 / 288
323009M	9	13.2	17.8	12.0	63	57	18 / 288
323010M	10	14.5	17.8	12.0	63	57	15 / 240
323011M	11	15.8	17.8	15.0	63	57	15 / 240
323012M	12	16.8	17.8	15.0	63	58	15 / 240
323013M	13	17.8	16.8	15.0	63	57	15 / 240
323014M	14	19.7	18.0	16.0	63	73	12 / 192
323015M	15	20.8	18.0	18.0	63	73	10 / 160
323016M	16	21.8	20.0	18.0	63	87	8 / 128
323017M	17	23.8	20.0	18.0	63	101	8 / 128
323018M	18	24.7	21.0	20.0	63	107	6 / 96
323019M	19	25.8	21.0	20.0	63	113	6 / 96
323021M	21	27.8	25.0	20.0	63	122	6 / 96
323022M	22	29.7	26.0	20.0	63	150	6 / 96
323024M	24	31.8	26.0	25.0	63	158	6 / 120

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
323008S	1/4	10.0	16.8	10.0	63	48	20 / 320
323010S	5/16	12.0	17.8	12.0	63	48	18 / 288
323012S	3/8	14.0	17.8	12.0	63	53	15 / 240
323014S	7/16	15.8	17.8	15.0	63	54	15 / 240
323016S	1/2	17.8	16.8	15.0	63	58	15 / 240
323018S	9/16	19.7	18.0	16.0	63	74	12 / 192
323020S	5/8	21.8	20.0	18.0	63	88	8 / 128
323022S	11/16	23.8	20.0	18.0	63	98	8 / 128
323024S	3/4	25.8	21.0	20.0	63	111	6 / 96
323026S	13/16	27.8	25.0	20.0	63	125	6 / 96
323028S	7/8	29.7	26.0	21.0	63	158	6 / 96
323030S	15/16	31.8	26.0	22.0	63	170	5 / 80
323032S	1	33.8	26.0	22.0	63	195	5 / 80

3235M

3235S 3/8"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI / ASME B107.1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
323506M	6	9.9	17.8	10.0	63	51	20 / 320
323507M	7	10.8	17.8	10.0	63	52	20 / 320
323508M	8	12.0	17.8	12.0	63	49	18 / 288
323509M	9	13.2	17.8	12.0	63	53	18 / 288
323510M	10	14.5	17.8	12.0	63	58	15 / 240
323511M	11	15.8	17.8	15.0	63	60	15 / 240
323512M	12	16.8	17.8	15.0	63	68	15 / 240
323513M	13	17.8	16.8	15.0	63	64	15 / 240
323514M	14	19.7	18.0	16.0	63	77	12 / 192
323515M	15	20.8	18.0	18.0	63	75	10 / 160
323516M	16	21.8	19.0	18.0	63	86	8 / 128
323517M	17	23.8	20.0	18.0	63	102	8 / 128
323518M	18	24.7	21.0	20.0	63	112	6 / 96
323519M	19	25.8	21.0	20.0	63	111	6 / 96
323521M	21	27.8	25.0	20.0	63	142	6 / 96
323522M	22	29.7	26.0	20.0	63	167	6 / 96
323524M	24	31.8	26.0	25.0	63	171	6 / 120

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
323508S	1/4	10.0	16.8	10.0	63	47	20 /320
323510S	5/16	12.0	17.8	12.0	63	56	18 / 288
323512S	3/8	14.0	17.8	12.0	63	56	15 / 240
323514S	7/16	15.8	17.8	15.0	63	59	15 / 240
323516S	1/2	17.8	16.8	15.0	63	41	15 / 240
323518S	9/16	19.7	18.0	16.0	63	76	12 / 192
323520S	5/8	21.8	20.0	18.0	63	90	8 / 128
323522S	11/16	23.8	20.0	18.0	63	97	8 / 128
323524S	3/4	25.8	21.0	20.0	63	108	6 / 96
323526S	13/16	27.8	25.0	20.0	63	146	6 / 96
323528S	7/8	29.7	26.0	21	63	166	6 / 96
323530S	15/16	31.8	26.0	22	63	182	5 / 80
323532S	1	33.8	26.0	22	63	206	5 / 80

Star Socket

KT No. & D1

3375M

3/8"

- DIN 3120



KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
337504M	E4	6.0	16.8	3.6	28	21	12 / 360
337505M	E5	7.0	16.8	4.0	28	21	12 / 360
337506M	E6	8.0	16.8	5.0	28	22	12 / 360
337507M	E7	8.9	16.8	6.0	28	22	12 / 360
337508M	E8	10.0	16.8	6.5	28	23	12 / 360
337510M	E10	12.0	16.8	7.0	28	24	12 / 360
337511M	E11	12.8	16.8	8.0	28	24	12 / 360
337512M	E12	14.3	16.8	9.0	28	26	12 / 360
337514M	E14	15.9	17.8	9.5	28	31	12 / 360
337516M	E16	18.0	19.8	10.5	28	42	10 / 300
337518M	E18	20.0	21.8	11.0	28	55	10 / 300

3275M

3/8"

- DIN 3120



KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
327504M	E4	6.0	16.8	3.6	63	45	12 / 240
327505M	E5	7.0	16.8	4.0	63	47	12 / 240
327506M	E6	8.0	16.8	5.0	63	48	12 / 240
327507M	E7	8.9	16.8	6.0	63	49	12 / 240
327508M	E8	10.0	16.8	6.5	63	52	12 / 240
327510M	E10	12.0	16.8	7.0	63	57	12 / 240
327511M	E11	12.8	16.8	8.0	63	59	12 / 240
327512M	E12	14.3	16.8	9.0	63	65	12 / 240
327514M	E14	15.9	16.8	9.5	63	67	12 / 240
327516M	E16	17.8	17.8	10.5	63	77	12 / 240
327518M	E18	19.8	19.8	11.0	63	100	10 / 160

333E

3/8"

- For torx plus external screw
- DIN 3120



KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
333E10M	EP10	13.2	10.5	8	37	53	20 / 240
333E11M	EP11	14.0	11.0	9	37	53	20 / 240
333E12M	EP12	14.6	12.0	10	37	53	20 / 240
333E14M	EP14	16.5	14.0	11	37	55	20 / 240
333E16M	EP16	19.0	16.0	12	37	59	20 / 240
333E18M	EP18	20.3	18.0	15	37	60	20 / 240
333E20M	EP20	21.8	19.5	15	37	63	20 / 240

KINGTONY
KINGTONY
KINGTONY

KING TONY Spark Plug Sockets

Square drive	Type	Size / KT NO. inch	Size / KT NO. mm	Rubber I	Magnet	Rubber II	Metal clip	Spring
3/8"	6PT		14	36B014				
			14	36B514				
		5/8"	16	363516	366516		367516	
			18				367518	
		13/16"	20.8	363521	366521		367521	
	12PT		14			36C014		36A014
			14			36D014		
		5/8"	16	363016				
			18	36B018			367018	
		13/16"	20.8	363021	366021		367021	
1/2"	6PT		14	463514RC			467514C	
		5/8"	16	463516RC	466516C		467516	
		13/16"	20.8	463521RC	466521C		467521	
	12PT		14	463014RC			467014C	
		5/8"	16	463016RC	466016		467016	
		13/16"	20.8	463021RC	466021		467021	

Metal Clip Universal Joint Spark Plug Socket

3650

3/8"

- Inside sleeve - Metal clip for a firm hold and assembly of the spark plugs
- Universal joint- for working in restricted access and obstructive areas
- 12-point socket enables application on 14mm spark plugs of 6-point and 12-point
- Application: For 14 mm spark plugs e.g. BMW and MERCEDES-BENZ
- DIN 3120

KT NO.	inch	mm	D mm	L mm	g	
365014B	-	14.0	18.5	155	169	6 / 120
365016A	5/8	16.0	21.0	101	130	6 / 180
365016B	5/8	16.0	21.0	162	185	6 / 120



36A0

36B5

36B0

36C0

36D0

3/8"

- Inside sleeve - rubber and spring
- DIN 3120
- 36C014 & 36D014 are suitable for BMW, Mini, RENAULT Clio / Twingo / Kangoo type, PEUGEOT 206 1.4 16V, CITROEN C5 HPI

Spring

36A014



Rubber

36B014

36C014

36B018

36D014

Rubber

36B514



KT NO.	Type	Size mm	D mm	L mm	g	
36A014	12 points	14.0	18.5	63	65	12 / 192
36B514	6 points	14.0	18.5	63	63	12 / 192
36B014	12 points	14.0	18.5	63	59	12 / 192
36B018	12 points	18.0	24.7	65	104	8 / 128
36C014	12 points	14.0	18.5	90	90	12 / 144
36D014	12 points	14.0	18.5	250	297	6 / 54

Spark Plug Socket

KT No. & D1

3630 | 3660 | 3635 | 3665 | 3670 | 3675 | 3/8"

- 6 / 12 points
- Size combined- 16.0mm (5/8") - 20.8mm (13/16")
- Inside sleeve - rubber / magnet
- DIN 3120

KT NO.	Type	Size inch	Size mm	D mm	L mm	g	
363016	12 points Rubber	5/8	16.0	21	70	85	10 / 200
363021	12 points Rubber	13/16	20.8	27.7	70	149	12 / 120
363516	6 points Rubber	5/8	16.0	21	70	88	10 / 200
363521	6 points Rubber	13/16	20.8	27.7	70	153	12 / 120
366516	6 points Magnet	5/8	16.0	21	70	89	10 / 200
366521	6 points Magnet	13/16	20.8	27.7	70	155	12 / 120
367018	12 points Metal clip	-	18.0	23.8	63	84	12 / 120
367021	12 points Metal clip	13/16	20.8	27.7	70	167	12 / 120
367516	6 points Metal clip	5/8	16.0	21.0	70	86	10 / 200
367518	6 points Metal clip	-	18.0	23.8	63	91	12 / 120
367521	6 points Metal clip	13/16	20.8	27.7	70	169	12 / 120

363016

363021

366021

363516

366516

363521

366521





367516

367018



Glow Plug Socket & Set

3785M 3/8"

- The socket has a Sprung-loaded clip with ball bearing end to stop the glow plug from falling out
- Suitable for the removal of glow plugs in most diesel engines



KT NO.	mm	D1 mm	D2 mm	L mm	g	
378508M	8	13.5	17.8	118	131	10 / 100
378509M	9	13.5	17.8	118	120	10 / 100
378510M	10	13.5	17.8	118	123	10 / 100
378512M	12	17.8	17.8	118	147	10 / 100
378514M	14	17.8	17.8	118	139	10 / 100
378516M	16	19.8	17.8	118	154	10 / 100

3716MR 3/8"

- Blow case size (mm):
- 260 x 160 x 64 (0.094 cuft)

6 PC.

Contents	kg	
3785M 8, 9, 10, 12, 14, 16	1.23	1 / 10

Flexible Crowfoot Socket Wrench & Set

3351M

3/8"

- Flexible head folds up to 200°
- Combined with F-handle, handle, T-handle speed-handle
- Suitable for all hydraulic, fuel, oil brake, A/C, auto tool and air line work
- DIN 3120

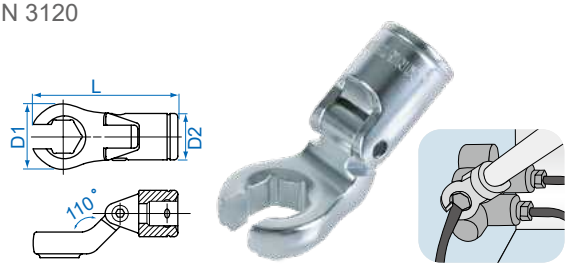

KT NO.	mm	D1 mm	D2 mm	L mm	g	
335108M	8	15.0	18.8	45.0	45	12 / 360
335109M	9	18.0	18.8	49.0	48	12 / 360
335110M	10	18.0	18.8	49.0	49	12 / 360
335111M	11	22.0	18.8	53.0	57	12 / 360
335112M	12	22.0	18.8	53.0	57	12 / 360
335113M	13	26.0	18.8	60.0	77	12 / 240
335114M	14	26.0	18.8	60.0	76	12 / 240
335115M	15	27.0	18.8	60.0	76	12 / 240
335116M	16	32.0	24.7	73.5	153	6 / 96
335117M	17	33.0	24.7	73.5	152	6 / 96
335118M	18	33.0	24.7	73.5	150	6 / 96
335119M	19	33.3	24.7	73.5	153	6 / 96

3619MR10

3/8"

- Socket rail 290mmL

9 PC.

Contents — kg 0.89 — 20

	3351M	8, 10, 12, 13, 14, 16, 17, 18, 19
	8731109	

3612MR

3/8"

- Metal case size (mm):
- 296 x 130 x 41 (0.056 cuft)

12 PC.

Contents — kg 1.89 — 1 / 10

	3351M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19

Universal Socket & Set

KT No. & D1

3750M

- Chrome vanadium alloy steel
- DIN 3120

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
375010M	10	14.5	19	4.6	49.5	56	15 / 240
375011M	11	15.8	19	5.4	50.5	57	15 / 240
375012M	12	17.0	19	6.1	51.0	57	15 / 240
375013M	13	18.3	19	6.7	52.0	56	15 / 240
375014M	14	20.0	19	8.3	52.0	60	12 / 192
375015M	15	22.0	19	8.3	54.5	66	10 / 160
375016M	16	22.0	19	9.5	54.5	63	10 / 160
375017M	17	24.0	19	9.5	55.5	71	8 / 128
375018M	18	26.0	19	10	55.5	75	6 / 96
375019M	19	26.0	19	11	57.5	72	6 / 96

3709MR10

3/8"

- Socket rail 240mmL

9 PC.

Contents — kg 0.6 — 14

	3750M	10, 11, 12, 13, 14, 16, 17, 18, 19
	8730907	

3750S

3/8"

- Chrome vanadium alloy steel



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
375012S	3/8	14.0	19	4.6	49.0	56	15 / 240
375014S	7/16	15.8	19	5.4	50.5	58	15 / 240
375016S	1/2	18.3	19	6.7	52.0	59	15 / 240
375018S	9/16	20.0	19	8.3	52.0	60	12 / 192
375020S	5/8	22.0	19	9.5	54.5	65	10 / 160
375022S	11/16	24.0	19	9.5	55.5	65	8 / 128
375024S	3/4	26.0	19	11.0	57.5	74	6 / 96

Bit Socket

CAUTION In order to get normal life of bit socket, always use within limited torque to bit.

3021 3/8"

- Phillips head
- DIN ISO 8764-1

KT NO.	No.	Overall length mm	g	
302102	PH2	50	34	20 / 400
302103	PH3	50	34	20 / 400
302104	PH4	50	34	20 / 400

3022 3/8"

- Slotted head
- DIN ISO 8764-1

KT NO.	Tip width mm	Tip thickness mm	Overall length mm	g	
302205	5	1.0	50	34	20 / 400
302208	8	1.2	50	38	20 / 400
302210	10	1.6	50	46	20 / 400

3025 3/8"

- Hexagon head
- DIN 7422 / 3120

KT NO.	mm	Overall length mm	g	
302503	H3	50	30	20 / 400
302504	H4	50	34	20 / 400
302505	H5	50	35	20 / 400
302506	H6	50	35	20 / 400
302507	H7	50	39	20 / 400
302508	H8	50	41	20 / 400
302509	H9	50	44	20 / 400
302510	H10	50	50	20 / 400
302512	H12	50	53	20 / 400

3023 3/8"

- For torx internal screw
- DIN 3120

KT NO.	mm	Overall length mm	g	
302308	T8	50	30	20 / 400
302309	T9	50	30	20 / 400
302310	T10	50	34	20 / 400
302315	T15	50	34	20 / 400
302320	T20	50	33	20 / 400
302325	T25	50	34	20 / 400
302327	T27	50	34	20 / 400
302330	T30	50	35	20 / 400
302340	T40	50	36	20 / 400
302345	T45	50	39	20 / 400
302350	T50	50	40	20 / 400

3027 3/8"

- For tamper resistant torx screw
- DIN 3120

KT NO.	mm	Overall length mm	g	
302708	T8H	50	33	20 / 400
302709	T9H	50	33	20 / 400
302710	T10H	50	33	20 / 400
302715	T15H	50	34	20 / 400
302720	T20H	50	33	20 / 400
302725	T25H	50	34	20 / 400
302727	T27H	50	34	20 / 400
302730	T30H	50	35	20 / 400
302740	T40H	50	35	20 / 400
302745	T45H	50	39	20 / 400
302750	T50H	50	39	20 / 400

3039 3/8"

- Ribe bit socket
- Use for VW, Audi, Fiat cylinder head bolt
- DIN 3120

KT NO.	size	Overall length mm	g	
303906	M6	90	70	8 / 160
303907	M7	90	71	8 / 160
303908	M8	90	71	8 / 160
303909	M9	90	88	8 / 160
303910	M10	90	90	8 / 160

302D 3/8"

- For torx plus tamper screw
- IPR20 for the operation of the screwed connection of the plug-in pump on MERCEDES-BENZ Atego and Actros MAZDA 3 1.4 and 1.6
- IPR25 for the screwed connections at the control unit and the air flow sensor on VW
- DIN 3120

KT NO.	mm	Overall length mm	g	
302D08	IPR8	50	33	20 / 400
302D09	IPR9	50	33	20 / 400
302D10	IPR10	50	33	20 / 400
302D15	IPR15	50	33	20 / 400
302D20	IPR20	50	34	20 / 400
302D25	IPR25	50	34	20 / 400
302D27	IPR27	50	34	20 / 400
302D30	IPR30	50	35	20 / 400
302D40	IPR40	50	36	20 / 400
302D45	IPR45	50	38	20 / 400
302D50	IPR50	50	40	20 / 400
302D55	IPR55	50	48	20 / 400
302D60	IPR60	50	53	15 / 300

Ratchet

KT No. & D1

3725

FINE GEAR 3/8"

- Reversible ratchet
- 8° gear action degree (45 teeth)
- DIN 3122

KT NO.	Overall length inch	mm	g	
3725-08F	8	203	369	2 / 40
3725-08G	8	207	384	2 / 32
3725DK	renewal kits		-	-

3725DK

3725-08F

3725-08G

3759

FINE GEAR 3/8"

- Reversible ratchet
- 5° gear action degree (72 teeth)
- DIN 3122

KT NO.	Overall lengt inch	mm	g	
3759-08G	8	200	190	2 / 40
3759DK	renewal kits		-	-

3759DK

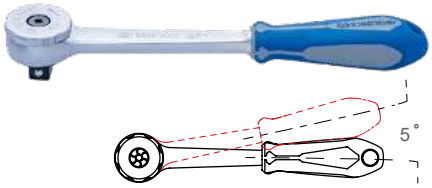

3752

QUICK RELEASE FINE GEAR 3/8"

- Quick release swivel reversible ratchet
- 5° gear action degree (72 teeth)
- Multi-angle design for difficult-to-reach fasteners

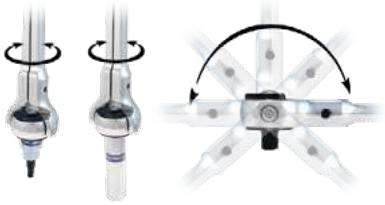

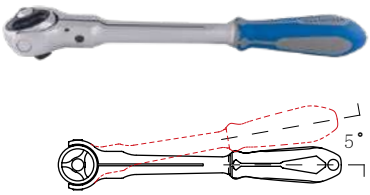

KT NO.	Overall length inch	mm	g	
3752-09G	9	235	374	2 / 32
3752DK	renewal kits		-	-

3752DK

3760

MINI RATCHET FINE GEAR 3/8"

- Mini reversible ratchet
- 5° gear action degree (72 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	mm	g	
3760-45	4-3/8	110	116	6 / 108
3760DK01	renewal kits		-	-

3760DK01

3761

QUICK RELEASE 3/8"

- Quick release reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	mm	g	
3761-08F	8	200	401	2 / 40
3761-08P	8	200	376	2 / 40
34362-2DK	renewal kits		-	-

34362-2DK

3761-08F

3761-08P

Ratchet

3769 — 3/8"

- Reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

3769-08F

3769-08P

KT NO.	Overall length inch	Overall length mm	g	
3769-08F	8	200	405	2 / 40
3769-08P	8	200	380	2 / 40
3769DK	renewal kits		-	-

3769DK

3771 — QUICK RELEASE 3/8"

- Quick release reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
3771-08G	8	200	268	2 / 40
3771DK	renewal kits		-	-

3771DK

3774 — 3/8"

- Universal joint reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122
- 15° rotation





KT NO.	Overall length inch	Overall length mm	g	
3774-08G	8	200	275	2 / 40
3774DK	renewal kits		-	-

3774DK

3779 — 3/8"

- Reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

3779-08F

3779-08G

KT NO.	Overall length inch	Overall length mm	g	
3779-08F	8	200	366	2 / 40
3779-08G	8	200	273	2 / 40
3779DK	renewal kits		-	-

3779DK

3781 — QUICK RELEASE 3/8"

- Quick release flexible and reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

3781-11F

KT NO.	Overall length inch	Overall length mm	g	
3781-11F	11	280	467	2 / 40
3781DK	renewal kits		-	-

3781DK

- Material - chrome vanadium alloy steel
- Finishing - polished, chrome plated & black phosphate sunk

Accessory

KT No. & D1

3221 3/8"

- Extension bar
- DIN 3123

KT NO.	Overall length inch	mm	g	
3221-16	1-3/4	44	47	12 / 360
3221-03	3	75	77	12 / 240
3221-06	6	150	146	6 / 120
3221-10	10	250	238	6 / 96
3221-18	18	450	324	1 / 50
3221-24	24	600	424	1 / 50

3223 3/8"

- Offset extension bar, wobble extension bar
- Max. torque : 150 N·m
- DIN 3123

CAUTION The offset extension bar has less strength than normal extension bar. Do not use as a normal extension bar.

KT NO.	Overall length inch	mm	g	
3223-14	1-1/2	38	40	14 / 224
3223-02	2	50	52	12 / 360
3223-03	3	75	75	12 / 240
3223-06	6	150	144	6 / 120
3223-10	10	250	237	6 / 96

3293 3/8"

- Multi-function of extension bar and offset extension bar, wobble extension bar
- Max. torque : 150 N·m

KT NO.	Overall length inch	mm	g	
3293-03	3	75	75	12 / 240
3293-06	6	150	143	6 / 120
3293-10	10	250	228	6 / 96

3311 3/8"

- Flexible extension bar
- DIN 3120

KT NO.	Overall length inch	mm	g	
3311-06	6	150	144	5 / 100
3311-12	12	300	168	12 / 108

3893EW 1/4" & 3/8"

- Extension wrench
- Length extension drive bar enables easier works in confined spaces
- Provided with two square drive adapters in 1/4" and 3/8"
- Chain-driven mechanism enhances working durability and smoothness
- Max torque allowed: 130 N m / 96 ft lb

3/8" 3893EW-01

1/4" 3893EW-02

KT NO.	Drive	Overall length inch	mm	Capcity	g	
3893EW		13.4	340	300	410	20 / 40
3893EW-01	3/8"	-	-		20	10 / 160
3893EW-02	1/4"	-	-		20	10 / 160

3452 3/8"

- Flexible handle
- Action degree -180°
- DIN 3122

3452DK

KT NO.	Overall length inch	mm	g	
3452-08F	8	205	291	4 / 80
3452-10F	10	250	310	4 / 64
3452DK	renewal kits		-	-

3453 3/8"

- Flexible handle
- Action degree -180°
- New pattern design added in firm and powerful elements
- New forge technologies I-Beam shank offers 15% lightweight
- DIN 3122

3453DK

KT NO.	Overall length inch	mm	g	
3453-08F	8	200	221	4 / 80

3571 3/8"

- Sliding T-handle
- DIN 3122

KT NO.	Overall length inch	mm	g	
3571-08	8	200	178	4 / 80

Accessory

KT No. & D1

3792 3/8"

- Universal joint
- DIN 3123

KT NO.	Overall length inch	Overall length mm	g	
3792	2	50	67	15 / 300

3793 3/8"



KT NO.	Overall length inch	Overall length mm	g	
3793	1-11/16	43	55	15 / 300

3794 3/8"

- Univesal joint
- 30° rotation
- Short pattern design enables greater access in confined spaces



KT NO.	Overall length inch	Overall length mm	g	
3794	1-4/5	46	106	15 / 300

9113PR 1/4" 3/8" 1/2"

- Universal joint
- Ball point type universal joint & with hex locking design
- Short pattern design enables greater access in confined spaces

3 PC.

Contents 0.20 6 / 108

2793	31mm
3793	43mm
4793	59mm

3812 3814 3/8"

- Adapter
- Convert to 1/4" drive or 1/2" drive
- 3812→Max. torque : 62 N·m
- DIN 3123, ISO 3316

1/4" drive (M)
1/2" drive (M)

3/8" drive (F)

3812 / 3814

KT NO.	Spec.	g	
3812	3/8"Fx1/4"M	30	12 / 192
3814	3/8"Fx1/2"M	46	12 / 360

Socket Rail Set

3148 3/8"

- Bit holder
- DIN 3120 / 3126

KT NO.	Size	Overall length mm	g	
314808S	1/4"	30	35	12 / 360
314810S	5/16"	30	35	12 / 360
314810M	10 mm	30	35	12 / 360

3013MR 3013SR

3513MR 3/8"

- Socket rail 290mmL

13 PC.

3013MR / 3513MR

3013SR

KT NO. Contents 0.52 4 / 24

3013MR	3330M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	8731213
3013SR	3330S	1/4, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16	
3513MR	3335M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	

3508MR10 3/8"

- Socket rail 210mmL

8 PC.

Contents 0.65 2 / 24

3235M	10, 11, 12, 13, 14, 16, 17, 19
8730808	

3106PR 3/8"

- Socket rail 150mmL

6 PC.

Contents 0.28 4 / 48

3375M	E8, E10, E12, E14, E16, E18
8730606	

3116PR 3/8"

- Socket rail 150mmL

6 PC.

Contents 0.39 4 / 32

3275M	E4, E5, E8, E10, E12, E14
8730606	

Socket Rail Set

Packing

3109PR8 / 3119PR8 / 3149PR8 / 3131PR8

3121PR 3/8"

- Socket rail 290mmL

11 PC.

Contents 0.32 4 / 24

	3375M	E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18
	8731213	

3E07PR 3/8"

- For torx plus external screw
- Socket rail 210mmL

7 PC.

Contents 0.42 4 / 32

	333E	EP10, EP11, EP12, EP14, EP16, EP18, EP20
	8730808	

3108PR8 3/8"

- Socket rail 210mmL
- For hex head screw
- H : 50mm

8 PC.

Contents 0.34 50

	3025	H3, H4, H5, H6, H7, H8 H10, H12
	8730808	

3109PR8 3/8"

- Socket rail 210mmL
- For torx head screw
- H : 50mm

9 PC.

Contents 0.36 50

	3023	T10, T15, T20, T25, T27, T30, T40, T45, T50
	8730809	

3119PR8 3/8"

- Socket rail 210mmL
- For tamper resistant torx head screw
- H : 50mm

9 PC.

Contents 0.36 50

	3027	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H
	8730809	

3129PR 3/8"

- Socket rail 210mmL

9 PC.

Contents 0.39 4 / 32

	3375M	E4, E5, E6, E7, E8, E10, E12, E14, E16
	8730809	

3131PR8 3/8"

- Socket rail 210mmL
- For tamper resistant torx head screw
- H : 50mm

11 PC.

Contents 0.4 48

	3027	T8H, T9H, T10H, T15H,T20H, T25H, T27H, T30H, T40H, T45H, T50H
	8730811	

3146PR 3/8"

- Socket rail 150mmL
- For torx plus tamper resistant head screw
- H : 50mm

6 PC.

Contents 0.36 4 / 32

	302D	IPR10, IPR15, IPR20, IPR25, IPR27, IPR30
	8730606	

3149PR8 3/8"

- Socket rail 210mmL
- For torx plus tamper resistant head screw
- H : 50mm

9 PC.

Contents 0.36 50

	302D	IPR10, IPR15, IPR20, IPR25, IPR27, IPR30, IPR40, IPR45, IPR50
	8730809	

3105PR 3/8"

- 3/8" + 1/2" drive ribe bit socket set
- Socket rail 150mmL
- For ribe head screw
- H : 100mm

5 PC.

Contents 0.75 4 / 32

	3039	M7, M8
	4049	M10, M12, M13
	8740606	

Socket Rail

873 3/8"

- Rail length from 160 mm to 560 mm

KT NO.		L (mm)
870406		160
870311		280
870422		560
8730		-

8730811D1 3/8"

- Socket rail carrier with retaining clip
- 446mm roller cabinet

KT NO.	Square drive	Clip	L (mm)
8730811D1	3/8"	11	508

Extension Bar Set

3113PR 3/8"

3 PC.

Contents		0.5 kg	35
	3221	3", 6", 10"	

3103PR 3/8"

3 PC.

Contents		0.4 kg	35
	3223	3", 6", 10"	

Socket Set

3213MR 3/8"

Contents		0.79 kg	1/24
	3330M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19	
	3759-08G	3221-06	

13 PC.

3508MR 3/8"

- Metal case size (mm):
- 203 x 79 x 41 (0.023 cuft)

Contents		1.0 kg	1/20
	3235M	10, 11, 12, 13, 14, 16, 17, 19	

3508SR 3/8"

- Metal case size (mm):
- 203 x 79 x 41 (0.023 cuft)

8 PC.

Contents		1.0 kg	1/20
	3235S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16	

Socket Set

3020MR | 3020SR | 3020MR02
3020SR02 | 3520MR | 3520MR02 3/8"

- Metal case size (mm) :
- 372 x 153 x 40 (0.08 cuft)

3020MR / 3520MR

3020SR

20 PC.

KT NO.			Contents				
3020MR	3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 22	363021	3769-08F	3221-03 3221-06	2.5	1 / 6
3020MR02				3779-08F		2.8	
3020SR	3330S	1/4, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 11/16, 3/4, 13/16, 7/8		3769-08F	3452-08F	2.5	
3020SR02				3779-08F	3571-08	2.8	
3520MR	3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 23	363521	3769-08F	3792	2.5	
3520MR02				3779-08F		2.8	

3023MR | 3523MR 3/8"

- Metal case size (mm) :
- 372 x 153 x 40 (0.08 cuft)

Contents						2.8	35
3023MR	3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22	3769-08F	3452-08F	3571-08		
3523MR	3335M			3221-03 3221-06	3792		

22 PC.

3024MR | 3024SR | 3524MR 3/8"

- Metal case size (mm) :
- 318 x 147 x 46 (0.076 cuft)

KT NO.			Contents		2.2	1 / 10
3024MR	3330M	6, 7, 8, 9, 10, 11, 13, 14, 17, 19	3021	PH2,PH3		
3524MR	3335M		3022	5,8		
			3025	H3, H4, H5, H6, H7, H8, H10		
3024SR	3330S	1/4, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	3779-08G	3221-06		
			3792			

3024MR/3524MR

3024SR

24 PC.

Socket Set

3027MR / 3027SR / 3527MR 3/8"

- Metal case size (mm) :
- 318 x 147 x 46 (0.076 cuft)

Kg 2.6 | 1 / 10

KT NO.	Contents			
3027MR	3330M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	3235M 8, 10, 11, 12, 13, 14, 16, 17, 19	3779-08G, 3221-03, 3812, 3792
3527MR	3335M			
3027SR	3330S	1/4, 5/16, 11/32, 3/8, 7/16,15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16		
	3235S	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16		

26 PC.

3027MR/3527MR

3027SR

3034MR / 3534MR 3/8"

- Metal case size (mm) :
- 372 x 153 x 40 (0.08 cuft)

Kg 3.1 | 1 / 6

KT NO.	Contents			
3034MR	3330M	6, 7, 8, 9, 10, 11, 13, 14, 17, 19	3375M E4, E5, E6, E7, E8, E10, E12, E14, E16, E18	3779-08G, 3452-10F, 3571-08, 3221-03, 3221-06, 3792
			3023 T8, T9, T10, T15, T20, T25, T27, T30, T40, T45	
3534MR	3335M			

36 PC.

3036CR 3/8"

- Metal case size (mm) :
- 372 x 153 x 40 (0.08 cuft)

Kg 3.27 | 1 / 6

KT NO.	Contents
3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22
3330S	1/4, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16, 7/8

3769-08F, 3452-08F, 3571-08, 3221-03, 3221-06, 3792

36 PC.

3537MR 3/8"

- Metal case size (mm) :
- 372 x 153 x 40 (0.08 cuft)

Kg 3.17 | 1 / 6

KT NO.	Contents
3023	T8, T9, T10, T15, T20, T25, T27, T30, T40, T45
3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19
3375M	E4, E5, E6, E7, E8, E10, E12, E14, E16, E18

3779-08G, 3452-10F, 3571-08, 3221-03, 3221-06, 3792

39 PC.

Socket Set

3055CR

3/8"

- Metal case size (mm) :
- 490 x 205 x 52 (0.185 cuft)

KT NO.	Contents				
		6	1 / 3		
3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22				
3230M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19				
3330S	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8				
3230S	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4				
363516		363521		3792	
3771-08G		3452-10F			
3293-06		3221-03 3221-10			

55 PC.

3523MRV10

Tray category #10 (375 x 140mm) 3/8"

- Plastic case size (mm) :
- 389 x 185 x 66 (0.168 Cuft)

KT NO.	Contents				
		2.43	1 / 10		
3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 23, 24				
3771-08G		3792			
3571-08		3452-08F			
3293-03 3293-06					

23 PC.

3023MRV11

3523MRV11

Tray category #10 (375 x 140mm) 3/8"

- Plastic case size (mm) :
- 389 x 185 x 66 (0.168 Cuft)

3023MRV11

3523MRV11

23 PC.

KT NO.	Contents						
			2.40	1 / 10			
3023MRV11	3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18,19, 21, 22, 24	3771-08G	3453-08F			
3523MRV11	3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	3571-08	3293-03 3293-06	3792		

3032SRV

Tray category #8 (375 x 187mm) 3/8"

Plastic case size (mm) :
389 x 230 x 66 (0.168 Cuft)

KT NO.	Contents				
		3.28	1 / 6		
3230S	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16, 7/8				
3330S	1/4, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16				
3771-08G		3453-08F			
3293-03 3293-06		3792			

32 PC.

Socket Set

3033MRV

3533MRV

Tray category #8 (375 x 187mm) 3/8"

- Plastic case size (mm) :
- 389 x 230 x 66 (0.168 Cuft)

3033MRV

3533MRV

33 PC.

Kg 3.4 1 / 6

KT NO.	Contents		
3033MRV	3330M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	3771-08G, 3792, 3453-08F, 3293-03, 3293-06
	3230M	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22	
3533MRV	3335M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	
	3235M	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22	

3545MRV

Tray category #8 (375 x 187mm) 3/8"

- Plastic case size (mm) :
- 389 x 230 x 66 (0.168 Cuft)

Kg 2.47 1 / 6

KT NO.	Contents
3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
3375M	E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18
3023	T8, T9, T10, T15, T20, T25, T27, T30, T40, T45, T50
3771-08G	3453-08F
3571-08	3792, 3293-03, 3293-06

45 PC.

3054MR

3/8"

- Blow case size (mm) :
- 340 x 263 x 80 (0.25cuft)

Kg 3.85 1 / 3

KT NO.	Contents
3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22
3235M	8, 10, 12, 13, 14
1025T	T10, T15, T20, T25, T30, T40, T45 T50
3630	16, 21
1145MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
14A1	PH2 x 100
14A2	5.5 x 100
1060	8, 10, 12, 13, 14, 17, 19
3771-08G	3792, 3221-03, 3221-06
314808S	6111-06

54 PC.

Socket Set

3568MR

3/8"

- Metal shelf size (mm) :
- 415 x 336 x 320 (1.58 cuft)

268 PC.

Contents			Each Q'ty
	3335M	8, 9, 10, 11, 12, 13	10
		14, 15, 16, 17, 18, 19	8
		21, 22, 23, 24	6
	3235M	7, 8, 9, 10, 11, 12, 13	10
		14, 15, 16, 17, 18, 19	8
		21, 22, 24	6

KT NO.	Spec.	kg	Cuft
3568MR-A	87102	6.35	0.67
3568MR-D	268 PC. socket content	16.50	0.38

• Metric-DIN 3124, ISO 2725-1 / Inch-ANSI / ASME B107.1

Standard Socket

KT No. & D1

4330MR 4330SR 1/2"



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
433008MR	8	13.2	23.3	7.0	38	53	10 / 200
433009MR	9	14.0	23.3	7.0	38	52	10 / 200
433010MR	10	15.0	23.3	8.0	38	51	10 / 200
433011MR	11	16.4	23.3	8.0	38	54	10 / 200
433012MR	12	17.8	23.3	9.0	38	54	10 / 200
433013MR	13	19.0	23.3	10.0	38	58	10 / 200
433014MR	14	20.4	23.3	11.0	38	60	10 / 200
433015MR	15	21.6	23.3	11.0	38	61	10 / 200
433016MR	16	22.5	23.3	11.0	38	61	10 / 200
433017MR	17	24.0	23.2	12.0	38	62	10 / 200
433018MR	18	25.2	23.2	13.0	38	69	10 / 200
433019MR	19	27.0	23.2	13.0	38	72	10 / 160
433020MR	20	27.9	23.2	13.0	38	74	10 / 160
433021MR	21	28.9	23.2	14.0	38	78	10 / 160
433022MR	22	30.2	24.0	15.0	40	90	10 / 160
433023MR	23	31.2	25.0	15.0	40	92	8 / 160
433024MR	24	32.1	26.0	17.0	42	101	8 / 160
433025MR	25	33.4	27.0	17.0	42	107	8 / 160
433026MR	26	35.0	28.0	17.0	42	125	6 / 120
433027MR	27	36.6	28.0	19.0	42	130	6 / 120
433028MR	28	37.8	30.0	20.0	42	142	6 / 120
433029MR	29	39.0	30.0	21.0	44	161	6 / 120
433030MR	30	40.0	29.5	21.0	44	156	6 / 120
433032MR	32	42.5	30.0	23.0	44	163	6 / 120
433033MR	33	43.0	30.0	24.0	46	173	6 / 96
433034MR	34	45.0	30.0	24.0	46	207	6 / 96
433036MR	36	47.0	33.0	24.0	46	236	6 / 96

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
433010SR	5/16	13.2	21.8	7.0	38	41	10 / 200
433012SR	3/8	15.0	21.8	7.0	38	44	10 / 200
433013SR	13/32	15.0	23.3	7.0	38	51	10 / 200
433014SR	7/16	16.4	23.3	8.0	38	53	10 / 200
433015SR	15/32	18.0	23.3	8.0	38	55	10 / 200
433016SR	1/2	19.0	23.3	10.0	38	57	10 / 200
433018SR	9/16	20.4	23.3	11.0	38	59	10 / 200
433019SR	19/32	21.6	23.3	11.0	38	60	10 / 200
433020SR	5/8	22.5	23.3	11.0	38	62	10 / 200
433022SR	11/16	24.0	23.2	12.0	38	60	10 / 200
433024SR	3/4	27.0	23.2	13.0	38	73	10 / 160
433025SR	25/32	28.0	23.2	13.0	38	75	10 / 160
433026SR	13/16	28.6	23.2	13.0	38	79	10 / 160
433028SR	7/8	30.2	24.0	15.0	40	87	10 / 160
433030SR	15/16	32.6	26.0	17.0	42	105	8 / 160
433032SR	1	34.8	26.8	17.0	42	119	8 / 160
433034SR	1-1/16	36.6	28.0	19.0	42	133	6 / 120
433036SR	1-1/8	39.0	30.5	21.0	44	158	6 / 120
433038SR	1-3/16	40.0	29.5	21.0	44	156	6 / 120
433040SR	1-1/4	42.5	30.0	23.0	44	173	6 / 120
433044SR	1-3/8	46.0	33.0	24.0	46	243	6 / 96

4335MR 4335SR 1/2"



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
433506MR	6	12.0	23.3	7.0	38	51	10 / 200
433507MR	7	12.6	23.3	7.0	38	51	10 / 200
433508MR	8	13.2	23.3	7.0	38	52	10 / 200
433509MR	9	14.0	23.3	7.0	38	51	10 / 200
433510MR	10	15.0	23.3	8.0	38	51	10 / 200
433511MR	11	16.4	23.3	8.0	38	54	10 / 200
433512MR	12	17.8	23.3	9.0	38	56	10 / 200
433513MR	13	19.0	23.3	10.0	38	58	10 / 200
433514MR	14	20.4	23.3	11.0	38	61	10 / 200
433515MR	15	21.6	23.3	11.0	38	62	10 / 200
433516MR	16	22.5	23.3	11.0	38	63	10 / 200
433517MR	17	24.0	23.2	13.5	38	63	10 / 200
433518MR	18	25.2	23.2	13.5	38	66	10 / 200
433519MR	19	27.0	23.2	17.0	38	74	10 / 160
433520MR	20	27.9	23.2	17.0	38	76	10 / 160
433521MR	21	28.9	23.2	17.0	38	79	10 / 160
433522MR	22	30.2	24.0	17.0	38	90	10 / 160
433523MR	23	31.2	25.0	17.0	38	99	8 / 160
433524MR	24	32.1	26.0	17.0	38	108	8 / 160
433525MR	25	33.4	27.0	18.0	40	118	8 / 160
433526MR	26	35.0	28.0	21.0	42	130	6 / 120
433527MR	27	36.6	28.0	21.0	42	141	6 / 120
433528MR	28	37.8	30.0	20.0	42	154	6 / 120
433529MR	29	39.0	30.0	20.0	44	165	6 / 120
433530MR	30	40.0	29.5	22.0	44	164	6 / 120
433532MR	32	42.5	30.0	22.0	44	180	6 / 120
433533MR	33	43.0	30.0	24.0	46	185	6 / 96
433534MR	34	45.0	30.0	24.0	46	206	6 / 96
433536MR	36	47.0	33.0	24.0	46	251	6 / 96
433538MR	38	49.0	34.0	25.0	50	268	6 / 60
433539MR	39	50.0	34.0	25.0	50	291	6 / 60
433541MR	41	53.0	36.0	27.0	53	336	6 / 36
433546MR	46	59.0	40.0	30.0	58	453	4 / 32

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
433510SR	5/16	13.2	21.8	7.0	38	44	10 / 200
433512SR	3/8	15.0	21.8	7.0	38	45	10 / 200
433514SR	7/16	16.4	23.3	8.0	38	54	10 / 200
433515SR	15/32	18.0	23.3	8.0	38	56	10 / 200
433516SR	1/2	19.0	23.3	10.0	38	58	10 / 200
433518SR	9/16	20.4	23.3	11.0	38	59	10 / 200
433519SR	19/32	21.6	23.3	11.0	38	61	10 / 200
433520SR	5/8	22.5	23.3	11.0	38	62	10 / 200
433522SR	11/16	24.0	23.2	12.0	38	62	10 / 200
433524SR	3/4	27.0	23.2	13.0	38	75	10 / 160
433525SR	25/32	28.0	23.2	13.0	38	77	10 / 160
433526SR	13/16	28.6	23.2	13.0	38	80	10 / 160
433528SR	7/8	30.2	24.0	15.0	40	92	10 / 160
433530SR	15/16	32.6	26.0	17.0	42	113	8 / 160
433532SR	1	34.8	26.8	17.0	42	124	8 / 160
433534SR	1-1/16	36.6	28.0	19.0	42	138	6 / 120
433536SR	1-1/8	39.0	30.5	21.0	44	166	6 / 120
433538SR	1-3/16	40.0	29.5	21.0	44	168	6 / 120
433540SR	1-1/4	42.5	30.0	23.0	44	176	6 / 120

Socket Set

4072MR | 4072SR | 4572MR | 4572SR 1/2"

- Metal shelf size (mm) :
- 415x 336 x 320 (1.58 cuft)

4072MR / 4572MR

KT NO.	PC.		Contents	Each Q'ty
4072MR	172	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18	8
			19, 20, 21, 22, 23, 24, 25	7
4572MR	172	4335MR	26. 27, 28, 29, 30,	6
			32	5
4072SR	136	4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16	8
			3/4, 25/32, 13/16, 7/8, 15/16	7
4572SR	136	4335SR	1, 1-1/16, 1-1/8, 1-3/16	6
			1-1/4	5

KT NO.	Spec.	Kg	Cuft
4072MR-A **4572MR-A**	87103	6.37	0.67
4072MR-D **4572MR-D**	172 PC. socket content	17.73	0.38
4072SR-A **4572SR-A**	87103	6.37	0.67
4072SR-D **4572SR-D**	136 PC. socket content	13.00	0.28

Deep Socket

4230M | 4230S 1/2"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI / ASME B107.1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
423008M	8	13.2	22.0	16	77	79	6 / 120
423009M	9	14.0	22.0	16	77	79	6 / 120
423010M	10	15.2	23.7	24	77	99	6 / 120
423011M	11	16.3	23.7	24	77	104	6 / 120
423012M	12	17.7	23.7	24	77	110	6 / 120
423013M	13	18.7	23.7	24	77	114	6 / 120
423014M	14	20.2	23.7	35	77	121	6 / 120
423015M	15	21.3	23.7	35	77	120	6 / 120
423016M	16	22.6	23.7	35	77	128	6 / 96
423017M	17	23.7	23.2	35	77	122	6 / 96
423018M	18	25.5	23.2	35	77	141	6 / 96
423019M	19	25.7	23.2	35	77	126	6 / 96
423020M	20	27.7	24.0	35	77	150	6 / 96
423021M	21	27.7	25.0	35	77	148	6 / 96
423022M	22	29.8	26.0	35	77	175	6 / 96

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
423023M	23	31.8	27.5	35	77	210	5 / 60
423024M	24	31.8	28.5	35	77	204	5 / 60
423025M	25	33.8	29.5	35	77	239	5 / 60
423026M	26	35.8	30.5	35	77	220	5 / 60
423027M	27	35.8	31.5	34	77	253	5 / 60
423028M	28	37.8	32.5	34	77	308	5 / 50
423029M	29	37.8	33.5	34	77	273	5 / 50
423030M	30	39.8	34.5	34	77	276	5 / 50
423032M	32	41.8	36.0	34	77	309	5 / 50
423033M	33	43.8	38.5	35	77	356	5 / 50
423034M	34	44.8	38.5	35	77	422	5 / 50
423036M	36	46.8	40.5	36	77	462	2 / 40

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
423010S	5/16	13.2	22.0	9	77	92	6 / 120
423012S	3/8	14.7	22.0	10	77	82	6 / 120
423014S	7/16	16.3	23.7	12	77	98	6 / 120
423016S	1/2	18.7	23.7	14	77	114	6 / 120
423018S	9/16	20.2	23.7	15	77	119	6 / 120
423020S	5/8	22.6	23.7	17	77	129	6 / 96
423022S	11/16	23.7	23.2	35	77	124	6 / 96
423024S	3/4	25.7	23.2	35	77	128	6 / 96
423026S	13/16	27.7	25.0	37	77	151	6 / 96
423028S	7/8	29.8	26.0	37	77	170	6 / 96
423030S	15/16	31.8	28.5	37	77	208	5 / 60
423032S	1	33.8	29.5	37	77	233	5 / 60
423034S	1-1/16	36.6	31.5	28	77	247	5 / 60
423036S	1-1/8	37.8	32.5	28	77	254	5 / 50
423038S	1-3/16	39.8	34.5	34	77	285	5 / 50
423040S	1-1/4	41.8	36.0	34	77	305	5 / 50

Deep Socket

KT No. & D1

4235M 4235S 1/2"

- Metric-DIN 3124, ISO 2725-1
- ANSI / ASME B107.1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
423508M	8	13.2	22.0	16	77	90	6 / 120
423509M	9	14.0	22.0	16	77	81	6 / 120
423510M	10	15.2	23.7	24	77	102	6 / 120
423511M	11	16.3	23.7	24	77	103	6 / 120
423512M	12	17.7	23.7	24	77	113	6 / 120
423513M	13	18.7	23.7	24	77	119	6 / 120
423514M	14	20.2	23.7	35	77	121	6 / 120
423515M	15	21.3	23.7	35	77	126	6 / 120
423516M	16	22.6	23.7	35	77	130	6 / 96
423517M	17	23.7	23.2	35	77	127	6 / 96
423518M	18	25.5	23.2	35	77	149	6 / 96
423519M	19	25.7	23.2	35	77	133	6 / 96
423520M	20	27.7	24.0	35	77	158	6 / 96
423521M	21	27.7	25.0	35	77	155	6 / 96
423522M	22	29.8	26.0	35	77	185	6 / 96
423523M	23	31.8	27.5	35	77	218	5 / 60
423524M	24	31.8	28.5	35	77	211	5 / 60
423525M	25	33.8	29.5	35	77	251	5 / 60
423526M	26	35.8	30.5	35	77	236	5 / 60
423527M	27	35.8	31.5	34	77	295	5 / 60
423528M	28	37.8	32.5	34	77	281	5 / 50
423529M	29	37.8	33.5	34	77	292	5 / 50
423530M	30	39.8	34.5	34	77	301	5 / 50
423532M	32	41.8	36.0	34	77	330	5 / 50
423533M	33	43.8	38.5	35	77	373	5 / 50
423534M	34	44.8	38.5	35	77	478	5 / 50
423536M	36	46.8	40.5	36	77	478	2 / 40
423538M	38	49.0	40.5	38	77	504	2 / 40
423541M	41	53.0	40.5	40	77	521	2 / 24

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
423510S	5/16	13.2	22.0	16	77	90	6 / 120
423512S	3/8	14.7	22.0	16	77	84	6 / 120
423514S	7/16	16.3	23.7	24	77	104	6 / 120
423516S	1/2	18.7	23.7	24	77	116	6 / 120
423518S	9/16	20.2	23.7	35	77	123	6 / 120
423520S	5/8	22.6	23.7	35	77	130	6 / 96
423522S	11/16	23.7	23.2	35	77	124	6 / 96
423524S	3/4	25.7	23.2	35	77	131	6 / 96
423526S	13/16	27.7	25.0	35	77	157	6 / 96
423528S	7/8	29.8	26.0	35	77	181	6 / 96
423530S	15/16	31.8	28.5	35	77	218	5 / 60
423532S	1	33.8	29.5	35	77	223	5 / 60
423534S	1-1/16	36.6	31.5	34	77	266	5 / 60
423536S	1-1/8	37.8	32.5	34	77	262	5 / 50
423538S	1-3/16	39.8	34.5	34	77	296	5 / 50
423540S	1-1/4	41.8	36.0	34	77	327	5 / 50
423542S	1-5/16	44.0	38.5	35	77	430	5 / 50
423544S	1-3/8	46.0	38.5	35	77	452	2 / 40
423546S	1-7/16	47.5	40.5	36	77	485	2 / 40
423548S	1-1/2	49.0	40.5	38	77	507	2 / 40

4245M EXTENDED LENGTH 1/2"

- DIN 3120



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
424508M	8	13.2	21.7	9.0	90	104	6 / 120
424509M	9	14.0	21.7	10.0	90	106	6 / 120
424510M	10	15.2	23.7	11.0	90	130	6 / 120
424512M	12	17.7	23.7	13.0	90	152	6 / 120
424513M	13	18.7	23.7	14.0	90	151	6 / 120
424514M	14	20.2	23.7	15.0	90	159	6 / 120

4255M EXTENDED LENGTH 1/2"

- DIN 3120



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
425508M	8	13.2	21.7	9	120	127	6 / 96
425509M	9	14.0	21.7	10	120	134	6 / 96
425510M	10	15.2	23.7	11	120	160	6 / 96
425512M	12	17.7	23.7	13	120	195	6 / 96
425513M	13	18.7	23.7	14	120	201	6 / 96
425514M	14	20.2	23.7	15	120	202	6 / 96

Square Socket

4014M 1/2"

- DIN 3120



KT NO.	mm	inch	D mm	ℓ mm	L mm	g	
401408M	RB8.0		23.5	13.5	35	54	10 / 200
401409M	RB9.5	3/8	23.5	13.5	35	58	10 / 200
401410M	RB10.0		23.5	13.5	35	57	10 / 200
401411M	RB10.5		23.5	13.5	35	58	10 / 200
401412M	RB12.0		23.5	13.5	35	62	10 / 200
401413M	RB12.7	1/2	23.5	13.5	35	64	10 / 200
401414M	RB13.5		23.5	13.5	35	67	10 / 200
401419M	RB19.0		25.0	15.5	40	108	10 / 160

Deep Socket Set

4066MR

- Metal shelf size (mm) :
- 415x 336 x 320 (1.58 cuft)

4066SR

4566MR 1/2"

4066MR / 4566MR

KT NO.	PC.		Contents	Each Q'ty
4066MR	165	4230M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18	8
			19, 20, 21, 22, 23, 24	7
4566MR	165	4235M	26, 27, 28, 29, 30	6
			32	5
4066SR	114	4230S	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16	8
			3/4, 13/16, 7/8, 15/16, 1	7
			1-1/16, 1-1/8, 1-3/16	6
			1-1/4	5

KT NO.	Spec.	Kg	Cuft
4066MR-A **4566MR-A**	87103	5.87	0.62
4066MR-D **4566MR-D**	165 PC. socket content	30.70	0.63
4066SR-A	87103	5.87	0.62
4066SR-D	114 PC. socket content	21.0	0.47

Star Socket

4375M 1/2"

- For torx external screw
- Chrome vanadium steel
- Polished, chrome plated
- DIN 3120



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
437508M	E08	11.4	23.8	7.0	37	52	10 / 200
437510M	E10	13.2	23.8	7.5	37	55	10 / 200
437511M	E11	14.0	23.8	8.0	37	57	10 / 200
437512M	E12	15.0	23.8	9.0	37	58	10 / 200
437514M	E14	16.4	23.8	10.0	37	59	10 / 200
437516M	E16	18.8	23.8	11.0	37	63	10 / 200
437518M	E18	20.5	23.8	12.5	39	68	10 / 200
437520M	E20	22.8	23.8	14.0	39	72	10 / 200
437522M	E22	24.6	23.8	16.0	39	78	10 / 200
437524M	E24	26.5	23.8	16.0	39	85	10 / 160

4275M 1/2"

- Long type
- Chrome vanadium steel
- Polished, chrome plated
- DIN 3120



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
427508M	E08	11.4	23.8	7.0	77	106	6 / 120
427510M	E10	13.2	23.8	7.5	77	112	6 / 120
427512M	E12	15.0	23.8	9.0	77	121	6 / 120
427514M	E14	16.4	23.8	10.0	77	127	6 / 120
427516M	E16	18.8	23.8	11.0	77	143	6 / 120
427518M	E18	20.5	23.8	12.5	77	148	6 / 120
427520M	E20	22.8	23.8	14.0	77	161	6 / 120
427522M	E22	24.6	23.8	16.0	77	178	6 / 96
427524M	E24	26.5	23.8	16.0	77	197	6 / 96

433E 1/2"

- For torx plus external screw
- DIN 3120

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
433E18M	EP18	21	25.8	15.0	45	91	6 / 96
433E20M	EP20	23	25.8	15.0	45	98	6 / 96
433E22M	EP22	-	25.8	17.0	45	110	6 / 96
433E24M	EP24	27.8	26.0	18.0	45	119	6 / 96
433E26M	EP26	29.8	26.0	19.0	45	125	6 / 96
433E28M	EP28	31.8	26.0	21.0	45	125	6 / 96
433E30M	EP30	33.8	26.0	22.0	45	131	6 / 96
433E32M	EP32	35.8	26.0	23.0	45	149	6 / 96



Spark Plug Socket

KT No. & D1

4630RC **4660** **4635RC** **4665C**

4670 **4675** 1/2"

- 6 / 12 points
- Size combined
  - 16.0mm (5/8")
  - 20.8mm (13/16")
- Inside sleeve
  - rubber
  - magnet
- DIN 3120
- 14mm use for Toyota Yaris, Vios

Magnet

KT NO.	Type	Size inch	Size mm	D mm	L mm	g	
463014RC	12 points Rubber	-	14.0	19.05	70	70	12 / 240
463016RC	12 points Rubber	5/8	16.0	20.75	70	72	10 / 200
466016	12 points Magnet	5/8	16.0	20.75	70	74	10 / 200
463514RC	6 points Rubber	-	14.0	19.05	70	70	12 / 240
463516RC	6 points Rubber	5/8	16.0	20.75	70	76	10 / 200
466516C	6 points Magnet	5/8	16.0	20.75	70	77	10 / 200
463021RC	12 points Rubber	13/16	20.8	27.7	70	142	12 / 120
466021	12 points Magnet	13/16	20.8	27.7	70	139	12 / 120
463521RC	6 points Rubber	13/16	20.8	27.7	70	148	12 / 120
466521C	6 points Magnet	13/16	20.8	27.7	70	150	12 / 120
467014C	12 points Metal clip	-	14.0	19.05	70	70	12 / 240
467016	12 points Metal clip	5/8	16.0	20.75	70	73	10 / 200
467021	12 points Metal clip	13/16	20.8	27.7	70	121	12 / 120
467514C	6 points Metal clip	-	14.0	19.05	70	70	12 / 240
467516	6 points Metal clip	5/8	16.0	20.75	70	74	10 / 200
467521	6 points Metal clip	13/16	20.8	27.7	70	162	12 / 120

463014RC - Thin walled design

463514RC - Thin walled design

463016RC - Thin walled design

466016 - Thin walled design

463516RC - Thin walled design

466516C - Thin walled design

463021RC

466021

463521RC

466521C





467514C

467014C



Bit Socket

CAUTION In order to get normal life of bit socket, always use within limited torque to bit.

4021 1/2"

- Phillips head
- DIN ISO 8764-1

KT NO.	No.	Overall length mm	g	
402102	PH2	60	67	10 / 180
402103	PH3	60	77	10 / 180
402104	PH4	60	68	10 / 180

4022 1/2"

- Slotted head
- DIN ISO 5264 / 3120

KT NO.	Tip width mm	Tip thickness mm	Overall length mm	g	
402208	8	1.2	60	68	10 / 180
402210	10	1.6	60	75	10 / 180
402212	12	2.0	60	89	10 / 180
402214	14	2.5	60	104	10 / 180
402216	16	2.5	60	104	10 / 180

4025 4035

40D5 1/2"

- Hexagon head
- DIN 7422

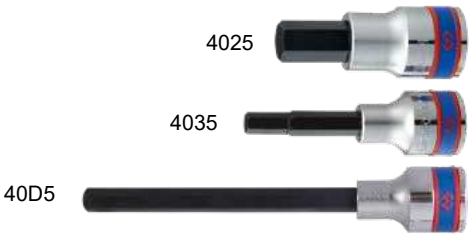

KT NO.	mm / Inch	Overall length mm	g	
402503	H3	60	65	10 / 180
402504	H4	60	65	10 / 180
402505	H5	60	66	10 / 180
402506	H6	60	68	10 / 180
402507	H7	60	67	10 / 180
402508	H8	60	70	10 / 180
402509	H9	60	78	10 / 180
402510	H10	60	80	10 / 180
402511	H11	60	95	10 / 180
402512	H12	60	94	10 / 180
402514	H14	60	114	10 / 180
402517	H17	66	166	10 / 100
402519	H19	66	225	10 / 120
403504	H4	80	74	6 / 120
403505	H5	80	75	6 / 120
403506	H6	80	77	6 / 120
403507	H7	80	77	6 / 120
403508	H8	80	80	6 / 120
403509	H9	80	91	6 / 120
403510	H10	80	93	6 / 120
403511	H11	80	111	6 / 120
403512	H12	80	113	6 / 120
403514	H14	80	140	6 / 120
403517	H17	80	193	6 / 120
403519	H19	80	259	6 / 96
40D506	H6	140	101	6 / 120
40D508	H8	140	102	6 / 120
40D510	H10	140	131	6 / 120
402506S	3/16	60	66	10 / 180
402507S	7/32	60	68	10 / 180
402508S	1/4	60	69	10 / 180
402509S	9/32	60	71	10 / 180
402510S	5/16	60	76	10 / 180
402512S	3/8	60	79	10 / 180
402514S	7/16	60	92	10 / 180
402516S	1/2	60	110	10 / 180
402518S	9/16	66	156	10 / 120
402520S	5/8	66	162	10 / 120
402524S	3/4	66	226	10 / 120

40D0 1/2"

- Hexagon with ball point head

KT NO.	mm	Overall length mm	g	
40D006	H6	140	101	6 / 120
40D008	H8	140	103	6 / 120
40D010	H10	140	132	6 / 120

4026 4036 1/2"

4046 4066

- Spline head
- DIN 3120

KT NO.	Size	Overall length mm	g	
402605	M5	60	69	10 / 180
402606	M6	60	67	10 / 180
402608	M8	60	70	10 / 180
402610	M10	60	78	10 / 180
402612	M12	60	91	10 / 180
402614	M14	60	108	10 / 180
402616	M16	60	144	10 / 120
402618	M18	60	195	10 / 120
403605	M5	80	75	6 / 120
403606	M6	80	76	6 / 120
403608	M8	80	76	6 / 120
403610	M10	80	91	6 / 120
403612	M12	80	110	6 / 120
403614	M14	80	135	6 / 120
404605	M5	100	83	6 / 120
404607	M7	100	84	6 / 120
404608	M8	100	85	6 / 120
404610	M10	100	105	6 / 120
404612	M12	100	128	6 / 120
404614	M14	100	161	6 / 120
406608	M8	140	102	6 / 120
406609	M9	140	131	6 / 120
406610	M10	140	130	6 / 120
406612	M12	140	168	6 / 120
406614	M14	140	212	6 / 120
406616	M16	140	301	6 / 72

Bit Socket

KT No. & D1

404108 1/2"

- Spline head
- DIN 3120
- Use for Toyota Tercel cylinder head bolt

KT NO.	Size	Overall length mm	g	
404108	M8.9	100	123	6 / 120

402A 1/2"

- Pentagon head
- For using on most vehicles fitting brake system

KT NO.	Size	Overall length mm	g	
402A10	10	60	89	10 / 180

402B 1/2"

- Spline head
- Tamper resistant type
- For gearbox and sump plugs of Audi A4/A6/A3, Golf IV/LT of VW

KT NO.	Size	Overall length mm	g	
402B16	M16	66	151	10 / 120
402B18	M18	66	204	10 / 120

4049 1/2"

- Use for VW, Audi, Fiat cylinder head bolt

KT NO.	Size	Overall length mm	g	
404904	M4	100	81	6 / 120
404905	M5	100	83	6 / 120
404906	M6	100	83	6 / 120
404907	M7	100	83	6 / 120
404908	M8	100	84	6 / 120
404909	M9	100	102	6 / 120
404910	M10	100	103	6 / 120
404925	M10.5	100	102	6 / 120
404912	M12	100	127	6 / 120
404913	M13	100	156	6 / 120
404914	M14	100	159	6 / 120
404916	M16	100	215	6 / 120

4027 4037 1/2"

- For tamper resistant torx screw
- DIN 3120

4027

4037

KT NO.	Size	Overall length mm	g	
402720	T20H	60	65	10 / 180
402725	T25H	60	66	10 / 180
402727	T27H	60	66	10 / 180
402730	T30H	60	66	10 / 180
402740	T40H	60	67	10 / 180
402745	T45H	60	70	10 / 180
402750	T50H	60	68	10 / 180
402755	T55H	60	77	10 / 180
402760	T60H	60	105	10 / 180
403720	T20H	80	74	6 / 120
403725	T25H	80	73	6 / 120
403727	T27H	80	74	6 / 120
403730	T30H	80	77	6 / 120
403740	T40H	80	76	6 / 120
403745	T45H	80	77	6 / 120
403750	T50H	80	79	6 / 120
403755	T55H	80	90	6 / 120
403760	T60H	80	131	6 / 120

4023 4033 1/2"

- For torx internal screw
- DIN 3120

4023

4033

KT NO.	Size	Overall length mm	g	
402320	T20	60	68	10 / 180
402325	T25	60	66	10 / 180
402327	T27	60	68	10 / 180
402330	T30	60	65	10 / 180
402340	T40	60	67	10 / 180
402345	T45	60	69	10 / 180
402350	T50	60	69	10 / 180
402355	T55	60	78	10 / 180
402360	T60	60	106	10 / 180
402370	T70	60	110	10 / 180
403320	T20	80	76	6 / 120
403325	T25	80	74	6 / 120
403327	T27	80	75	6 / 120
403330	T30	80	75	6 / 120
403340	T40	80	78	6 / 120
403345	T45	80	76	6 / 120
403350	T50	80	79	6 / 120
403355	T55	80	92	6 / 120
403360	T60	80	132	6 / 120
403370	T70	80	136	6 / 120

Ratchet & Set

KT No. & D1

4725

FINE GEAR 1/2"

- Reversible ratchet
- 8° gear action degree(45 teeth)
- DIN 3122

KT NO.	Overall length inch	mm	g	
4725-10FR	10	250	590	1 / 40
4725-10GR	10	250	631	1 / 20
4725-12FR	12	300	652	2 / 40
4725-12GR	12	300	693	1 / 20
4725-12BR	12	300	637	2 / 40
4725DKR01	renewal kits		-	-



4725DKR01

4725-10FR
4725-12FR

4725-10GR
4725-12GR

4725-12BR

4759

FINE GEAR 1/2"

- Reversible ratchet
- 5° gear action degree (72 teeth)
- DIN 3122

KT NO.	Overall length inch	mm	g	
4759-10G	10	262	540	1 / 20
4759DK	renewal kits		-	-

4759DK

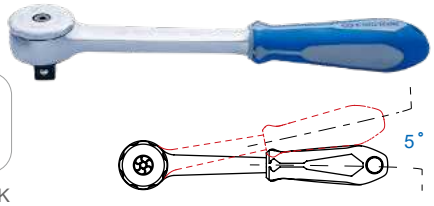

4756

QUICK RELEASE FINE GEAR 1/2"

- Quick release reversible ratchet
- 5° gear action degree (72 teeth)
- DIN 3122

KT NO.	Overall length inch	mm	g	
4756-10G	10	262	539	1 / 20
4756DK	renewal kits		-	-

4756DK

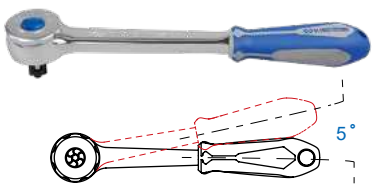

Ratchet

4752

QUICK RELEASE | FINE GEAR | 1/2"

- Quick release swivel and reversible ratchet
- 5° gear action degree (72 teeth)
- Multi-angle design for difficult-to-reach fasteners



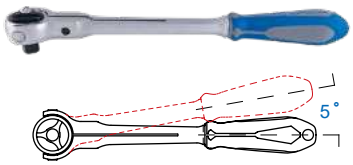

KT NO.	Overall length inch	mm	g	
4752-12G	12	312	639	1 / 20
4752DK	renewal kits		-	-

4752DK

4760

MINI RATCHET | FINE GEAR | 1/2"

- Mini reversible ratchet
- 5° gear action degree (72 teeth)
- Two teeth pawl action
- DIN 3122

4760-05

KT NO.	Overall length inch	mm	g	
4760-05	4-3/4	120	209	5 / 90
4760-05G	5-1/2	137	201	4 / 72
4760DK01	renewal kits		-	-

4760DK01

4760-05G

4762

QUICK RELEASE | 1/2"

- Quick release reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

4762-10G / 4762-15G

4762-10F

4762-10P

KT NO.	Overall length inch	mm	g	
4762-10G	10	250	536	5 / 30
4762-10F	10	250	580	6 / 36
4762-10P	10	250	552	6 / 36
4762-15G	15	375	693	5 / 20
4762DK	renewal kits		-	-

4762DK

4768

1/2"

- Reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

4768-10G

4768-10F / 4768-15F

4768-10P

KT NO.	Overall length inch	mm	g	
4768-10G	10	250	542	5 / 30
4768-10F	10	250	589	6 / 36
4768-10P	10	250	557	6 / 36
4768DK	renewal kits		-	-



4768DK

4771

QUICK RELEASE | 1/2"

- Quick release reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122



4771-10BR

4771-10FR

4771-10GR

KT NO.	Overall length inch	mm	g	
4771-10BR	10	250	551	2 / 40
4771-10FR	10	250	620	2 / 40
4771-10GR	10	262	540	1 / 20
4771DK	renewal kits		-	-

4771DK

Ratchet

KT No. & D1

4774 1/2"

- Universal joint reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122
- 15° rotation





4774-10F
4774-10G

KT NO.	Overall length inch	mm	g	
4774-10G	10	262	553	1 / 20
4774DK	renewal kits		-	-

4774DK

4779 1/2"

- Reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

4779-10BR
4779-10FR
4779-10GR

KT NO.	Overall length inch	mm	g	
4779-10BR	10	250	559	2 / 40
4779-10FR	10	250	626	2 / 40
4779-10GR	10	262	551	1 / 20
4779DK01	renewal kits		-	-

4779DK01

4781 QUICK RELEASE 1/2"

- Quick release flexible and reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	mm	g	
4781-12F	12	300	783	1 / 20
4781DK	renewal kits		-	-

4781DK

Ratchet Set

7773GS QUICK RELEASE 1/2" & 1/4"

2 PC. IP 51 PAT.

- 1/4" & 1/2" DR. 90 teeth dustproof ratchets
- 90 teeth ratchet mechanism, allowing ratchet action in very tight spaces
- IP51, dustproof design

2773-55GS
4773-10GS

Contents		kg 0.70	1 / 36
	2773-55GS	140mm	
	4773-10GS	262mm	

90 Teeth Dustproof Ratchet (PAT.)

4773-10GS 1/2"

IP 51

- Quick release reversible ratchet
- 4° gear action degree (90 teeth)
- DIN 3122
- IP51

4773DK



1 New slimline I-Beam shank offers superior strength with less effort



2 Dustproof - Double Sealing gasket

3 Screwless design - Easy to repair

•Material
- chrome vanadium alloy steel handle
- chrome molybdenum steel (gear) driver

•Finishing
- polished, chrome plated
- black driver by phosphate sunk

KT NO.	Square DR.	Overall length inch	Overall length mm	g	
4773-10GS	1/2"	10"	262	500	1 / 25
4773DK			renewal kits		

Telescopic Ratchet Wrench (PAT.)

4773-22GS 1/2"

- Special telescopic design saves storage space
- Pull down to unlock, fix, and quickly adjust
- Dust-proof design to increase product life
- 700N·m torque value, which far exceeds the standard
- Higher torque, less effort. Extra long lever for increased power:max 550 mm
- The long plastic handle has a hook at its end for hanging and working at height
- 4° gear action degree (90 teeth)



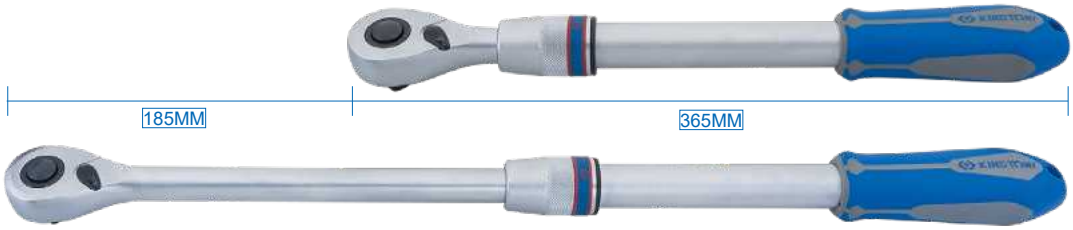

KT NO.	Max L mm	Min L mm	g	
4773-22GS	550	365	1200	1 / 20
4773DK		renewal kits		

- Screwless design-easy to repair

- Pull down to unlock

Accessory

CAUTION

The offset extension bar has less strength than normal extension bar. Do not use as a normal extension bar.

4121 1/2"

- Adjustable handle
- Push-Lock design

KT NO.	Overall length inch	Overall length mm	g	
4121-11GR	11-1/2	295	535	1 / 20

4251 1/2"

- Extension bar
- DIN 3123

KT NO.	Overall length inch	Overall length mm	g	
4251-02R	2	55	105	12 / 216
4251-03R	3	75	143	6 / 120
4251-04R	4	100	182	4 / 80
4251-05R	5	125	197	4 / 80
4251-06R	6	150	231	4 / 64
4251-08R	8	200	294	4 / 80
4251-10R	10	250	364	4 / 64

4104PR 1/2"

- Extension bar

4 PC.

Contents		Kg 0.84	1 / 25
4251	3" 5" 6" 10"		

4221 1/2"

- Extension bar
- DIN 3123

KT NO.	Overall length inch	Overall length mm	g	
4221-18	18	450	548	1 / 20
4221-24	24	600	685	1 / 20
4221-30	30	750	860	1 / 20
4221-36	36	900	1055	1 / 20

4223 1/2"

- Offset extension bar, wobble extension bar
- Max. torque : 320 N·m
- DIN 3123

KT NO.	Overall length inch	Overall length mm	g	
4223-02R	2	55	98	12 / 216
4223-05R	5	125	194	4 / 80
4223-10R	10	250	358	4 / 64

4293 1/2"

- Multi-function of extension bar and offset extension bar, wobble extension bar
- Max. torque : 320 N·m
- DIN 3123

KT NO.	Overall length inch	Overall length mm	g	
4293-02	2	55	97	12 / 216
4293-05	5	125	191	4 / 80
4293-10	10	250	356	4 / 64

4311 1/2"

- Speed brace
- DIN 3122

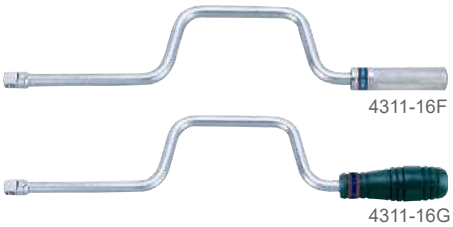

KT NO.	Overall length inch	Overall length mm	g	
4311-16F	16-1/4	412	610	5 / 40
4311-16G	16-1/4	412	499	5 / 40

4452 1/2"

- Flexible handle
- Action degree -180°
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
4452-15FR	15	375	718	2 / 24
4452-18FR	18	450	810	2 / 20
4452DK	renewal kits(for 15F/18F)		62	-

KT NO.	Overall length inch	Overall length mm	g	
4452-24FR	24	600	1138	20
4452DK1	renewal kits(for 24F)		62	-

4453 1/2"

- Flexible handle
- Action degree -180°
- New pattern design added in firm and powerful elements
- New forge technologies I-Beam shank offer 15% lightweight
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
4453-15F	15	375	630	2 / 24
4453-18F	18	450	708	2 / 20
4452DK	renewal kits(for 15F/18F)		62	-

Accessory

KT No. & D1

4461 1/2"

- Extends from 18 in. to 24 in.
- This breaker bar has a 180° swivel head and an ergonomically designed handle
- Break free stubborn or stuck fasteners
- Flexible head for multiple angles of use



4461DK

KT NO.	Max.L mm	Min.L mm	g	
4461-24G	600	450	1185	1 / 10
4461DK	renewal kits			

4462 1/2"

- Flexible handle
- Action degree -180°
- DIN 3122

4462DK

KT NO.	Overall length inch	mm	g	
4462-18F	18	463	1046	1 / 20
4462-24F	24	613	1350	1 / 20
4462DK	renewal kits		-	-

4572 1/2"

- Sliding T-handle
- DIN 3122

4572DK

KT NO.	Overall length inch	mm	g	
4572-10	10	250	371	2 / 40
4572-12	12	300	426	2 / 40
4572DK	renewal kits		-	-

4573 1/2"

- Sliding T-handle
- DIN 3120

4573DK



KT NO.	Overall length inch	mm	g	
4573-10R	10	250	470	2 / 40
4573DK	renewal kits		-	-

4581 1/2"

- 90° L-handle
- DIN 3122

KT NO.	Overall length inch	mm	g	
4581-10	10	250	450	1 / 40

4583 1/2"

- 105° L-handle
- DIN 3120

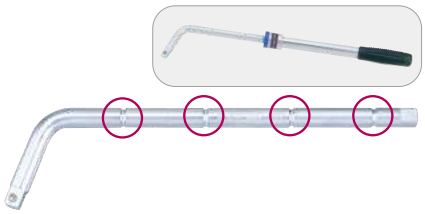

KT NO.	Overall length inch	mm	g	
4583-12R	12-1/2	315	550	1 / 40

4584 1/2"

- 90° L-handle
- DIN 3120



KT NO.	Overall length inch	mm	g	
4584-12R	12	300	547	40

4148 1/2"

- Bit holder

KT NO.	Size	Overall length mm	g	
414808S	1/4"	38	50	10 / 200
414810S	5/16"	38	55	10 / 200
414810M	10 mm	38	56	10 / 200

4813 / 4816 1/2"

- Adapter
- Convert to 3/8" drive or 3/4" drive
- 4813 →Max. torque : 202 N·m
- DIN 3123, ISO 3316

4813
3/8" drive(M)

4816
3/4" drive(M)

1/2" drive(F)

KT NO.	Spec.	g	
4813	1/2"Fx3/8"M	56	10 / 200
4816	1/2"Fx3/4"M	111	10 / 200

Accessory

KT No. & D1

4791R 1/2"

- Univesal joint
- DIN 3120, ISO 3316



KT NO.	Overall length inch	mm	g	
4791R	3	77.5	159	5 / 100

4793 1/2"



KT NO.	Overall length inch	mm	g	
4793	2-5/16	59	18	20 / 600

4794 1/2"

- Univesal joint
- 30° rotation
- Short pattern design enables greater access in confined spaces



KT NO.	Overall length inch	mm	g	
4794	2-3/8	60	105	5 / 180

9113PR 1/4" 3/8" 1/2"

- Universal joint
- Ball point type universal joint & with hex locking design
- Short pattern design enables greater access in confined spaces

3 PC.

Contents — Kg 0.20 — 6 / 108

2793	31mm
3793	43mm
4793	59mm

4844R 1/2"

- 1/2 " drive (1/2 " F x 1/2 " M)
- Finish : Chrome Alloy Steel, chrome plated
- Reversible
- 5° gear action degree (72 teeth)
- Apply to 1/2" accessory (Ex : 4453-15F)
- Apply to 1/2 " torque wrench (Ex : 3446E series)

PAT.

Outer diameter 37 x Height 62 mm

KT NO.	Overall length inch	mm	g	
4844R	2-7/16	62	250	1 / 64

KT NO.	Contents		g	
4122FR	4844R	4453-15F	880	1 / 20
4122FR01	4844R	4453-18F	958	1 / 20

Magnetic Insert

91000M

- Magnetic insert for sockets
- Powerful retention force
- Reusable
- 11 PC. set, for metric sockets





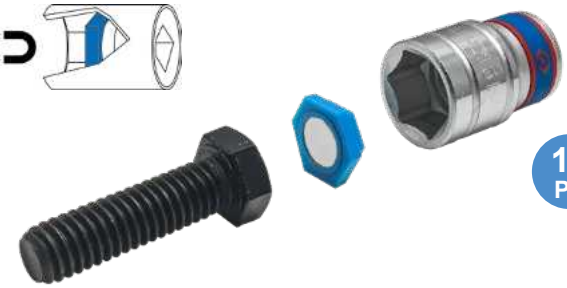

11 PC.

KT NO.	Size (mm)	g	
91000M	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm	42	12 / 144

Socket Rail Set

4010MR / 4010SR / 4510MR / 4510SR — 1/2"

- Socket rail 230mmL

8 PC.

4010MR/4510MR

4010SR/4510SR

Kg 0.64 | 4 / 32

KT NO.	Contents		
4010MR	4330MR	10, 12, 13, 14, 17, 19, 21, 22	8740908
4510MR	4335MR		
4010SR	4330SR	3/8, 7/16, 1/2, 9/16, 11/16, 3/4, 13/16, 7/8	
4510SR	4335SR		

4208MR10 / 4308MR10 — 1/2"

- Socket rail 240mmL

8 PC.

Kg 1.22 | 2 / 12

KT NO.	Contents		
4208MR10	4230MR	12, 13, 14 17, 19, 21 22, 23	8741108
4308MR10	4235MR		

4106PR — 1/2"

- Socket rail 230mmL

6 PC.

Contents Kg 0.51 | 4 / 32

4375M	E10, E12, E14, E16, E18, E20	
8740906		

4148PR10 — 1/2"

- Socket rail 240mmL

8 PC.

Contents Kg 1.24 | 2 / 12

4275M	E10, E12, E14, E16, E18, E20, E22, E24	
8741108		

4118MR — 1/2"

- Socket rail 230mmL

8 PC.

Contents Kg 0.57 | 4 / 32

4014M	RB8, RB9.5, RB10, RB10.5, RB12, RB12.7, RB13.5, RB19	
8740908		

4311MR — 1/2"

- Socket rail 230mmL

11 PC.

Contents Kg 0.92 | 2 / 12

4335MR	10, 11, 13, 14, 15, 17, 18, 19	
4725-10GR	4572-10	
4251-05R	8740908	

Bit Socket Rail Set

4110PR10 — 1/2"

- Socket rail 240mmL
- For hex head screw
- H : 60mm

9 PC.

Contents Kg 0.77 | 2 / 12

4025	H3, H4, H5, H6, H7, H8, H10, H12, H14	
8741009		

4110SR10 — 1/2"

- Socket rail 240mmL
- For hex head screw
- H : 60mm

9 PC.

Contents Kg 1.22 | 2 / 12

4025S	3/16, 7/32, 1/4, 9/32, 5/16, 3/8, 1/2, 9/16, 5/8	
8741009		

Bit Socket Rail Set

4120PR10 1/2"

- Socket rail 240mmL
- For hex head screw
- H : 80mm

9 PC.

Contents 1.0 kg 2 / 12

	4035	H4, H5, H6, H7, H8, H10, H12, H14, H17
	8741009	

4108PR10 1/2"

- Socket rail 240mmL
- For hex head screw
- H : 60mm

8 PC.

Contents 0.96 kg 2 / 12

	4025	H6, H7, H8, H10, H12, H14, H17, H19
	8741009	

4126PR 1/2"

- Socket rail 127mmL
- For spline head screw
- H : 60mm

4 PC.

Contents 0.38 kg 4 / 32

	4026	M6, M8, M10, M12
	8740504	

4105PR 1/2"

- Socket rail 150mmL
- For spline head screw
- H : 60 & 66 mm

5 PC.

Contents 0.57 kg 4 / 32

	4026	M8, M10, M12, M14
	402B	M16
	8740605	

4136PR 1/2"

- Socket rail 127mmL
- For spline head screw
- H : 80mm

4 PC.

Contents 0.46 kg 4 / 32

	4036	M6, M8, M10, M12
	8740504	

4109PR10 1/2"

- Socket rail 240mmL
- For torx head screw
- H : 60mm

9 PC.

Contents 0.74 kg 2 / 12

	4023	T20, T25, T27, T30, T40, T45, T50, T55, T60
	8741009	

4119PR10 1/2"

- Socket rail 240mmL
- For torx head screw
- H : 80mm

9 PC.

Contents 0.84 kg 2 / 2

	4033	T20, T25, T27, T30, T40, T45, T50, T55, T60
	8741009	

4116PR 1/2"

- Socket rail 180mmL
- For ribe head screw
- H : 100mm

6 PC.

Contents 0.38 kg 4 / 24

	4049	M9, M10, M12, M13, M14, M16
	8740706	

Socket Rail

874 1/2"

- Rail length from 160 mm to 560 mm

KT NO.		L (mm)
870406		160
870410		260
870422		560
8740		-

8740809D1 1/2"

- Socket rail carrier with retaining clip
- 446mm roller cabinet

KT NO.	Square drive	Clip	L (mm)
8740809D1	1/2"	9	508

Socket & Wrench Set

4313MR01 1/2"

13 PC.

Contents 1.55 1 / 12

4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19
4771-10GR	4251-06R

4213MR 1/2"

11 PC.

Contents 1.39 1 / 15

4330MR	10, 11, 12, 13, 14, 17, 19, 21, 22
4766-10G	4251-06R

Socket Set

4208MR 4208SR

4308MR 1/2"

- Metal case size (mm) :
- 246 x 103 x 38 (0.034 cuft)

8 PC.

4208MR / 4308MR

4208SR

Contents 1.75 1 / 12

KT NO.	Contents	
4208MR	4230M	12, 13, 14, 17, 19, 21, 22, 23
4308MR	4235M	
4208SR	4230S	1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16

4215MR 4315MR 1/2"

- Metal case size (mm) :
- 445 x 135 x 50 (0.107 cuft)

15 PC.

Contents 3.80 1 / 6

KT NO.	Contents	
4215MR	4230M	10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32
4315MR	4235M	

4216MR 4316MR 1/2"

- Metal case size (mm) :
- 445 x 135 x 50 (0.107 cuft)

16 PC.

Contents 3.68 1 / 6

KT NO.	Contents	
4216MR	4230M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32
4316MR	4235M	

Bit Socket Set

4109PR / 4119PR 1/2"

- Metal case size (mm) :
- 198 x 105 x 32 (0.023 cuft)

9 PC.

4109PR

4119PR

KT NO.	Contents		Kg	
4109PR	4023	T20, T25, T27, T30, T40, T45, T50, T55, T60	1.04	1 / 20
4119PR	4033		1.13	1 / 20

4110PR / 4120PR 1/2"

- Metal case size (mm) :
- 198 x 105 x 32 (0.023 cuft)

9 PC.

4110PR

4120PR

KT NO.	Contents		Kg	
4110PR	4025	H3, H4, H5, H6, H7, H8, H10, H12, H14	1.03	1 / 20
4120PR	4035	H4, H5, H6, H7, H8, H10, H12, H14, H17	1.38	1 / 20

4117PR 1/2"

- Metal case size (mm) :
- 224 x 94 x 40 (0.03 cuft)

7 PC.

Contents — Kg 1.22 — 1 / 8

4026	M6, M8, M10, M12, M14
402B	M16, M18

4128PR 1/2"

- Metal case size (mm) :
- 224 x 94 x 40 (0.03 cuft)

8 PC.

Contents — Kg 1.24 — 1 / 8

4026	M5, M6, M8, M10
402B	M16
4036	M8, M10, M12

Socket Set

4501MR 1/2"

- Metal case size (mm) :
- 392 x 90 x 50 (0.062 cuft)

15 PC.

Contents — Kg 3.28 — 1 / 6

	4335MR	8, 10, 11, 12, 13, 14, 17, 19, 21, 22, 24, 27
	4779-10FR	4251-05R
	4452-15FR	

4511MR / 4511SR 1/2"

- Metal case size (mm) :
- 445 x 187 x 50 (0.147 cuft)

24 PC.

4511MR

4511SR

KT NO.	Contents		Kg 5.5 — 1 / 4
4511MR	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	463521RC 4725-12GR 4572-10 4251-05R 4251-10R 4223-02R
4511SR	4335SR	3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4	

Socket Set

4012MR | 4012SR | 4512MR | 4512SR 1/2"

- Metal case size (mm) :
- 445 x 135 x 50 (0.106 cuft)

14 PC.

4012MR / 4512MR

4012SR / 4512SR

3.5 | 1 / 4

KT NO.	Contents			
4012MR	4330MR	10, 11, 12, 13, 14, 17, 19, 21, 22, 24	463021RC	4768-10F, 4572-12, 4251-05R
4512MR	4335MR		463521RC	
4012SR	4330SR	3/8, 7/16, 15/32, 1/2, 9/16, 11/16, 3/4, 13/16, 7/8, 15/16	463021RC	
4512SR	4335SR		463521RC	

4016SR | 4516MR | 4516SR 1/2"

- Metal case size (mm) :
- 370 x 150 x 54 (0.105 cuft)

16 PC.

4516MR

4016SR / 4516SR

3.68 | 1 / 6

KT NO.	Contents			
4016SR	4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1-1/16	463021RC	4791R, 4779-10FR, 4251-05R, 4452-15FR
4516MR	4335MR	10, 11, 12, 13, 14, 17, 19, 21, 23, 24, 27	463521RC	
4516SR	4335SR	3/8, 7/16, 15/32, 1/2, 9/16, 5/8, 3/4, 13/16, 15/16, 1, 1-1/16	463521RC	

4220MR

- Metal case size (mm) :
- 445 x 135 x 50 (0.106 cuft)

3.83 | 1 / 6

KT NO.	Contents		
4220MR	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27	4759-10G, 4251-05R, 4251-10R, 4791R
4320MR	4335MR		

4320MR 1/2"

20 PC.

4223MR 1/2"

- Metal case size (mm) :
- 490 x 205 x 52 (0.185 cuft)

4.7 | 1 / 3

Contents		
4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32, 34	
4771-10G	4461-24G	
4791R	4251-05R	

22 PC.

Socket Set

4031MR | 4031SR | 4531MR | 4531SR 1/2"

- Metal case size (mm) :
- 445 x 187 x 50 (0.147 cuft)

4031MR / 4531MR

4031SR / 4531SR

23 PC.

KT NO.	Contents			5.3	1 / 4
4031MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32		4779-10GR	4251-05R 4251-10R
4531MR	○ 4335MR				
4031SR	○ 4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4		4452-15FR	4791R
4531SR	○ 4335SR				

4024MR | 4024SR | 4524MR | 4524SR
4033MR | 4033SR | 4533MR | 4533SR 1/2"

- Metal case size (mm) :
- 445 x 187 x 50 (0.147 cuft)

4024SR / 4524SR

4024MR / 4524MR

4033SR / 4533SR

4033MR / 4533MR

24 PC.

KT NO.	Contents				5.7	1 / 4
4033SR	○ 4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4	○ 463021RC	4779-10BR	4121-11GR 4223-02R 4573-10 4583-12R	
4533SR	○ 4335SR		○ 463521RC			
4033MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	○ 463021RC			
4533MR	○ 4335MR		○ 463521RC			
4024SR	○ 4330SR	3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4	○ 463021RC	4725-12BR		
4524SR	○ 4335SR		○ 463521RC			
4024MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	○ 463021RC			
4524MR	○ 4335MR		○ 463521RC			

Socket Set

4224MR / 4324MR — 1/2"

- Metal case size (mm) :
- 445 x 187 x 50 (0.147 cuft)

24 PC.

4224MR / 4324MR

5.3 | 1 / 4

KT NO.	Contents						
4224MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4779-10GR	4452-18FR	4572-12	4251-05R 4251-10R	4791R
4324MR	○ 4335MR						

4028MR / 4028SR / 4528MR / 4528SR — 1/2"

- Metal case size (mm) :
- 445 x 187 x 50 (0.147 cuft)

24 PC.

4028MR / 4528MR

4028SR / 4528SR

5.3 | 1 / 4

KT NO.	Contents				
4028MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	○ 463021RC	4779-10GR	4791R 4251-05R 4251-10R 4572-10
4528MR	○ 4335MR		○ 463521RC		
4028SR	○ 4330SR	3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4	○ 463021RC		
4528SR	○ 4335SR		○ 463521RC		

4032MR / 4032SR / 4532MR / 4532SR — 1/2"

- Metal case size (mm) :
- 445 x 187 x 50 (0.147 cuft)

24 PC.

4032MR / 4532MR

4032SR / 4532SR

5.3 | 1 / 4

KT NO.	Contents				
4032MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	○ 463021RC	4779-10FR 4452-15FR	4251-05R 4251-10R 4791R
4532MR	○ 4335MR		○ 463521RC		
4032SR	○ 4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4	○ 463021RC		
4532SR	○ 4335SR		○ 463521RC		

Socket Set

4325MR 1/2"

- Metal case size (mm) :
- 445 x 187 x 50 (0.147 cuft)

Contents			5.3	1 / 4
○	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32		
	4779-10GR	4251-05R 4251-10R	4791R	
	4311-16G	4572-10		

24 PC.

4026MR | 4026SR | 4526MR | 4526SR | 4026MR03 | 4026SR03 | 4526MR03 | 4526SR03

4026MR04 1/2"

- Metal case size (mm) :
- 445 x 187 x 50 (0.147 cuft)

4026MR / 4526MR

4026SR / 4526SR

24 PC.

4026SR03 / 4526SR03

4026MR03 / 4526MR03

4026MR04

KT NO.		Contents		5.3	1 / 4
4026MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	○ 463021RC	4768-10F	
4526MR	○ 4335MR		○ 463521RC		
4026MR03	○ 4330MR	8, 10, 11, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4791R	4779-10GR	4452-15FR 4572-12 4251-05R 4251-10R
4526MR03	○ 4335MR				
4026MR04	○ 4330MR			4759-10G	
4026SR	○ 4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4	○ 463021RC	4768-10F	
4526SR	○ 4335SR		○ 463521RC		
4026SR03	○ 4330SR		4791R	4779-10GR	
4526SR03	○ 4330MR				

Socket Set

4033MR03

- Metal case size (mm) :
- 445 x 187 x 50 (0.147 cuft)

4533MR03 1/2"

24 PC.

4033MR03 / 4533MR03

KT NO.			Contents				4.43	1 / 4
4033MR03	○	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4791R	4779-10BR	4223-02R		
4533MR03	○	4335MR		4121-11GR	4573-10	4583-12R		

4030CR

- Metal case size (mm) :
- 445 x 187 x 50 (0.147 cuft)

4030CR01 1/2"

30 PC.

4030CR

4030CR01

KT NO.			Contents					
4030CR	○	4330MR	10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 30, 32	4768-10P	4452-15FR	4791R	4.90	1 / 4
4030CR01	○	4330SR	7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1	4779-10GR	4251-05R	4813	4.92	

4034MR

4034MR06

4534MR

4534MR06 1/2"

- Metal case size (mm) :
- 476 x 282 x 57 (0.27 cuft)

33 PC.

4034MR / 4534MR

4034MR06 / 4534MR06

KT NO.			Contents					
4034MR	○	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	○ 463021RC	○ 463516RC	4251-03R 4251-05R 4251-10R	7.6	1 / 2
4534MR	○	4335MR		○ 463521RC	4779-10FR	4572-12		
4034MR06	○	4330MR		○ 463014RC	4779-10GR	4452-18FR	7.9	
4534MR06	○	4335MR		○ 463016RC		4791R		

Socket Set

4535MR 1/2"

- Metal case size (mm) :
- 445 x 187 x 50 (0.147 Cuft)

35 PC.

Contents		4.46	1 / 4
4335MR	10, 11, 12, 13, 14, 15, 17, 19, 21, 22, 24, 27, 30, 32		
1836H	H5, H6, H7, H8, H10, H12		
1836T	T25, T27, T30, T40, T45, T50		
1836P	PH2, PH3		
463516RC	463514RC		
4251-05R 4251-10R	4771-10GR	4794	414810S

4042CR 4042CR02 4542CR 4542CR02 1/2"

- Metal case size (mm) :
- 476 x 282 x 57 (0.27 cuft)

42 PC.

4042CR / 4542CR

4042CR02 / 4542CR02

KT NO.			Contents			8.5	1 / 2
4042CR	4330MR	4330SR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 5/16, 3/8, 7/16, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4	463021RC	4768-10F	4452-18FR 4251-05R 4251-10R 4572-12	
4542CR	4335MR	4335SR		463521RC			
4042CR02	4330MR	4330SR		4779-10GR 4791R			
4542CR02	4335MR	4335SR					

4044CR 4544CR 1/2"

- Metal case size (mm) :
- 476 x 282 x 57 (0.27 cuft)

43 PC.

Contents			8.5	1 / 2
4044CR	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32	4779-10BR 4573-10 4121-11GR 4583-12R 4791R 4223-02R	
	4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-3/16, 1-1/4		
4544CR	4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32		
	4335SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-3/16, 1-1/4		

Socket Set

4523MRV01

Tray category #8 (375 x 187mm) 1/2"

- Plastic case size (mm) :
- 389 x 230 x 66 (0.208 Cuft)

Contents		3.88	1 / 6
4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32		
4771-10GR		4791R	
4572-10		4251-05R 4251-10R	

23 PC.

Socket & Tool Set

4524MRV04

Tray category #8 (375 x 187mm) 1/2"

- Plastic case size (mm) :
- 389 x 230 x 66 (0.208 Cuft)

Contents		5.08	1 / 4
4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 28, 30, 32		
4251R	5, 10		
4793			
4572-12			
4773-22GS			

24 PC.

4526MR15

1/2"

- Blow case size (mm) :
- 422 x 275 x 85 (0.35 cuft)

Contents		5.05	1 / 4
4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32		
4779-10FR		4572-12	
4452-15FR		4791R	4251-05R 4251-10R

24 PC.

4047MR

4547MR

1/2"

- Blow case size (mm) :
- 422 x 275 x 85 (0.35 cuft)

KT NO.		Contents	6.62	1 / 2
4047MR	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	1120MR: H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10 1147R: T10H, T15H, T20H, T25H, T27H, T30H, T40H 1411: PH2x100, PH2x150 1412: 6.5x100, 6.5x150 4251-05R, 4251-10R, 4452-15FR, 4572-12, 4791R, 4768-10F, 463521RC, 6111-07, 6311-06	
4547MR	4335MR			

47 PC.

Socket Set

4306MRN 1/2"

Contents | 2.28 | 1 / 8

4335MR	17, 19
4121-11GR	4251-03R
4584-12R	4725-12BR

6 PC.

Impact Driver Set

CAUTION Please wear proper safety gear while working.

4108FR

4111FR

4112FR 1/2"

- Metal case size (mm) :
- 190 x 60 x 48 (0.019 cuft)

4108FR

4111FR

4112FR

KT NO.	PC.	Contents				
4108FR	8	⊖ 1836S 9, 11	⊕ 1836P PH2, PH3	⊕ 1880P PH2, PH3	4112	1.04
4111FR	6	⊖ 1880S 8, 10	⊕ 1880P PH2, PH3		414810S	1.00
4112FR	6	⊖ 1836S 9, 11	⊕ 1836P PH2, PH3			1.00

1 / 24

4505MR

- Metal case size (mm) :
- 246 x 103 x 38 (0.034 cuft)

10 PC.

4505SR 1/2"

10 PC.

KT NO. | Contents | 1.6 | 1 / 12

4505MR	4335MR	8, 10 12, 14
4505SR	4335SR	5/16, 3/8 1/2, 9/16

⊖ 1836S 9, 11 ⊕ 1836P PH2, PH3 4112 414810S

4116FR01 3/4"

- 3/4"DR. impact driver with knurled grip
- Instant impact force releases rusted or frozen screws without damaging them
- Forward and reverse drive direction
- Comfortable handle with non-slip knurled handle
- Can be used anywhere, no air or power source required
- Max torque: 512N.m for 1/2″ DR. convert adapter

1.27 | 1 / 20

Standard Socket

6330M

3/4"

- Metric-DIN 3124, ISO 2725-1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
633017M	17	26.0	32.7	14	51	144	8 / 96
633019M	19	30.0	32.7	14	51	164	8 / 96
633021M	21	32.0	32.7	16	51	169	8 / 96
633022M	22	33.0	35.7	16	51	204	8 / 96
633023M	23	34.0	35.7	16	51	210	8 / 96
633024M	24	35.0	35.7	17	51	209	8 / 96
633026M	26	35.7	35.0	17	52	196	8 / 96
633027M	27	38.0	36.0	19	52	219	8 / 96
633028M	28	39.0	36.0	19	52	220	8 / 96
633029M	29	40.0	38.0	19	52	245	8 / 96
633030M	30	42.0	38.0	21	54	274	6 / 48
633032M	32	44.0	38.0	23	56	297	6 / 48
633033M	33	46.0	39.0	23	56	330	6 / 48
633034M	34	47.0	42.0	24	57	377	6 / 48
633035M	35	48.0	42.0	25	58	393	6 / 36
633036M	36	50.0	42.0	25	58	420	6 / 36
633038M	38	52.0	45.0	27	60	468	6 / 36
633041M	41	56.0	45.0	29	64	549	4 / 32
633042M	42	57.0	45.0	29	64	541	4 / 32
633046M	46	62.0	48.0	33	68	673	4 / 32
633048M	48	64.0	48.0	34	70	689	2 / 24
633050M	50	68.0	48.0	34	72	840	2 / 24
633054M	54	72.0	50.0	35	75	943	1 / 20
633055M	55	74.0	50.0	37	76	989	1 / 20
633058M	58	77.0	50.0	37	78	1044	1 / 20
633060M	60	80.0	50.0	40	78	1072	1 / 20
633063M	63	83.0	55.0	40	81	1201	1 / 12
633065M	65	85.0	58.0	43	83	1311	1 / 12
633070M	70	92.0	58.0	46	88	1634	1 / 12

6330S

3/4"

- Inch-ANSI / ASME B107.1



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
633022S	11/16	26	35.7	14	50.8	144	8 / 96
633024S	3/4	30	35.7	14	50.8	164	8 / 96
633026S	13/16	32	35.7	16	50.8	169	8 / 96
633028S	7/8	33	35.7	16	51.0	206	8 / 96
633030S	15/16	35	35.7	17	51.0	213	8 / 96
633032S	1	35	35.7	17	52.0	208	8 / 96
633034S	1-1/16	38	36.0	19	52.0	219	8 / 96
633036S	1-1/8	40	38.0	19	52.0	244	8 / 96
633038S	1-3/16	42	38.0	21	54.0	273	6 / 48
633040S	1-1/4	44	38.0	23	56.0	299	6 / 48
633042S	1-5/16	46	39.0	23	56.0	331	6 / 48
633044S	1-3/8	48	42.0	25	58.0	393	6 / 36
633046S	1-7/16	50	42.0	25	58.0	412	6 / 36
633048S	1-1/2	52	45.0	27	60.0	477	6 / 36
633050S	1-9/16	54	45.0	28	62.0	493	4 / 32
633052S	1-5/8	56	45.0	29	64.0	564	4 / 32
633054S	1-11/16	58	45.0	29	65.0	562	4 / 32
633056S	1-3/4	60	48.0	31	66.0	636	4 / 32
633058S	1-13/16	62	48.0	34	68.0	669	4 / 32
633060S	1-7/8	64	48.0	34	70.0	712	2 / 24
633062S	1-15/16	66	48.0	34	70.0	768	2 / 24
633064S	2	68	48.0	34	72.0	826	2 / 24
633066S	2-1/16	70	50.0	35	74.0	893	1 / 20
633068S	2-1/8	72	50.0	35	75.0	944	1 / 20
633070S	2-3/16	74	50.0	37	76.0	957	1 / 20
633072S	2-1/4	76	50.0	37	76.0	962	1 / 20
633074S	2-5/16	78	50.0	37	78.0	1084	1 / 20
633076S	2-3/8	80	50.0	40	78.0	1093	1 / 20
633078S	2-7/16	82	55.0	40	81.0	1160	1 / 12
633080S	2-1/2	84	55.0	40	81.0	1238	1 / 12
633082S	2-9/16	85	58.0	43	83.0	1355	1 / 12
633084S	2-5/8	86	58.0	43	83.0	1277	1 / 12
633086S	2-11/16	90	58.0	43	85.0	1514	1 / 12
633088S	2-3/4	92	58.0	46	88.0	1642	1 / 12

Standard Socket

6335M

3/4"

- DIN 3124, ISO 2725-1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
633517M	17	26.0	32.7	14	51	147	8 / 96
633518M	18	28.0	32.7	14	51	155	8 / 96
633519M	19	30.0	32.7	14	51	168	8 / 96
633520M	20	31.0	32.7	16	51	169	8 / 96
633521M	21	32.0	32.7	16	51	173	8 / 96
633522M	22	33.0	35.7	16	51	208	8 / 96
633523M	23	34.0	35.7	16	51	211	8 / 96
633524M	24	35.0	35.7	17	51	216	8 / 96
633525M	25	35.0	35.7	17	52	211	8 / 96
633526M	26	35.7	35.0	17	52	199	8 / 96
633527M	27	38.0	36.0	19	52	226	8 / 96
633528M	28	39.0	36.0	19	52	230	8 / 96
633529M	29	40.0	38.0	19	52	252	8 / 96
633530M	30	42.0	38.0	21	54	287	6 / 48
633531M	31	43.0	38.0	23	55	295	6 / 48
633532M	32	44.0	38.0	23	56	308	6 / 48
633533M	33	46.0	39.0	23	56	345	6 / 48
633534M	34	47.0	42.0	24	57	392	6 / 48
633535M	35	48.0	42.0	25	58	403	6 / 36
633536M	36	50.0	42.0	25	58	438	6 / 36
633537M	37	51.0	45.0	25	59	471	6 / 36
633538M	38	52.0	45.0	27	60	491	6 / 36
633539M	39	53.0	45.0	28	61	499	4 / 32
633540M	40	54.0	45.0	28	62	512	4 / 32
633541M	41	56.0	45.0	29	64	571	4 / 32
633542M	42	57.0	45.0	29	64	573	4 / 32
633543M	43	58.0	45.0	29	65	591	4 / 32
633544M	44	60.0	48.0	31	66	689	4 / 32
633545M	45	61.0	48.0	33	67	687	4 / 32
633546M	46	62.0	48.0	33	68	708	4 / 32
633547M	47	63.0	48.0	33	69	729	4 / 32
633548M	48	64.0	48.0	34	70	708	2 / 24
633549M	49	66.0	48.0	34	70	808	2 / 24
633550M	50	68.0	48.0	34	72	891	2 / 24
633551M	51	69.0	50.0	35	73	911	1 / 20
633552M	52	69.0	50.0	35	73	873	1 / 20
633553M	53	70.0	50.0	35	74	904	1 / 20
633554M	54	72.0	50.0	35	75	968	1 / 20
633555M	55	74.0	50.0	37	76	1025	1 / 20
633556M	56	75.0	50.0	37	76	1052	1 / 20
633557M	57	76.0	50.0	37	76	1017	1 / 20
633558M	58	77.0	50.0	37	78	1067	1 / 20
633559M	59	78.0	50.0	37	78	1127	1 / 20
633560M	60	80.0	50.0	40	78	1145	1 / 20
633562M	62	82.0	55.0	40	81	1258	1 / 12
633563M	63	83.0	55.0	40	81	1304	1 / 12
633564M	64	84.0	55.0	40	81	1300	1 / 12
633565M	65	85.0	58.0	43	83	1422	1 / 12
633570M	70	92.0	58.0	46	88	1800	1 / 12

Deep Socket

KT No. & D1

6230M

3/4"

- DIN 3124, ISO 2725-1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
623030M	30	42.0	38.0	31	90	584	1 / 24
623032M	32	44.0	38.0	34	90	568	1 / 24
623033M	33	46.0	39.0	34	90	542	1 / 24
623036M	36	50.0	42.0	37	90	608	1 / 24
623039M	39	53.0	45.0	41	90	666	1 / 24
623041M	41	56.0	45.0	41	90	701	1 / 24
623046M	46	62.0	48.0	46	95	889	1 / 10
623050M	50	68.0	48.0	50	95	1022	1 / 10

6235M

3/4"

- DIN 3124, ISO 2725-1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
623517M	17	26.0	32.7	20	90	275	2 / 48
623518M	18	28.0	32.7	20	90	345	2 / 48
623519M	19	30.0	32.7	20	90	325	2 / 48
623520M	20	31.0	32.7	22	90	373	2 / 48
623521M	21	32.0	32.7	22	90	335	2 / 48
623522M	22	33.0	35.7	22	90	391	2 / 48
623523M	23	34.0	35.7	24	90	390	2 / 48
623524M	24	35.0	35.7	24	90	406	2 / 48
623525M	25	35.0	35.7	25	90	399	2 / 48
623526M	26	35.7	35.0	25	90	353	1 / 24
623527M	27	38.0	36.0	28	90	389	1 / 24
623528M	28	39.0	36.0	28	90	397	1 / 24
623529M	29	40.0	38.0	28	90	428	1 / 24
623530M	30	42.0	38.0	31	90	469	1 / 24
623531M	31	43.0	38.0	34	90	472	1 / 24
623532M	32	44.0	38.0	34	90	490	1 / 24
623533M	33	46.0	39.0	34	90	549	1 / 24
623534M	34	47.0	42.0	34	90	591	1 / 24
623535M	35	48.0	42.0	37	90	583	1 / 24
623536M	36	50.0	42.0	37	90	632	1 / 24
623537M	37	51.0	45.0	37	90	687	1 / 24
623538M	38	52.0	45.0	41	90	673	1 / 24
623539M	39	53.0	45.0	41	90	689	1 / 24
623540M	40	54.0	45.0	41	90	713	1 / 24
623541M	41	56.0	45.0	41	90	753	1 / 24
623542M	42	57.0	45.0	46	95	794	1 / 24
623543M	43	58.0	45.0	46	95	816	1 / 10
623544M	44	60.0	48.0	46	95	920	1 / 10
623545M	45	61.0	48.0	46	95	932	1 / 10
623546M	46	62.0	48.0	46	95	940	1 / 10
623547M	47	63.0	48.0	46	95	961	1 / 10
623548M	48	64.0	48.0	50	95	948	1 / 10
623549M	49	66.0	48.0	50	95	1015	1 / 10
623550M	50	68.0	48.0	50	95	1064	1 / 10
623551M	51	69.0	50.0	50	95	1114	1 / 10
623552M	52	69.0	50.0	50	95	1109	1 / 10
623553M	53	70.0	50.0	50	95	1119	1 / 10
623554M	54	72.0	50.0	50	95	1170	1 / 10
623555M	55	74.0	50.0	50	95	1236	1 / 10
623556M	56	75.0	50.0	50	95	1272	1 / 10
623557M	57	76.0	50.0	52	100	1392	1 / 10
623558M	58	78.0	50.0	52	100	1446	1 / 10
623559M	59	78.0	50.0	52	100	1410	1 / 10
623560M	60	80.0	50.0	53	100	1471	1 / 10
623563M	63	83.0	55.0	53	100	1511	1 / 6
623565M	65	85.0	58.0	55	100	1613	1 / 6
623570M	70	92.0	58.0	55	100	1766	1 / 6

Bit Socket

6023 3/4"

- For torx internal screw
- DIN 3120
- E.g. on commercial vehicles and agricultural machinery
- Screw of the steering tie lever on commercial vehicles MAN
- 602380 : for M series
- 6023A0 : for F series

602360 6023A0

KT NO.	Size	L mm	g	
602360	T60	80	246	2/48
602370	T70	80	253	2/48
602380	T80	80	326	2/48
602390	T90	80	332	2/48
6023A0	T100	80	339	2/48

6025 3/4"

- HEXAGON head
- DIN 7422

602514 602519

KT NO.	mm	L mm	g	
602514	H14	80	257	2 / 48
602517	H17	80	268	2 / 48
602519	H19	80	278	2 / 48
602522	H22	80	361	2 / 48

Ratchet

6724 3/4"

- Reversible ratchet
- 8° gear action degree (45 teeth)
- DIN 3122

6724DK

KT NO.	Overall length inch	mm	g	
6724-20F	20	500	2223	1 / 6
6724DK	renewal kits		-	-

6778 3/4"

- Quick release reversible ratchet
- 15° gear action degree (24 teeth)
- DIN 3122

6778DK

KT NO.	Overall length inch	mm	g	
6778-20FS	20	500	2612	1 / 6
6778DK	renewal kits		-	-

Ratchet & Accessory

6779 3/4"

- Reversible ratchet
- 15° gear action degree (24 teeth)
- DIN 3122

6779DK

KT NO.	Overall length inch	mm	g	
6779-20F	20	500	2449	1 / 6
6779DK	renewal kits		-	-

6251 KT No. & D1 3/4"

- Extension bar
- DIN 3123

KT NO.	Overall length inch	mm	g	
6251-04	4	100	418	4 / 40
6251-08	8	200	734	2 / 20
6251-16	16	400	1375	1 / 10

6452 3/4"

- Flexible handle
- Action degree -180°
- DIN 3122

6452DK

KT NO.	Overall length inch	mm	g	
6452-18F	18	450	1768	1 / 10
6452-30F	30	750	2581	1 / 8
6452DK	renewal kits		-	-

- Material - chrome vanadium alloy steel
- Finishing - polished, chrome plated & black phosphate sunk

6462 3/4"

- Flexible Handle
- Action degree-180
- DIN3122

6462DK

KT NO.	Overall length inch	mm	g	
6462-40P	40	1020	3900	1 / 6
6462DK	renewal kits			

Ratchet & Accessory

6482 3/4"

- 180° swivel ratchet head
- 3 position ratchet control : forward / reverse / lock
- Telescopic handle : 620 mm-970 mm
- 15° gear action (24 teeth)
- DIN 3122

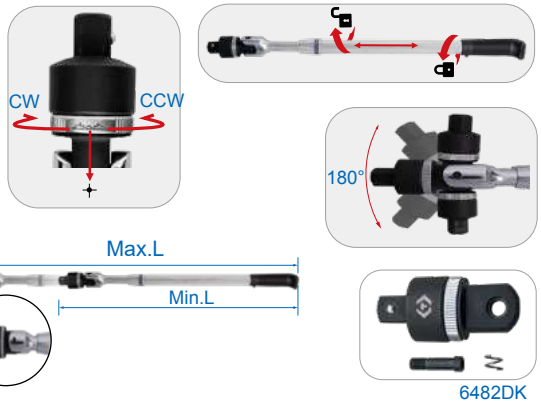

6482DK

KT NO.	D mm	Min.L inch	Min.L mm	Max.L inch	Max.L mm	Kg	
6482-24G	46	24	620	36	970	3	1 / 6
6482DK	renewal kits						

6572 3/4"

- Sliding T-handle
- DIN 3122

6572DK

KT NO.	Overall length inch	Overall length mm	g	
6572-20	20	500	1542	1 / 10
6572DK	renewal kits		-	-

6581 3/4"

- 90° L-handle

KT NO.	Overall length inch	Overall length mm	g	
6581-12	12	300	1307	10
6581-18	18	450	1939	12

6585 3/4"

- Double driver L-handle 90°

KT NO.	Overall length inch	Overall length mm	g	
6585-19	19	478	2010	12

6791 3/4"

KT No. & D1

- Universal joint
- DIN 3123, ISO 3316

KT NO.	Overall length inch	Overall length mm	g	
6791	4-1/4	108	571	2 / 20

6814 / 6818 3/4"

- Adapter
- Convert to 1/2" drive or 1" drive
- 6814→Max. torque : 512 N·m
- DIN 3123, ISO 3316

KT No. & D1

KT NO.	Spec.	g	
6814	3/4"F x 1/2"M	120	8 / 96
6818	3/4"F x 1"M	296	6 / 60

78106

- According to DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation

Cr-V | DIN 3123 | ISO 3316 | Chrome plated

6 PC.

Contents — kg 1.31 — 1 / 20

	M		F		M		F
2813	3/8 DR.		1/4 DR.	3812	1/4 DR.		3/8 DR.
3814	1/2 DR.		3/8 DR.	4813	3/8 DR.		1/2 DR.
4816	3/4 DR.		1/2 DR.	6814	1/2 DR.		3/4 DR.

Socket Rail New

8760807D1 3/4"

- Socket rail carrier with retaining clip
- 446mm roller cabinet

KT NO.	Square drive	Clip	L (mm)
8760807D1	3/4"	7	508
8760			

Socket Set

6014MR / 6314MR 3/4"

- Metal case size (mm) :
- 537 x 177 x 78 (0.26 cuft)

6014MR

• 6314MR

14 PC.

Kg 13.8 1

KT NO.		Contents	
6014MR	6330M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50	6779-20F, 6251-08, 6251-16, 6572-20
6314MR	6335M		

6016MR / 6316MR / 6016SR 3/4"

- Metal case size (mm) :
- 537 x 177 x 78 (0.26 cuft)

6316MR

6016MR/6016SR

16 PC.

Kg 14.0 1

KT NO.		Contents	
6016MR	6330M	21, 22, 23, 24, 27, 30, 32, 36, 38, 41, 46, 50	6779-20F, 6251-08, 6251-16, 6572-20
6316MR	6335M		
6016SR	6330S	7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4, 1-3/8, 1-1/2, 1-5/8, 1-3/4, 1-7/8, 2	

6023MR / 6323MR / 6023SR 3/4"

- Metal case size (mm) :
- 537 x 177 x 78 (0.26 cuft)

6323MR

6023MR/6023SR

23 PC.

Kg 17.1 1

KT NO.		Contents	
6023MR	6330M	21, 22, 23, 24, 26, 27, 28, 29, 30, 32, 34, 35, 36, 38, 41, 46, 50	6779-20F, 6251-04, 6251-08, 6251-16, 6572-20, 6791
6323MR	6335M		
6023SR	6330S	7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-9/16, 1-5/8, 1-3/4 1-13/16, 1-7/8, 2	

6224CR 3/4"

- Metal case size (mm) :
- 537 x 177 x 78 (0.26 cuft)

24 PC.

Kg 17.9 1

KT NO.		Contents	
6224CR	6330M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50	6779-20F, 6251-08, 6251-16, 6572-20
	6330S	1, 1-1/8, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-5/8, 1-3/4, 2	

Socket Set

6226CR

3/4"

- Metal case size (mm) :
- 537 x 177 x 78 (0.26 cuft)

26 PC.

KT NO.			Contents		17.27	1
6226CR	○	6330M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50	6251-04 6251-08	6572-20	
	○	6330S	7/8, 15/16, 1, 1-1/8, 1-3/16, 1-5/16, 1-3/8, 1-7/16, 1-5/8, 1-3/4, 1-7/8, 2		6452-18F	

6014MR12

- Blow case size(mm) :
- 422 x 372 x 92 (0.51 cuft)

Contents		10.8	1/2
○	6330M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50	
	6251-04 6251-08	6779-20F	
	6572-20		

6314MR12

3/4"

- Blow case size(mm) :
- 422 x 372 x 92 (0.51 cuft)

14 PC.

Contents		10.8	1/2
○	6335M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50	
	6251-04 6251-08	6779-20F	
	6572-20		

Socket Set

8330M 1"

- DIN 3124, ISO 2725-1



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
833036M	36	52	48	26	65	514	1 / 24
833038M	38	54	48	26	65	536	1 / 24
833041M	41	58	50	29	70	659	1 / 24
833046M	46	65	54	32	75	961	1 / 24
833050M	50	70	54	34	75	985	1 / 20
833054M	54	74	57	38	80	1164	1 / 20
833055M	55	76	57	42	83	1256	1 / 12
833058M	58	79	57	42	83	1263	1 / 12
833060M	60	82	58	46	87	1488	1 / 12
833063M	63	86	58	46	87	1548	1 / 12
833065M	65	88	65	49	90	1817	1 / 12
833067M	67	91	70	49	91	1932	1 / 12
833070M	70	94	70	50	93	2064	1 / 8
833071M	71	95	70	50	93	2026	1 / 8
833075M	75	100	70	50	95	2168	1 / 8
833077M	77	103	80	52	100	2732	1 / 8
833080M	80	107	80	52	100	3009	1 / 8

8330S 1"

- ANSI / ASME B107.1



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
833046S	1-7/16	52	48	26	65	506	1 / 24
833048S	1-1/2	54	48	26	65	537	1 / 24
833054S	1-11/16	60	54	29	70	741	1 / 24
833060S	1-7/8	67	54	34	75	912	1 / 10
833064S	2	71	54	34	75	989	1 / 10
833072S	2-1/4	78	57	42	83	1267	1 / 12
833076S	2-3/8	82	58	46	87	1452	1 / 12
833084S	2-5/8	90	65	49	90	1825	1 / 12
833094S	2-15/16	100	70	52	95	2076	1 / 8
8330A0S	3-1/8	107	80	52	100	2975	1 / 8

Ratchet

8779 1"

- Reversible ratchet
- 15° gear action degree (24 teeth)
- DIN 3122

8779DK

KT NO.	Overall length inch	mm	g	
8779-32F	32	800	4400	5
8779DK	renewal kits		-	-

Accessory

- Chrome vanadium handle, chrome molybdenum driver
- Chrome plated handle & black phosphate sunk driver

8251 1"

- Extension bar
- DIN3123

KT NO.	Overall length inch	mm	g	
8251-08	8	200	1364	1 / 16
8251-16	16	400	2555	1 / 10

8462 1"

Flexible Handle
Action degree-180
DIN3122

8462DK

KT NO.	Overall length inch	mm	g	
8462-40P	40	1020	3950	1 / 6
8462DK	renewal kits			

8572 1"

- Sliding T-handle
- DIN 3122

8572DK

KT NO.	Overall length inch	mm	g	
8572-25	25	630	4200	6
8572DK	renewal kits		-	-

8581 1"

- L-handle
- DIN 3122

KT NO.	Overall length inch	mm	g	
8581-26	26	660	5182	4

8816 1"

- Adapter
- Convert to 3/4" drive
- Max. torque : 1412 N·m
- DIN 3123, ISO 3316

3/4" drive(M)

1" drive(F)

KT NO.	Spec.	g	
8816	1"F x 3/4"M	309	6 / 48

Socket Set

8015MR

- Metal case size (mm) :
- 660 x 205 x 108 (0.52 cuft)

8015SR 1"

14 PC.

KT NO.		Contents	Kg 34.1	1
8015MR	8330M	36, 41, 46, 50, 55, 60, 65, 70, 75, 80	8779-32F	8251-08 8251-16	8572-25
8015SR	8330S	1-7/16, 1-1/2, 1-11/16, 1-7/8, 2, 2-1/4, 2-3/8, 2-5/8, 2-15/16, 3-1/8			

Socket Rail Set

7112PR

- Socket rail 260mmL
  - Rail with 5 PC. 3/8" & 6 PC. 1/2" drive clip

12 PC.

Contents — Kg 0.76 — 2 / 24

	3375M	E4, E5, E6, E8
	4375M	E10, E12, E14, E16, E18, E20

3571-08 — 8771011 — 3814

7113PR 3/8"+1/2"

- Socket rail 260mmL
  - Rail with 6 PC. 3/8" drive & 6 PC. 1/2" drive clip

12 PC.

Contents — Kg 0.6 — 2 / 24

	3375M	E4, E5, E6, E7, E8, E11
	4375M	E10, E12, E14, E16, E18, E20

8771012

Socket Set

7120PR

- Metal case size (mm) :
- 296 x 130 x 41 (0.056 cuft)

7120PR01 3/8"+1/2"

20 PC.

KT NO.	Contents		Kg 17.9	1 / 10
7120PR	4023	T30, T40, T45, T50, T55	3375M E6, E7, E8, E10 4375M E12, E14, E16, E18, E20 3023 T10, T15, T20, T25, T27 4813	
7120PR01	4027	T30H, T40H, T45H, T50H, T55H		

Socket Set

5022MR

- Metal case size (mm) :
- 285 x 135 x 45 (0.059 cuft)

5522MR

5022MR / 5522MR

5022SR 1/4"+3/8"

5022SR

21 PC.

| KT NO. | Contents | | |

Socket Set

9063MR
9563MR
9063MR01
9563MR01 — 1/4"+3/8"+1/2"

- Metal case size (mm) :
- 476 x 282 x 57 (0.27 cuft)

62 PC.

9063MR/9563MR

9063MR01/9563MR01

KT NO.			Contents			7.4 / 1 / 2
9063MR	4330MR 3330M	4330MR / 4335MR 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 3330M / 3335M 8, 9, 10, 11, 12, 13, 14, 15, 17, 19	363021	4768-10F 3769-08F	2335M: 4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12 3023: T20, T25, T27, T30, T40 3025: H4, H5, H6, H8, H10 2571-45 2221-04 3571-08 3221-06 4572-12 4251-06R 3792 4791R 3812	
9563MR	4335MR 3335M		363521	3235M 12, 14, 17, 19		
9063MR01	4330MR 3330M		363021	4759-10G 3779-08G		
9563MR01	4335MR 3335M		363521	3235M 10, 13, 17, 19		

9033CR — 1/4"+3/8"+1/2"

- Metal case size (mm) :
- 450 x 370 x 56 (0.329 cuft)

Contents		12.3 / 1 / 2
	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
	2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
	2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
	3330M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22
	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32
	4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-3/16, 1-1/4
	2015M	H3, H4, H5, H6, H8, H10
	2015S	1/8, 3/16, 7/32, 1/4, 5/16, 3/8
	2011X	PH1, PH2, PH3, PH4
	1115-03	H1.5, H2, H2.5

135 PC.

Contents

463516RC, 463021RC, 2179DF, 2452-05F, 3769-08F, 4768-10F, 2571-45, 4572-10, 2221-02, 2221-04, 3221-03, 3221-06, 4251-05R, 4251-10R, 3812, 3792, 4791R

2561 cross bar. 4-1/2"L

3840 3/8" drive spin disc.

4840 1/2" drive spin disc.

Socket & Tool Set

7096MR

7596MR 1/4"+1/2"

- Blow case size (mm) :
- 422 x 275 x 85 (0.35 cuft)

96 PC.

KT NO.	Contents			
				Kg 6.22 / 1 / 4
7096MR	2330M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	2031: PH1, PH2		2771-55G
	2230M: 6, 7, 8, 9, 10, 11, 12, 13	2032: 4, 5.5, 6.5		2178DF
	4230M: 14, 15, 17, 19, 22	2033: T8, T10, T15, T20, T25, T27, T30		4771-10GR
	4330MR: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	2035: H3, H4, H5, H6		2571-45
	4630RC: 16, 21	2038: PZ1, PZ2		4222-10
				2221-02 2221-04
				4251-05R
7596MR	2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	1836P: PH3, PH4		2792 4791R
	2235M: 6, 7, 8, 9, 10, 11, 12, 13	1836S: 8x1.2, 10x1.6, 12x2.0		3824
	4235M: 14, 15, 17, 19, 22	1836T: T40, T45, T50, T55		414810S
	4335MR: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	1836H: H7, H8, H10, H12, H14		7702-25
	4635RC: 16, 21	1836Z: PZ3, PZ4		2745
		1115-03: 1.5, 2, 2.5		

Socket & Tool Set

7011MR

- Blow case size (mm) :
- 422 x 275 x 85 (0.35 cuft)

7511MR 1/4"+1/2"

110 PC.

7011MR

7511MR

KT NO. | Contents | 6.90 | 1 / 4

7011MR

- 2330M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2230M: 6, 7, 8, 9, 10, 11, 12, 13
- 4230M: 14, 15, 17, 19, 22
- 4330MR: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463016RC
- 463021RC

7511MR

- 2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2235M: 6, 7, 8, 9, 10, 11, 12, 13
- 4235M: 14, 15, 17, 19, 22
- 4335MR: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463516RC
- 463521RC

Contents

- 2375M: E4, E5, E6, E7, E8
- 4375M: E10, E11, E12, E14, E16, E18, E20, E24
- 2031: PH1, PH2
- 2032: 4, 5.5, 6.5
- 2033: T8, T10, T15, T20, T25, T27, T30
- 2035: H3, H4, H5, H6
- 2038: PZ1, PZ2
- 1836P: PH3, PH4
- 1836S: 8x1.2, 10x1.6, 12x2.0
- 1836T: T40, T45, T50, T55, T60
- 1836H: H7, H8, H10, H12, H14
- 1836Z: PZ3, PZ4
- 1115-03: 1.5, 2, 2.5
- 2771-55G
- 4771-10GR
- 2178DF
- 2221-02, 2221-04
- 4222-10
- 4251-05R
- 2571-45
- 3824
- 414810S
- 2792, 4791R
- 2745
- 7702-25

Socket & Tool Set

7082MR

7582MR 1/4"+1/2"

- Blow case size (mm) :
- 422 x 275 x 85 (0.35 cuft)

83 PC.

KT NO.		Contents	
7082MR	2330M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	1060: 8, 10, 11, 12, 13, 14, 17, 19	1836T: T40, T45, T50, T55
	4330MR: 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32	2031: PH1, PH2	1836Z: PZ3, PZ4
	463016RC, 463021RC	2032: 4, 5.5, 6.5	2771-55G
		2033: T8, T10, T15, T20, T25, T27, T30	4771-10GR
		2035: H3, H4, H5, H6	2178DF
			2221-02, 2221-04
			2312-06
7582MR	2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	2038: PZ1, PZ2	2571-45
	4335MR: 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32	1836P: PH3, PH4	4251-05R
		1836S: 8x1.2, 10x1.6, 12x2.0	4222-10
	463516RC, 463521RC	1836H: H8, H10, H12, H14	79831
			2792, 4791R
			7702-25
			3824
			414810S

Kg 5.65 1 / 4

Socket Set

7077MR

7577MR 1/4"+1/2"

- Blow case size (mm) :
- 422 x 360 x 110 (0.59 Cuft)

77 PC.

KT NO. | Contents | 7.52 | 1 / 4

KT NO.		Contents	
7077MR	2330M 4, 5, 6, 7, 8, 9, 10, 11, 12 2230M 8, 10, 12, 13 4330MR 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32	463016RC 463021RC	1115-03 1.5, 2, 2.5 1025P PH1, PH2, PH3 1025S 3, 4, 5, 6 1025H H3, H4, H5, H6 1025T T10, T15, T20, T25, T27, T30, T40 1421 PH1 x 80, PH2 x 100, PH3 x 150 1422 4 x 100, 6.5 x 100 1060 8, 10, 12, 13, 14, 15, 17, 19
7577MR	2335M 4, 5, 6, 7, 8, 9, 10, 11, 12 2235M 8, 10, 12, 13 4335MR 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32	463516RC 463521RC	

2771-55G
4771-10GR
6111-07
6516-10
2178DF
7821-50
2571-45
2221-03
2312-06
4222-10
4251-05R
2792
4791R
3824
2141

Socket & Tool Set

7081MR

7581MR

7581MR01

1/4"+1/2"

- Blow case size (mm) :
- 422 x 360 x 110 (0.59 cuft)

81 PC.

7581MR01

7581MR / 7081MR

7.14 1 / 2

KT NO.	Contents			
7081MR	2330M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 4330MR: 10, 11, 12, 13, 14, 15, 17, 19, 22, 24	4771-10GR	463016RC 463021RC	1421: PH1 x 80, PH2 x 100 1422: 4 x 100, 5.5 x 125, 6.5 x 150 1025H: H3, H4, H5, H6, H7, H8 1025T: T20, T25, T30, T40 1120MR: H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10 1147R: T10H, T15H, T20H, T25H, T27H, T30H, T40H 1060: 6, 7, 8, 10, 12, 13, 14, 15, 17, 19 276A-04G, 6111-06, 6311-06, 6516-10 76104-05, 76215-05, 76404-06, 2221-04 9DC22, 79831, 7821-50, 4251-05R 750-60, 2792, 4791R
7581MR	2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	4771-10GR	463516RC	
7581MR01	4335MR: 10, 11, 12, 13, 14, 15, 17, 19, 22, 24	4759-10G	463521RC	

Socket & Tool Set

7087MR

7587MR

7587MR01 1/4"+1/2"

- Blow case size (mm) :
- 422 x 360 x 110 (0.59 cuft)

87 PC.

7087MR / 7587MR

7587MR01

KT NO.	Contents					
						9.2 / 1 / 2
7087MR	2330M: 5, 5.5, 6, 7, 8, 10, 11, 12, 13 2230M: 7, 8, 10, 12, 13 4330MR: 10, 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32 1060: 8, 10, 12, 13, 14, 15, 17, 18, 19, 22 20107MR01	2312-06 463016RC	1636H: H5, H6, H7, H8, H10, H12 1636M: M6, M8, M10, M12 1636T: T30, T40, T45, T50, T55, T60 1421: PH1 x 80, PH2 x 100 1422: 4 x 100, 5.5 x 100			
7587MR	2335M: 5, 5.5, 6, 7, 8, 10, 11, 12, 13	2312-06				
7587MR01	2235M: 7, 8, 10, 12, 13 4335MR: 10, 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32 1060: 8, 10, 12, 13, 14, 15, 17, 18, 19, 22 463516RC 20107MR01	2221-06	463014RC 414810M 4791R 2792 4251-05R 2571-45 4453-15FR 2779-55G 4779-10GR 6111-06 6231-07 6516-10 20407PR 19980016 19980410			

Socket & Tool Set

7098MR

7598MR 1/4"+1/2"

- Blow case size (mm) :
- 422 x 360 x 110 (0.59 cuft)

97 PC.

| KT NO. | Contents | | |

Socket & Tool Set

7003MR

7503MR 1/4"+1/2"

- Blow case size (mm) :
- 422 x 360 x 110 (0.59 Cuft)

103 PC.

KT NO.	Contents						
							Kg 9.24 / 1 / 2
7003MR	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10	2375M	E4, E5, E6, E7, E8, E10			4771-10GR
							2771-55G
	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4375M	E11, E12, E14, E16, E18			6111-07
			1060	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24			2178DF
							3611-08R
	463016RC	463021RC	1930	8 x 10, 11 x 13, 12 x 14, 17 x 19			2221-03 2221-06
7503MR	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10	1025H	H2, H2.5, H3, H4 , H5, H6, H7, H8, H10			2571-45 4572-10
			1025M	M4, M5, M6, M8, M10			2312-06
	4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	1025T	T15, T20, T25, T27, T30, T40, T45, T50			4251-05R 4251-10R
			1421	PH1 x 80, PH2 x 100			2792 4791R
							4223-02R
	463516RC	463521RC	1422	5.5 x 125, 6.5 x 150			2128-26
							2141

Socket & Tool Set

7010MR

7510MR 1/4"+1/2"

- Blow case size (mm) :
- 422 x 360 x 110 (0.59 cuft)

7010MR

7510MR

110 PC.

| KT NO. | Contents | | |

Socket & Tool Set

7028MR | 7528MR | 7528MR01 1/4"+1/2"

- Blow case size (mm) :
- 560 x 400 x 110 (0.87 Cuft)

128 PC.

7028MR

7528MR

7528MR01

14.95 / 1 / 2

KT NO.	Contents		
7028MR	2330M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 2230M: 7, 8, 10, 12, 13 4230M: 10, 12, 13, 14, 15, 17, 19 4330MR: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 463016RC 463021RC	2759-55G 4759-10G	1060: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16,17, 19, 21, 22, 24, 27, 30, 32 1930: 8 x 10, 9 x 11, 12 x 13, 14 x 17, 17 x 19 1143: T10, T15, T20, T25, T27, T30, T40 1145: H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10 1421: PH1 x 80, PH2 x 38, PH2 x 100 1422: 5 x 75, 6.5 x 38, 6.5 x 100 2033: T10, T15, T20, T25, T27 2035: H4, H5, H6, H7, H8, H10 4025: H12, H14, H17 7821-50 6111-07 6211-06 6511-10C 4452-15FR 2571-45 4572-10 2311-06 2293-02 2293-06 2221-03 2221-06 4251-05R 4251-10R 76215-05 76404-06 76505-05 76104-05 76303-05 2128-26 4223-02R 2792 4791R
7528MR	2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 2235M: 7, 8, 10, 12, 13 4235M: 10, 12, 13, 14, 15, 17, 19	2759-55G 4759-10G	
7528MR01	4335MR: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 463516RC 463521RC	2771-55G 4771-10GR	

Socket & Tool Set

7053MR01

- Blow case size (mm) :
- 560 x 400 x 110 (0.87 cuft)

7553MR01 1/4"+1/2"

153 PC.

7053MR01

7553MR01

KT NO. | Contents | 14.17 | 1 / 2

KT NO.	Contents
7053MR01	2330M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
	4330MR: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32
	2230M: 6, 7, 8, 9, 10, 11, 12, 13
	4230M: 13, 14, 17, 19, 22
7553MR01	2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
	4335MR: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32
	2235M: 6, 7, 8, 9, 10, 11, 12, 13
	4235M: 13, 14, 17, 19, 22

2375M	E4, E5, E6, E7, E8
4375M	E10, E12, E14, E16, E18, E20
1461	PH1 x 75, PH2 x 100
1462	5.5 x 100, 6.5 x 150
1421	PH2 x 38
1422	6.5 x 38
1025S	4, 5, 6.5
1025P	PH0, PH1, PH2
1025H	H3, H4, H5, H6
1025Z	PZ1, PZ2, PZ3
1025T	T10, T15, T20, T25, T27, T30, T40
1636H	H5, H6, H7, H8, H10, H12
1636M	M6, M8, M10, M12
1636T	T30, T40, T45, T50, T55, T60
1680H	H5, H6, H7, H8, H10, H12
1680M	M6, M8, M10, M12
1680T	T25, T30, T40, T45, T50, T55
463014RC	
463016RC	
1060	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27
1930	8x10, 11x13, 12x14
4771-10GR	
2771-55G	
6511-10	
6111-06	
6211-06	
2178DF	
4462-18FR	
2452-05F	
2221-02 2221-06	
4251-05R 4251-10R	
2792 4791R	
4223-02R	
2142	
414810M	

Socket & Wrench Set

9043MR

9543MR 1/4"+3/8"+1/2"

- Blow case size (mm) :
- 560 x 400 x 110 (0.87 cuft)

9043MR

9543MR

143 PC.

KT NO.		Contents		Kg 13.7 / 1 / 2
9043MR	2330M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10 3330M: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22 4330MR: 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32 4630RC: 16, 21	2375M: E4, E5, E6, E7, E8 4375M: E10, E12, E14, E16, E20 1025P: PH0, PH1, PH2, PH3 1025S: 4, 5.5, 7 1025U: T10H, T15H, T20H, T25H, T27H, T30H, T40H 1025H: H2, H3, H4, H5, H6, H7, H8, H10 1025Z: PZ0, PZ1, PZ2, PZ3	1145MR: H1.5, H2.0, H2.5, H3.0, H4.0, H5.0, H6.0, H8.0, H10 4771-10GR 2771-55G 2178DF 6111-07 3781-11F 4452-18FR 4581-10 6011-10R 4222-10 2312-06	
9543MR	2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10 3330M: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22 4335MR: 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32 4635RC: 16, 21	1421: PH2 x 38, PH1 x 80 1461: PH2 x 100 1422: 6.5 x 38, 5.5 x 75 1462: 6.5 x 150 1060: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 1930: 8 x 10, 10 x 12, 11 x 13, 12 x 14, 17 x 19	2221-02 2221-04 2221-06 3221-03 3221-06 4251-03R 3824 3812 2141 2792 3792 4791R 7821-30 79093-03M 79831	

Socket & Wrench Set

9519MR50

1/4"+3/8"+1/2"

- Blow case size (mm) :
- 560 x 400 x 110 (0.87 cuft)

119 PC.

- Extra HDPE board to prevent product dropping

- Extra hinge design

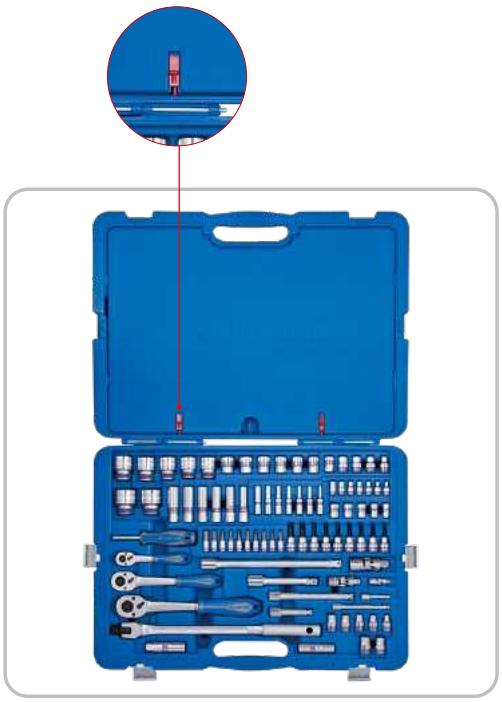

Contents

	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
	3335M	9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19
	4335MR	20, 21, 22, 24, 27, 30, 32
	2235M	4, 4.5, 5, 5.5, 6, 7, 8
	3235M	10, 11, 12, 13, 14, 15
	3375M	E8, E10, E11, E12, E14, E16, E18
	2031	PH1, PH2, PH3
	2032	5.5, 6.5
	2035	H3, H4, H6, H8, H10
	3023	T10, T15, T20, T25, T27, T30, T40, T45, T50

Contents

Kg 12.48 1 / 2

	4535M	17, 19, 21
	4435M	10, 12, 13, 14, 17, 19
	1060	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19

36A014 366516 2178DF 4453-15F

2293-02 2293-04 3293-03 3293-06 4293-05 4293-10 2792 3792 4791R

6516-10C 6111-06 6211-06 6311-08

2771-55G 3771-08G 4771-10GR 20219MR

Tool Box Set

9052-002MRV

- Plastic case size (mm) :
- 456 x 372 x 155 (0.93 cuft)

112 PC.

Pouch 1

13 PC.

Pouch 2

7 PC.

EVA foam(9-7592MPV)

92 PC.

Pouch 1

Contents		
	1062	8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22
	9TA281	

Pouch 2

Contents			
3611-10R	6AB31-75	6211-06	6111-07
6311-08	6511-10	79095-05M	

EVA foam(9-7592MPV)

Contents		10.46	CUFT 1.16
	2335MR	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
	4335MR	10, 13, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	
	1147PR	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H,T50H	
	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	
	20002UB	5 x 6mm, 8 x 10mm	

1032CQ	1005APR	2792 4791R	4251-10R	2179DF
7821-30	4773-10GS	2759-55G	2142	

Tools Bag Set

92543MR

92543MR01 1/4"

43 PC.

- Tool bag size (mm) :
- 250 x 400 x 30 (0.11 cuft)

92543MR

92543MR01

KT NO.		Contents	Kg 2.49 / 1 / 10
92543MR	79093-03C 7978-07 2141	2335M 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 1421 PH0 x 60, PH1 x 100, PH2 x 38, PH2 x 150 1422 3.0 x 75, 6.5 x 38, 6.5 x 150 1025Z PZ1, PZ2, PZ3 1025T T10, T15, T20, T25, T27, T30, T40 6511-10 6111-07 2178DF 3611-08P 20317MR 8720813 2792
92543MR01	79093-03M 7971-07 2142		

Axial Lock Nut Socket

44K9M 1/2"

64K9M 3/4"

- Specially for SKF bearing

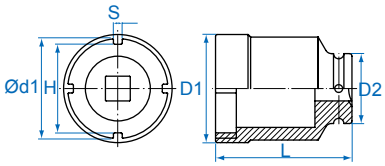

KT NO.	Designation	mm	DR.	H mm	S mm	D1 mm	D2 mm	Ød1 mm	L mm	g	
44K928M	TMFS 3	28	1/2	24.4	3.8	36	30	30	90	382	1 / 24
44K932M	TMFS 4	32	1/2	28.4	3.8	38	30	34	90	378	1 / 24
44K938M	TMFS 5	38	1/2	34.4	4.8	46	30	40	90	559	1 / 24
64K975M	TMFS 11	75	3/4	69.4	6.8	83.5	54	77	105	1645	1 / 6

External & Internal KM Locknut Socket

44K7 1/2" **64K7** 3/4" **44K8** 1/2" **64K8** 3/4"

- Specially for SKF bearing

KT NO.	Designation	mm	DR.	H mm	S mm	D1 mm	D2 mm	Ød1 mm	L mm	g	
44K732M	TMFS 4	32	1/2	28.3	3.7	37.3	30	28.3	60	207	1 / 24
44K738M	TMFS 5	38	1/2	34.3	4.7	44.3	30	34.3	60	259	1 / 24
44K745M	TMFS 6	45	1/2	41.3	4.7	52.3	30	41.3	60	321	1 / 24
44K752M	TMFS 7	52	1/2	48.3	4.7	59.3	30	48.3	60	350	1 / 20
44K758M	TMFS 8	58	1/2	53.5	4.7	65.5	30	53.5	60	422	1 / 20
64K765M	TMFS 9	65	3/4	60.5	5.7	73.5	42	60.5	68	601	1 / 20
64K770M	TMFS 10	70	3/4	65.5	5.7	78.5	42	65.5	68	625	1 / 12
64K775M	TMFS 11	75	3/4	69.5	6.7	82.6	42	59.5	68	664	1 / 12
64K780M	TMFS 12	80	3/4	74.5	6.7	87.7	42	74.5	68	691	1 / 12

44K7 & 64K7



KT NO.	Designation	mm	DR.	H mm	S mm	D1 mm	D2 mm	Ød1 mm	L mm	g	
44K832M	TMFS 4	32	1/2	28.3	3.7	41.5	30	34.5	60	282	1 / 24
44K838M	TMFS 5	38	1/2	34.3	4.7	49.5	30	40.7	60	365	1 / 24
44K845M	TMFS 6	45	1/2	41.3	4.7	59.0	30	48.0	60	474	1 / 24
44K852M	TMFS 7	52	1/2	48.3	4.7	66.0	30	54.8	60	540	1 / 20
44K858M	TMFS 8	58	1/2	53.5	5.7	73.0	30	60.8	60	582	1 / 20
64K865M	TMFS 9	65	3/4	60.5	5.7	80.0	42	67.7	68	915	1 / 20
64K870M	TMFS 10	70	3/4	65.5	5.7	86.0	42	72.7	68	1022	1 / 12
64K875M	TMFS 11	75	3/4	69.5	6.7	93.0	42	78.8	68	1167	1 / 12
64K880M	TMFS 12	80	3/4	74.5	6.7	98.0	42	83.5	68	1329	1 / 12

44K8 & 64K8



Application: Removal and installation of bearings, gear wheels, cone roll bearings, ball bearings etc.
Trucks, land and construction machines, municipally and forestery technology etc.

Internal KM Locknut Socket Set

7K09MP

1/2"+3/4"

- For loosening and tightening groove nuts DIN 981 on crimping or clamping sleeves
- Minimum space on nut size
- Use in conjunction with extensions, ratchets etc.
- Working range KM4 to KM12 (nuts of ball bearing)

9 PC.

	Contents		7.90	1 / 3
	44K8	TMFS 4, 5, 6, 7, 8		
	64K8	TMFS 9, 10, 11, 12		

External KM Locknut Socket Set

7K09MP01

1/2"+3/4"

- For loosening and tightening groove nuts DIN 981 on crimping or clamping sleeves
- Minimum space on nut size
- Slim design
- Working range KM4 to KM12 (nuts of ball bearing)

9 PC.

	Contents		5.33	1 / 3
	44K7	TMFS 4, 5, 6, 7, 8		
	64K7	TMFS 9, 10, 11, 12		

41 KING TONY
35 KING TONY
KING TONY

Impact Sockets & Accessories

Professional production & quality control

DIN 50%

KING TONY impact socket 50% higher torque on performance.

Quality control also ensure that a sufficient level of production output. King Tony uses advance technology to inspect tiny difference on each step. Our Impact socket reach 50% higher torque than DIN standards.

Standard Impact Socket & Rail Set

2535M — 1/4"

- DIN 3129, ISO 2725-2



KT NO.	⬡ mm	D1 mm	D2 mm	ℓ mm	L mm	g	
253504M	4	7.5	13	4	23	12	20 / 600
253545M	4.5	8.1	13	5	23	12	20 / 600
253505M	5	8.8	13	6	23	11	20 / 600
253555M	5.5	9.4	13	6	23	12	20 / 600
253506M	6	10.0	13	7	23	13	20 / 600
253507M	7	11.3	13	7	23	13	20 / 600
253510M	10	15.0	13	9	23	17	12 / 360
253513M	13	18.8	13	9	23	22	12 / 360
253514M	14	19.8	13	9	23	23	10 / 300

Standard Impact Socket

3535M — 3/8"

- DIN 3129, ISO 2725-2

3535S — 3/8"

- ANSI / ASME B107.2



KT NO.	⬡ mm	D1 mm	D2 mm	ℓ mm	L mm	g	
353506M	6	10.6	19	5	32	33	12 / 360
353507M	7	11.8	19	5	32	33	12 / 360
353508M	8	13.2	19	6	32	35	12 / 360
353509M	9	14.5	19	6	32	36	12 / 360
353510M	10	15.5	19	7	32	37	12 / 360
353511M	11	17.0	19	7	32	39	12 / 360
353512M	12	18.2	19	8	32	39	12 / 360
353513M	13	19.4	22	9	32	53	10 / 200
353514M	14	20.7	22	9	32	54	10 / 200
353515M	15	22.0	22	10	32	56	10 / 200
353516M	16	23.8	22	10	32	57	10 / 200
353517M	17	24.8	22	11	32	58	10 / 200
353518M	18	25.8	22	11	32	62	10 / 200
353519M	19	27.6	22	13	32	63	10 / 160

KT NO.	⬡ Inch	D1 mm	D2 mm	ℓ mm	L mm	g	
353508S	1/4	10.8	19	5	32	32	12 / 360
353510S	5/16	13.0	19	6	32	36	12 / 360
353512S	3/8	15.3	19	7	32	38	12 / 360
353514S	7/16	17.0	19	7	32	38	12 / 360
353516S	1/2	18.2	19	9	32	53	12 / 360
353518S	9/16	20.7	22	9	32	53	10 / 200
353520S	5/8	23.8	22	10	32	57	10 / 200
353522S	11/16	24.5	22	11	32	60	10 / 200
353524S	3/4	27.0	22	11	32	61	10 / 160

Impact Accessory

2863P — 1/4"

- Adapter
- Convert to 3/8" drive
- DIN 3121

KT NO.	Spec.	D mm	g	
2863P	1/4"F x 3/8"M	14	20	12 / 360

Deep Impact Socket

3435M — 3/8"

- DIN 3121

3435S — 3/8"

- ANSI / ASME B107.2



KT NO.	⬡ mm	D1 mm	D2 mm	ℓ mm	L mm	g	
343506M	6	10.6	19	10	65	50	6 / 120
343507M	7	11.8	19	10	65	55	6 / 120
343508M	8	13.2	19	12	65	68	6 / 120
343509M	9	14.5	19	12	65	65	6 / 120
343510M	10	15.5	19	12	65	82	6 / 120
343511M	11	17.0	19	13	65	75	6 / 120
343512M	12	18.2	19	14	65	89	6 / 120
343513M	13	19.4	22	14	65	111	6 / 120
343514M	14	20.7	22	14	65	109	6 / 120
343515M	15	22.0	22	16	65	112	6 / 120
343516M	16	23.8	22	16	65	126	6 / 96
343517M	17	24.8	22	17	65	143	6 / 96
343518M	18	25.8	22	18	65	133	6 / 96
343519M	19	27.6	22	20	65	171	6 / 96
343520M	20	28.3	22	20	65	154	6 / 96
343521M	21	29.5	22	22	65	161	6 / 96
343522M	22	30.8	22	22	65	178	5 / 60
343523M	23	32.0	22	24	65	177	5 / 60
343524M	24	32.5	22	24	65	176	5 / 60

KT NO.	⬡ Inch	D1 mm	D2 mm	ℓ mm	L mm	g	
343508S	1/4	10.8	19	10	63.5	62	6 / 120
343510S	5/16	13.0	19	12	63.5	71	6 / 120
343512S	3/8	15.3	19	12	63.5	82	6 / 120
343514S	7/16	17.0	19	13	63.5	84	6 / 120
343516S	1/2	18.2	19	14	63.5	113	6 / 120
343518S	9/16	20.7	22	14	65	114	6 / 120
343520S	5/8	23.8	22	16	65	126	6 / 96
343522S	11/16	24.5	22	17	65	138	6 / 96
343524S	3/4	27.0	22	20	65	154	6 / 96
343526S	13/16	29.5	22	22	65	156	6 / 96
343528S	7/8	30.8	22	22	65	172	5 / 60

Impact Star Socket

3575M

3/8"

- For torx external screw
- DIN 3121

KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
357505M	E5	9.6	19	4.0	32	31	12 / 360
357506M	E6	10.2	19	5.0	32	31	12 / 360
357507M	E7	10.8	19	6.0	32	33	12 / 360
357508M	E8	11.5	19	6.5	32	35	12 / 360
357510M	E10	12.0	19	7.0	32	33	12 / 360
357512M	E12	14.0	19	9.0	32	34	12 / 360
357514M	E14	17.0	19	9.5	32	40	12 / 360



Impact Bit Socket

KT No. & D1

CAUTION

1. Air pressure must not exceed 90PSI (6.3bar)
2. Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

3055M

3/8"

- For hexagon head screw
- DIN 3121

KT NO.	mm	L mm	Max. torq N·m	g	
305504M	H4	55	20.8	34	12 / 360
305505M	H5	55	36.0	38	12 / 360
305506M	H6	55	62.4	40	12 / 360
305507M	H7	55	97.0	43	12 / 360
305508M	H8	55	144.0	46	12 / 360
305510M	H10	55	264.0	55	12 / 360
305512M	H12	55	480.0	65	12 / 360
305514M	H14	55	650.0	77	12 / 288
305516M	H16	55	680.0	91	12 / 288
305517M	H17	55	715.0	99	12 / 288

3055S

3/8"

- For hexagon head
- DIN 3121

KT NO.	inch	L mm	Max. torq N·m	g	
305504S	1/8	55	18.8	34	12 / 360
305545S	9/64	55	20.8	34	12 / 360
305505S	5/32	55	22.5	36	12 / 360
305506S	3/16	55	36.0	36	12 / 360
305507S	7/32	55	62.4	38	12 / 360
305508S	1/4	55	93.6	41	12 / 360
305510S	5/16	55	144.0	46	12 / 360
305512S	3/8	55	264.0	54	12 / 360
305516S	1/2	55	518.0	71	12 / 360

3065M

3/8"

- For hexagon head screw
- DIN 3121

KT NO.	mm	L mm	Max. torq N·m	g	
306504M	H4	90	20.8	39	8 / 160
306505M	H5	90	36.0	44	8 / 160
306506M	H6	90	62.4	50	8 / 160
306508M	H8	90	144.0	66	8 / 160
306510M	H10	90	264.0	86	8 / 160

3053 / 3063

3/8"

- For torx internal screw
- DIN 3121

3053

3063

KT NO.	Size	L mm	g	
305310	T10	55	35	12 / 360
305315	T15	55	34	12 / 360
305320	T20	55	35	12 / 360
305325	T25	55	36	12 / 360
305327	T27	55	36	12 / 360
305330	T30	55	36	12 / 360
305340	T40	55	39	12 / 360
305345	T45	55	43	12 / 360
305350	T50	55	44	12 / 360
305355	T55	55	52	12 / 288
305360	T60	55	60	12 / 288
306320	T20	90	42	8 / 160
306325	T25	90	42	8 / 160
306327	T27	90	43	8 / 160
306330	T30	90	45	8 / 160
306340	T40	90	50	8 / 160
306345	T45	90	57	8 / 160
306350	T50	90	64	8 / 160
306355	T55	90	82	8 / 160

Impact Accessory

3862P

3/8"

- Adapter
- Convert to 1/4" drive
- 3862P Max. torque : 62 N·m
- DIN 3121

KT NO.	Spec.	D mm	g	
3862P	3/8"F x 1/4"M	20.8	32	24 / 384

Impact Accessory

3864P 3/8"

- Adapter
- Convert to 1/2" drive
- DIN 3121

KT NO.	Spec.	D mm	g	
3864P	3/8"F x 1/2"M	20.8	53	24 / 384

3147 3/8"

- Bit holder

KT NO.	Size	L mm	g	
314708S	1/4"	40	41	12 / 420
314710S	5/16"	40	43	12 / 420
314710M	10mm	40	42	12 / 420

3260P 3/8"

- Extension bar
- DIN 3121

KT NO.	Overall length inch	mm	g	
3260-03P	3	75	98	6 / 120
3260-04P	4	100	121	8 / 160
3260-05P	5	125	147	8 / 144
3260-06P	6	150	169	5 / 100
3260-08P	8	200	217	6 / 72
3260-10P	10	250	264	6 / 54

3796P 3/8"

- Universal joint
- DIN 3121



KT NO.	Overall length inch	mm	D mm	g	
3796P	2	50	22	87	10 / 200

90608

- Locking pin
- Chrome vanadium steel
- DIN 3129

90609 3/8"

KT NO.	Desp.	Ø	d / ℓ	Applied to socket sizes
90608	pin	2.5	14	3535M (6~12 mm)3535S (1/4~1/2 inch) 3435M (6~12 mm) 3435S (1/4~1/2 inch) 3055M (4~12 mm) 3055S (3/16~1/2inch) 3065M (4~10 mm) 3053 (T10~T15) 3575M (E5~E14) 3053.3055.3065.3147.3862.3864
90609	pin	2.5	16	3535M (13~19 mm) 3535S (9/16~3/4inch) 3435M (13~24 mm) 3435S (9/16~7/8inch) 3260.3796

Impact Bit Socket Set

3406MP 3/8"

- For hexagon head screw
- 55mmL

6 PC.

Metal case size (mm) : 203 x 79 x 41 (0.023 cuft)

Contents	Kg	
3055M	0.72	1 / 20
H4, H5, H6, H8, H10, H12		

3419PP 3/8"

- For torx internal head
- 55mmL

9 PC.

Metal case size (mm) : 203 x 79 x 41 (0.023 cuft)

Contents	Kg	
3053	0.62	1 / 20
T10, T15, T20, T25, T27, T30, T40, T45, T50		

Standard Impact Socket

KT No. & D1

4530M 1/2"

- DIN 3129, ISO 2725-2



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
453008M	8	15.0	25	7	38	65	10 / 200
453009M	9	16.3	25	7	38	68	10 / 200
453010M	10	17.6	25	8	38	68	10 / 200
453011M	11	18.8	25	8	38	69	10 / 200
453012M	12	20.0	25	9	38	73	10 / 200
453013M	13	21.2	25	10	38	71	10 / 200
453014M	14	22.5	25	10	38	78	10 / 200
453015M	15	23.8	30	11	38	111	10 / 160
453016M	16	25.0	30	11	38	118	10 / 160
453017M	17	26.2	30	12	38	116	10 / 160
453018M	18	27.5	30	13	38	115	10 / 160
453019M	19	28.8	30	13	38	114	10 / 160
453020M	20	29.5	30	13	38	117	10 / 160
453021M	21	30.0	30	14	40	121	8 / 160
453022M	22	32.4	30	14	40	129	8 / 160
453023M	23	33.2	30	15	40	130	8 / 160
453024M	24	34.4	30	15	42	147	6 / 120
453025M	25	36.0	30	15	42	164	6 / 120
453026M	26	37.0	30	15	42	168	6 / 120
453027M	27	38.0	30	16	44	170	6 / 120
453028M	28	41.0	30	16	44	205	6 / 120
453029M	29	41.0	30	17	44	184	6 / 120
453030M	30	42.0	30.5	17	44	197	6 / 120
453032M	32	46.0	30	19	44	226	6 / 120
453033M	33	46.0	30	19	46	246	6 / 96
453034M	34	46.0	30	20	46	217	6 / 96
453036M	36	47.0	30	20	46	214	6 / 96
453038M	38	50.0	30	21	50	279	6 / 60
453041M	41	56.0	30	22	52	402	6 / 60

Standard Impact Socket

KT No. & D1

4530S

1/2"

- ANSI / ASME B107.2



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
453016S	1/2	20	25	10	38	72	10 / 200
453018S	9/16	22	25	10	38	76	10 / 200
453020S	5/8	24	25	11	38	78	10 / 200
453022S	11/16	26	30	12	38	116	10 / 160
453024S	3/4	28.8	30	13	38	120	10 / 160
453026S	13/16	30	30	14	40	122	8 / 160
453028S	7/8	32	30	14	40	138	8 / 160
453030S	15/16	34	30	15	42	148	6 / 120
453032S	1	36	30	15	42	162	6 / 120
453034S	1-1/16	38	30	16	44	167	6 / 120
453036S	1-1/8	41	30	17	44	189	6 / 120
453038S	1-3/16	42	30.5	17	44	203	6 / 120

Stubby Impact Socket

4525M

1/2"

- For impact wrench use
- DIN 3129, ISO 2725-2



19, 22, 24 mm

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
452513M	13	20	26	5.5	28.5	57	10 / 160
452514M	14	22	26	5.5	28.5	61	10 / 160
452517M	17	26	26	5.5	28.5	64	10 / 160
452519M	19	28	26	10	28.5	63	10 / 160
452521M	21	30	30	10	28.5	81	8 / 160
452522M	22	32	30	10	28.5	87	8 / 160
452524M	24	34	30	10	28.5	80	6 / 120

Standard Impact Socket

4535M

1/2"

- DIN 3129, ISO 2725-2



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
453508M	8	15.0	25	7	38	67	10 / 200
453509M	9	16.3	25	7	38	69	10 / 200
453510M	10	17.6	25	8	38	70	10 / 200
453511M	11	18.8	25	8	38	71	10 / 200
453512M	12	20.0	25	9	38	73	10 / 200
453513M	13	21.2	25	10	38	75	10 / 200
453514M	14	22.5	25	10	38	78	10 / 200
453515M	15	23.8	30	11	38	117	10 / 160
453516M	16	25.0	30	11	38	118	10 / 160
453517M	17	26.2	30	12	38	121	10 / 160
453518M	18	27.5	30	13	38	123	10 / 160
453519M	19	28.8	30	13	38	117	10 / 160
453520M	20	29.5	30	13	38	115	10 / 160
453521M	21	30.0	30	14	40	118	8 / 160
453522M	22	31.8	30	14	40	132	8 / 160
453523M	23	33.8	30	15	40	144	8 / 160
453524M	24	33.8	30	15	42	139	6 / 120
453525M	25	35.8	30	15	42	156	6 / 120
453526M	26	37.8	30	15	42	173	6 / 120
453527M	27	37.8	30	16	44	175	6 / 120
453528M	28	39.8	30	16	44	204	6 / 120
453529M	29	39.8	30	17	44	198	6 / 120
453530M	30	41.8	30.5	17	44	206	6 / 120
453532M	32	46.0	30	19	44	239	6 / 120
453533M	33	46.0	30	19	46	246	6 / 96
453534M	34	46.0	30	20	46	240	6 / 96
453535M	35	46.0	30	20	46	227	6 / 96
453536M	36	47.0	30	20	46	243	6 / 96
453537M	37	49.0	30	21	48	271	6 / 96
453538M	38	50.0	30	21	50	291	6 / 60
453539M	39	51.0	30	22	50	306	6 / 60
453541M	41	56.0	30	22	52	403	6 / 60
453546M	46	64.0	30	23	55	595	4 / 32

Standard Impact Socket

4535S 1/2"

- ANSI / ASME B107.2



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
453510S	5/16	15	25	7	38	66	10 / 200
453512S	3/8	17	25	7	38	70	10 / 200
453514S	7/16	18	25	8	38	70	10 / 200
453516S	1/2	20	25	10	38	72	10 / 200
453518S	9/16	22	25	10	38	77	10 / 200
453520S	5/8	24	25	11	38	80	10 / 160
453522S	11/16	26	30	12	38	116	10 / 160
453524S	3/4	28.8	30	13	38	116	10 / 160
453526S	13/16	30	30	14	40	127	8 / 160
453528S	7/8	32	30	14	40	136	8 / 160
453530S	15/16	34	30	15	42	152	6 / 120
453532S	1	36	30	15	42	164	6 / 120
453534S	1-1/16	38	30	16	44	180	6 / 120
453536S	1-1/8	41	30	17	44	199	6 / 120
453538S	1-3/16	42	30.5	17	44	208	6 / 120
453540S	1-1/4	46	30	18	44	237	6 / 120

Impact Socket Set

4472MP

- Standard impact socket

Stand size (mm) :
415 x 336 x 320

4472SP 1/2"

4472MP / 4472SP

KT NO.	PC.		Contents	Each Q'ty
4472MP	158	4535M	8, 9, 10, 11, 12, 13, 14	8
			15, 16, 17, 18, 19, 20, 21	6
			22, 23, 24	7
			25, 26, 27, 28	6
			29, 30, 32	5
4472SP	106	4535S	5/16, 3/8, 7/16, 1/2, 9/16	8
			5/8, 11/16, 3/4, 13/16	6
			7/8, 15/16,	7
			1, 1-1/16, 1-1/8	6
			1-3/16, 1-1/4	5

KT NO.	Spec.	Kg	Cuft
4472MP-A	87103	6.37	0.67
4472MP-D	158 PC. socket content	19.63	0.54
4472SP-A	87103	6.37	0.67
4472SP-D	106 PC. socket content	20.4	0.37

Deep Impact Socket

KT No. & D1

4430M 1/2"

- DIN 3121



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
443008M	8	15.0	24.8	12	78	125	6 / 120
443009M	9	16.3	24.8	12	78	135	6 / 120
443010M	10	17.6	24.8	12	80	153	6 / 120
443011M	11	18.8	24.8	13	80	150	6 / 120
443012M	12	20.0	24.8	14	80	166	6 / 120
443013M	13	21.2	24.8	14	80	158	6 / 120
443014M	14	22.5	24.8	14	80	172	6 / 120
443015M	15	23.8	29.8	16	80	233	6 / 96
443016M	16	25.0	29.8	16	80	232	6 / 96
443017M	17	26.2	29.8	16	80	240	6 / 96
443018M	18	27.5	29.8	17	80	253	6 / 96
443019M	19	28.8	29.8	18	80	272	6 / 96
443020M	20	29.5	29.8	20	80	253	6 / 96
443021M	21	29.8	29.8	20	80	254	6 / 96
443022M	22	32.4	30.0	22	80	296	5 / 60
443023M	23	33.2	30.0	24	80	291	5 / 60
443024M	24	34.4	30.0	24	80	299	5 / 60
443027M	27	38.0	30.0	27	80	343	5 / 60
443030M	30	42.0	30.5	30	80	397	5 / 50
443032M	32	46.0	30.0	32	80	454	1 / 24
443036M	36	47.0	30.0	36	80	422	1 / 24

4430S 1/2"

- ANSI / ASME B107.2



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
443020S	5/8	24.0	24.8	16	80	179	6 / 96
443024S	3/4	28.8	29.8	18	80	258	6 / 96
443028S	7/8	32.0	30.0	22	80	284	5 / 60
443030S	15/16	34.0	30.0	24	80	297	5 / 60
443032S	1	36.0	30.0	24	80	328	5 / 60
443034S	1-1/16	38.0	30.0	27	80	340	5 / 60
443036S	1-1/8	41.0	30.0	27	80	394	5 / 50
443040S	1-1/4	46.0	30.0	32	80	477	1 / 24
443042S	1-5/16	46.0	30.0	34	80	440	1 / 24
443048S	1-1/2	50.0	30.0	34	80	454	1 / 24

4435M 1/2"

- DIN 3121



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
443508M	8	15.0	24.8	12	78	124	6 / 120
443509M	9	16.3	24.8	12	78	137	6 / 120
443510M	10	17.6	24.8	12	80	149	6 / 120
443511M	11	18.8	24.8	13	80	153	6 / 120
443512M	12	20.0	24.8	14	80	164	6 / 120
443513M	13	21.2	24.8	14	80	169	6 / 120
443514M	14	22.5	24.8	14	80	168	6 / 120
443515M	15	23.8	29.8	16	80	225	6 / 96
443516M	16	25.0	29.8	16	80	233	6 / 96
443517M	17	26.2	29.8	16	80	239	6 / 96
443518M	18	27.5	29.8	17	80	246	6 / 96
443519M	19	28.8	29.8	18	80	254	6 / 96
443520M	20	29.0	29.8	20	80	244	6 / 96
443521M	21	29.8	29.8	20	80	247	6 / 96
443522M	22	31.8	30.0	22	80	278	5 / 60
443523M	23	33.8	30.0	24	80	316	5 / 60
443524M	24	33.8	30.0	24	80	297	5 / 60
443525M	25	35.8	30.0	24	80	326	5 / 60
443526M	26	37.8	30.0	27	80	367	5 / 60
443527M	27	37.8	30.0	27	80	364	5 / 60
443528M	28	39.8	30.0	27	80	424	5 / 50
443529M	29	39.8	30.0	27	80	407	5 / 50
443530M	30	41.8	30.5	30	80	422	5 / 50
443532M	32	46.0	30.0	32	80	503	1 / 24
443533M	33	46.0	30.0	32	80	471	1 / 24
443534M	34	46.0	30.0	33	80	466	1 / 24
443536M	36	47.0	30.0	36	80	445	1 / 24
443538M	38	50.0	30.0	38	80	515	1 / 24
443541M	41	56.0	30.0	38	80	689	1 / 24
443546M	46	64.0	30.0	40	80	943	1 / 24

4435S 1/2"

- ANSI / ASME B107.2



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
443510S	5/16	14.0	24.8	12	78	123	6 / 120
443512S	3/8	17.0	24.8	12	80	151	6 / 120
443514S	7/16	18.0	24.8	13	80	151	6 / 120
443516S	1/2	20.0	24.8	14	80	157	6 / 120
443518S	9/16	22.0	24.8	14	80	175	6 / 120
443520S	5/8	24.0	24.8	16	80	182	6 / 96
443522S	11/16	26.0	29.8	17	80	247	6 / 96
443524S	3/4	28.8	29.8	18	80	254	6 / 96
443526S	13/16	29.8	29.8	20	80	263	6 / 96
443528S	7/8	32.0	30.0	22	80	294	5 / 60
443530S	15/16	34.0	30.0	24	80	308	5 / 60
443532S	1	36.0	30.0	24	80	337	5 / 60
443534S	1-1/16	38.0	30.0	27	80	364	5 / 60
443536S	1-1/8	41.0	30.0	27	80	407	5 / 50
443538S	1-3/16	42.0	30.5	30	80	418	5 / 50
443540S	1-1/4	46.0	30.0	32	80	499	1 / 24
443542S	1-5/16	46.0	30.0	34	80	471	1 / 24

Impact Socket Set

4466MP

- Deep impact socket

Stand size (mm) :
415 x 336 x 320

4466SP 1/2"

4466MP / 4466SP

KT NO.	PC.		Contents	Each Q'ty
4466MP	166	4435M	8, 9, 10, 11, 12, 13, 14	8
			15, 16, 17, 18, 19, 20	7
			21, 22, 23, 24	7
			25, 26, 27, 28, 29	6
			30, 32	5
4466SP	110	4435S	5/16, 3/8, 7/16,	8
			1/2, 9/16	8
			5/8, 11/16, 3/4,	7
			13/16, 7/8, 15/16	7
			1, 1-1/16, 1-1/8	6
			1-3/16, 1-1/4	5

Packing NO.	Spec.	Kg	Cuft
4466MP-A	87103	5.87	0.54
4466MP-DA	166 PC. socket content	21.63	0.44
4466MP-DB		23.40	0.37
4466SP-A	87103	6.37	0.67
4466SP-D	110 PC. socket content	28.0	0.47

Impact Thin Wall Socket

KT No. & D1

4835M 1/2"

- DIN 3121



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
483510M	10	16	25.0	20	52	93	10 / 180
483511M	11	17	25.0	20	52	88	10 / 180
483512M	12	18	25.0	20	52	92	10 / 180
483513M	13	19	25.0	20	52	95	10 / 180
483514M	14	21	25.0	20	52	99	10 / 180
483516M	16	23	25.0	20	52	101	8 / 80
483517M	17	25	25.0	23	52	106	8 / 80
483519M	19	27	30.0	23	52	150	8 / 80
483521M	21	29	30.0	25	52	142	8 / 80
483522M	22	31	30.0	25	52	158	8 / 80
483523M	23	32	30.0	26	52	172	8 / 80
483524M	24	33	30.0	26	52	165	8 / 80
483526M	26	36	30.0	27	65	241	6 / 60
483527M	27	37	30.0	27	65	249	6 / 60
483530M	30	41	30.5	27	65	294	5 / 50
483535M	35	46	30.0	32	70	367	1 / 24

Impact Thin Wall Socket

KT No. & D1

4930M

1/2"

- DIN 3121



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
493008M	8	13.2	25	12	78	118	6 / 120
493009M	9	14.0	25	12	78	118	6 / 120
493010M	10	15.5	25	12	80	134	6 / 120
493011M	11	16.7	25	13	80	136	6 / 120
493012M	12	18.0	25	14	80	142	6 / 120
493013M	13	19.0	25	14	80	165	6 / 120
493014M	14	20.5	25	14	80	153	6 / 120
493015M	15	21.5	30	16	80	204	6 / 96
493016M	16	23.0	30	16	80	219	6 / 96
493017M	17	24.5	30	16	80	218	6 / 96
493018M	18	25.5	30	17	80	267	6 / 96
493019M	19	27.0	30	18	80	241	6 / 96
493020M	20	28.0	30	20	80	235	6 / 96
493021M	21	29.0	30	20	80	241	6 / 96
493022M	22	30.5	30	22	80	252	5 / 60
493023M	23	32.0	30	24	80	267	5 / 60
493024M	24	33.0	30	24	80	277	5 / 60
493027M	27	37.0	30	27	80	318	5 / 60
493030M	30	40.5	30	30	80	355	5 / 50
493032M	32	42.5	30	32	80	356	5 / 50
493036M	36	45.5	30	36	80	361	1 / 24

4935M

1/2"

- DIN 3121



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
493510M	10	15.5	25	12	80	133	6 / 120
493511M	11	16.7	25	13	80	134	6 / 120
493512M	12	18.0	25	14	80	140	6 / 120
493513M	13	19.0	25	14	80	142	6 / 120
493514M	14	20.5	25	14	80	142	6 / 120
493516M	16	23.0	30	16	80	201	6 / 96
493517M	17	24.5	30	16	80	211	6 / 96
493519M	19	27.0	30	18	80	222	6 / 96
493521M	21	29.0	30	20	80	230	6 / 96
493522M	22	30.5	30	22	80	261	5 / 60
493523M	23	32.0	30	24	80	273	5 / 60
493524M	24	33.0	30	24	80	285	5 / 60
493526M	26	35.5	30	27	80	303	5 / 60
493527M	27	37.0	30	27	80	335	5 / 60
493530M	30	40.5	30	30	80	376	5 / 50

Impact Thin Wall Socket

4935S

1/2"

- ANSI / ASME B107.2



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
493510S	5/16	13.0	25.0	12	80	129	6 / 120
493512S	3/8	16.0	25.0	12	80	144	6 / 120
493514S	7/16	16.7	25.0	13	80	148	6 / 120
493516S	1/2	19.0	25.0	14	80	159	6 / 120
493518S	9/16	20.5	25.0	14	80	165	6 / 120
493520S	5/8	23.0	25.0	16	80	167	6 / 96
493522S	11/16	24.5	30.0	17	80	235	6 / 96
493524S	3/4	27.0	30.0	18	80	224	6 / 96
493526S	13/16	29.0	30.0	20	80	250	6 / 96
493528S	7/8	30.5	30.0	22	80	260	5 / 60
493530S	15/16	33.0	30.0	24	80	336	5 / 60
493532S	1	34.0	30.0	24	80	356	5 / 60
493534S	1-1/16	37.0	30.0	27	80	405	5 / 60
493536S	1-1/8	39.0	30.5	27	80	355	5 / 50
493538S	1-3/16	40.5	30.0	30	80	417	5 / 50
493540S	1-1/4	42.5	30.0	32	80	389	5 / 50

Extra Thin Wall Impact Socket

4415M

1/2"

- Finishing - phosphate sunk
- For aluminum alloy wheel
- Material - chrome molybdenum alloy steel
- Super thin wall version has less strength than a standard deep one
- DIN 3121

Thin walled design (D1)



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
441517M	17	23.8	25	17	80	163	6 / 96
441519M	19	25.8	30	20	80	214	6 / 96
441521M	21	27.8	30	22	80	221	6 / 96
441522M	22	29.5	30	24	80	238	6 / 96

Wheel Nut Impact Socket

KT No. & D1

- Material - chrome molybdenum alloy steel
- Durable outer sleeve protects polished wheels and lug nuts
- Plastic sleeve thin wall version

4945M 1/2"

15mm 17mm 19mm 21mm 22mm

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
494515M	15	25.0	26.0	25	85	160	5 / 60
494517M	17	27.3	30.0	26	85	213	5 / 60
494519M	19	29.3	30.0	26	85	232	5 / 60
494521M	21	30.9	30.0	26	85	243	5 / 60
494522M	22	32.0	31.5	25	85	266	5 / 60

4955MX 1/2"

- Plastic insert to protect the surface of the wheel rim
- 17MX: Especially for wheel mounting and dismounting on AMG-rims and/or alloy rims with deeply located wheel bolts
- 19MX: Particularly suitable for wheel mounting and assembly on SUVs e.g. PORSCHE Cayenne, Macan, AUDI Q7, Q5, VW Touareg
- 21MX: Particularly for wheel mounting and installation of aluminium rims to HYUNDAI, KIA, TOYOTA, MAZDA, TESLA



17mm 19mm 21mm

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
495517MX	17	27.3	30	25	150	310	2 / 48
495519MX	19	29.3	30	25	150	339	2 / 48
495521MX	21	30.9	30	25	150	413	2 / 48

Double - Ended Impact Socket

4915M



4915S 1/2"

KT NO.	mm / inch	D1 mm	D2 mm	L mm	L1 mm	L2 mm	g	
49151719M	17 x 19	26	28	77	22	26	210	6 / 96
49151921M	19 x 21	26	28	77	23	26	200	6 / 96
49152122M	21 x 22	30	32	77	20	26	310	5 / 60
49152123M	21 x 23	30	32	77	22	26	310	5 / 60
49152426S	3/4" x 13/16"	26	28	77	23	26	200	6 / 96

Impact Star Socket

4575M 1/2"

- For torx external screw
- DIN 3121



KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
457510M	E10	14.0	25.0	7.5	38	68	10 / 200
457512M	E12	15.9	25.0	9.0	38	68	10 / 200
457514M	E14	17.7	25.0	10.0	38	71	10 / 200
457516M	E16	20.0	25.0	11.0	38	75	10 / 200
457518M	E18	22.0	25.0	12.5	38	78	10 / 200
457520M	E20	24.5	30.0	14.0	38	120	10 / 160

Impact Bit Socket

CAUTION

1. Air pressure must not exceed 90PSI (6.3bar)
2. Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

4015M

- Hexagon head
- DIN 3121

4015S 1/2"

KT NO.	mm	L mm	Max. torq N·m	g	
401505M	H5	80	36.0	73	6 / 120
401506M	H6	80	62.4	77	6 / 120
401507M	H7	80	97.0	84	6 / 120
401508M	H8	80	144.0	86	6 / 120
401509M	H9	80	229.0	97	6 / 120
401510M	H10	80	264.0	100	6 / 120
401512M	H12	80	480.0	117	6 / 120
401513M	H13	80	518.0	128	6 / 120
401514M	H14	80	650.0	137	6 / 120
401517M	H17	80	715.0	217	6 / 96
401519M	H19	80	786.0	246	6 / 96

KT NO.	inch	L mm	Max. torq N·m	g	
401508S	1/4	80	93.6	77	6 / 120
401510S	5/16	80	144.0	86	6 / 120
401512S	3/8	80	264.0	100	6 / 120
401516S	1/2	80	518.0	126	6 / 120

Impact Bit Socket

CAUTION

1. Air pressure must not exceed 90PSI (6.3bar)
2. Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

4053

- For torx internal screw
- DIN 3121

4063 1/2"

4053

4063

KT NO.	Size	L mm	g	
405320	T20	60	64	10 / 180
405325	T25	60	65	10 / 180
405327	T27	60	66	10 / 180
405330	T30	60	66	10 / 180
405340	T40	60	68	10 / 180
405345	T45	60	73	10 / 180
405350	T50	60	78	10 / 180
405355	T55	60	87	10 / 180
405360	T60	60	93	10 / 180
405370	T70	60	104	10 /180
406325	T25	100	72	6 / 120
406327	T27	100	76	6 / 120
406330	T30	100	78	6 / 120
406340	T40	100	81	6 / 120
406345	T45	100	88	6 / 120
406350	T50	100	97	6 / 120
406355	T55	100	117	6 / 120
406360	T60	100	137	6 / 120

4055M

- Hexagon head
- DIN 3121

KT NO.	mm	L mm	Max. torq N·m	g	
405504M	H4	60	20.8	64	10 / 180
405505M	H5	60	36.0	67	10 / 180
405506M	H6	60	62.4	71	10 / 180
405507M	H7	60	97.0	74	10 / 180
405508M	H8	60	144.0	79	10 / 180
405510M	H10	60	264.0	87	10 / 180
405512M	H12	60	480.0	98	10 / 180
405513M	H13	60	518.0	104	10 / 180
405514M	H14	60	650.0	110	10 / 180
405516M	H16	60	680.0	125	10 / 180
405517M	H17	60	715.0	178	10 / 80
405518M	H18	60	740.0	186	10 / 80
405519M	H19	60	786.0	195	10 / 80

4055S 1/2"

- Hexagon head
- ANSI / ASME B107.2

KT NO.	inch	L mm	Max. torq N·m	g	
405506S	3/16	60	36.0	65	10 / 180
405508S	1/4	60	93.6	72	10 / 180
405510S	5/16	60	144.0	78	10 / 180
405512S	3/8	60	264.0	86	10 / 180
405514S	7/16	60	420.0	93	10 / 180
405516S	1/2	60	518.0	104	10 / 180

4056M 1/2"

- Spline head
- DIN 3121

KT NO.	Size	L mm	Max. torq N·m	g	
405608M	M 8	60	62.4	73	10 / 180
405610M	M10	60	144.0	81	10 / 180
405612M	M12	60	229.0	88	10 / 180

4065M 1/2"

- Hexagon head
- DIN 3121

KT NO.	mm	L mm	Max. torq N·m	g	
406504M	H4	100	20.8	73	6 / 120
406505M	H5	100	36.0	78	6 / 120
406506M	H6	100	62.4	85	6 / 120
406508M	H8	100	144.0	95	6 / 120
406510M	H10	100	264.0	114	6 / 120
406512M	H12	100	480.0	138	6 / 120
406514M	H14	100	650.0	164	6 / 120

4075M 1/2"

- Hexagon head
- DIN 3121

KT NO.	mm	L mm	Max. torq N·m	g	
407505M	H5	150	36.0	115	6 / 120
407506M	H6	150	62.4	115	6 / 120
407508M	H8	150	144.0	116	6 / 120
407510M	H10	150	264.0	148	6 / 120
407512M	H12	150	480.0	187	6 / 120
407514M	H14	150	650.0	231	6 / 120

Impact Bit Socket KT No. & D1

CAUTION

1. Air pressure must not exceed 90PSI (6.3bar)
2. Adjust your air tool to its lowest torque output,should this torque level not be enough, increase it gradually

1740

409616M 1/2"

- Hex bit & bit holder
- DIN 3121

1740 409616M

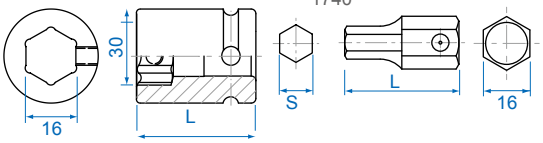

KT NO.	S mm	L mm	Max. torq N·m	g	
174010H	H10	40	264.0	46	20 / 400
174012H	H12	40	480.0	52	20 / 400
174014H	H14	40	684.0	60	20 / 200
174017H	H17	40	680.0	73	20 / 200
174019H	H19	40	680.0	80	20 / 200
174022H	H22	40	680.0	97	12 / 120
409616M	16	38	680.0	145	10 / 160

Impact Accessory

4147 1/2"

- Bit holder
- DIN 3121

KT NO.	Size	Overall length mm	g	
414708S	1/4"	48	73	12 / 216
414710S	5/16"	48	79	12 / 216
414710M	10 mm	48	79	12 / 216

414A08S 1/2"

- Quick-release
- Bit holder
- DIN 3121

KT NO.	Size	Overall length mm	g	
414A08S	1/4"	50	93.6	10 / 180

4260P 1/2"

- Extension bar
- DIN 3121

KT NO.	Overall length inch	mm	g	
4260-03P	3	75	198	4 / 80
4260-04P	4	100	240	4 / 80
4260-05P	5	125	278	2 / 40
4260-06P	6	150	324	4 / 80
4260-08P	8	200	402	4 / 48
4260-10P	10	250	487	4 / 48
4260-12P	12	300	573	2 / 40
4260-16P	16	400	746	2 / 20

Impact Accessory & Set

4269 1/2"

- Torque extension bar
- Color coded and engraved with N·m and lbf·ft setting
- Helps to eliminate overtorqued lug nut

4269-08-90
4269-08-A0
4269-08-B0
4269-08-C0
4269-08-D5
4269-08-F0
4269-08-G0
4269-08-H5
4269-08-J0
4269-08-K0

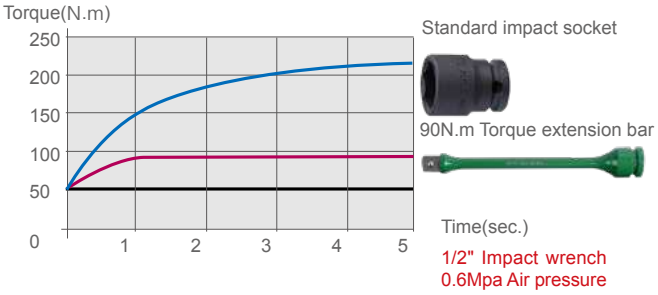

How to use torque extension bar

1.Use with 1/2"DR. impact wrench, don't use by hand.
2.Set air pressure 0.6 MPa(90 PSI) and adjust torque value between 190 N.m and 210 N.m.
3.Select suitable torque extension bar according to wheel nut size and indicated tightening torque.
4.Attach the torque extension bar with socket to impact wrench and apply load.
5.Check the actual tightening torque value by torque wrench.
6.Adjust air pressure or torque value according to the result of above.
7.Tight other wheel nuts in diagonal order.

KT NO.	Color	Max. torq N·m	lbf·ft	Overall length inch	mm	g
4269-08-90		90	65	7-11/16	195	192
4269-08-A0		100	75	7-11/16	195	201
4269-08-B0		110	80	7-11/16	195	217
4269-08-C0		120	90	7-11/16	195	224
4269-08-D5		135	100	7-11/16	195	238
4269-08-F0		150	110	7-11/16	195	263
4269-08-G0		160	120	7-11/16	195	304
4269-08-H5		175	130	7-11/16	195	284
4269-08-J0		190	140	7-11/16	195	331
4269-08-K0		200	150	7-11/16	195	344

Impact Accessory & Set

4481PP1 1/2"

- Torque extension bar set

10 PC.

Contents		Kg 2.58	1 / 6
	4269-08-90	90 N·m	
	4269-08-A0	100 N·m	
	4269-08-B0	110 N·m	
	4269-08-C0	120 N·m	
	4269-08-D5	135 N·m	
	4269-08-F0	150 N·m	
	4269-08-G0	160 N·m	
	4269-08-H5	175 N·m	
	4269-08-J0	190 N·m	
	4269-08-K0	200 N·m	

9TE41

- Hook for torque extension bar
- Groove capacity : 22 mm

Ø22mm

KT NO.	Overall length (mm)	g	
9TE41	311	196.4	1 / 24

Impact Accessory KT No. & D1

4796P 1/2"

- Universal joint
- DIN 3121



KT NO.	Overall length inch	mm	D mm	g	
4796P	2-3/8	59	25	124	6 / 96

4797P 1/2"

- Universal joint
- DIN 3121



KT NO.	Overall length inch	mm	D mm	g	
4797P	2-1/2	65	29.1	168	6 / 96

4798P 1/2"

- Universal joint



KT NO.	Overall length inch	mm	D mm	D1 mm	g	
4798P	3	74	29.1	29.1	213	6 / 96

4799P 1/2"

- Universal joint
- Durable pinless hex ball locking design
- DIN 3121



KT NO.	Overall length inch	mm	D mm	g	
4799P	2-3/8	60	30	170	6 / 96

4873P 1/2"

- Adapter
- Convert to 3/8"
- 4873P ⟶ Max. torque : 202 N·m
- DIN 3121



KT NO.	Spec.	D mm	g	
4873P	1/2"F x 3/8"M	25	66	10 / 160

4863P / 4866P 1/2"

- Adapter
- Convert to 3/8", 3/4" drive
- 4863P ⟶ Max. torque : 202 N·m
- DIN 3121



4863P & 4866P

KT NO.	Spec.	g	
4863P	1/2"F x 3/8"M	97	10 / 160
4866P	1/2"F x 3/4"M	147	8 / 160

90401 / 90402 1/2"

- Locking ring
- High tensile rubber material

90601 / 90602 1/2"

- Locking pin
- Chrome vanadium steel
- DIN 3129



90401
90402



90601
90602

KT NO.	Type	Ø	d / ℓ	Applied to socket sizes
90401	ring	3.5	19	4535M (8~14mm) 4535S (15/16"~9/16") 4435M (8~14mm) 4435S (15/16"~9/16") 4015M (5~14mm) 4015S (1/4"~1/2") 4055M (4~14mm) 4055S (3/16"~1/2") 4935M (10~14mm) 4935S (7/16"~9/16") 4415M (17mm) 4575 (E10~E18)
90601	pin	3.0	20	4835M (10~17mm) 4530M (8~14mm) 414A08S.4053.4063.4065.4075.4873.4015 4147.4055.4056
90402	ring	3.5	23	4535M (15~46mm) 4535S (11/16"~1-1/4") 4435M (15~46mm) 4435S (5/8"~1-1/4") 4935M (16~30mm) 4935S (11/16"~1-1/4") 4015M (17.19mm) 4415M (19.21mm) 4530M (15~36mm)
90602	pin	3.0	25	4575M (E20) 4835M (19~30mm) 4260.4796.4797.4863.4873.4866

Impact Socket Rail Set

4423MP 1/2"

- Thin wall version

3 PC.

KT NO.	Contents	Kg 0.45	48
4423MP	4835M	17, 19, 21	

7411PP 1/2"

11 PC.

KT NO.	Contents	Kg 0.76	4 / 32
7411PP	3575M	E5, E6, E7, E8	
	4575M	E10, E12, E14, E16, E18, E20	
	4863P	1/2"F x 3/8"M	

4421MP1 1/2"

11 PC.

KT NO.	Contents	Kg 1.69	1 / 12
4421MP1	3575M	10, 11, 13, 17, 19, 22, 24, 27, 29, 30, 32	

Impact Socket Set

4408MP 1/2"

- Metal case size (mm) :
- 270 x 73 x 46 (0.032 cuft)

8 PC.

KT NO.	Contents	Kg 1.3	1 / 20
4408MP	4535M	10, 12, 13, 14, 17, 19, 21, 24	

Impact Socket Set

4408SP 1/2"

- Metal case size (mm) :
- 270 x 73 x 46 (0.032 cuft)

8 PC.

KT NO.	Contents	Kg 1.3	1 / 20
4408SP	4535S	3/8, 7/16, 1/2, 9/16, 11/16, 3/4, 13/16, 15/16	

Impact Socket Set

4412MP 1/2"

- Metal case size (mm) :
- 224 x 94 x 40 (0.03 cuft)

11 PC.

KT NO.	Contents		1.61	1 / 8
4412MP	○	4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21	

4414MP 4414SP 1/2"

- Metal case size (mm) :
- 270 x 100 x 49 (0.047 cuft)

14 PC.

4414MP

4414SP

KT NO.	Contents			
4414MP	○	4535M	10, 11, 12, 13, 14, 15, 16, 17,18, 19, 21, 22, 24, 27	2.25	1 / 8
4414SP	○	4535S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	2.4	

4419MP 1/2"

- Metal case size (mm) :
- 445 x 135 x 50 (0.021 cuft)

19 PC.

KT NO.	Contents		2.7	1 / 6
4419MP	○	4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 26, 27, 30, 32	
		4260-05P		

4410MP 4410MP01

4410SP 1/2"

- Metal case size (mm) :
- 246 x 103 x 38 (0.034 cuft)

8 PC.

4410MP / 4410MP01

8 PC.

4410SP

KT NO.	Contents		2.3	1 /12
4410MP	○	4435M	12, 13, 14, 17, 19, 21, 22, 23	
4410MP01	○	4435M	12, 13, 14, 17, 19, 21, 22, 24	
4410SP	○	4435S	1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16	

4413MP 1/2"

- Metal case size (mm) :
- 270 x 73 x 46 (0.032 cuft)

8 PC.

KT NO.	Contents		1.37	1 / 20
4413MP	○	4835M	10, 12, 13, 14, 17, 19, 21, 24	

4416SP 1/2"

- Metal case size (mm) :
- 445 x 135 x 50 (0.021 cuft)

14 PC.

KT NO.	Contents		4.8	1 / 6
4416SP	○	4535S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	

4415MP

- Metal case size (mm) :
- 445 x 135 x 50 (0.021 cuft)

15 PC.

4415MP

4415MP03 1/2"

15 PC.

4415MP03

KT NO.	Contents		Kg	
4415MP	4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 24, 26, 29, 32	4.9	1 / 6
4415MP03		10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32	5.15	1 / 6

4815MP04

- Metal case size (mm) :
- 445 x 135 x 50 (0.021 cuft)

4815MP05 1/2"

15 PC.

4815MP04 / 4815MP05

KT NO.	Contents		Kg	
4815MP04	4430M	10, 12, 13, 14, 15, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	5.1	1 / 6
4815MP05		8, 9, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24	4.3	1 / 6

Wheel Nut Impact Socket Set

4405MXL 1/2"

- Thin wall impact socket set with plastic sleeve
- Durable outer sleeve protects polished wheels and lug nuts
- Blow case size (mm) :
- 206 x 147 x 50 (0.053 cuft)

3 PC.

Contents — Kg 1.20 — 1 / 20

	495517MX	17 mm, 150mmL
	495519MX	19 mm, 150mmL
	495521MX	21 mm, 150mmL

44906MP 1/2"

- Wheel nut impact socket
- Torque extension bar
- Metal case size (mm) :
- 296 x 130 x 41 (0.056 cuft)

6 PC.

Contents — Kg 2.13 — 1 / 10

	494517M	17 mm
	494519M	19 mm
	494521M	21 mm
	4269-08-90	90 N·m
	4269-08-B0	110 N·m
	4269-08-D5	135 N·m

Wheel Nut Impact Socket Set

44905MP 1/2"

- Thin wall impact socket set with plastic sleeve
- Durable outer sleeve protects polished wheels and lug nuts
- Blow case size (mm) :
- 149 x 132 x 45 (0.031 cuft)

3 PC.

0.89 / 1 / 16

KT NO.	Contents	
44905MP	494517M	17 mm
	494519M	19 mm
	494521M	21 mm

44904MP01 / 44904MP02 1/2"

- Thin wall impact socket set with plastic sleeve
- Color coded, sizes are easy to recognize
- Material: Chrome molybdenum alloy steel
- The design of protective sleeve is able to reduce the wear of sheath and avoid damaging the aluminum alloy rims

4 PC.

44904MP01



Blow case size (mm) :
160 x 135 x 50 (0.038 cuft)

1.12 / 1 / 20

KT NO.	Contents	DR.	Applicable vehicle	Size mm	L mm
44904MP01	494515M	1/2"	Smart	15	85.0
	494517M	1/2"	-	17	85.0
	494519M	1/2"	-	19	85.5
	494521M	1/2"	-	21	85.5

4 PC.

44904MP02



Blow case size (mm) :
160 x 135 x 50 (0.038 cuft)

1.12 / 1 / 20

KT NO.	Contents	DR.	Applicable vehicle	Size mm	L mm
44904MP02	494517M	1/2"	-	15	85.0
	494519M	1/2"	-	17	85.0
	494521M	1/2"	-	19	85.5
	494522M	1/2"	Opel	22	85.5

44904MP 1/2"

- Material - chrome molybdenum alloy steel
- Idling type protective sleeve design, reduce sheath wear and avoid damage to aluminum alloy rims
- With color management, easy to recognize the sizes
- Blow case size (mm) :
- 160 x 135 x 50 (0.038 cuft)

4 PC.

1.06 / 1 / 20



KT NO.	Contents	DR.	Applicable vehicle	Size mm	L mm
44904MP	494515M	1/2"	Smart	15	85.0
	494522M	1/2"	Opel	22	85.0
	9BW4501	1/2"	Mercedes Benz	17	85.5
	9BW4502	1/2"	Hyundai/Kia	21	85.5

44907MP 1/2"

7 PC.

2.13 / 1 /12

KT NO.	Contents	DR.	Applicable vehicle	Size mm	L mm
44907MP	494515M	1/2"	Smart	15	85.0
	494517M	1/2"	-	17	85.0
	494519M	1/2"	-	19	85.5
	494521M	1/2"	-	21	85.5
	494522M	1/2"	Opel	22	85
	9BW4501	1/2"	Mercedes Benz	17	85
	9BW4502	1/2"	Hyundai/Kia	21	85

Impact Bit Socket Set

4407MP 1/2"

- For hexagon head screw
- 60mmL
- Metal case size (mm) :
- 198 x 105 x 32 (0.023 cuft)

7 PC.

Contents — 0.94 kg / 1 / 20

◉	4055M	H4, H5, H6, H8, H10, H12, H14

4417PP 1/2"

- For torx internal screw
- 60mmL
- Metal case size (mm) :
- 198 x 105 x 32 (0.023 cuft)

7 PC.

Contents — 0.94 kg / 1 / 20

✱	4053	T25, T30, T40, T45, T50, T55, T60

4457MP 1/2"

- For hexagon head screw
- 100mmL
- Metal case size (mm) :
- 244 x 118 x 37 (0.038 cuft)

7 PC.

Contents — 1.44 kg / 1 / 18

◉	4065M	H4, H5, H6, H8, H10, H12, H14

4467PP 1/2"

- For torx internal screw
- 100mmL
- Metal case size (mm) :
- 244 x 118 x 37 (0.038 cuft)

7 PC.

Contents — 1.25 kg / 1 / 18

✱	4063	T25, T30, T40, T45, T50, T55, T60

4476MP 1/2"

- For hexagon head screw
- 150mmL
- Metal case size (mm) :
- 244 x 118 x 37(0.038 cuft)

6 PC.

Contents — 1.47 kg / 1 / 18

◉	4075M	H5, H6, H8, H10, H12, H14

4418MP 1/2"

- For hexagon head screw
- 60mmL
- Metal case size (mm) :
- 270 x 73 x 46 (0.032 cuft)

8 PC.

Contents — 1.34 kg / 1 / 20

◉	4055M	H5, H6, H8, H10, H12, H14, H17, H19

Standard Impact Socket

KT No. & D1

6510M 3/4"

- Lightweight type
- DIN 3121



KT NO.	○ mm	D1 mm	D2 mm	ℓ mm	L mm	g	
651017M	17	29.0	38	10	50	225	8 / 96
651018M	18	30.0	38	10	50	230	8 / 96
651019M	19	32.0	38	10	50	240	8 / 96
651021M	21	35.0	38	13	50	252	8 / 96
651022M	22	36.0	38	13	50	255	8 / 96
651023M	23	37.0	38	15	50	256	8 / 96
651024M	24	38.0	38	15	50	265	8 / 96
651026M	26	38.0	38	15	53	257	6 / 48
651027M	27	42.0	38	18	53	299	6 / 48
651028M	28	44.0	38	18	53	325	6 / 48
651029M	29	45.0	38	18	53	330	6 / 48
651030M	30	46.0	38	20	53	337	6 / 48

Standard Impact Socket

KT No. & D1

6515M

3/4"

- Lightweight type
- DIN 3121



KT NO.	○ mm	D1 mm	D2 mm	ℓ mm	L mm	g	
651514M	14	25.0	38	10	50	206	8 / 96
651515M	15	26.0	38	10	50	210	8 / 96
651516M	16	27.5	38	10	50	216	8 / 96
651517M	17	29.0	38	10	50	228	8 / 96
651518M	18	30.0	38	10	50	232	8 / 96
651519M	19	32.0	38	10	50	241	8 / 96
651521M	21	35.0	38	13	50	254	8 / 96
651522M	22	36.0	38	13	50	260	8 / 96
651523M	23	37.0	38	15	50	261	8 / 96
651524M	24	38.0	38	15	50	265	8 / 96
651525M	25	38.0	38	15	53	275	8 / 96
651526M	26	38.0	38	15	53	259	6 / 48
651527M	27	42.0	38	18	53	311	6 / 48
651528M	28	44.0	38	18	53	332	6 / 48
651529M	29	45.0	38	18	53	345	6 / 48
651530M	30	46.0	38	20	53	348	6 / 48

6530M

3/4"

- DIN 3129, ISO 2725-2



KT NO.	○ mm	D1 mm	D2 mm	ℓ mm	L mm	g	
653017M	17	29.0	44	10	50	319	6 / 48
653019M	19	32.0	44	10	50	322	6 / 48
653021M	21	35.0	44	13	50	333	6 / 48
653022M	22	36.0	44	13	50	335	6 / 48
653023M	23	37.0	44	15	50	335	6 / 48
653024M	24	38.0	44	15	50	338	6 / 48
653026M	26	40.0	44	15	53	360	6 / 48
653027M	27	42.0	44	18	53	361	6 / 48
653028M	28	44.0	44	18	53	384	6 / 48
653029M	29	45.0	44	18	53	387	6 / 48
653030M	30	46.0	44	20	53	390	6 / 48
653032M	32	48.0	44	20	57	440	6 / 36
653033M	33	50.0	44	20	57	476	6 / 36
653034M	34	51.0	44	22	57	479	6 / 36
653035M	35	52.0	44	22	57	488	6 / 36
653036M	36	53.0	44	22	57	489	6 / 36
653038M	38	56.0	44	22	57	534	4 / 32
653040M	40	58.0	44	22	58	577	4 / 32
653041M	41	59.0	44	24	58	573	4 / 32
653042M	42	61.0	44	24	58	610	2 / 24
653046M	46	66.0	44	24	62	723	2 / 24
653063M	63	83.5	54	40	80	1352	1 / 12
653065M	65	85.5	54	43	80	1381	1 / 12
653070M	70	92.0	54	45	83	1445	1 / 12

6535M

3/4"

- DIN 3121



KT NO.	○ mm	D1 mm	D2 mm	ℓ mm	L mm	g	
653513M	13	22.0	38	16	50	205	8 / 96
653517M	17	29.0	44	10	50	309	6 / 48
653518M	18	30.0	44	10	50	314	6 / 48
653519M	19	32.0	44	10	50	323	6 / 48
653521M	21	35.0	44	13	50	336	6 / 48
653522M	22	36.0	44	13	50	340	6 / 48
653523M	23	37.0	44	15	50	339	6 / 48
653524M	24	38.0	44	15	50	343	6 / 48
653526M	26	40.0	44	15	53	364	6 / 48
653527M	27	42.0	44	18	53	379	6 / 48
653528M	28	44.0	44	18	53	390	6 / 48
653529M	29	45.0	44	18	53	399	6 / 48
653530M	30	46.0	44	20	53	349	6 / 48
653531M	31	47.0	44	20	53	413	6 / 48
653532M	32	48.0	44	20	57	456	6 / 36
653533M	33	50.0	44	20	57	481	6 / 36
653534M	34	51.0	44	22	57	488	6 / 36
653535M	35	52.0	44	22	57	499	6 / 36
653536M	36	53.0	44	22	57	508	6 / 36
653538M	38	56.0	44	22	57	553	4 / 32
653540M	40	58.0	44	22	58	590	4 / 32
653541M	41	59.0	44	24	58	584	4 / 32
653542M	42	61.0	44	24	58	622	2 / 24
653543M	43	62.0	44	24	58	638	2 / 24
653544M	44	64.0	44	24	62	706	2 / 24
653545M	45	64.0	44	24	62	704	2 / 24
653546M	46	66.0	44	24	62	730	2 / 24
653548M	48	68.0	44	26	65	807	2 / 24
653550M	50	71.0	44	26	65	870	1 / 20
653552M	52	74.0	54	30	68	1083	1 / 20
653554M	54	76.0	54	30	68	1151	1 / 20
653555M	55	77.0	54	30	70	1196	1 / 20
653557M	57	79.0	54	32	70	1211	1 / 20
653558M	58	81.0	54	32	70	1275	1 / 20
653560M	60	84.0	54	32	70	1424	1 / 20
653563M	63	83.5	54	40	80	1317	1 / 12
653565M	65	85.5	54	43	80	1324	1 / 12
653570M	70	92.0	54	45	83	1571	1 / 12

Standard Impact Socket

KT No. & D1

6535S

3/4"

- ANSI / ASME B107.2

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
653522S	11/16	29	38	10	50	226	8 / 96
653524S	3/4	32	38	10	50	240	8 / 96
653526S	13/16	35	38	13	50	254	8 / 96
653528S	7/8	36	38	13	50	259	8 / 96
653530S	15/16	37	38	15	50	256	8 / 96
653532S	1	38	38	15	53	274	8 / 96
653534S	1-1/16	42	40	18	53	328	6 / 48
653536S	1-1/8	44.7	40	18	53	360	6 / 48
653538S	1-3/16	46	40	20	53	368	6 / 48
653540S	1-1/4	48	44	20	57	459	6 / 36
653542S	1-5/16	50	44	20	57	485	6 / 36
653544S	1-3/8	52	44	22	57	495	6 / 36
653546S	1-7/16	54	44	22	57	526	6 / 36
653548S	1-1/2	56	44	22	57	545	4 / 32
653550S	1-9/16	58	44	22	58	596	4 / 32
653552S	1-5/8	59	44	24	58	588	4 / 32
653554S	1-11/16	63.5	44	25	58	681	2 / 24



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
653556S	1-3/4	64	44	25	62	710	2 / 24
653558S	1-13/16	66	44	25.5	62	718	2 / 24
653560S	1-7/8	68	44	27	65	806	2 / 24
653562S	1-15/16	70	44	27	65	951	1 / 20
653564S	2	72	54	28	68	1048	1 / 20
653566S	2-1/16	74	54	30	68	1078	1 / 20
653568S	2-1/8	76	54	30	68	1142	1 / 20
653570S	2-3/16	77	54	30.5	70	1141	1 / 20
653572S	2-1/4	79	54	32.5	70	1178	1 / 20
653574S	2-5/16	81	54	32.5	70	1266	1 / 20
653576S	2-3/8	84	54	33.5	70	1346	1 / 20

Deep Impact Socket

6435M

3/4"

- DIN 3121



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
643519M	19	32	44	16	90	546	1 / 24
643521M	21	35	44	18	90	567	1 / 24
643522M	22	36	44	18	90	578	1 / 24
643523M	23	37	44	23	90	596	1 / 24
643524M	24	38	44	23	90	598	1 / 24
643525M	25	40	44	25	90	630	1 / 24
643526M	26	40	44	25	90	600	1 / 24
643527M	27	42	44	27	90	625	1 / 24
643528M	28	44	44	27	90	666	1 / 24
643529M	29	45	44	27	90	666	1 / 24
643530M	30	46	44	27	90	693	1 / 24
643532M	32	48	44	30	90	727	1 / 24
643533M	33	50	44	30	90	792	1 / 24
643534M	34	51	44	32	90	795	1 / 24
643535M	35	52	44	32	90	811	1 / 24
643536M	36	53	44	32	90	818	1 / 24
643538M	38	56	44	34	90	882	1 / 24
643540M	40	58	44	34	90	926	1 / 24
643541M	41	59	44	34	90	936	1 / 24
643542M	42	61	44	36	95	1047	1 / 24
643543M	43	62	44	38	95	1092	1 / 10
643544M	44	64	44	38	95	1159	1 / 10
643546M	46	66	44	38	95	1239	1 / 10
643548M	48	68	44	40	95	1218	1 / 10
643550M	50	71	44	40	95	1317	1 / 10
643555M	55	77	54	45	100	1799	1 / 10
643560M	60	84.5	54	50	100	2042	1 / 6
643565M	65	86.5	54	54	100	1904	1 / 6

6435S

3/4"

- ANSI / ASME B107.2



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
643524S	3/4	32	38	16	90	432	1 / 24
643526S	13/16	35	38	18	90	473	1 / 24
643528S	7/8	36	38	18	90	495	1 / 24
643530S	15/16	37	38	23	90	495	1 / 24
643532S	1	38	38	25	90	478	1 / 24
643534S	1-1/16	42	44	27	90	624	1 / 24
643536S	1-1/8	44.7	44	27	90	665	1 / 24
643538S	1-3/16	46	44	27	90	692	1 / 24
643540S	1-1/4	48	44	30	90	725	1 / 24
643542S	1-5/16	50	44	30	90	782	1 / 24
643544S	1-3/8	52	44	32	90	807	1 / 24
643546S	1-7/16	54	44	32	90	845	1 / 24
643548S	1-1/2	56	44	34	90	874	1 / 24
643550S	1-9/16	58	44	34	90	923	1 / 24
643552S	1-5/8	59	44	34	90	924	1 / 24
643554S	1-11/16	63.5	44	38	95	1181	1 / 10
643556S	1-3/4	64	44	38	95	1139	1 / 10
643558S	1-13/16	66	44	38	95	1212	1 / 10
643560S	1-7/8	68	54	40	95	1354	1 / 10
643562S	1-15/16	70	54	40	95	1256	1 / 10
643564S	2	72	54	40	95	1476	1 / 10

Thin Wall Impact Socket

KT No. & D1

6835M

3/4"

- DIN 3121



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
683517M	17	28.0	44	16	60	346	6 / 48
683519M	19	30.0	44	16	60	351	6 / 48
683521M	21	33.0	44	18	60	369	6 / 48
683522M	22	34.0	44	18	60	372	6 / 48
683523M	23	35.0	44	23	60	373	6 / 48
683524M	24	36.5	44	23	60	382	6 / 48
683526M	26	39.0	44	25	80	397	1 / 24
683527M	27	40.0	44	26	80	424	1 / 24
683529M	29	43.0	44	26	80	455	1 / 24
683530M	30	44.0	44	26	80	555	1 / 24
683532M	32	46.5	44	26	80	512	1 / 24

6935M

3/4"

- DIN 3121



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
693519M	19	30.0	44	16	90	513	1 / 24
693521M	21	33.0	44	18	90	546	1 / 24
693522M	22	34.0	44	18	90	541	1 / 24
693523M	23	35.0	44	23	90	519	1 / 24
693524M	24	36.5	44	23	90	573	1 / 24
693526M	26	39.0	44	25	90	578	1 / 24
693527M	27	40.0	44	27	90	574	1 / 24
693529M	29	43.0	44	27	90	578	1 / 24
693530M	30	44.0	44	27	90	622	1 / 24
693532M	32	46.5	44	30	90	683	1 / 24

6935S

3/4"

- ANSI / ASME B107.2



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
693524S	3/4	30.0	38	16	90	370	1 / 24
693526S	13/16	33.0	38	18	90	380	1 / 24
693528S	7/8	34.0	38	18	90	385	1 / 24
693530S	15/16	36.5	38	23	90	415	1 / 24
693532S	1	38.0	38	23	90	500	1 / 24
693534S	1-1/16	40.0	44	25	90	654	1 / 24
693536S	1-1/8	43.0	44	25	90	680	1 / 24
693538S	1-3/16	44.0	44	27	90	684	1 / 24
693540S	1-1/4	46.5	44	30	90	733	1 / 24

Impact Star Socket

6575M

3/4"

- For torx external screw
- DIN 3121



KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
657524M	E24	32.5	44.0	17.0	50	334	6 / 48
657526M	E26	35.0	44.0	19.0	60	402	6 / 48
657528M	E28	36.5	44.0	25.5	60	401	6 / 48
657530M	E30	37.5	44.0	27.0	65	428	1 / 24
657532M	E32	39.5	44.0	29.0	65	447	1 / 24

Deep Impact Star Socket

6475M

3/4"

- For torx external screw
- DIN 3121
- For the operation of cylinder head bolts
- E18 application MAN M 2000 / Bus with D 08 engine
- E20 application MAN F 2000 / F 90/ F 8/ Bus with D 25 and D 28 engines
- E24 application MAN D20 engine



KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
647518M	E18	26.5	44.0	12.5	110	592	1 / 10
647520M	E20	29.0	44.0	14.0	110	627	1 / 10
647522M	E22	31.0	44.0	15.0	110	662	1 / 10
647524M	E24	32.5	44.0	17.0	110	693	1 / 10

Rear Wheel Socket

KT No. & D1

6514M

3/4"

- 4 points
- DIN 3121



KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
651417M	17	39.8	34	28	53	353	1 / 24
651419M	19	39.8	34	28	53	339	1 / 24
651420M	20	41.8	36	28	53	381	1 / 24
651421M	21	41.8	36	28	53	369	1 / 24

Impact Bit Socket KT No. & D1

6015M 3/4"

- Hexagon head
- DIN 3121

KT NO.	mm	L mm	Max. torq N·m	g	
601514M	H14	87	684	310	2 / 48
601517M	H17	87	1136	342	2 / 48
601519M	H19	87	1577	365	2 / 48
601521M	H21	87	2134	508	1 / 24
601522M	H22	87	2436	524	1 / 24
601524M	H24	87	2436	546	1 / 24
601527M	H27	87	2436	597	1 / 24
601530M	H30	87	2436	710	1 / 24
601532M	H32	87	2436	750	1 / 24

609616MxxH / 609622MxxH 3/4"

- DIN 3121



609616MxxH

609622MxxH

KT NO.	S mm	mm	L (mm)	Max. torq N·m	g	
609616M10H	H10	16	77	264	416	4 / 40
609616M12H	H12	16	77	480	422	4 / 40
609616M14H	H14	16	77	684	430	4 / 40
609616M17H	H17	16	77	880	443	4 / 40
609616M19H	H19	16	77	880	450	4 / 40
609616M22H	H22	16	77	880	473	4 / 40
609622M19H	H19	22	93	1577	670	1 / 24
609622M22H	H22	22	93	2436	692	1 / 24
609622M24H	H24	22	93	2436	706	1 / 24
609622M27H	H27	22	93	2436	730	1 / 24
609622M30H	H30	22	93	2436	744	1 / 24
609622M32H	H32	22	93	2436	783	1 / 24

1740 / 609616M 3/4"

- Hex bit & bit holder
- DIN 3121

1740

609616M



KT NO.	S mm	L mm	Max. torq N·m	g	
174010H	H10	40	264	46	20 / 400
174012H	H12	40	480	55	20 / 400
174014H	H14	40	684	61	20 / 200
174017H	H17	40	880	72	20 / 200
174019H	H19	40	880	83	20 / 200
174022H	H22	40	880	102	12 / 120
609616M	16	52	-	370	6 / 48

1954 / 609622M 3/4"

- Hex bit & bit holder
- DIN 3121

1954XXH

609622M



195404R



KT NO.	S mm	L mm	Max. torq N·m	g	
195419H	H19	54.5	1577	159	12 / 120
195422H	H22	54.5	2436	176	12 / 120
195424H	H24	54.5	2436	191	10 / 100
195427H	H27	54.5	2436	217	10 / 100
195430H	H30	54.5	2436	248	6 / 60
195432H	H32	54.5	2436	276	6 / 60
609622M	22	60.0	-	530	6 / 48
195404R	1/2"M	54.5	-	133	12 / 120

Impact Accessory

6797P 3/4"

- Universal joint
- DIN 3121



6797P

KT NO.	Overall length inch	mm	D mm	g	
6797P	4-1/2	114	44	738	2 / 20

6798P 3/4"

- Universal joint
- DIN 3121



6798P

KT NO.	Overall length inch	mm	D mm	D1 mm	g	
6798P	4-1/4	108	44	44	749	2 / 20

6260 | 6260P 3/4"

- Extension bar
- DIN 3121

6260

6260P

KT NO.	Overall length inch	Overall length mm	D mm	g /
6260-04	4	100	566	2 / 20
6260-07	7	175	864	2 / 20
6260-10	10	250	1145	1 / 16
6260-13	13	330	1450	1 / 10
6260-04P	4	100	566	2 / 20
6260-07P	7	175	864	2 / 20
6260-10P	10	250	1145	1 / 16
6260-13P	13	330	1450	1 / 10

90403 | 90404 | 90405 3/4"

- Locking ring
- High tensile rubber material

90603 | 90604 | 90607 3/4"

- Locking pin
- Chrome vanadium steel
- DIN 3129



90603 / 90604 / 90607



90403 / 90404 /90405

KT NO.	Type	Ø	d / ℓ	Applied to socket sizes
90403	ring	3.5	33	6015M (14~19mm) 6435S (3/4"~1") 6510M (17~30mm) 6535S (11/16"~1-3/16")
90607	pin	3.0	30	6515M (17~30mm) 6935S (3/4"~1") 6874
90404	ring	5.5	37	6535M (17~46mm) 6535S (1-1/4" ~1-13/16") 6435M (19~46mm) 6435S (1-1/16"~1-13/16")
90603	pin	4.0	35	6935M (19~32mm) 6935S (1-1/16"~1-1/4") 6015M (21~27mm) 6260.6797.6798.6864 6530M (17~46mm) 6868 6835M (17~32mm) 609616M.609622M
90405	ring	5.5	44	6535M (48~65mm) 6535S (1-7/8" ~ 2-3/8")
90604	pin	4.0	45	6435M (48~50mm) 6435S (1-7/8" ~ 2")

6864 | 6864P

6868 | 6868P 3/4"

- Adapter
- Convert to 1/2" drive
- 6864 → Max. torque : 512 N·m
- DIN 3121



6864 / 6864P
6868 / 6868P

6864 &6868

6864P &6868P

KT NO.	Spec.	D (mm)	g	/
6864	3/4"F x 1/2"M	44	311	6 / 48
6868	3/4"F x 1"M	44	445	6 / 48
6864P	3/4"F x 1/2"M	44	311	6 / 48
6868P	3/4"F x 1"M	44	445	6 / 48

6874 | 6874P 3/4"

- Adapter
- Convert to 1/2" drive
- 6874 → Max. torque : 512 N·m
- DIN 3121



6874 / 6874P

6874

6874P

KT NO.	Spec.	D (mm)	g	/
6874	3/4"F x 1/2"M	38	233	6 / 48
6874P	3/4"F x 1/2"M	38	233	6 / 48

786P06 1/4" 3/8" 1/2" 3/4"

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage

6 PC. | CR-MO | DIN 3121

KT NO.	Contents	Kg 1.31	/ 1 / 20
786P06	M 3/8 DR. / F 1/4 DR. 2863P	M 3/8 DR. / F 1/2 DR. 4863P	
	1/4 DR. / 3/8 DR. 2862P	3/4 DR. / 1/2 DR. 4866P	
	1/2 DR. / 3/8 DR. 2864P	1/2 DR. / 3/4 DR. 4864P	

Impact Bit Socket Set

6411MP 3/4"

- Metal case size (mm) :
- 270 x 100 x 49 (0.048 cuft)

11 PC.

KT NO.	Contents		2.77 / 1 / 8
6411MP	6096M	16, 22	
	1740	H10, H12, H14, H17	
	1954	H19, H22, H24, H27, H32	

Impact Socket Set

6408MP 6408MP10 6408SP10 3/4"

- Metal case size (mm) :
- 241 x 124 x 68 (0.07 cuft)

KT NO.		Contents		
6408MP	6535M	19, 22, 24, 27, 30, 32, 36, 38	3.9	1 / 6
6408MP10	6515M	19, 22, 24, 27, 30	3.9	
	6535M	32, 36, 38		
6408SP10	6535S	3/4, 7/8, 15/16, 1-1/16, 1-3/16, 1-1/4, 1-7/16, 1-1/2	3.8	

8 PC.

6408MP / 6408MP10 / 6408SP10

6409MP 6409MP03 6409SP10 3/4"

- Metal case size (mm) :
- 445 x 100 x 65 (0.10 cuft)

8 PC.

6409MP / 6409MP03

6409SP10

KT NO.		Contents		
6409MP	6535M	26, 29, 30, 32, 34, 35, 36, 38	4.7	1 / 2
6409MP03	6535M	21, 22, 24, 27, 30, 32, 36, 41	4.7	
6409SP10	6535S	1, 1-1/16, 1-1/8, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2	4.8	

6410MP 6410SP 3/4"

- Metal case size (mm) :
- 445 x 100 x 65 (0.10 cuft)

8 PC.

6410MP

6410SP

KT NO.		Contents		
6410MP	6435M	26, 29, 30, 32, 34, 35, 36, 38	7.1	1/2
6410SP	6435S	1, 1-1/16, 1-1/8, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2		

6424MP 3/4"

- Blow case size (mm) : 422 x 360 x 90 (0.48 cuft)

14 PC.

KT NO.	Contents			
6408MP	6535M	24, 27, 30, 32, 33, 34, 36, 38, 41, 46, 50, 55, 60, 65,	11.58	1 / 2

Standard Impact Socket

8535M

1"

- DIN 3129, ISO 2725-2



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
853519M	19	35	54	15	58	508	1 / 24
853521M	21	37	54	15	58	537	1 / 24
853522M	22	38	54	15	58	548	1 / 24
853523M	23	39	54	17	58	544	1 / 24
853524M	24	41	54	17	58	562	1 / 24
853525M	25	42	54	17	58	562	1 / 24
853526M	26	43	54	19	58	564	1 / 24
853527M	27	44	54	19	58	565	1 / 24
853528M	28	45	54	19	58	570	1 / 24
853529M	29	47	54	19	58	591	1 / 24
853530M	30	48	54	20	60	592	1 / 24
853532M	32	51	54	20	62	647	1 / 24
853533M	33	52	54	20	62	662	1 / 24
853534M	34	53	54	20	62	665	1 / 24
853535M	35	54	54	20	62	665	1 / 24
853536M	36	56	54	20	65	721	1 / 24
853537M	37	56	54	22	65	698	1 / 24
853538M	38	58	54	22	65	733	1 / 24
853540M	40	60	54	22	65	758	1 / 24
853541M	41	61	54	22	70	824	1 / 24
853542M	42	64	54	22	70	905	1 / 20
853544M	44	67	54	26	70	978	1 / 20
853545M	45	67	54	26	70	960	1 / 20
853546M	46	68	54	26	75	1033	1 / 20
853548M	48	70	54	26	75	1061	1 / 20
853550M	50	73	54	26	75	1170	1 / 20
853552M	52	75	54	30	80	1244	1 / 12
853553M	53	76	54	30	80	1278	1 / 12
853554M	54	78	54	30	80	1351	1 / 12
853555M	55	79	54	32	83	1435	1 / 12
853558M	58	83	54	32	83	1514	1 / 12
853560M	60	86	54	32	87	1693	1 / 12
853563M	63	90	54	34	87	1750	1 / 12
853565M	65	92	54	34	90	1750	1 / 12
853566M	66	94	54	34	90	1889	1 / 12
853568M	68	95	54	34	90	1963	1 / 12
853570M	70	97	54	34	93	2036	1 / 8
853571M	71	99	86	36	93	2917	1 / 8
853575M	75	104	86	36	95	3120	1 / 8
853580M	80	110	86	43	95	3387	1 / 4
853585M	85	115	86	43	95	3532	1 / 4
853590M	90	122	86	43	100	4004	1 / 4
853595M	95	130	95	52	105	4924	1 / 2
8535A0M	100	136	95	51	105	4972	1 / 2

8535S

1"

- ANSI / ASME B107.2



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
853524S	3/4	35	54	15	58	528	1 / 24
853526S	13/16	37	54	15	58	548	1 / 24
853528S	7/8	38	54	15	58	538	1 / 24
853530S	15/16	41	54	17	58	568	1 / 24
853532S	1	42	54	17	58	559	1 / 24
853534S	1-1/16	44	54	19	58	566	1 / 24
853536S	1-1/8	47	54	19	58	586	1 / 24
853538S	1-3/16	48	54	20	60	600	1 / 24
853540S	1-1/4	51	54	20	62	659	1 / 24
853542S	1-5/16	52	54	20	62	660	1 / 24
853544S	1-3/8	54	54	20	62	660	1 / 24
853546S	1-7/16	56	54	20	65	713	1 / 24
853548S	1-1/2	58	54	22	65	728	1 / 24
853550S	1-9/16	60	54	22	65	758	1 / 24
853552S	1-5/8	61	54	22	70	822	1 / 24
853554S	1-11/16	64	54	22	70	886	1 / 20
853556S	1-3/4	67	54	26	70	968	1 / 20
853558S	1-13/16	68	54	26	75	1075	1 / 20
853560S	1-7/8	70	54	26	75	1057	1 / 20
853562S	1-15/16	72	54	26	75	1100	1 / 20
853564S	2	74	54	30	75	1170	1 / 20
853566S	2-1/16	75	54	30	80	1225	1 / 12
853568S	2-1/8	78	54	30	80	1355	1 / 12
853570S	2-3/16	79	54	32	83	1423	1 / 12
853572S	2-1/4	82	54	32	83	1486	1 / 12
853574S	2-5/16	83	54	32	83	1459	1 / 12
853576S	2-3/8	86	54	32	87	1681	1 / 12
853578S	2-7/16	88	54	34	87	1681	1 / 12
853580S	2-1/2	90	54	34	87	1704	1 / 12
853582S	2-9/16	92	54	34	90	1881	1 / 12
853584S	2-5/8	94	54	34	90	1795	1 / 12
853586S	2-11/16	95	54	34	90	1931	1 / 12
853588S	2-3/4	97	54	34	93	2114	1 / 8
853590S	2-13/16	99	86	36	93	2869	1 / 8
853592S	2-7/8	102	86	36	93	2997	1 / 8
853594S	2-15/16	104	86	36	95	3161	1 / 8
853596S	3	106	86	36	95	3279	1 / 8
8535A0S	3-1/8	110	86	43	95	3386	1 / 4
8535A4S	3-1/4	112	86	43	95	3342	1 / 4
8535A8S	3-3/8	117	86	43	100	3873	1 / 4
8535B2S	3-1/2	122	86	43	100	4148	1 / 4

Deep Impact Socket

8435M — 1"

- DIN 3121



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
843524M	24	41	54	25	90	874	1 / 24
843527M	27	44	54	25	90	871	1 / 24
843528M	28	45	54	25	90	887	1 / 24
843530M	30	48	54	28	90	908	1 / 24
843532M	32	51	54	28	90	953	1 / 24
843533M	33	52	54	28	92	1016	1 / 24
843534M	34	53	54	28	92	988	1 / 24
843535M	35	54	54	28	92	1020	1 / 24
843536M	36	56	54	32	92	1034	1 / 24
843538M	38	58	54	32	92	1048	1 / 24
843540M	40	60	54	32	92	1094	1 / 24
843541M	41	61	54	32	92	1103	1 / 24
843542M	42	64	54	32	92	1236	1 / 24
843546M	46	68	54	35	95	1329	1 / 10
843548M	48	70	54	35	95	1378	1 / 10
843550M	50	73	54	35	95	1484	1 / 10
843552M	52	75	54	40	100	1594	1 / 6
843554M	54	78	54	40	100	1714	1 / 6
843555M	55	79	54	40	100	1706	1 / 6
843558M	58	83	54	42	100	1887	1 / 6
843560M	60	86	54	42	100	2022	1 / 6
843565M	65	92	54	50	110	2133	1 / 6
843570M	70	97	54	59	110	2285	1 / 6

8435S — 1"

- ANSI / ASME B107.1



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
843530S	15/16	40.8	54	25	90	872	1 / 24
843532S	1	42	54	25	90	847	1 / 24
843534S	1-1/16	44	54	25	90	868	1 / 24
843536S	1-1/8	46.3	54	25	90	911	1 / 24
843538S	1-3/16	48	54	28	90	926	1 / 24
843540S	1-1/4	51	54	28	90	980	1 / 24
843542S	1-5/16	52	54	28	92	1010	1 / 24
843544S	1-3/8	54	54	28	92	1022	1 / 24
843546S	1-7/16	56	54	32	92	1017	1 / 24
843548S	1-1/2	58	54	32	92	1048	1 / 24
843550S	1-9/16	60	54	32	92	1096	1 / 24
843552S	1-5/8	61	54	32	92	1097	1 / 24
843554S	1-11/16	64	54	32	92	1211	1 / 24
843556S	1-3/4	67	54	32	92	1312	1 / 12
843558S	1-13/16	68	54	35	95	1322	1 / 12
843560S	1-7/8	70	54	35	95	1382	1 / 6
843562S	1-15/16	72	54	35	95	1450	1 / 6
843564S	2	74	54	35	95	1510	1 / 6
843566S	2-1/16	75	54	40	100	1589	1 / 6
843568S	2-1/8	78	54	40	100	1729	1 / 6
843570S	2-3/16	79	54	40	100	1646	1 / 6
843572S	2-1/4	82	54	42	100	1837	1 / 6

Thin Wall Impact Socket

8835M — 1"

- Thin wall version
- 6 points
- Metric size
- DIN 3121



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
883524M	24	38.0	54	26	80	690	1 / 24
883527M	27	42.0	54	26	80	710	1 / 24
883529M	29	44.0	54	26	80	750	1 / 24
883530M	30	46.0	54	30	80	750	1 / 24
883532M	32	48.0	54	30	80	743	1 / 24
883533M	33	49.0	54	30	80	776	1 / 24
883534M	34	50.0	54	30	80	761	1 / 24
883535M	35	52.0	54	32	80	800	1 / 24
883536M	36	53.0	54	32	80	781	1 / 24
883538M	38	56.0	54	32	80	831	1 / 24
883541M	41	59.5	54	32	80	882	1 / 24

Rear Wheel Socket

8514M | 8514S | 8524M — 1"

- 4 points
- DIN 3121

8514M

8524M

8514S



KT NO.	SQ	D1 mm	D2 mm	ℓ mm	L mm	g	
851417M	17	40.0	54	30.0	60	612	1 / 24
851419M	19	42.0	54	30.0	60	611	1 / 24
851420M	20	43.0	54	30.0	60	625	1 / 24
851421M	21	44.0	54	30.0	60	618	1 / 24
851422M	22	45.5	54	30.0	60	629	1 / 24
852421M	21	44.0	48	30.0	60	502	1 / 24
851426S	13/16	44	54	30.0	60	617	1 / 24

Rear Wheel Socket

8534M 1"

- 4 points
- DIN 3121



KT NO.	SQ	D1 mm	D2 mm	ℓ mm	L mm	g	
853417M	17	38.0	54	23.5	76	658	1 / 24
853419M	19	43.0	54	23.5	76	717	1 / 24
853421M	21	47.0	54	23.5	76	773	1 / 24

8545M 1"

- DIN 3121
- 17SQ x35MM Isuzu, Mitsubishi, Nissan, Mazda
- 19SQ x41MM Mazda
- 20SQ x38MM Hino, Toyota, Daihatsu
- 20SQ x41MM Hino, Toyota, Daihatsu
- 21SQ x41MM Scania, Isuzu, Hino, Mitsubishi, Nissan



Use for

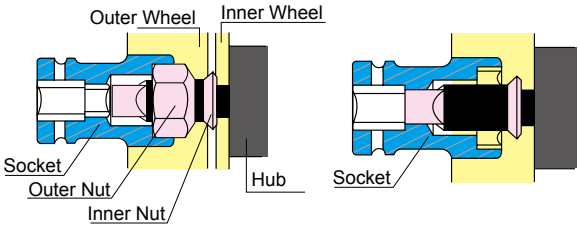

The wheel nut socket fits onto both outer nut and inner nut

KT NO.	SQ	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
85451735M	17	x 35	54	54	13	83	857	1 / 24
85451941M	19	x 41	55	54	14	87	924	1 / 24
85452038M	20	x 38	58	54	14	83	796	1 / 24
85452041M	20	x 41	58	54	14	87	1086	1 / 24
85452141M	21	x 41	58	54	14	87	1017	1 / 24

Impact Bit Socket

1954

809622M 1"

- Hex bit & bit holder
- DIN 3121

1954

809622M

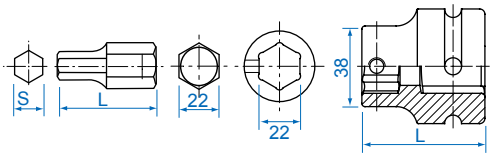

KT NO.	S mm	L mm	Max. torq N·m	g	
195419H	H19	54.5	1577	140	12 / 120
195422H	H22	54.5	2436	162	12 / 120
195424H	H24	54.5	2436	176	10 / 100
195427H	H27	54.5	2436	200	10 / 100
195430H	H30	54.5	2436	232	6 / 60
195432H	H32	54.5	2436	243	6 / 60
809622M	22	58.0	-	547	1 / 24

809622MxxH 1"

- Hexagon head
- DIN 3121



KT NO.	S mm	mm	L (mm)	Max. torq N·m	g	
809622M19H	H19	22	93	1577	896	1 / 10
809622M22H	H22	22	93	2436	918	1 / 10
809622M24H	H24	22	93	2436	932	1 / 10
809622M27H	H27	22	93	2436	956	1 / 10
809622M30H	H30	22	93	2436	988	1 / 10
809622M32H	H32	22	93	2436	999	1 / 10

8015M



KT NO.	mm	L mm	g	
801521M	H21	80	710	1 / 24
801522M	H22	80	720	1 / 24
801524M	H24	80	741	1 / 24
801527M	H27	80	776	1 / 24
801530M	H30	80	820	1 / 24
801532M	H32	80	851	1 / 24
801536M	H36	80	921	1 / 24

Impact Accessory

8260

- Extension bar
- DIN 3121

8260P 1"

8260

8260P

KT NO.	Overall Length inch	Overall Length mm	g	
8260-07	7	175	1400	1 / 12
8260-10	10	250	1932	1 / 12
8260-13	13	330	2458	1 / 8
8260-07P	7	175	1400	1 / 12
8260-10P	10	250	1932	1 / 12
8260-13P	13	330	2458	1 / 8

8797

- Universal joint
- DIN 3121



8797P 1"

8797

8797P

KT NO.	Overall Length inch	Overall Length mm	D mm	g	
8797	5	125	60	1491	1 /18
8797P	5	125	60	1491	1 /18

8866

- Adapter
- Convert to 3/4" drive
- 8866 → Max. torque : 1412 N·m
- DIN 3121

8866P 1"

8866

8866P

KT NO.	Spec.	g	
8866	1"F x 3/4"M	606	4 / 32
8866P	1"F x 3/4"M	606	4 / 32

8869

- Adapter
- Convert to 1-1/2" drive
- DIN 3121

8869P 1"

8869

8869P

KT NO.	Spec.	g	
8869	1" F x 1-1/2"M	941	1 / 24
8869P	1" F x 1-1/2"M	941	1 / 24

90405

- Locking ring
- High tensile rubber material

90406

90605

- Locking pin
- Chrome vanadium steel
- DIN 3129

90606 1"

90605
90606



90405
90406

KT NO.	Type	Ø	d / ℓ	Applied to socket sizes
90405	ring	5.5	44	8535M (19~70mm) 8535S (3/4"~2-3/4") 8435M (24~60mm) 8435S (15/16"~2-1/4") 8835M (24~60mm) 8514M.8514S.8534M.806519M 8260.8797.8866.8869
90605	pin	5.0	45	
90406	ring	10	75	8535M (71~90mm) 8535S (2-13/16"~3-1/2")
90606	pin	5.0	75	

Impact Accessory

9BC4A05MP 1/2"

- Brake caliper socket set dedicated to Volkswagen, Audi and Porsche (VAG) vehicles.
- 10-tooth sockets: 11.5 mm - 15 mm - 20 mm
- 7-tooth socket: Ø 14 mm - 22 mm

5 PC.

kg 1.18 2 /24

KT NO.	Specification (mm)	Applicable car models
9BC42A11	10-tooth : 11.5	Porsche
9BC42A15	10-tooth : 15	Audi Q7, S8 & Porsche Macan, Cayenne, Cayman
9BC42A20	10-tooth : 20	Audi A8, S6 & Porsche Cayenne
9BC41A14	7-tooth : 14	Audi Q7 and S4
9BC41A22	7-tooth : 22	Audi S5

Impact Socket Set

8404MP 1"

- Metal case size (mm) :
- 241 x 124 x 68 (0.51 cuft)

4 PC.

KT NO.	Contents		Kg	
8404MP	8435M	27, 30, 32, 33	4.65	1 / 4

8409MP 1"

- Metal case size (mm) :
- 445 x 100 x 65 (0.104 cuft)

8 PC.

KT NO.	Contents		Kg	
8409MP	8435M	24, 27, 30, 32, 33, 36, 38, 41	8.9	1 / 2

8408MP / 8408MP02 1"

- 6 PC. thin wall deep version
- 2 PC. rear wheel, square
- Metal case size (mm) :
- 445 x 120 x 68 (0.128 cuft)

8 PC.

KT NO.	Contents			Kg 6.4	1 / 4
8408MP	8835M	24, 27, 32, 36, 38, 41	8534M		17, 21
8408MP02					19, 21

8410MP / 8410SP 1"

- Metal case size (mm) :
- 280 x 130 x 74 (0.095 cuft)

8 PC.

KT NO.	Contents		Kg 6.4	1 / 4
8410MP	8535M	24, 27, 30, 32, 33, 36, 38, 41		
8410SP	8535S	15/16, 1-1/16, 1-3/16, 1-1/4, 1-5/16, 1-7/16, 1-1/2, 1-5/8		

Impact Accessory

9260 / 9260P 1-1/2"

- Extension bar
- DIN 3121

9260

9260P

KT NO.	Overall Length inch	mm	g	
9260-13	13	330	5900	1 / 4
9260-13P	13	330	5900	1 / 4

9868 / 9868P 1-1/2"

- Adapter
- Convert to 1" drive
- Max. → torque : 2515 N·m
- DIN 3121

9868

9868P

KT NO.	Spec.	g	
9868	1-1/2" F x 1"M	2250	1 / 6
9868P	1-1/2" F x 1"M	2250	1 / 6

Standard Impact Socket

9535M — 1-1/2"

- DIN 3129



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	Kg	
953532M	32	56	86	23	80	1.393	1 / 6
953533M	33	57	86	23	80	1.952	1 / 6
953534M	34	58	86	24	80	1.923	1 / 6
953536M	36	62	86	26	80	1.994	1 / 6
953538M	38	64	86	26	80	2.001	1 / 6
953541M	41	68	86	28	80	2.056	1 / 6
953542M	42	70	86	28	80	2.081	1 / 6
953546M	46	73	86	30	85	2.154	1 / 6
953550M	50	78	86	32	85	2.246	1 / 6
953555M	55	85	86	36	93	2.520	1 / 6
953560M	60	90	86	40	95	2.757	1 / 6
953565M	65	96	86	42	100	3.134	1 / 6
953570M	70	103	86	46	103	3.529	1 / 6
953575M	75	108	86	48	105	3.713	1 / 4
953580M	80	115	86	52	105	3.934	1 / 4
953585M	85	121	86	55	110	4.467	1 / 4
953590M	90	127	86	58	110	4.652	1 / 4
953595M	95	134	127	50	110	7.224	1 / 1
9535A0M	100	140	127	53	115	7.729	1 / 1
9535A5M	105	146	127	53	115	7.856	1 / 1
9535B0M	110	152	127	56	125	8.845	1 / 1
9535B5M	115	160	127	60	125	9.454	1 / 1
9535C0M	120	166	127	62	130	9.960	1 / 1
9535C5M	125	172	127	65	135	10.826	1 / 1
9535D0M	130	180	127	68	140	12.423	1 / 1
9535D5M	135	185	127	70	145	13.240	1 / 1
9535E0M	140	190	127	75	150	13.570	1 / 1
9535F0M	150	200	127	80	155	14.270	1 / 1

9535S — 1-1/2"

- ANSI / ASME B107.1



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	Kg	
953564S	2	81	86	35	85	2.305	1 / 6
953566S	2-1/16	82	86	36	85	2.364	1 / 6
953568S	2-1/8	84	86	36	90	2.508	1 / 6
953570S	2-3/16	85	86	43	93	3.204	1 / 6
953572S	2-1/4	87	86	43	93	5.209	1 / 6
953574S	2-5/16	89	86	43	93	2.560	1 / 6
953576S	2-3/8	90	86	45	95	2.622	1 / 6
953578S	2-7/16	93	86	44	95	2.711	1 / 6
953580S	2-1/2	95	86	46	97	2.833	1 / 6
953582S	2-9/16	96	86	49	100	2.863	1 / 6
953584S	2-5/8	99	86	48	100	2.958	1 / 6
953586S	2-11/16	101	86	48	100	3.055	1 / 6
953588S	2-3/4	103	86	48	103	3.217	1 / 6
953590S	2-13/16	105	86	50	105	3.306	1 / 6
953592S	2-7/8	107	86	50	105	3.600	1 / 6
953594S	2-15/16	108	86	50	105	3.455	1 / 6
953596S	3	111	86	50	105	3.590	1 / 4
953598S	3-1/16	114	86	52	105	3.931	1 / 4
9535A0S	3-1/8	116	86	53	105	4.123	1 / 4
9535A2S	3-3/16	118	86	53	105	4.089	1 / 4
9535A4S	3-1/4	120	86	54	105	4.829	1 / 4
9535A6S	3-5/16	122	86	56	105	4.207	1 / 4
9535A8S	3-3/8	123	86	56	105	4.306	1 / 4
9535B0S	3-7/16	125	86	57	105	4.256	1 / 4
9535B2S	3-1/2	129	86	60	110	4.905	1 / 4
9535B4S	3-9/16	130	86	60	110	5.435	1 / 4
9535B6S	3-5/8	131	86	60	110	4.894	1 / 4
9535B8S	3-11/16	133	86	62	113	5.468	1 / 1
9535C0S	3-3/4	136	127	62	113	3.741	1 / 1
9535C2S	3-13/16	138	127	64	120	9.098	1 / 1
9535C4S	3-7/8	139	127	66	120	8.954	1 / 1
9535C6S	3-15/16	140	127	66	120	8.931	1 / 1
9535C8S	4	142	127	66	120	7.886	1 / 1
9535D0S	4-1/16	143	127	68	120	7.843	1 / 1
9535D2S	4-1/8	146	127	68	120	8.003	1 / 1
9535D4S	4-3/16	146	127	70	120	7.851	1 / 1
9535D6S	4-1/4	150	127	72	124	8.385	1 / 1
9535D8S	4-5/16	154	127	72	124	8.973	1 / 1
9535E0S	4-3/8	155	127	72	124	8.923	1 / 1
9535E2S	4-7/16	155	127	75	128	9.033	1 / 1
9535E4S	4-1/2	159	127	75	128	9.258	1 / 1
9535E8S	4-5/8	164	127	79	132	13.730	1 / 1
9535F2S	4-3/4	167	127	79	132	10.386	1 / 1
9535F6S	4-7/8	171	127	79	136	10.930	1 / 1
9535G0S	5	174	127	79	140	11.338	1 / 1
9535G4S	5-1/8	180	127	80	143	12.279	1 / 1
9535G8S	5-1/4	184	127	80	145	12.728	1 / 1
9535J2S	6	203	127	85	165	14.270	1 / 1

Standard Impact Socket

A535M

2-1/2"

- DIN 3129



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	Kg	
A535041M	41	78	127	39	115	5.98	1 / 4
A535046M	46	83	127	39	115	5.97	1 / 4
A535050M	50	88	127	39	115	6.05	1 / 4
A535051M	51	89	127	39	115	6.06	1 / 4
A535055M	55	94	127	42	115	6.14	1 / 4
A535057M	57	96	127	42	115	6.18	1 / 4
A535060M	60	100	127	45	125	6.87	1 / 2
A535065M	65	105	127	48	125	6.90	1 / 2
A535070M	70	110	127	50	125	6.93	1 / 2
A535075M	75	115	127	55	125	7.14	1 / 2
A535076M	76	120	127	55	125	7.14	1 / 2
A535077M	77	120	127	55	125	7.15	1 / 2
A535080M	80	123	127	57	125	7.22	1 / 2
A535085M	85	127	127	60	130	7.54	1 / 2
A535086M	86	127	127	60	130	7.47	1 / 2
A535090M	90	135	127	65	130	7.90	1 / 2
A535095M	95	140	127	70	140	8.61	1 / 2
A535100M	100	145	127	70	140	8.81	1 / 2
A535105M	105	155	127	70	142	10.18	1 / 2
A535110M	110	160	127	76	155	11.50	1 / 2
A535115M	115	165	127	78	155	18.39	1 / 2
A535120M	120	175	127	80	160	13.18	1 / 1
A535125M	125	180	127	82	165	19.87	1 / 1
A535130M	130	185	127	85	170	20.64	1 / 1
A535135M	135	190	127	90	175	21.75	1 / 1
A535140M	140	200	127	95	180	24.06	1 / 1
A535145M	145	205	127	95	183	24.96	1 / 1
A535150M	150	210	127	100	190	26.91	1 / 1
A535155M	155	215	175	100	195	27.99	1 / 1
A535160M	160	225	175	100	200	31.13	1 / 1
A535165M	165	230	175	105	205	32.45	1 / 1
A535170M	170	235	175	105	205	33.15	1 / 1
A535175M	175	240	175	110	210	34.52	1 / 1
A535180M	180	250	175	110	213	38.23	1 / 1
A535185M	185	255	175	110	213	39.84	1 / 1
A535190M	190	265	175	115	220	41.49	1 / 1
A535200M	200	275	175	120	225	44.44	1 / 1
A535210M	210	285	175	125	235	48.78	1 / 1
A535215M	215	290	175	125	240	51.21	1 / 1
A535225M	225	305	175	135	250	57.57	1 / 1
A535235M	235	315	175	140	260	62.92	1 / 1

(Make - to - order production)

A535S

2-1/2"

- ANSI / ASME B107.1



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	Kg	
A535076S	2-3/8	100	127	45	125	6.89	1 / 2
A535078S	2-7/16	103	127	45	125	6.93	1 / 2
A535080S	2-1/2	103	127	48	125	6.85	1 / 2
A535082S	2-9/16	105	127	48	125	6.90	1 / 2
A535084S	2-5/8	107	127	50	125	6.94	1 / 2
A535088S	2-3/4	110	127	50	125	6.93	1 / 2
A535090S	2-13/16	115	127	50	125	7.04	1 / 2
A535094S	2-15/16	115	127	55	125	7.16	1 / 2
A535096S	3	120	127	55	125	7.20	1 / 2
A535100S	3-1/8	123	127	57	125	7.26	1 / 2
A535108S	3-3/8	127	127	60	130	7.48	1 / 2
A535112S	3-1/2	135	127	65	130	7.98	1 / 2
A535120S	3-3/4	140	127	70	140	8.56	1 / 2
A535124S	3-7/8	145	127	70	140	8.65	1 / 2
A535126S	3-15/16	145	127	70	140	8.76	1 / 2
A535132S	4-1/8	155	127	70	142	9.91	1 / 2
A535136S	4-1/4	160	127	75	155	11.74	1 / 2
A535138S	4-5/16	160	127	75	155	12.52	1 / 2
A535144S	4-1/2	165	127	78	155	12.61	1 / 2
A535148S	4-5/8	175	127	80	160	19.18	1 / 1
A535156S	4-7/8	180	127	82	165	19.87	1 / 1
A535160S	5	185	127	82	165	20.02	1 / 1
A535164S	5-1/8	185	127	85	170	20.42	1 / 1
A535168S	5-1/4	190	127	90	175	21.81	1 / 1
A535172S	5-3/8	200	127	95	180	23.90	1 / 1
A535180S	5-5/8	205	127	95	183	24.43	1 / 1
A535184S	5-3/4	205	127	95	183	26.30	1 / 1
A535188S	5-7/8	210	127	100	190	26.62	1 / 1
A535192S	6	215	175	100	195	29.10	1 / 1
A535196S	6-1/8	220	175	100	195	28.69	1 / 1
A535200S	6-1/4	220	175	100	195	28.58	1 / 1
A535204S	6-3/8	225	175	100	200	30.77	1 / 1
A535208S	6-1/2	230	175	105	205	31.05	1 / 1
A535212S	6-5/8	235	175	105	205	32.17	1 / 1
A535216S	6-3/4	235	175	105	205	33.68	1 / 1
A535220S	6-7/8	240	175	110	210	32.41	1 / 1
A535224S	7	245	175	110	210	35.53	1 / 1
A535240S	7-1/2	265	175	115	220	41.16	1 / 1
A535244S	7-5/8	265	175	115	220	41.52	1 / 1
A535252S	7-7/8	275	175	120	225	44.46	1 / 1
A535256S	8	280	175	120	230	45.89	1 / 1

(Make - to - order production)

Standard Impact Socket

B535M — 3-1/2"

- DIN 3129



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	Kg	
B535105M	105	165	175	70	175	18.73	1 / 1
B535110M	110	170	175	75	175	19.19	1 / 1
B535115M	115	175	175	78	180	19.74	1 / 1
B535120M	120	180	175	80	185	20.24	1 / 1
B535125M	125	185	175	82	185	21.86	1 / 1
B535130M	130	190	175	85	194	22.70	1 / 1
B535135M	135	200	175	90	200	24.24	1 / 1
B535140M	140	205	175	95	205	25.59	1 / 1
B535145M	145	210	175	95	210	31.12	1 / 1
B535150M	150	215	175	100	210	32.38	1 / 1
B535160M	160	230	175	100	220	35.85	1 / 1
B535165M	165	235	175	105	224	37.92	1 / 1
B535170M	170	240	175	105	225	38.71	1 / 1
B535175M	175	245	175	110	230	40.05	1 / 1
B535180M	180	255	200	110	230	43.77	1 / 1
B535185M	185	260	200	110	235	46.94	1 / 1
B535190M	190	270	200	115	240	50.60	1 / 1
B535200M	200	280	200	120	245	52.90	1 / 1
B535210M	210	290	200	125	250	57.50	1 / 1
B535215M	215	300	200	125	250	60.06	1 / 1
B535225M	225	310	200	135	265	61.50	1 / 1
B535235M	235	315	200	140	267	67.91	1 / 1

(Make - to - order production)

B535S — 3-1/2"

- ANSI / ASME B107.1



KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	Kg	
B535132S	4-1/8	165	175	70	175	18.74	1 / 1
B535136S	4-1/4	168	175	75	175	19.08	1 / 1
B535140S	4-3/8	170	175	75	175	19.74	1 / 1
B535144S	4-1/2	175	175	78	180	19.72	1 / 1
B535148S	4-5/8	175	175	80	180	19.95	1 / 1
B535152S	4-3/4	180	175	80	185	20.14	1 / 1
B535156S	4-7/8	185	175	82	185	22.04	1 / 1
B535160S	5	190	175	82	194	21.59	1 / 1
B535164S	5-1/8	190	175	85	194	22.64	1 / 1
B535168S	5-1/4	200	175	90	200	23.59	1 / 1
B535172S	5-3/8	200	175	95	200	24.64	1 / 1
B535176S	5-1/2	205	175	95	205	25.57	1 / 1
B535180S	5-5/8	205	175	95	205	30.53	1 / 1
B535184S	5-3/4	210	175	95	210	31.92	1 / 1
B535188S	5-7/8	215	175	100	210	32.50	1 / 1
B535192S	6	220	175	100	215	33.43	1 / 1
B535196S	6-1/8	220	175	100	215	34.28	1 / 1
B535200S	6-1/4	230	175	100	220	35.13	1 / 1
B535204S	6-3/8	230	175	100	220	36.51	1 / 1
B535208S	6-1/2	235	175	105	224	37.76	1 / 1
B535212S	6-5/8	235	175	105	224	37.98	1 / 1
B535216S	6-3/4	240	175	105	225	38.70	1 / 1
B535220S	6-7/8	245	175	110	230	39.87	1 / 1
B535224S	7	250	200	110	230	41.99	1 / 1
B535228S	7-1/8	255	200	110	230	44.24	1 / 1
B535232S	7-1/4	260	200	110	235	46.61	1 / 1
B535236S	7-3/8	270	200	115	240	48.11	1 / 1
B535240S	7-1/2	270	200	115	240	50.65	1 / 1
B535244S	7-5/8	275	200	115	240	51.49	1 / 1
B535248S	7-3/4	280	200	120	245	52.11	1 / 1
B535252S	7-7/8	280	200	120	245	53.59	1 / 1
B535256S	8	285	200	120	245	55.59	1 / 1
B535260S	8-1/8	290	200	120	250	56.25	1 / 1
B535264S	8-1/4	290	200	125	250	57.50	1 / 1
B535268S	8-3/8	300	200	125	250	59.14	1 / 1
B535272S	8-1/2	300	200	125	250	59.43	1 / 1
B535276S	8-5/8	305	200	135	260	61.94	1 / 1
B535280S	8-3/4	310	200	135	265	64.58	1 / 1
B535284S	8-7/8	315	200	140	267	66.14	1 / 1

(Make - to - order production)

Mechanical Structure

New Twin Hammer | Twin Hammer | Jumbo Hammer | Twin Dog | Pinless Hammer

PNEUMATIC TOOLS

KING TONY
GIL DALLY

What you need to know

Air supply system :

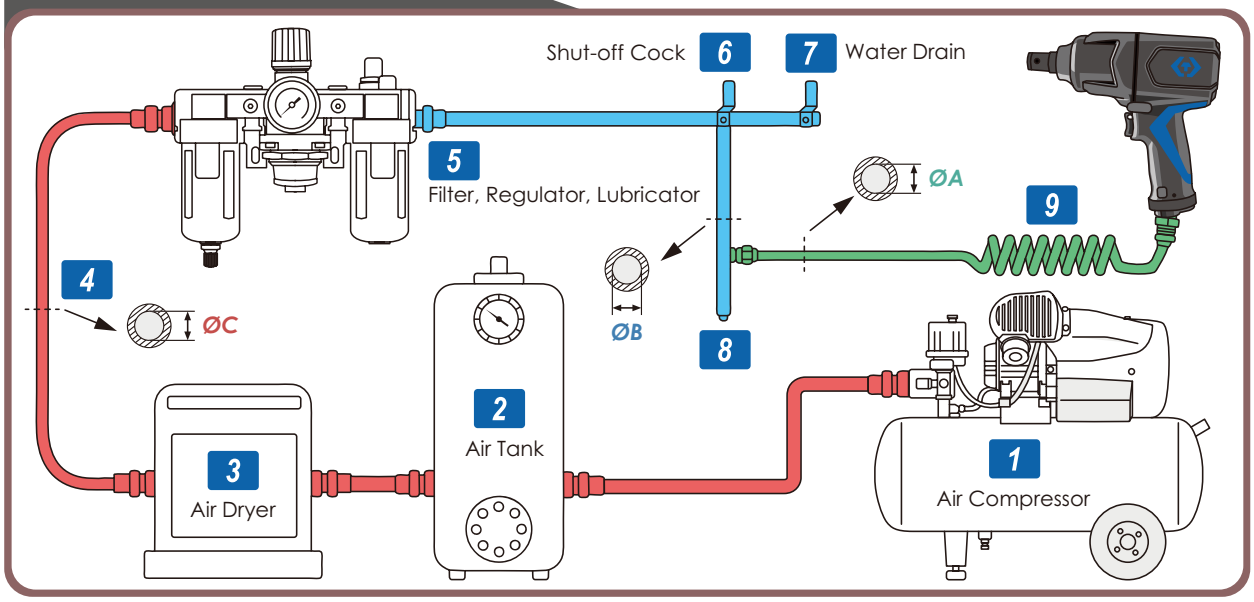

Piping diameters and length requirement :

ØA = Follow air tools specification table, length should be less than 4.5m.

ØB = 2 times tools hose size. (ØB = 2xØA)

ØC = 3 times tools hose size. (ØC = 3xØA)

Preparation

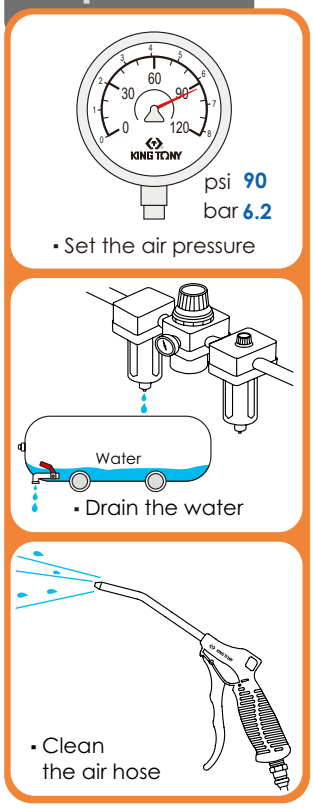

Operation

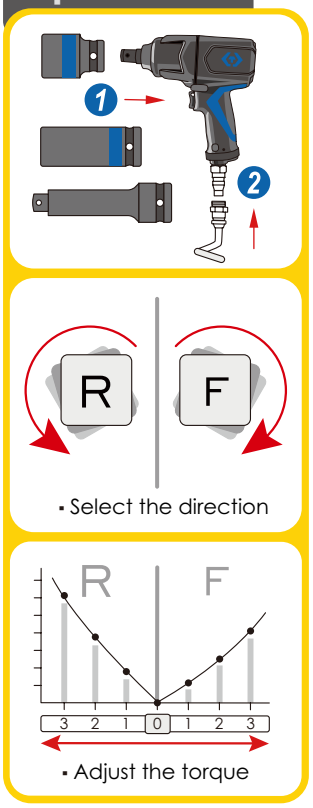

Maintenance

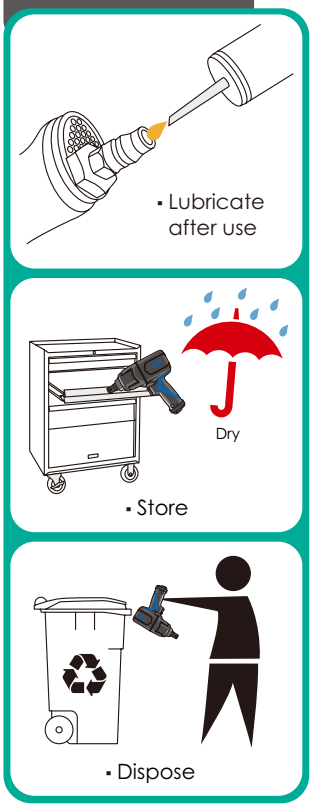

		Max. torque		Type				Anvil		
KT NO.	Drive	ft·lb	N·m	Standard	Lightweight	Mini.	Working place	STD	Long	Page
33491-030 33491-031	1/2"	300	407					○		261
33431-050 33431-051		500	678					○		262
33411-040 33411-041		500	678					○		264
33421-040 33421-041		500	678					○		262
33411-050 33411-051		650	881					○		264
33412-050 33412-051		650	881						2"	264
33431-065		1000	881					○		263
33461-100 33461-101		950	1356					○		261
33481-095 33481-096		700	1288					○		263
33611-055 33611-056	3/4"	800	949					○		264
33621-075 33621-076		800	1085					○		264
33622-075 33622-076		1100	1085						6"	264
33681-100 33681-101		1100	1491					○		263
33631-110 33631-111		1100	1491					○		264
33632-110 33632-111		1100	1491						6"	264
33671-160 33672-160		1600	2170					○	6"	266
33851-120 33851-121		1200	1626					○		265
33852-120 33852-121		1200	1626						6"	265
33811-150 33812-150	1"	1500	2033					○	6"	267
33871-160 33872-160		1600	2170					○	6"	266
33841-180 33842-180		1800	2440					○	6"	265
33831-180 33832-180		1800	2440					○	6"	267
33861-200 33862-200		2000	2712					○	6"	266
33851-250 33852-250		2500	3388					○	8"	267
33911-250 33912-250	1-1/2"	2500	3388					○	8"	267
33921-300 33922-300		3000	4065					○	8"	267

Super Duty Composite Impact Wrench

33461

- Lightweight 17%
- One-handed F/R control, Easy forward/reverse switch
- 4-speed power setting, full speed in reverse
- TPR Handle that can help to reduce the effect of vibration on the operator

1/2"

33461

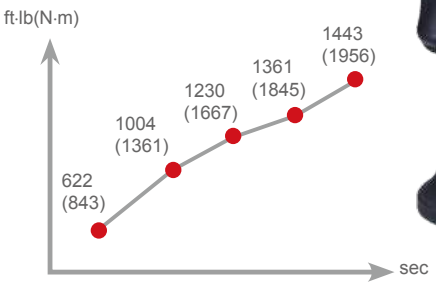

Twin Hammer

- TPR ergonomic handle material reduces vibration

- 3-speed power setting, full speed in reverse

KT NO.	Square drive inch	Square drive mm	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33461-100	1/2"	12.70	1"	M24	9500	1000	1356	7.5	190	1/4" BSPT	3/8"	6.2	90	207	7.3	99.2	13.32	2.30	5.28	1 / 8
33461-101	1/2"	12.70	1"	M24	9500	1000	1356	7.5	190	1/4" NPT	3/8"	6.2	90	207	7.3	99.2	13.32	2.30	5.28	1 / 8

Ultra Compact Angle Impact Wrench

33491

- Easy to work in confined space, head length 88mm
- Ergonomic handle in hand and great power setting
- Lightweight : 1.4Kg
- Max. torque : 350ft·lb (475N·m) in reverse

1/2"

33491

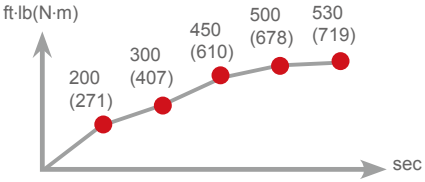

3-speed power setting

3 2 1

Full speed in reverse

3

- 360˚ swivel exhaust deflector

- Gearless hammer design
- Reduces vibration by 50%, Increases torque by 20%

Jumbo Hammer

KT NO.	Square drive inch	Square drive mm	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33491-030	1/2"	12.70	9/16"	M14	6,500	300	407	9-64/49"	248	1/4"BSPT	3/8"	6.2	90	119	4.2	94.00	7.48	1.40	3.09	1/12
33491-031	1/2"	12.70	9/16"	M14	6,500	300	407	9-64/49"	248	1/4"NPT	3/8"	6.2	90	119	4.2	94.00	7.48	1.40	3.09	1/12

Mini Impact Wrench

33431

- Mini design, overall length 109mm with 1.35kg
- Nickel chrome molybenum square drive
- Improved jumbo hammer design : 30% higher torque
- One hand operation

- 360 rotation air inlet connector design

- One-hand control forward & reverse switch

- Convenient to switch on both sides

- Ergonomic design interchangeable rubber grip

- Air exhaust away from the operator

- 3-speed regulator for precise control

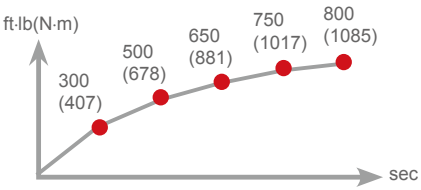

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33431-050	1/2"	12.70	Std.anvil	5/8"	M16	9000	500	678	4-19/64"	109	1/4"BSPT	3/8"	6.2	90	142	5.0	101.02	8.70	1.35	2.98	1 / 12
33431-051	1/2"	12.70	Std.anvil	5/8"	M16	9000	500	678	4-19/64"	109	1/4"NPT	3/8"	6.2	90	142	5.0	101.02	8.70	1.35	2.98	1 / 12

Impact Wrench

33421

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on front exhaust

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33421-040	1/2"	12.70	Std.anvil	5/8"	M16	8000	500	678	6-3/4"	171	1/4"BSPT	3/8"	6.2	90	113	4.0	101.02	8.70	2.56	5.64	1 / 8
33421-041	1/2"	12.70	Std.anvil	5/8"	M16	8000	500	678	6-3/4"	171	1/4"NPT	3/8"	6.2	90	113	4.0	101.02	8.70	2.56	5.64	1 / 8

Impact Wrench

33431

- One-handed F / R control
- Convenient to switch on both sides
- 3-speed regulator for precise control
- Ergonomic design interchangeable rubber grip

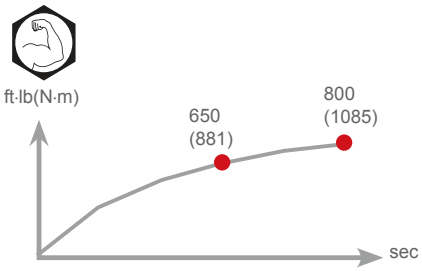

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33431-065	1/2"	12.70	Std.anvil	3/4"	M19	8000	650	881	6-7/8"	175	1/4"BSPT	3/8"	6.2	90	139	4.9	101.50	9.37	2.58	5.69	1 / 8

Composite Impact Wrench

33481

- One-handed F / R control
- 4-speed power setting, full speed in reverse
- TPR ergonomic handle material reduces vibration

33681

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33481-095	1/2"	12.70	Std.anvil	1"	M24	8000	950	1288	7-3/4"	197	1/4"BSPT	3/8"	6.2	90	190	6.7	96.00	8.10	2.25	4.96	1 / 8
33481-096	1/2"	12.70	Std.anvil	1"	M24	8000	950	1288	7-3/4"	197	1/4"NPT	3/8"	6.2	90	190	6.7	96.00	8.10	2.25	4.96	1 / 8
33681-100	3/4"	19.05	Std.anvil	1-3/16"	M30	8000	1100	1491	8-3/8"	211	1/4"BSPT	3/8"	6.2	90	190	6.7	96.00	8.98	2.35	5.20	1 / 8
33681-101	3/4"	19.05	Std.anvil	1-3/16"	M30	8000	1100	1491	8-3/8"	211	1/4"NPT	3/8"	6.2	90	190	6.7	96.00	8.98	2.35	5.20	1 / 8

Impact Wrench

33411-040

1/2"

33411-040

33411-050 / 33412-050

1/2"

33411-050

1/2"

33412-050

33611

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust

3/4"

33611

33621 / 33622

3/4"

33621

33631 / 33632

3/4"

33622

3/4"

33631

3/4"

33632

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33411-040	1/2"	12.70	Std. anvil	5/8"	M16	8000	500	678	7-23/64"	187	1/4"BSPT	3/8"	6.2	90	113	4.0	95.22	4.85	2.60	5.73	1 / 8
33411-041	1/2"	12.70	Std. anvil	5/8"	M16	8000	500	678	7-23/64"	187	1/4"NPT	3/8"	6.2	90	113	4.0	95.22	4.85	2.60	5.73	1 / 8
33411-050	1/2"	12.70	Std. anvil	3/4"	M19	8000	650	881	7-41/64"	194	1/4"BSPT	3/8"	6.2	90	125	4.4	96.50	8.13	2.80	6.17	1 / 8
33411-051	1/2"	12.70	Std. anvil	3/4"	M19	8000	650	881	7-41/64"	194	1/4"NPT	3/8"	6.2	90	125	4.4	96.50	8.13	2.80	6.17	1 / 8
33412-050	1/2"	12.70	Long anvil	3/4"	M19	8000	650	881	9-23/64"	238	1/4"BSPT	3/8"	6.2	90	125	4.4	96.19	6.84	3.20	7.05	1 / 8
33412-051	1/2"	12.70	Long anvil	3/4"	M19	8000	650	881	9-23/64"	238	1/4"NPT	3/8"	6.2	90	125	4.4	96.19	6.84	3.20	7.05	1 / 8
33611-055	3/4"	19.05	Std. anvil	7/8"	M20	6500	700	949	7-13/32"	188	1/4"BSPT	3/8"	6.2	90	125	4.4	96.56	8.64	3.00	6.61	1 / 8
33611-056	3/4"	19.05	Std. anvil	7/8"	M20	6500	700	949	7-13/32"	188	1/4"NPT	3/8"	6.2	90	125	4.4	96.56	8.64	3.00	6.61	1 / 8
33621-075	3/4"	19.05	Std. anvil	1"	M24	6500	800	1085	8-63/64"	228	1/4"BSPT	3/8"	6.2	90	198	7.0	97.28	6.89	4.50	9.92	1 / 4
33621-076	3/4"	19.05	Std. anvil	1"	M24	6500	800	1085	8-63/64"	228	1/4"NPT	3/8"	6.2	90	198	7.0	97.28	6.89	4.50	9.92	1 / 4
33622-075	3/4"	19.05	Long anvil	1"	M24	6500	800	1085	12-63/64"	330	1/4"BSPT	3/8"	6.2	90	198	7.0	96.68	6.46	5.00	11.02	1 / 4
33622-076	3/4"	19.05	Long anvil	1"	M24	6500	800	1085	12-63/64"	330	1/4"NPT	3/8"	6.2	90	198	7.0	96.68	6.46	5.00	11.02	1 / 4
33631-110	3/4"	19.05	Std. anvil	1-3/16"	M30	5500	1100	1491	8-43/64"	220	3/8"BSPT	1/2"	6.2	90	269	9.5	98.35	5.31	5.60	12.35	1 / 4
33631-111	3/4"	19.05	Std. anvil	1-3/16"	M30	5500	1100	1491	8-43/64"	220	3/8"NPT	1/2"	6.2	90	269	9.5	98.35	5.31	5.60	12.35	1 / 4
33632-110	3/4"	19.05	Long anvil	1-3/16"	M30	5500	1100	1491	14-55/64"	377	3/8"BSPT	1/2"	6.2	90	269	9.5	97.20	7.90	6.04	13.32	1 / 4
33632-111	3/4"	19.05	Long anvil	1-3/16"	M30	5500	1100	1491	14-55/64"	377	3/8"NPT	1/2"	6.2	90	269	9.5	97.20	7.90	6.04	13.32	1 / 4

Impact Wrench

33851 / 33852

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust

New Twin Hammer

33841 / 33842

1"
33851

1"
33841

1"
33852

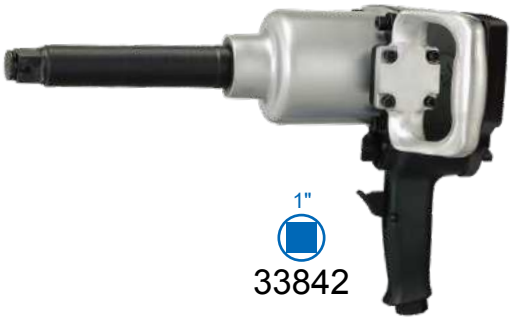

1"
33842

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch L	Overall length mm L	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33851-120	1"	25.40	Std. anvil	1-17/64"	M32	5500	1200	1626	8-53/64"	224	3/8"BSPT	1/2"	6.2	90	269	9.5	99.75	6.57	5.64	12.43	1 / 4
33851-121	1"	25.40	Std. anvil	1-17/64"	M32	5500	1200	1626	8-53/64"	224	3/8"NPT	1/2"	6.2	90	269	9.5	99.75	6.57	5.64	12.43	1 / 4
33852-120	1"	25.40	Long anvil	1-17/64"	M32	5500	1200	1626	14-1/64"	356	3/8"BSPT	1/2"	6.2	90	269	9.5	98.00	8.40	6.04	13.32	1 / 4
33852-121	1"	25.40	Long anvil	1-17/64"	M32	5500	1200	1626	14-1/64"	356	3/8"NPT	1/2"	6.2	90	269	9.5	98.00	8.40	6.04	13.32	1 / 4
33841-180	1"	25.40	Std. anvil	1-27/64"	M36	4000	1800	2440	12-3/32"	307	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	101.56	4.37	10.62	23.41	1 / 2
33842-180	1"	25.40	Long anvil	1-27/64"	M36	4000	1800	2440	20-5/64"	510	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	99.85	5.87	12.52	27.60	1 / 2

Composite Impact Wrench

33671 / 33672

33871 / 33872

33861 / 33862

- Lightweight durable composite housing
- Nickel chrome molybenum square drive
- Comfortable rubber handle

Twin Hammer

3/4"

33671-160

3/4"

33672-160

1"

33871-160

1"

33872-160

1"

33861-200

1"

33862-200

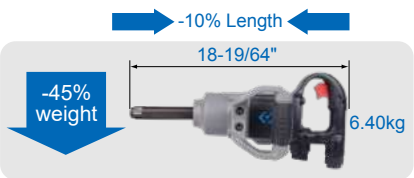

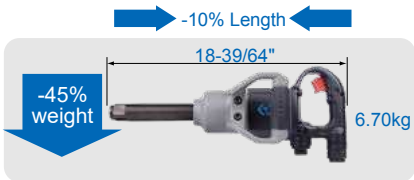

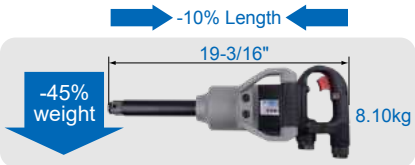

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33671-160	3/4"	19.05	Std. anvil	1-3/16"	M30	5500	1600	2170	12-1/2"	318	1/2" BSPT / NPT	3/4"	6.2	90	241	8.5	105.00	15.40	5.70	12.57	1 / 2
33672-160	3/4"	19.05	Long anvil	1-3/16"	M30	5500	1600	2170	18-19/64"	465	1/2" BSPT / NPT	3/4"	6.2	90	241	8.5	106.00	13.80	6.40	14.11	1 / 2
33871-160	1"	25.40	Std. anvil	1-3/16"	M30	5500	1600	2170	12-45/64"	323	1/2" BSPT / NPT	3/4"	6.2	90	241	8.5	106.00	13.70	5.80	12.79	1 / 2
33872-160	1"	25.40	Long anvil	1-3/16"	M30	5500	1600	2170	18-39/64"	473	1/2" BSPT / NPT	3/4"	6.2	90	241	8.5	104.00	14.98	6.70	14.77	1 / 2
33861-200	1"	25.40	Std. anvil	1-27/64"	M36	5000	2000	2712	13-43/64"	347	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	106.00	17.20	7.40	16.31	1 / 2
33862-200	1"	25.40	Long anvil	1-27/64"	M36	5000	2000	2712	19-3/16"	487	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	104.00	14.50	8.10	17.86	1 / 2

Impact Wrench

33811 / 33812

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust

New Twin Hammer

1"

33811-150

1"

33812-150

1"

33831-180

1"

33832-180

33831 / 33832

33851 / 33852

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust

33911 / 33912

Twin Hammer

33921 / 33922

1"

33851-250

1"

33852-250

1-1/2"

33911-250
33921-300

1-1/2"

33912-250
33922-300

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33811-150	1"	25.40	Std. anvil	1-1/4"	M36	4000	1500	2033	14-19/32"	371	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	101.17	10.77	10.30	22.71	1 / 1
33812-150	1"	25.40	Long anvil	1-1/4"	M36	4000	1500	2033	20-19/32"	523	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	100.40	6.13	11.30	24.91	1 / 1
33831-180	1"	25.40	Std. anvil	1-1/2"	M38	4000	1800	2440	14-19/32"	371	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	102.11	8.84	11.50	25.35	1 / 1
33832-180	1"	25.40	Long anvil	1-1/2"	M38	4000	1800	2440	20-19/32"	523	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	103.99	6.60	12.50	27.56	1 / 1
33851-250	1"	25.40	Std. anvil	1-25/32"	M45	3000	2500	3388	17-11/64"	436	1/2" BSPT / NPT	3/4"	6.2	90	411	14.5	101.15	6.30	15.80	34.83	1 / 1
33852-250	1"	25.40	Long anvil	1-25/32"	M45	3000	2500	3388	24-7/8"	632	1/2" BSPT / NPT	3/4"	6.2	90	411	14.5	101.91	6.49	18.70	41.23	1 / 1
33911-250	1-1/2"	38.10	Std. anvil	1-25/32"	M45	3000	2500	3388	17-53/64"	453	1/2" BSPT / NPT	3/4"	6.2	90	411	14.5	104.13	6.32	15.80	34.83	1 / 1
33912-250	1-1/2"	38.10	Long anvil	1-25/32"	M45	3000	2500	3388	23-53/64"	605	1/2" BSPT / NPT	3/4"	6.2	90	411	14.5	103.90	6.53	18.70	41.23	1 / 1
33921-300	1-1/2"	38.10	Std. anvil	2"	M50	3000	3000	4065	17-3/4"	451	1/2" BSPT / NPT	3/4"	6.2	90	453	16.0	104.52	8.86	19.70	43.43	1 / 1
33922-300	1-1/2"	38.10	Long anvil	2"	M50	3000	3000	4065	25-15/32"	647	1/2" BSPT / NPT	3/4"	6.2	90	453	16.0	104.52	7.12	22.80	50.27	1 / 1

Impact Socket & Wrench Set

44116MP

1/2"

21 PC.

Blow case size (mm) :
315 x 250 x 120 (0.334 cuft)

- 10 PC. impact sockets 9~27mm
- 3 PC. thin wall impact sockets 17, 19, 21mm
- 1 PC. impact wrench
- 1 PC. extension bar
- 1 PC. universal joint
- 2 PC. ring Ø 3.5 x 19mm & Ø 3.5 x 23mm
- 2 PC. pin Ø 3 x 20 & Ø 3 x 25 (6150)
- 1 PC. air inlet adapter

KT NO.	Contents	Kg 6.1	1 / 4
44116MP	4535M 9, 10, 11, 13, 14, 17, 19, 22, 24, 27	33411-040	SY-221M (1/4"BSPT)
44116MP04	4415M 17, 19, 21 4260-05 4797		SY-2-11M (1/4"BSPT)
44116MP10	90601 90602 90401 90402	33411-041	SY-231M (1/4"NPT)

44118MP

1/2"

23 PC.

Blow case size (mm) :
420 x 315 x 100 (0.475 cuft)

- 14 PC. deep impact sockets 10~27mm
- 1 PC. impact wrench
- 2 PC. extension bars, 3" & 5" L
- 1 PC. universal joint
- 2 PC. ring Ø 3.5 x 19mm & Ø 3.5 x 23mm
- 2 PC. pin Ø 3 x 20mm & Ø 3 x 25mm (6150)
- 1 PC. air inlet adapter

KT NO.	Contents	Kg 8.4	1 / 2
44118MP	4435M 10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 23, 24, 26, 27	33411-040	SY-221M (1/4"BSPT)
44118MP04	4260-03 4260-05 4797		SY-211M (1/4"BSPT)
44118MP10	90601 90602 90401 90402	33411-041	SY-231M (1/4"NPT)

Impact Socket & Wrench Set

44106AMP01

1/2"

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

- 10 PC. impact sockets 9~27mm
- 3 PC. thin wall impact sockets 17, 19, 21mm
- 1 PC. impact wrench
- 1 PC. extension bar & with ball
- 1 PC. universal joint
- 1 PC. air inlet adapter

17 PC.

Contents

6.32 Kg / 1 / 2

	4535M	9, 10, 11, 13, 14, 17, 19, 22, 24, 27
	4415M	17, 19, 21
	4260-05P	5"
	4799P	
	33411-050	
	SY-211M	(1/4"BSPT)

44108AMP01

1/2"

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

- 14 PC. deep impact sockets 8~27mm
- 1 PC. impact wrench
- 2 PC. extension bar & with ball, 3" & 5" L
- 1 PC. universal joint
- 1 PC. air inlet adapter

19 PC.

Contents

7.92 Kg / 1 / 2

	4435M	8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27
	4260P	3", 5"
	4799P	
	33411-050	
	SY-211M	(1/4"BSPT)

Impact Socket & Wrench Set

44801FMP

1/2"

Blow case size (mm) :
422 x 275 x 85mm (0.35cuff)

20 PC.

- 12 PC. standard impact sockets 10~24mm
- 1 PC. impact wrench
- 3 PC. thin wall impact sockets with plastic sleeve 17, 19, 21mm
- 1 PC. extension bar 3" L
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

KT NO.	Contents	5.79	1 / 4
44801FMP	4535M 10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24	33481-095	SY-221M (1/4"BSPT)
44801AMP	4945M 17, 19, 21		SY-211M (1/4"BSPT)
44801BMP	4260-03P 4797P LUBE15	33481-096	SY-231M (1/4"NPT)

44801FMP01

1/2"

Blow case size (mm) :
422 x 275 x 85mm (0.35cuff)

20 PC.

- 12 PC. standard impact sockets 10~24mm
- 1 PC. impact wrench
- 3 PC. thin wall impact sockets with plastic sleeve 17, 19, 21mm
- 1 PC. extension bar 3" L
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

KT NO.	Contents	6.03	1 / 4
44801FMP01	4535M 10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24	33431-065	SY-221M (1/4"BSPT)
44801AMP01	4945M 17, 19, 21 4260-03P 4797P LUBE15		SY-211M (1/4"BSPT)

44802FMP

1/2"

Blow case size (mm) :
340 x 263 x 80mm (0.253 cuft)

16 PC.

- 11 PC. standard impact sockets 10~24mm
- 1 PC. impact wrench
- 1 PC. extension bar
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

KT NO.	Contents	3.9	1 / 3
44802FMP	4535M 10, 12, 13, 14, 16, 17, 18 ,19, 21, 22, 24,	33431-050	SY-221M (1/4"BSPT)
44802AMP			SY-211M (1/4"BSPT)
44802BMP	4260-05P 4796P LUBE15	33431-051	SY-231M (1/4"NPT)

Impact Socket & Wrench Set

44803FMP

1/2"

- 7 PC. standard impact sockets 17~27mm
- 1 PC. impact wrench
- 3 PC. deep impact sockets 17, 19, 21mm
- 1 PC. extension bar 5" L
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
422 x 275 x 85mm (0.35cuff)

15 PC.

KT NO.	Contents	Kg 5.7	1 / 4
44803FMP	4535M 17, 18, 19, 21, 22, 24, 27	33461-100	SY-221M (1/4"BSPT)
44803AMP	4435M 17, 19, 21		SY-211M (1/4"BSPT)
44803BMP	4260-05P 4799P LUBE15	33461-101	SY-231M (1/4"NPT)

64801FMP

3/4"

- 8 PC. standard impact sockets 19~38mm
- 1 PC. impact wrench
- 1 PC. extension bar 7" L
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
422 x 275 x 85mm(0.35 cuff)

13 PC.

KT NO.	Contents	Kg 8.48	1 / 2
64801FMP	6515M 19, 22, 24, 27, 30	33681-100	SY-221M (1/4"BSPT)
64801AMP	6535M 32, 36, 38		SY-211M (1/4"BSPT)
64801BMP	6260-07P 6797P LUBE15	33681-101	SY-231M (1/4"NPT)

64114FMP

3/4"

- 11 PC. impact sockets 19~38mm
- 1 PC. impact wrench
- 1 PC. extension bar, 7" L (w/o ball)
- 1 PC. universal joint
- 1 PC. ring Ø 5.5 x 37mm
- 1 PC. pin Ø 4.0 x 35mm
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
422 x 360 x 110 (0.59 cuft)

18 PC.

KT NO.	Contents	Kg 12.32	1 / 2
64114FMP	6535M 19, 22, 24, 27, 28, 30, 32, 33, 34, 36, 38	33621-075	SY-221M (1/4"BSPT)
64114AMP	6260-07 6797 90603 90404 LUBE15		SY-211M (1/4"BSPT)

Impact Screwdriver

3312

1/4"

33121
33122

KT NO.	Square drive inch	Square drive mm	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33121	1/4"	6.35	3/16"	M5	11000	75	102	7-1/4"	183	1/4"BSPT	3/8"	6.2	90	96	3.4	92.8	3.83	0.82	1.81	1 / 20
33122	1/4"	6.35	3/16"	M5	11000	75	102	7-1/4"	183	1/4"NPT	3/8"	6.2	90	96	3.4	92.8	3.83	0.82	1.81	1 / 20

Air Ratchet Wrench

37221 / 37321

- Ergonomically enhanced composite handle
- Dual pawl design provides higher torque



- Dust-free design
- Prevents deformation and triples the life of the parts

1/4" & 3/8"

37221
37321

3/8" & 1/2"

37334
37434

37334 / 37434

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
37221-030	1/4"	6.35	Std. anvil	1/4"	M6	250	30	41	8-1/16"	205	1/4"BSPT	3/8"	6.2	90	79	2.8	86.00	2.32	0.67	1.48	1 / 30
37321-050	3/8"	9.53	Std. anvil	5/16"	M8	270	50	68	8-1/16"	205	1/4"BSPT	3/8"	6.2	90	79	2.8	93.00	2.26	0.67	1.48	1 / 30
37334-080	3/8"	9.53	Std. anvil	3/8"	M10	210	80	108	10-39/64"	268	1/4"BSPT	3/8"	6.2	90	127	4.5	93.00	3.58	1.25	2.76	1 / 10
37334-081	3/8"	9.53	Std. anvil	3/8"	M10	210	80	108	10-39/64"	268	1/4"NPT	3/8"	6.2	90	127	4.5	93.00	3.58	1.25	2.76	1 / 10
37434-080	1/2"	12.70	Std. anvil	3/8"	M10	210	80	108	10-39/64"	268	1/4"BSPT	3/8"	6.2	90	127	4.5	92.00	3.91	1.26	2.78	1 / 10
37434-081	1/2"	12.70	Std. anvil	3/8"	M10	210	80	108	10-39/64"	268	1/4"NPT	3/8"	6.2	90	127	4.5	92.00	3.91	1.26	2.78	1 / 10

Super Duty Air Ratchet Wrench

37323 | 37423

- Ergonomically enhanced composite handle
- 360° exhaust rotation leads the air away from working area
- Unique head design: dust free and prevent deformation and triples the life of parts
- Dual pawl design provides higher torque

3/8" & 1/2"

37323
37423

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
37323-080	3/8"	9.53	Std. anvil	3/8"	M10	280	80	108	11"	279	1/4"BSPT	3/8"	6.2	90	113	4.0	94.00	2.52	1.25	2.76	1 / 12
37323-081	3/8"	9.53	Std. anvil	3/8"	M10	280	80	108	11"	279	1/4"NPT	3/8"	6.2	90	113	4.0	94.00	2.52	1.25	2.76	1 / 12
37423-080	1/2"	12.70	Std. anvil	3/8"	M10	280	80	108	11"	279	1/4"BSPT	3/8"	6.2	90	113	4.0	93.00	2.07	1.25	2.76	1 / 12
37423-081	1/2"	12.70	Std. anvil	3/8"	M10	280	80	108	11"	279	1/4"NPT	3/8"	6.2	90	113	4.0	93.00	2.07	1.25	2.76	1 / 12

Air Ratchet Wrench

37235 / 37335 / 37435

- Working around tightly packed engines, machinery and equipment

1/4" & 3/8"

37235
37335

3/8"

37335

1/2"

37435

KT NO.	Square drive inch	Square drive mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
37235-030	1/4"	6.35	230	30	41	6-1/8"	155	1/4"BSPT	3/8"	6.2	90	71	2.5	92.00	10.50	0.49	1.08	1 / 20
37235-031	1/4"	6.35	230	30	41	6-1/8"	155	1/4"NPT	3/8"	6.2	90	71	2.5	92.00	10.50	0.49	1.08	1 / 20
37335-030	3/8"	9.53	230	30	41	6-1/8"	155	1/4"BSPT	3/8"	6.2	90	71	2.5	92.00	10.50	0.49	1.08	1 / 20
37435-075	1/2"	12.70	200	75	102	10-1/4"	260	1/4"BSPT	3/8"	6.2	90	113	4.0	92.00	10.50	1.20	2.64	1 / 20
37435-076	1/2"	12.70	200	75	102	10-1/4"	260	1/4"NPT	3/8"	6.2	90	113	4.0	92.00	10.50	1.20	2.64	1 / 20

Continuous Flow Air Grease Gun

9BV14

- Ideal for machine, automobile, farm and garden equipments, vehicles etc.
- 360° rotating handle

KT NO.	Air inlet (inch)	Screw Thread	Air Source Range input (psi/bar)	Air Source Range output (psi/bar)	Recommended Air Source input (psi/bar)	Recommended Air Source output (psi/bar)	Capacity c.c.	Capacity oz	Kg	
9BV1420	1/4"BSPT	M10 x 1.0P	60~150 psi (4.2~10.3 bar)	2400~6000 psi (165~413 bar)	90 psi (6.2 bar)	3600 psi (250 bar)	400	14	1.7	1 / 10

9BV1420 For Germany, South Africa, Egypt, etc.

Continuous Flow Air Grease Gun with 12" Tube

9BV14T

- Ideal for machine, automobile, farm and garden equipments, vehicles etc.
- 360° rotating handle

9BU8109
9BU8209
9BU8112
9BU8212

KT NO.	Air inlet (inch)	Screw Thread	Air Source Range input (psi/bar)	Air Source Range output (psi/bar)	Recommended Air Source input (psi/bar)	Recommended Air Source output (psi/bar)	Capacity c.c.	Capacity oz	Kg	
9BV1420T	1/4"BSPT	M10 x 1.0P	60~150 psi (4.2~10.3 bar)	2400~6000 psi (165~413 bar)	90 psi (6.2 bar)	3600 psi (250 bar)	400	14	1.7	1 / 10
9BU8109	9" length	1/8"-28NPT								
9BU8209	9" length	M10 x 1.0P								
9BU8112	12" length	1/8"-28NPT								
9BU8212	12" length	M10 x 1.0P								

9BV1420T For Germany, South Africa, Egypt, etc.

Air Blow Gun

7990

- Ideal for cleaning
- Steel nozzle & nylon fiber handle
- Air pressure : 90 psi recommended
- Air consumption : 1/4″ hose-13cfm-350l/min , 3/8″ hose-15cfm-430l/min
- Sound pressure : 85~90 dB
- Working pressure : 75~120 psi/5.3~8.4 kgf/cm^2
- Max pressure : 200 psi/ 14.07 kgf/cm^2



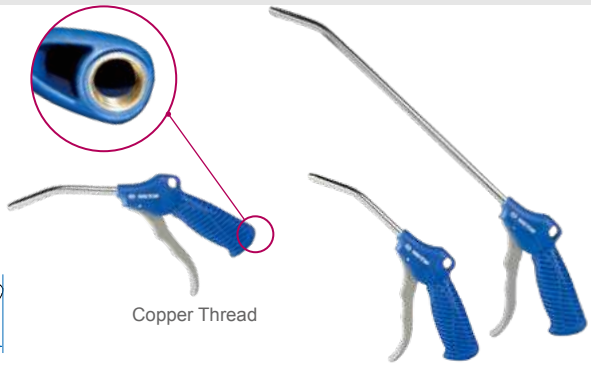

KT NO.	Air inlet inch	ℓ inch	ℓ mm	L (mm)	g	
79900-04	1/4"BSPT	4	100	245	200	20 / 100
79900-10	1/4"BSPT	10	250	420	240	25 / 50
79900-13	1/4"BSPT	13	330	475	260	25 / 50
79900-20	1/4"BSPT	20	500	650	300	25 / 50

KT NO.	Air inlet inch	ℓ inch	ℓ mm	L (mm)	g	
79901-04	1/4"NPT	4	100	245	200	20 / 100
79901-10	1/4"NPT	10	250	420	240	25 / 50
79901-13	1/4"NPT	13	330	475	260	25 / 50
79901-20	1/4"NPT	20	500	650	300	25 / 50

Spray Gun

79982

- Suitable for spraying a wide range of oils, cleaning agents and rustproofing liquids
- Fitted with fluid/air control valve

79982-06

79982-10

KT NO.	Max Capacity	Working Pressure(psi)	Air inlet connection	g	
79982-06	600 c.c	90-150	1/4″ BSPT(EU)	600	1 / 10
79982-10	1000 c.c	90-150	1/4″ BSPT(EU)	800	1 / 10

Interchangeable Air Blow Gun Set

New

7990A

- Mini blow gun with 6pcs quick release nozzle tip
- Unique design control airflow output
- Venturi nozzle for produce X2.7 boost air flow
- Flat jet nozzle tip 42mm wide low noise under 85dBA
- 100mm non-scratch nozzle tip
- 100mm steel extension nozzle tip
- Conical rubber nozzle tip allow extension wear
- Safety venting nozzle tip control under 30psi
- Plastic case size (mm) :
  207 x 170 x 55 (0.068 cuft)

KT NO.	Air inlet inch	Working pressure PSI	Temperature range
7990A	1/4"	90-120	-20°C to 85°C (-4°F to 185°F)

Contents

7990A-P01(1/4" BSPT)

7990A-P02

7990A-P03

7990A-P04

7990A-P05

7990A-P06

7990A-P07

Interchangeable Accessories

New

- Airflow adjusting knob (Mini type)

- Quick release

- Multi-angle adjustment for air blow direction(6 different angle, reduce the pressure to your wrist)



- Brass inlet

Mini Air Blow Gun 7990A-P01(1/4" BSPT)

7990A-P02

Plastic nozzle
100mm, NY+GF. Ideal for any kind of project, avoid causing damage to object

7990A-P05

Steel nozzle
ø6x100mm

7990A-P03

Turbo nozzle
Special structure, increase 270% of airflow

7990A-P06

Rubber nozzle
Preventing causing damage to object
(Use with steel nozzle)

7990A-P04

Noise reduction nozzle (42mm)
Sound less than 85 Decibel, low noise level

7990A-P07

Safety venting nozzle
The pressure will be reduced to below 30PSI . It's to make sure the pressure won't cause damage to human body (Use with steel nozzle)

3-In-1 Inflator

9BM

- Diaphragm pressure gauge
- Accuracy: ANSI B40.100 ±3% ~ ±2% ~ ±3%
- Special rubber housing protects manometer against light impacts
- 3 functions(check, release, inflator) all together on the press handle
- Variable trigger, two control positions for inflate/deflate level
- Flexible 400MM high pressure rubber hose with clip-on air tire chuck
- Pressure Range:
  0-160 psi (9BM21) / 0-220 psi (9BM22)
- Built in hang-up hook allows easy storage

9BM2110
9BM2111
9BM2210
9BM2211

9BM2110A
9BM2111A

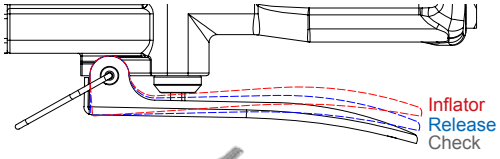

9BM2-01

9BM2-02

KT NO.	Pressure range (psi)	Air Inlet (BSPT/NPT)	L (mm) L1	L2	Air hose (ID)	g	
9BM2110	160	1/4"BSPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2111	160	1/4"NPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2210	220	1/4"BSPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2211	220	1/4"NPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2210A	220	1/4"BSPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2211A	220	1/4"NPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2-01	(included in all 9BM series)		20		-	25	-
9BM2-02	(included in 9BM2210A & 11A only)		185		-	105	-

PU Air Spiral Hose

79953

- Super mechanical strength and excellent abrasive resistance
- Superior heat and cold resistance
- Oil resistance
- Light weight
- Temperature resistance from -20° C ~ +60° C

79953

79962

79962

KT NO.	Hose I.D. (mm)	Hose O.D. (mm)	Hose Length (M)	Working Pressure (psi)	(bar)	Maximum Pressure (psi)	(bar)	Type	Male PT Fitting (inch)	Weight (kgs)	(lbs)	
79953-10	8	12	10	108	7.4	320	22.2	-	1/4"BSPT	0.80	1.76	1 / 20
79953-15	8	12	15	108	7.4	320	22.2	-	1/4"BSPT	1.30	2.87	1 / 12
79962-10	8	12	10	160	11.0	640	44.1	EU	1/4"BSPT	0.92	2.02	1 / 20
79962-15	8	12	15	160	11.0	640	44.1	EU	1/4"BSPT	1.31	2.87	1 / 12
79962-20	8	12	20	160	11.0	640	44.1	EU	1/4"BSPT	1.63	3.78	1 / 10

Air Hose Reel

7991

- Automatic rewind with SK5 alloy steel spring
- 16 teeth gear-stop ensures safety
- 300 psi working pressure allowed
- Sturdy structure with 0.7mm thick steel rail stored in iron case
- Replaceable air house design & hanging rack

CAUTION
Do not pull the air hose when seeing tag STOP

- Pull the air hose to the end till it shows joint replacement

- Install new air hose

- Dismantle connection

16 teeth gear design can spread stress evenly and stop returning

1 Bar = 1.01972 kgf/cm^2
1 Bar = 14.5036 psi

KT NO.	Hose I.D. mm	Hose O.D. mm	Hose length (M)	Type	Air Inlet / outlet inch	Working pressure psi	kg	
79910-10	8	12	10	Asian	1/4"BSPT	300	5.5	1 / 2
79910-15	8	12	15	Asian	1/4"BSPT	300	6.5	1 / 2
79911-10	8	12	10	US	1/4"NPT	300	5.5	1 / 2
79911-15	8	12	15	US	1/4"NPT	300	6.5	1 / 2
79912-10	8	12	10	EU	1/4"BSPT	300	5.5	1 / 2
79912-15	8	12	15	EU	1/4"BSPT	300	6.5	1 / 2

Air Lubricator

799A

- Semi auto drain valve
- Steel guards offer better protection
- Easy installation and disassembly

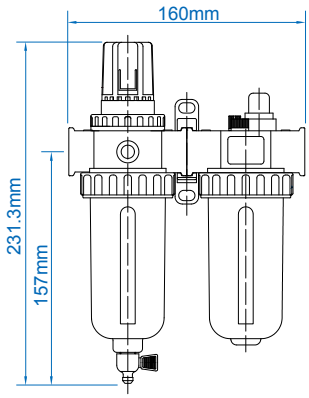

KT NO.	Port Size (inch)	Filter Element (μ)	Max Input Pressure (psi)	Max Output Pressure (psi)	Max Flow (L/min)	Operation Temperature Range (°C)	Drain Capacity (ml)	Oil Capactity (ml)	Air Inlet (inch)	Weight (Kgs) (lbs)	
799A0-23C	1/4"	5	215	7~150	1750	5 ~ 60	80	150	1/4"BSPT	1.40 3.17	1 / 12
799A1-23C	1/4"	5	215	7~150	1750	5 ~ 60	80	150	1/4"NPT	1.42 3.17	1 / 12
799A0-33C	3/8"	5	215	7~150	2500	5 ~ 60	80	150	3/8"BSPT	1.14 2.51	1 / 12
799A1-33C	3/8"	5	215	7~150	2500	5 ~ 60	80	150	3/8"NPT	1.14 2.51	1 / 12
799A0-43C	1/2"	5	215	7~150	3000	5 ~ 60	80	150	1/2" BSPT / NPT	1.15 2.53	1 / 12

Air Quick Coupler

KT NO.	Size	Type		g	
SY-211M	1/4"BSPT	European		21.4	12 / 504
SY-211F				22.8	10 / 420
SY-210M				88.4	20 / 240
SY-221M	1/4"BSPT	Asian		24.4	12 / 504
SY-221F				28.6	10 / 420
SY-260M				81.6	20 / 240
SY-210H	1/4" hose	European		78.0	15 / 180
SY-211H				18.0	10 / 320
SY-220H		Asian		87.0	10 / 320
SY-221H				31.0	10 / 320
SY-231M	1/4"NPT	American		23.6	12 / 504
SY-231F				21.2	10 / 420
SY-230M				85.5	20 / 240
SY-310H	3/8" hose	European		75.0	15 / 180
SY-311H				22.0	10 / 320
SY-320H		Asian		78.0	15 / 180
SY-321H				23.0	10 / 320
SY-410H	1/2" hose	European		82.0	15 / 180
SY-411H				26.0	10 / 320
SY-421M	1/2" BSPT/NPT	Asian		24.4	12 / 504

Mini Lubricator

33411-71 1/4"

KT NO.	Size	g	
33411-71	1/4"-19BSPT	90	1 / 150

Repair Tools Set

14103GP

- 3 PC. Impact wrench repair tools set
- Suitable for 33411-040, 33411-050, 33412-050, 33611-055, 33621-075, 33622-075

3 PC.

Contents kg 0.58 1 / 20

33011	
33012	
33013	

Tools Display Stand Set

87156A

- Overall Size - W 280 x D 170 x H 45 mm

1.9 Kg 1 / 1

Contents

	87156
	87154-01
	SY-210M x3
	SY-20A x6
	SY-10A x3

A4 size paper :
297 x 210mm

Impact Wrench Holder

871061

- Applied for 3/8″ & 1/2″ DR. air tools

KT NO.	Size	Type	g	/
871061A	1/4" x 19 BSPT	European	450	1 / 24
871061B	1/4" x 18 NPT	American		
871061F	1/4" x 19 BSPT	Asian		

KING TONY CR-MO
18 KING TONY

TORQUE CONTROL & MULTIPLIERS

Recyclable cylindrical package

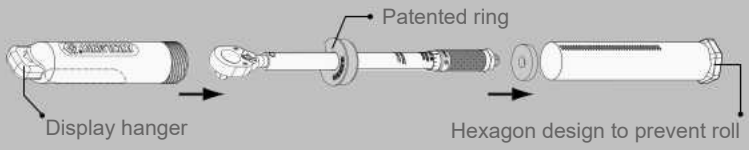

CAUTION

1. Do not use this torque wrench over its scale range.
2. Do not use this torque wrench as a normal hand tool.
3. Torque wrench need to be calibrated periodically for accuracy.

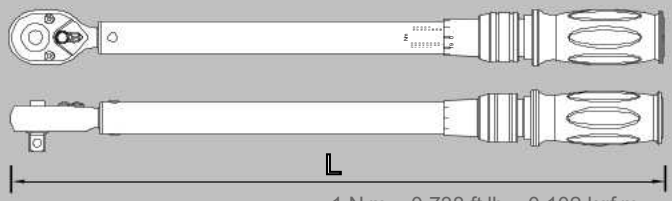

1 N·m = 0.738 ft·lb = 0.102 kgf·m
1 ft·lb = 1.356 N·m = 0.138 kgf·m
1 in·lb = 0.113 N·m = 1.152 kgf·cm

Calibration Instruction And Reminder of Torque Wrench

In test conditions, the torque wrench should remain within the tolerances laid down by DIN ISO 6789:2017 & ASME B107.300-2010 for 5000 cycles.

Practically, this may be affected and changed by ingress of dust, causing wear, or by damage caused by using the tool improperly such as to loosen fasteners or being dropped regularly.

Assume the users are trained to use the torque wrenches, and follow the manual, a period of twelve months is reasonable for torque wrenches used in non safety critical areas.

For those tools used in critical applications, a three month or even monthly check would be suggested.

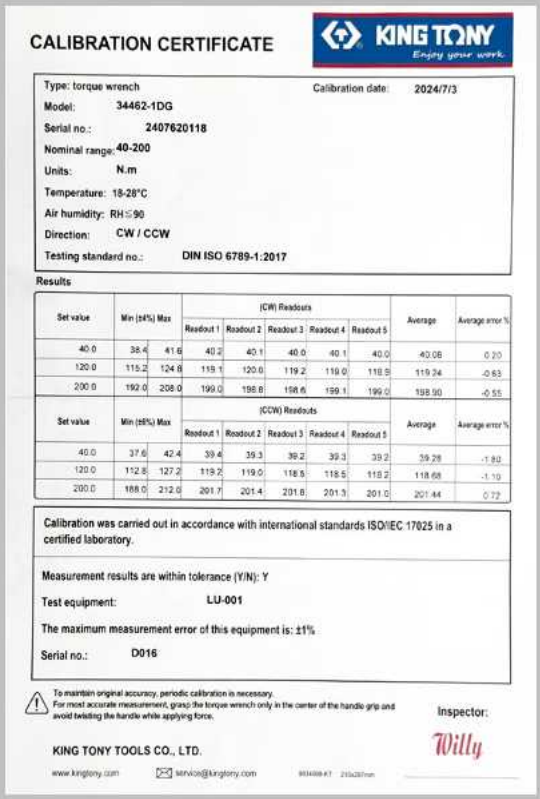

CALIBRATION CERTIFICATE

KING TONY Enjoy your work

Type: torque wrench
Calibration date: 2024/7/3
Model: 34462-1DG
Serial no.: 2407620118
Nominal range: 40-200
Units: N.m
Temperature: 18-28°C
Air humidity: RH≤90
Direction: CW / CCW
Testing standard no.: DIN ISO 6789-1:2017

Results

Set value	Min (±4%)	Max	(CW) Readouts					Average	Average error %
			Readout 1	Readout 2	Readout 3	Readout 4	Readout 5		
40.0	38.4	41.6	40.2	40.1	40.0	40.1	40.0	40.08	0.20
120.0	115.2	124.8	119.1	120.0	119.2	119.0	118.5	119.24	-0.63
200.0	192.0	208.0	199.0	198.8	198.6	199.1	199.0	198.90	-0.55

Set value	Min (±6%)	Max	(CCW) Readouts					Average	Average error %
			Readout 1	Readout 2	Readout 3	Readout 4	Readout 5		
40.0	37.6	42.4	39.4	39.3	39.2	39.3	39.2	39.28	-1.80
120.0	112.8	127.2	119.2	119.0	118.5	118.5	118.2	118.68	-1.10
200.0	188.0	212.0	201.7	201.4	201.8	201.3	201.0	201.44	0.72

Calibration was carried out in accordance with international standards ISO/IEC 17025 in a certified laboratory.

Measurement results are within tolerance (Y/N): Y

Test equipment: LU-001

The maximum measurement error of this equipment is: ±1%

Serial no.: D016

To maintain original accuracy, periodic calibration is necessary.
For most accurate measurement, grasp the torque wrench only in the center of the handle grip and avoid twisting the handle while applying force.

Inspector: Willy

KING TONY TOOLS CO., LTD.

www.kingtony.com service@kingtony.com

Calibration Certificate

Master Torque Control

62 SERIES

Quick:
Quick release and fine tooth gears design increases efficiency for safety tightening

Spring:
Made of high quality alloy steel to offer extended working cycles

Frame:
Hardened tube provides extreme durability against friction to assure precision of tolerance

Easy:
Auto lock design of torque adjustment provides quick and comfortable working experience

Lubrication:
Apply top industrial level lubrication to reduce friction and keep performance in good condition much longer

Sound:
Click sound and vibration reminds operator to stop in correct torque

•±3% tolerance of torque and 10,000 cycles durability performs better than international standard “DIN ISO 6789:2017 &
ASME B107.300-2010”
with ±4% tolerance and 5,000 cycles requirement

Heavy Duty Adjustable Torque Wrench

- Design for easy torque adjustment
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque ± 3%(CW)
- CW/CCW Direction

10,000 Precision In use

±3% Tolerance

Video QR Code

3/4" & 1" No Push

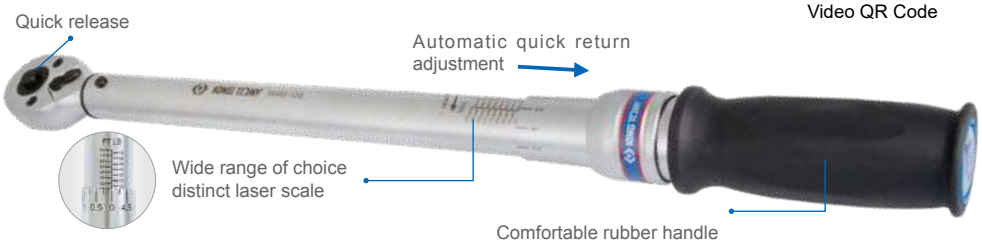

CG Series in.lb / ft.lb & N.m

1/4" 34262

KT NO	Square drive	Torque range in.lb/ft.lb	Incr.	Torque range N.m	Incr	Gear teeth	Overall length mm	g		DK
34262-1CG	1/4"	40~200 in.lb	1 in.lb	5.1~22.0	0.12N.m	24	324	640	1/12	**34262-1DK**

3/8" 34362

KT NO	Square drive	Torque range in.lb/ft.lb	Incr.	Torque range N.m	Incr	Gear teeth	Overall length mm	g		DK
34362-1CG	3/8"	40~200 in.lb	1 in.lb	5.1~22.0 N.m	0.12 N.m	24	324	640	1/12	**34362-1DK**
34362-2CG	3/8"	15-80 ft.lb	0.5 ft.lb	23.7~105.1 N.m	0.7 N.m	32	435	1300	1/12	**34362-2DK 34362-2xx/3xx**

1/2" 34462

KT NO	Square drive	Torque range in.lb/ft.lb	Incr.	Torque range N.m	Incr	Gear teeth	Overall length mm	g		DK
34462-1CG	1/2"	20~150 in.lb	1 in.lb	34~197 N.m	1.4 N.m	32	521	1590	1/12	**34462-1DK**
34462-2CG	1/2"	50~250 ft.lb	1 ft.lb	75~332 N.m	1.4 N.m	32	613	1810	1/12	**34462-1DK**

3/4" 34662

KT NO	Square drive	Torque range in.lb/ft.lb	Incr.	Torque range N.m	Incr	Gear teeth	Overall length mm	g		DK
034662-1CG	3/4"	100~450 ft.lb	5 ft.lb	169~576 N.m	6.8 N.m	24	1048	5500	1/2	**34662-1DK**
034662-2CG	3/4"	100~600 ft.lb	5 ft.lb	169~779 N.m	6.8 N.m	24	1234	5600	1/2	**34662-1DK**
034662-3CG	3/4"	150~750 ft.lb	5 ft.lb	237~983 N.m	6.8 N.m	24	1238	6150	1/2	**34662-1DK 34662-3DK 1:34662-3xxx series**

1" 34862

KT NO	Square drive	Torque range in.lb/ft.lb	Incr.	Torque range N.m	Incr	Gear teeth	Overall length mm	g		DK
34862-1CG	1"	150~750 ft.lb	5 ft.lb	237~983 N.m	6.8 N.m	24	1238	6150	1/2	**34862-2DK :series**
34862-2CG	1"	200~1000 ft.lb	5 ft.lb	305~1322 N.m	6.8 N.m	24	1850	10510	1/2	**34862-2DK :series**

Heavy Duty Adjustable Torque Wrench

- Design for easy torque adjustment
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque ± 3%(CW)
- CW/CCW Direction

10,000 Precision in use

±3% Tolerance

DG Series N.m

1/4" 34262

KT NO	Square drive	Torque range N.m	Incr.	Gear teeth	Overall length mm	g		DK
34262-2DG	1/4"	2~10 N.m	0.1 N.m	24	281	560	1/12	**34262-1DK**
34262-1DG	1/4"	4~20 N.m	0.1 N.m	24	324	640	1/12	**34262-1DK**
34262-3DG	1/4"	5~30 N.m	0.5 N.m	24	325	640	1/12	**34262-1DK**

3/8" 34362

KT NO	Square drive	Torque range N.m	Incr.	Gear teeth	Overall length mm	g		DK
34362-1DG	3/8"	4~20 N.m	0.1 N.m	24	324	640	1/12	**34362-1DK**
34362-3DG	3/8"	10~60 N.m	0.5 N.m	32	325	700	1/12	**34362-2DK 34362-2xx/3xx**
34362-2DG	3/8"	20~100 N.m	0.5 N.m	32	435	1300	1/12	**34362-2DK 34362-2xx/3xx**

1/2" 34462

KT NO	Square drive	Torque range N.m	Incr.	Gear teeth	Overall length mm	g		DK
034462-3DG	1/2"	20~100 N.m	1 N.m	32	436	1300	1/12	**34462-3DK: 34462-3DG/3GG**
034462-1DG	1/2"	40~200 N.m	1 N.m	32	521	1590	1/12	**34462-1DK**
034462-2DG	1/2"	60~340 N.m	2 N.m	32	613	1810	1/12	**34462-1DK**
034462-4DG	1/2"	80~400 N.m	2 N.m	32	613	1970	1/12	**34462-1DK**

3/4" 34662

KT NO	Square drive	Torque range N.m	Incr.	Gear teeth	Overall length mm	g		DK
034662-1DG	3/4"	100~600 N.m	5 N.m	24	1048	5500	1/2	**34662-1DK**
034662-2DG	3/4"	150~800 N.m	5 N.m	24	1234	5600	1/2	**34662-1DK**
034662-3DG	3/4"	200~1000 N.m	5 N.m	24	1238	6150	1/2	**34662-1DK 34662-3DK1: 34662-3xxx series**

1" 34862

KT NO	Square drive	Torque range N.m	Incr.	Gear teeth	Overall length mm	g		DK
34862-1DG	1"	200~1000 N.m	5 N.m	24	1238	6150	1/2	**34862-2DK:series**
34862-2DG	1"	300~1500 N.m	10 N.m	24	1850	10510	1/2	**34862-2DK:series**

Heavy Duty Adjustable Torque Wrench

- Design for easy torque adjustment
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque ± 3%(CW)
- CW/CCW Direction

10,000 Precision in use ±3% Tolerance

GG Series kgf.m & N.m

3/8" 34362

KT NO	Square drive	Torque range kgf.m	Incr.	Torque range N.m	Incr	Gear teeth	Overall length mm	g		DK
34362-1GG	3/8"	40~200 kgf.m	1 kgf.m	4.4~19.1	0.92	24	324	640	1/12	**34362-1DK**

1/2" 34362

KT NO	Square drive	Torque range kgf.m	Incr.	Torque range N.m	Incr	Gear teeth	Overall length mm	g		DK
034462-1GG	1/2"	400~2000 kgf.m	10 kgf.m	44.1~191.2 N.m	0.46 N.m	32	521	1590	1/12	**034462-1DK**
034462-3GG	1/2"	200~1000 kgf.m	5 kgf.m	22.1~95.6 N.m	4.9 N.m	32	436	1470	1/12	**034462-3DK: 34462-3DG/3GG**

Heavy Duty Mini-type Torque Wrench

- Industrial application
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque ±3%(CW)
- CW/CCW Direction

10,000 Precision in use ±3% Tolerance

MINI Series N.m

1/4" 3426C

KT NO	Square drive	Torque range N.m	Incr.	Gear teeth	Overall length mm	g		DK
3426C-1DF	1/4"	3~15 N.m	0.1 N.m	64	211	330	1/24	**3426C-1DK**
3426C-2DF	1/4"	5~25 N.m	0.2 N.m	64	249	430	1/24	**3426C-1DK**

3/8" 3436C

KT NO	Square drive	Torque range N.m	Incr.	Gear teeth	Overall length mm	g		DK
3436C-1DF	3/8"	3~15 N.m	0.1 N.m	64	211	450	1/24	**3436C-1DK**
3436C-2DF	3/8"	5~25 N.m	0.2 N.m	64	249	550	1/24	**3436C-1DK**

Heavy Duty Adjustable Torque Wrench

- Design for easy torque adjustment
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque ± 3%(CW)
- CW/CCW Direction

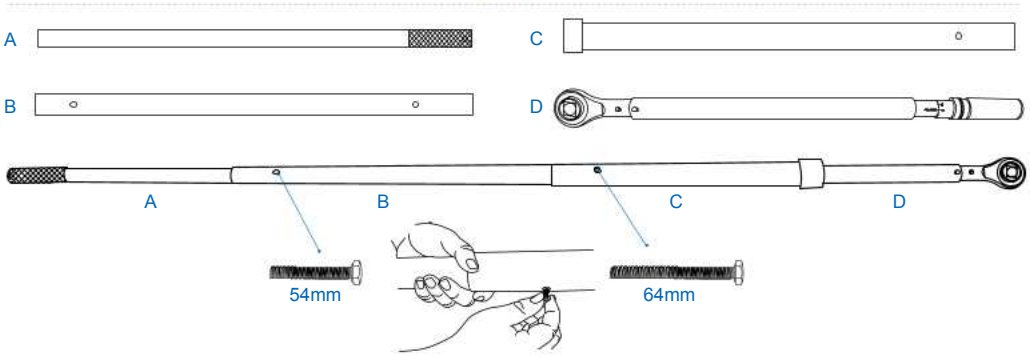

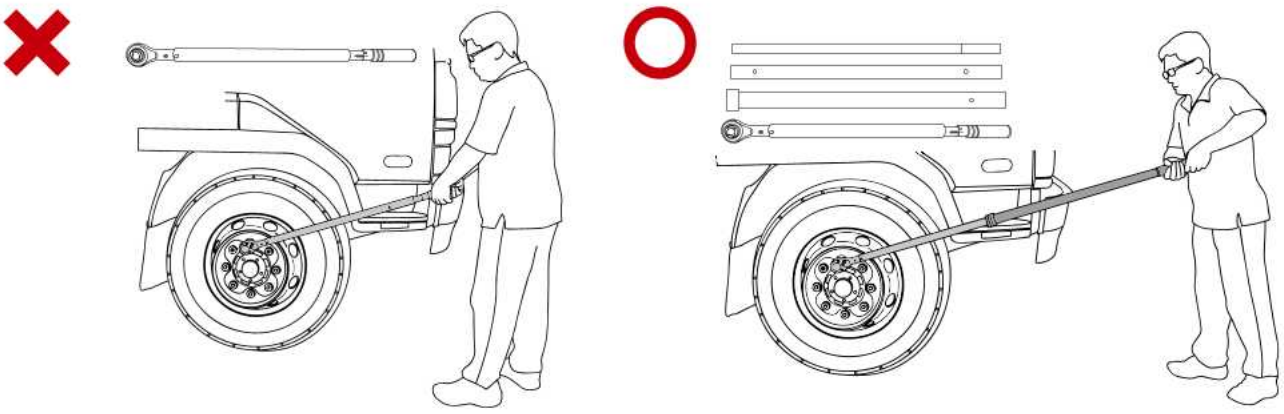

34862-3DK90 34862-3DK 34862-3DK91 34862-3DK92

1" 34862

KT NO	Square drive	Torque range ft.lb	Incr.	Torque range N.m	Incr.	Gear teeth	Overall length mm	g	
34862-3CF	1"	400~2000 ft.lb	10 ft.lb	610~2644 N.m	13.55 N.m	2755	23.99	1/1	1/12
34862-3FF	1"	443~1771 ft.lb	14.77 ft.lb	500~2500 N.m	20 N.m	2755	25.38	1/1	1/12

Heavy Duty 72 Teeth Adjustable Torque Wrench

- Colorful quick release button design
- Fixed head version allows using in narrow spaces
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque ± 3%(CW)
- CW/CCW Direction

10,000 Precision in use

±3% Tolerance

72 Teeth Series N.m

1/4" 3426A

KT NO	Square drive	Torque range N.m	incr.	Gear teeth	Overall length mm	g		DK
3426A-1DG	1/4"	2~10 N.m	0.1 N.m	72	285	560	1/24	3426A-1DK02 (series No.before 19106A)
3426A-2DG	1/4"	4~20 N.m	0.1 N.m	72	325	640	1/24	

3/8" 3436A

KT NO	Square drive	Torque range N.m	incr.	Gear teeth	Overall length mm	g		DK
3436A-2DG	3/8"	20~100 N.m	0.5 N.m	72	430	1300	1/12	3436A-2DK 3436A-2DK02 (series No.before 19106A) 3436A-2DK03 (series No.before 2209)

1/2" 3446A

KT NO	Square drive	Torque range N.m	incr.	Gear teeth	Overall length mm	g		DK
3446A-1DG	1/2"	40~200 N.m	1 N.m	72	490	1400	1/12	3446A-1DK 3446A-1DK02 (series No.before 19106A) 3446A-1DK03 (series No.before 2209)
3446A-2DG	1/2"	60~340 N.m	2 N.m	72	590	1750	1/12	

Heavy Duty Interchangeable Torque Wrench

- Using standard insert head
- Positive button design which removes the insert head easily
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque ± 3%(CW)
- CW/CCW Direction

10,000 Precision in use

±3% Tolerance

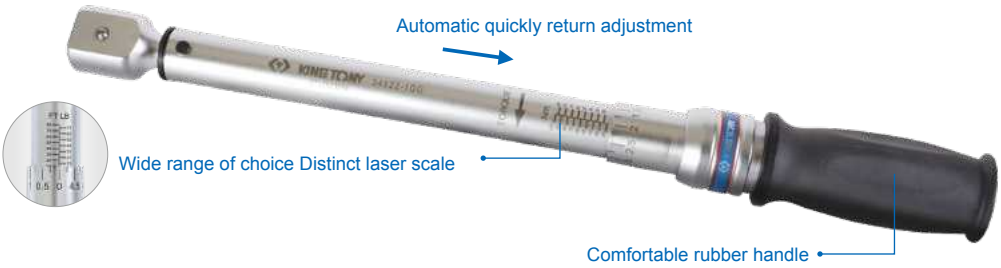

Interchangeable Series in.lb / ft.lb & N.m

9*12 34512

KT NO	Size mm	Torque range in.lb/ft.lb	Incr.	Torque range N.m	Incr.	Overall length mm	g	
34512-1CG	9*12	20~100 in.lb	1 in.lb	2.8~10.7 N.m	0.12 N.m	261	510	1/12
34512-2CG	9*12	40~200 in-lb	1 in.lb	5.1~22.0 N.m	0.12 N.m	306	590	1/12
34512-3CG	9*12	15~80 ft.lb	0.5 ft.lb	23.7~105.1 N.m	0.7 N.m	403	1286	1/12

14*18 34522

KT NO	Size mm	Torque range in.lb/ft.lb	Incr.	Torque range N.m	Incr.	Overall length mm	g	
34522-1CG	14*18	15~80 ft.lb	0.5 ft.lb	23.7~105.1 N.m	0.7 N.m	430	1286	1/12
34522-2CG	14*18	20~150 ft.lb	1 ft.lb	34~197 N.m	1.4 N.m	485	1410	1/12
34522-3CG	14*18	50~250 ft.lb	1 ft.lb	75~332 N.m	1.4 N.m	585	1602	1/12

Interchangeable Series N.m

9*12 34512

KT NO	Size mm	Torque range N.m	Incr.	Overall length mm	g	
34512-1DG	9*12	2~10 N.m	0.1 N.m	261	510	1/12
34512-2DG	9*12	4~20 N.m	0.1 N.m	306	590	1/12
34512-4DG	9*12	10~60 N.m	0.5 N.m	306	590	1/12
34512-3DG	9*12	20~100 N.m	0.5 N.m	403	1286	1/12

14*18 34522

KT NO	Size mm	Torque range N.m	Incr.	Overall length mm	g	
34522-5DG	14*18	10~60 N.m	0.5 N.m	430	1286	1/12
34522-1DG	14*18	20~100 N.m	0.5 N.m	430	1286	1/12
34522-2DG	14*18	40~200 N.m	1 N.m	485	1410	1/12
34522-3DG	14*18	60~340 N.m	2 N.m	585	1602	1/12
34522-7DG	14*18	70~350 N.m	2 N.m	585	1602	1/12
34522-9DG	14*18	80~400 N.m	2 N.m	585	1602	1/12
34522-4DG	14*18	100~600 N.m	5 N.m	1015	6200	1/2
34522-6DG	14*18	150~800 N.m	5 Nm	1195	6620	1/2
34522-8DG	14*18	200~1000 N.m	5 Nm	1200	6620	1/2

Insert Tool

345031

Chrome plated

- Ratchet insert tool
- Square drive size : 9 x 12
- 5° gear action degree (72 teeth)
- Interchageable head for interchangeable torque wrenches



KT NO.	Size	Maximum Torque N.m	Lw* mm	L mm	g		DK
34503102R	1/4" DR.	62	17.0	46.0	68	12 / 192	3426A-1DK02 (series No.before 19106A)
34503103R	3/8" DR.	202	17.6	49.0	99	10 / 160	3436A-2DK 3436A-2DK02 (series No.before 19106A) 3436A-2DK03 (series No.before 2209)
34503104R	1/2" DR.	512	25.0	61.9	216	6 / 96	3446A-1DK(series No.before 17086A) 3446A-1DK02 (series No.before 19106A) 3446A-1DK03 (series No.before 2209)

345032

Chrome plated

- Ratchet insert tool
- Square drive size : 14 x 18
- 5° gear action degree (72 teeth)
- Interchageable head for interchangeable torque wrenches



KT NO.	Size	Maximum Torque N.m	Lw* mm	L mm	g		DK
34503203R	3/8" DR.	202	25	70.0	239	6 / 96	3436A-2DK 3436A-2DK02 (series No.before 19106A) 3436A-2DK03 (series No.before 2209)
34503204R	1/2" DR.	512	25	70.0	248	6 / 96	3446A-1DK(series No.before 17086A) 3446A-1DK02 (series No.before 19106A) 3446A-1DK03 (series No.before 2209)
34503206R	3/4" DR.	800	25	71.5	353	4 / 64	3446A-1DK (series No.before 17086A) 3466A-1DK01 / 3466A-1DK01 / 3466A-1DK03
New **34503206R1**	3/4" DR.	1000	25	71.5	353	4 / 64	

345011

Chrome plated

- Open end insert tool
- Square drive size : 9 x 12

KT NO.	Size mm	Maximum Torque N.m	Lw* mm	L mm	g		
34501107M	7	10	17.5	37.4	36	12 / 192	
34501108M	8	13	17.5	37.9	38	12 / 192	
34501109M	9	19	17.5	37.9	38	12 / 192	
34501110M	10	25	17.5	38.2	41	12 / 192	
34501111M	11	33	17.5	39.0	39	12 / 192	
34501112M	12	42	17.5	39.0	41	12 / 192	
34501113M	13	52	17.5	39.3	44	12 / 192	
34501114M	14	64	20	43.1	54	12 / 192	
34501115M	15	77	20	43.4	58	12 / 192	
34501116M	16	93	20	43.9	57	12 / 192	
34501117M	17	110	20	44.4	61	12 / 192	
34501118M	18	130	20	45.3	62	12 / 192	
34501119M	19	150	20	45.0	66	12 / 192	
34501121M	21	198	25	52.4	118	10 / 160	
34501122M	22	225	25	53.1	124	10 / 160	
34501124M	24	287	25	54.1	128	8 / 128	
34501127M	27	400	32.5	60.1	198	8 / 128	
34501130M	30	537	32.5	60.9	195	10 / 80	
34501132M	32	644	32.5	62.6	213	10 / 80	
34501136M	36	762	32.5	64.8	213	10 / 80	



KT NO.	Size inch	Maximum Torque N.m	Lw* mm	L mm	g	
34501108S	1/4	10	17.5	37.4	36	12 / 192
34501110S	5/16	13	17.5	37.9	38	12 / 192
34501112S	3/8	25	17.5	38.2	40	12 / 192
34501114S	7/16	33	17.5	39.0	41	12 / 192
34501116S	1/2	52	17.5	39.3	43	12 / 192
34501118S	9/16	64	20.0	43.1	53	12 / 192
34501120S	5/8	93	20.0	43.9	59	12 / 192
34501122S	11/16	110	20.0	44.4	63	12 / 192
34501124S	3/4	150	20.0	45.0	64	12 / 192

Insert Tool

345014

Chrome plated

- Square drive size : 9 x 12

KT NO.	Size mm	Maximum Torque N.m	Lw* mm	L mm	g	
34501410M	10	25	17.5	42.4	53	12 / 192
34501411M	11	33	17.5	43.0	53	12 / 192
34501412M	12	42	17.5	43.8	53	12 / 192
34501413M	13	52	17.5	43.9	54	12 / 192
34501414M	14	64	17.5	44.3	57.6	12 / 192
34501416M	16	93	17.5	45.0	61	12 / 192
34501417M	17	110	17.5	45.4	62	12 / 192
34501418M	18	130	17.5	46.0	67	12 / 192
34501419M	19	150	17.5	46.7	70	12 / 192
34501421M	21	198	17.5	47.6	72	12 / 192
34501422M	22	225	17.5	48.5	74	12 / 192



345021

Chrome plated

- Ring insert tool
- Square drive size : 9 x 12



KT NO.	Size mm	Maximum Torque N.m	Lw* mm	L mm	g	
34502107M	7	26	17.5	39.8	37	12 / 288
34502108M	8	35	17.5	40.5	37	12 / 288
34502110M	10	60	17.5	41.6	40	12 / 288
34502111M	11	73	17.5	43.3	42	12 / 288
34502112M	12	90	17.5	43.8	51	12 / 288
34502113M	13	108	17.5	44.5	52	12 / 288
34502114M	14	128	17.5	45.2	53	12 / 288
34502115M	15	152	17.5	45.9	55	12 / 288
34502116M	16	175	17.5	46.3	57	12 / 288
34502117M	17	202	17.5	47.0	55	12 / 192
34502118M	18	230	17.5	47.4	61	12 / 192
34502119M	19	262	17.5	49.2	63	12 / 192
34502121M	21	330	17.5	50.3	68	12 / 192
34502122M	22	360	17.5	51.2	73	12 / 192

KT NO.	Size inch	Maximum Torque N.m	Lw* mm	L mm	g	
34502108S	1/4	26	17.5	39.8	38	12 / 288
34502110S	5/16	35	17.5	40.5	37	12 / 288
34502112S	3/8	60	17.5	41.6	42	12 / 288
34502114S	7/16	73	17.5	43.3	42	12 / 288
34502116S	1/2	108	17.5	44.5	52	12 / 288
34502118S	9/16	152	17.5	45.2	53	12 / 288
34502120S	5/8	175	17.5	46.3	58	12 / 288
34502122S	11/16	202	17.5	47.0	62	12 / 192
34502124S	3/4	262	17.5	49.2	65	12 / 192
34502126S	13/16	330	17.5	50.3	72	12 / 192
34502128S	7/8	360	17.5	51.2	70	12 / 192

345012

Chrome plated

- Open end insert tool
- Square drive size : 14 x 18



KT NO.	Size mm	Maximum Torque N.m	Lw* mm	L mm	g	
34501213M	13	52	25	57.5	114	12 / 192
34501214M	14	64	25	58.0	115	12 / 192
34501215M	15	77	25	58.0	118	12 / 192
34501216M	16	93	25	58.5	125	10 / 160
34501217M	17	110	25	59.5	135	10 / 160
34501218M	18	130	25	60.0	134	10 / 160
34501219M	19	150	25	60.5	136	10 / 160
34501221M	21	198	25	61.0	153	6 / 96
34501222M	22	225	25	62.0	158	6 / 96
34501223M	23	255	25	63.1	166	6 / 96
34501224M	24	287	25	63.1	163	6 / 96
34501225M	25	322	25	69.0	162	6 / 96
34501226M	26	359	30	69.0	230	6 / 96
34501227M	27	400	32.5	69.0	239	6 / 96
34501230M	30	537	32.5	70.6	239	6 / 96
34501232M	32	644	32.5	72.1	248	6 / 72
34501234M	34	762	32.5	73.2	246	6 / 72
34501236M	36	800	32.5	73.3	244	6 / 72
34501238M	38	800	32.5	72.7	222	6 / 72
34501240M	40	800	37	80.5	321	6 / 72
34501241M	41	800	37	80.5	315	6 / 72

KT NO.	Size inch	Maximum Torque N.m	Lw* mm	L mm	g	
34501216S	1/2	52	25	57.5	117	12 / 192
34501218S	9/16	64	25	58.0	121	12 / 192
34501220S	5/8	93	25	58.5	127	10 / 160
34501222S	11/16	110	25	59.5	135	10 / 160
34501224S	3/4	150	25	60.5	140	10 / 160
34501226S	13/16	198	25	61.0	156	6 / 96
34501228S	7/8	225	25	62.0	162	6 / 96
34501230S	15/16	287	25	63.1	168	6 / 96
34501232S	1	322	25	69.0	232	6 / 96
34501236S	1-1/8	537	32.5	70.6	243	6 / 96
34501240S	1-1/4	644	32.5	72.1	242	6 / 96
34501248S	1-1/2	800	32.5	72.7	226	6 / 96

Insert Tool

345022

Chrome plated

- Square drive size : 14 x 18

KT NO.	Size mm	Maximum Torque N.m	Lw* mm	L mm	g	
34502213M	13	108	25	62.2	129	12 / 192
34502214M	14	128	25	63.2	128	12 / 192
34502215M	15	152	25	63.3	125	12 / 192
34502216M	16	175	25	63.1	137	12 / 192
34502217M	17	202	25	65.0	134	12 / 192
34502218M	18	230	25	65.0	134	10 / 160
34502219M	19	262	25	66.7	135	10 / 160
34502221M	21	330	25	67.3	151	10 / 160
34502222M	22	368	25	68.5	156	6 / 96
34502224M	24	452	25	69.9	156	6 / 96
34502227M	27	595	31	78.0	201	6 / 96
34502230M	30	762	31	79.6	198	6 / 96
34502232M	32	800	31	81.0	201	6 / 96
34502234M	34	800	31	82.4	225	6 / 90
34502236M	36	800	31	83.7	230	6 / 90
34502241M	41	800	31	86.6	235	6 / 90

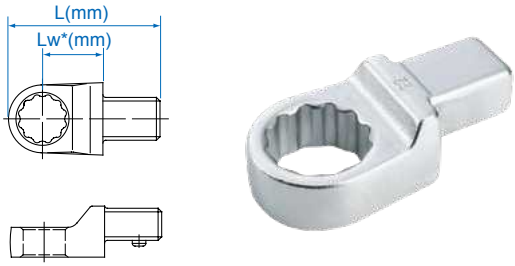

KT NO.	Size inch	Maximum Torque N.m	Lw* mm	L mm	g	
34502216S	1/2	108	25	62.2	128	12 / 192
34502218S	9/16	128	25	63.2	128	12 / 192
34502220S	5/8	175	25	63.1	132	12 / 192
34502224S	3/4	262	25	66.7	141	10 / 160

34505102R

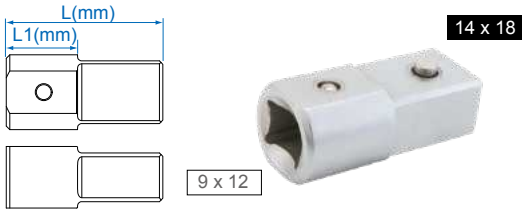

KT NO.	mm	mm	L1 mm	L mm	g	
34505102R	9 x 12	14 x 18	20.5	45.5	82.2	12 / 144

34505201R

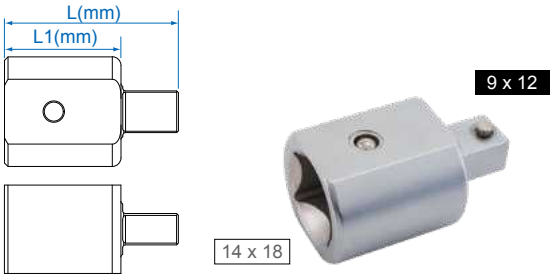

KT NO.	mm	mm	L1 mm	L mm	g	
34505201R	14 x 18	9 x 12	33.5	49.5	131.8	12 / 144

Hook Wrench Head & Set

345042M

- Square drive size: 14 x 18

KT NO.	Size mm	Capacity mm	Maximum Torque N.m	Lw* mm	L mm	g	
34504236M	36	28-36	354	77	121	248.20	12 / 72
34504245M	45	40-45	377	77	129	274.00	12 / 72
34504255M	55	50-55	398	77	129	263.20	12 / 72
34504262M	62	58-62	421	77	134	278.20	12 / 72
34504275M	75	68-75	444	77	139	294.60	12 / 72
34504290M	90	80-90	465	77	142	288.80	12 / 72

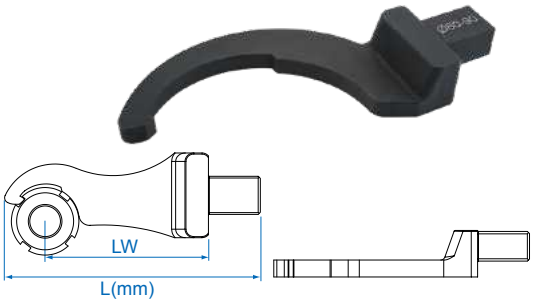

3452407MR

- Suitable for tightening round nuts with radial notches
- Applied with interchangeable torque wrench
- Widely used in automobile, machine tool building and petroleum industries

Contents		kg	
		2.48	1 / 6
34505201R	14 x 18(F) ➔ 9 x 12(M)		
345042M	36, 45, 55, 62, 75, 90		

Interchangeable Torque Wrench Set

34510

34520

KT NO.	mm	Contents								
345102D08MR	9 x 12	34512-2DG	4~20 N·m		34503102R	1/4" DR.	345011M 10, 13, 17	345021M 10, 13, 17	1.3	1 / 15
345104D08MR		34512-4DG	10~60 N·m		34503103R	3/8" DR.			1.3	1 / 15
345101E08MR		34512-1EG	20~100 in·lb		34503102R	1/4" DR.			1.2	1 / 15
345102E08MR		34512-2EG	40~200 in·lb		34503102R	1/4" DR.			1.3	1 / 15

KT NO.	mm	Contents							
345202C11MR	14 x 18	34522-2CG	20~150 ft·lb 34~197 N·m		34503204R	1/2" DR.	345012M 13, 14, 15, 17, 19, 22, 24, 27, 30	3.8	1/6
345201D11MR		34522-1DG	20~100 N·m		34503203R	3/8" DR.		3.7	1 / 6
345202D11MR		34522-2DG	40~200 N·m		34503204R	1/2" DR.		3.8	1 / 6
345203D11MR		34522-3DG	60~340 N·m		34503204R	1/2" DR.		4	1 / 6
345201E11MR		34522-1EG	15~80 ft·lb		34503203R	3/8" DR.		3.7	1 / 6
345202E11MR		34522-2EG	20~150 ft·lb		34503204R	1/2" DR.		3.8	1 / 6
345203E11MR		34522-3EG	50~250 ft·lb		34503204R	1/2" DR.		4	1 / 6

Classic Type Adjustable Torque Wrench

- Design for easy torque adjustment
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque ± 4%(CW)
- CW/CCW Direction

5,000 Precision in use

±4% Tolerance

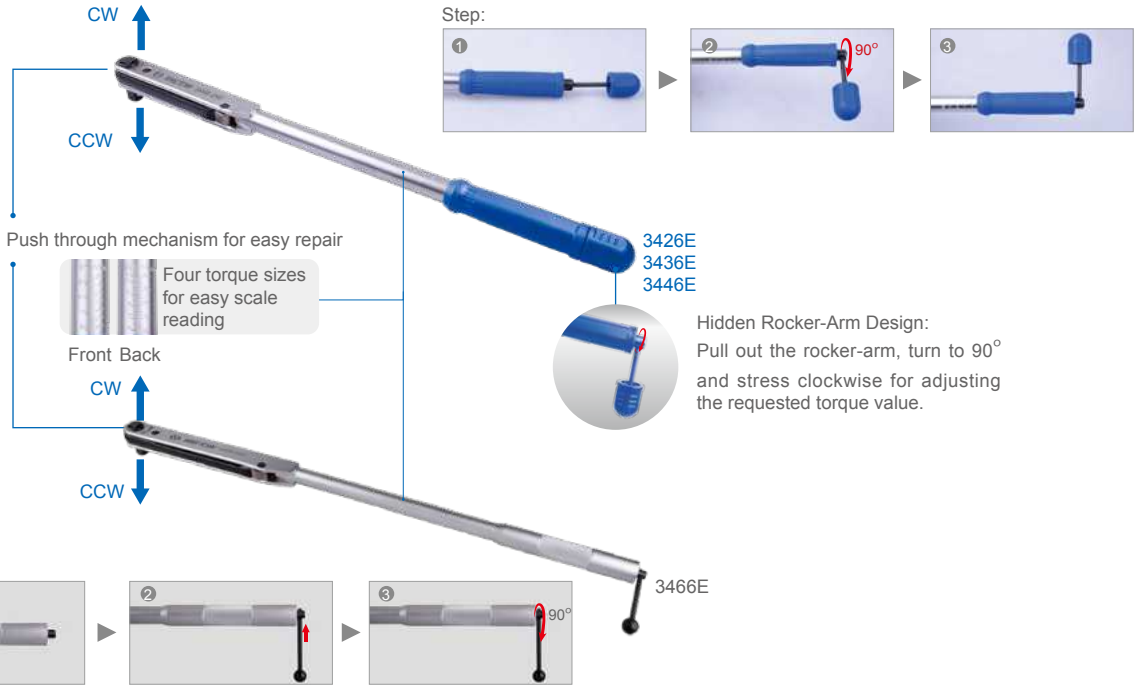

Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb / in·lb & kgf·m)

1/4" 3426E

KT NO	Square drive	Torque range N.m	Incr.	ft.lb	Incr.	in.lb	Incr.	kgf.m	Incr.	Overall length mm	g		DK
3426E-1HG	1/4"	2.5~11 N.m	0.5	2~8 ft.lb	1	20~100 in.lb	10	0.3~1.2 kgf.m	0.1	352	630	1 / 12	3426E-1DK

3/8" 3436E

KT NO	Square drive	Torque range N.m	Incr.	ft.lb	Incr.	in.lb	Incr.	kgf.m	Incr.	Overall length mm	g		DK
3436E-1HG	3/8"	2.5~11 N.m	0.5	2~8 ft.lb	1	20~100 in.lb	10	0.3~1.2 kgf.m	0.1	352	740	1 / 12	3436E-1DK
3436E-2HG	3/8"	7~33 N.m	1	5~24 ft.lb	1	60~300 in.lb	10	0.7~3.4 kgf.m	0.1	450	870	1 / 12	3436E-1DK
3436E-3HG	3/8"	14~68 N.m	2	10~50 ft.lb	5	125~600 in.lb	25	1.4~7 kgf.m	0.2	505	1210	1 / 12	3436E-1DK

1/2" 3446E

KT NO	Square drive	Torque range N.m	Incr.	ft.lb	Incr.	in.lb	Incr.	kgf.m	Incr.	Overall length mm	g		DK
3446E-1HG	1/2"	25~135 N.m	5	20~100 ft.lb	2	200~1200 in.lb	50	3~14 kgf.m	1	555	1640	1 / 12	3446E-1DK
3446E-2HG	1/2"	50~225 N.m	5	40~160 ft.lb	5	400~2000 in.lb	50	5~23 kgf.m	1	590	1710	1 / 12	3446E-1DK
3446E-3HG	1/2"	70~330 N.m	10	50~250 ft.lb	5	600~3000 in.lb	100	7~35 kgf.m	1	803	3440	1 / 6	3446E-1DK

3/4" 3466E

KT NO	Square drive	Torque range N.m	Incr.	ft.lb	Incr.	in.lb	Incr.	kgf.m	Incr.	Overall length mm	g		DK
3466E-1HG	3/4"	140~560 N.m	10	100~410 ft.lb	10	1200~5000 in.lb	100	14~57 kgf.m	1	977	8480	1 / 2	3466E-1DK
3466E-2HG	3/4"	200~800 N.m	20	150~600 ft.lb	20	1800~7200 in.lb	200	22~82 kgf.m	2	1033	8860	1 / 2	3466E-1DK

Window Type Adjustable Torque Wrench

- Adjustable torque wrench with window dual scale
- Tolerance of torque ± 3% clockwise
- Dual scale in N·m and ft·lb conversion table on window
- Grip handle and large number NM on center handle for setup required torque
- Simple lock and unlock knob for quick in adjustment
- Durable mechanism with over 10,000 cycles within accuracy
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- The 3/4" torque wrenches have a cylinder body

10,000 Precision in use

±3% Tolerance

CAUTION

1. Do not use this torque wrench over its scale range.
2. Do not use this torque wrench as a normal hand tool.
3. Torque wrench need to be calibrated periodically for accuracy.

1/4" 34266

KT NO.	Gear teeth	Square drive	Torque range N·m	Incr.	Torque range ft·lb	Overall length mm	g		DK
34266-1FG	24	1/4"	5-25 N·m	0.1 N·m	3.6-18 ft·lb	296	410	1 / 12	2761DK

3/8" 34366

KT NO.	Gear teeth	Square drive	Torque range N·m	Incr.	Torque range ft·lb	Overall length mm	g		DK
34366-1FG	32	3/8"	10-50 N·m	0.25 N·m	7.4-37 ft·lb	333	470	1 / 12	34362-1DK

1/2" 34466

KT NO.	Gear teeth	Square drive	Torque range N·m	Incr.	Torque range ft·lb	Overall length mm	g		DK
34466-1FG	32	1/2"	20-100 N·m	0.5 N·m	15-75 ft·lb	398	820	1 / 12	34462-3DK
34466-2FG	32	1/2"	40-200 N·m	1 N·m	30-150 ft·lb	500	1300	1 / 12	34462-1DK
34466-3FG	32	1/2"	60-300 N·m	1 N·m	45-220 ft·lb	633	1470	1 / 12	34462-1DK

3/4" 34666

KT NO.	Gear teeth	Square drive	Torque range N·m	Incr.	Torque range ft·lb	Overall length mm	g		DK
34666-1FG	24	3/4"	100~600 N·m	2 N·m	75~440 ft·lb	1040	4650	1 / 2	34666-1DK
34666-2FG	24	3/4"	150~800 N·m	2 N·m	110~590 ft·lb	1235	5450	1 / 2	34666-1DK
34666-3FG	24	3/4"	200~1000 N·m	2 N·m	150~740 ft·lb	1238	5450	1 / 2	34666-3DK

Click Type Adjustable Torque Wrench

- Industrial application with durability
- Loud click sound and strong impulse when required torque is reached
- Tolerance of torque ± 3%(CW)
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Ideal for using on oily, chemical and noisy assembling working field
- CW/CCW Direction

10,000 Precision in use | ±3% Tolerance

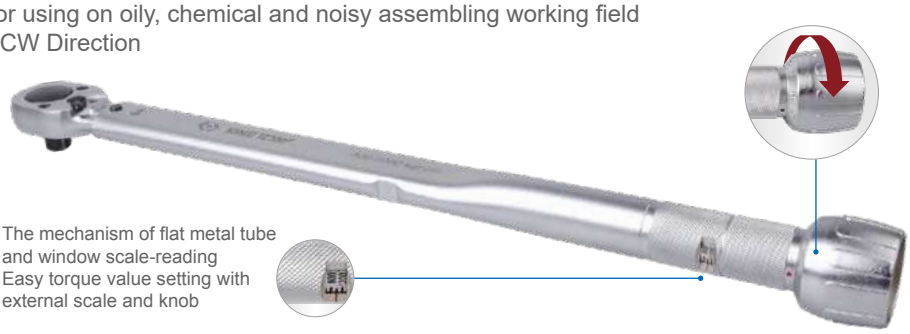

3/8" 3432F

KT NO.	Gear teeth	Square drive	Torque range kgf·cm	Incr.	Overall length mm	g		DK
3432F-1KF	24	3/8"	50-250 kgf·cm	2.5 kgf·cm	240	450	1 / 24	3432F-1DK
3432F-3KF	24	3/8"	200-1000 kgf·cm	10 kgf·cm	342	800	1 / 12	3442F-1DK

1/2" 3442F

KT NO.	Gear teeth	Square drive	Torque range kgf·cm	Incr.	Overall length mm	g		DK
3442F-1KF	24	1/2"	200-1000 kgf·cm	10 kgf·cm	342	800	1 / 12	3432F-1DK
3442F-3KF	24	1/2"	400-2000 kgf·cm	20 kgf·cm	498	1500	1 / 12	3442F-1DK

Adjustable Torque Wrench

- Design for easy torque adjustment
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque ± 4%(CW)
- CW/CCW Direction

5,000 Precision in use | ±4% Tolerance

- The production of injection molding helps it against come off



- One hand operation
- Quick torque set
- Automatic torque locking

1/2" 34464

KT NO	Gear teeth	Square drive	Torque range N.m	Torque range ft.lb	Incr.	Overall length mm	g		DK
34464-1FG	24	1/2"	40-210 N·m	(33.2-151.2 ft·lb)	1.0 N·m	470	1250	1 / 12	34464-1DK
34464-2FG	24	1/2"	70-340 N·m	(62.7-239.7 ft·lb)	3.0 N·m	590	1590	1 / 12	34464-1DK

Adjustable Torque Wrench

- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque ± 4%(CW)
- CW/CCW Direction

5,000 Precision in use

±4% Tolerance

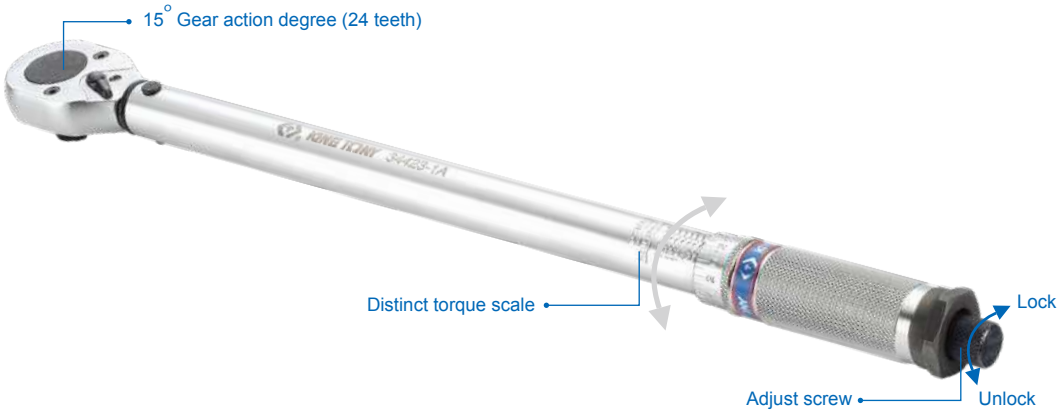

1/4" 34223

KT NO	Square drive	Torque range N.m	Incr	Torque range kgf.m / kgf.cm	Incr	Overall length mm	g		DK
34223-1A	1/4"	5~25 N.m	0.1 N·m	51~255 kgf.cm	1 kgf.cm	280	595	1 / 12	34223-1DK1
34223-1B	1/4"	55~250 in·lb	1.5 in·lb	63~288 kgf.cm	1.13 kgf.cm	280	595	1 / 12	34223-1DK1
34223-1C	1/4"	55~250 in·lb	1 in·lb	6.2~28.2 N.m	0.17 N.m	280	595	1 / 12	34223-1DK1

3/8" 34323

KT NO	Square drive	Torque range N.m	Incr	Torque range kgf.m / kgf.cm	Incr	Overall length mm	g		DK
34323-1A	3/8"	5~25 N.m	0.1 N.m	51~255 kgf.cm	1 kgf.cm	280	595	1 / 12	34323-1DK1
34323-2A	3/8"	20~110 N.m	1 N.m	2.04~11.22 kgf.m	0.1 kgf.m	370	820	1 / 12	34323-2DK1
34323-1B	3/8"	55~250 in.lb	1.5 in.lb	63~288 kgf.cm	1.13 kgf.cm	280	595	1 / 12	34323-1DK1
34323-2B	3/8"	15~80 ft.lb	0.5 ft.lb	2.1~11.10 kgf.m	0.07 kgf.m	370	820	1 / 12	34323-2DK1
34323-1C	3/8"	55~250 in.lb	1 in.lb	6.2~28.2 N.m	0.17 N.m	280	595	1 / 12	34323-1DK1
34323-2C	3/8"	15~80 ft.lb	0.5 ft.lb	20.3~108.5 N.m	0.68 N.m	370	820	1 / 12	34323-2DK1

1/2" 34423

KT NO	Square drive	Torque range N.m	Incr	Torque range kgf.m / kgf.cm	Incr	Overall length mm	g		DK
34423-1A	1/2"	42~210 N.m	1 N.m	4.3~21.4 kgf.m	0.41 kgf.m	450	1340	1 / 12	34423-1DK1(24T) -series NO. before 090923xxxx
34423-2A	1/2"	70~340 N.m	3 N.m	7.1~34.7 kgf.m	0.27 kgf.m	570	2400	1 / 12	34423-1DK1(24T) -series NO. before 090923xxxx 34423-3DK(24T) -series NO. after 1309230001
34423-1B	1/2"	30~150 ft.lb	1 ft.lb	4.2~20.8 kgf.m	0.14 kgf.m	450	1340	1 / 12	34423-1DK1(24T) -series NO. before 090923xxxx
34423-2B	1/2"	50~250 ft.lb	2 ft.lb	6.9~34.6 kgf.m	0.27 kgf·m	570	2400	1 / 12	34423-1DK1(24T) -series NO. before 090923xxxx 34423-3DK(24T) -series NO. after 1309230001
34423-1C	1/2"	30~150 ft.lb	1 ft.lb	40.7~203.4 N.m	1.35 N.m	450	1658	1 / 12	34423-1DK1(24T) -series NO. before 090923xxxx
34423-2C	1/2"	50~250 ft.lb	2 ft.lb	67.8~339 N.m	2.71 N.m	570	2400	1 / 12	34423-1DK1(24T) -series NO. before 090923xxxx 34423-3DK(24T) -series NO. after 1309230001

Adjustable Torque Wrench Set

344251A12MR

1/2"

- Blow case size (mm) :
- 500 x 125 x 70 (0.15cuft)

Contents — 2.85 kg / 1 / 10

34423-1A	42~210 N·m
4335MR	13, 14, 15, 16, 17, 18, 19, 21, 22, 24
4251-04R	

12 PC.

Heavy Duty Adjustable Aluminum Torque Wrench

- Industrial application
- Lightweight and robust housing made by aluminium alloy
- Multi-lever mechanism brings length independence and accurate torque
- Loud click sound and string impulse when torque value reached
- Easy lock and adjustment design
- Tolerance of torque ± 3%(CW)
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010

10,000 Precision in use

±3% Tolerance

Step:



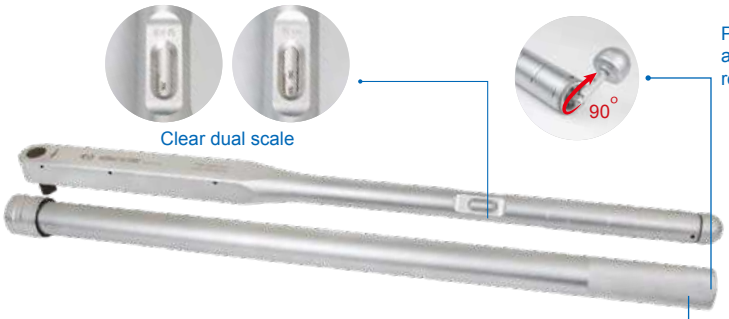

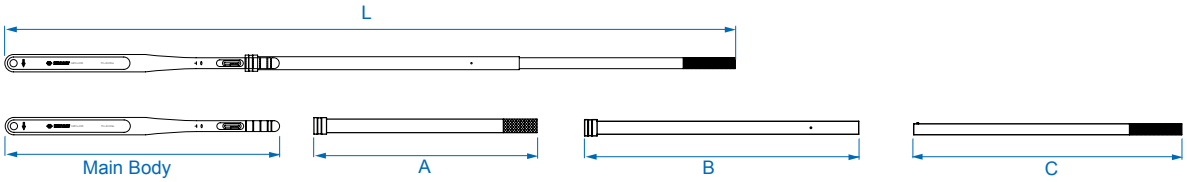

1/2" 3445G

KT NO.	Square drive	Torque range N.m	Incr.	Torque range ft·lb	Incr.	Main Body	A	B	C	Overall length mm	kg	
3445G-1FB	1/2"	40~200 N.m	5	30~150 ft.lb	5	563	-	-	-	563	1.50	1 / 12

3/4" 3465G

KT NO.	Square drive	Torque range N.m	Incr.	Torque range ft·lb	Incr.	Main Body	A	B	C	Overall length mm	kg	
3465G-1FB	3/4"	110~550 N.m	10	80~400 ft.lb	10	827	-	-	-	827	3.00	1 / 2
3465G-2FB	3/4"	140~760 N.m	10	100~560 ft.lb	10	827	-	-	-	827	3.00	1 / 2
3465G-3FB	3/4"	200~1000 N.m	10	140~740 ft.lb	10	808	762	-	-	1413	3.80	1 / 2

1" 3485G

KT NO.	Square drive	Torque range N.m	Incr.	Torque range ft·lb	Incr.	Main Body	A	B	C	Overall length mm	kg	
3485G-1DB	1"	600~1500 N.m	25	-	-	945	-	771	362	1615	10.90	1 / 1
3485G-2DB	1"	750~2000 N.m	50	-	-	947	-	945	924	2370	16.30	1 / 1

Torque Angle Adapter

34417-1A

Specifications:

Accuracy	Clockwise:±2% Anti-Clockwise:±2%				
Memory	10				
Unit Selection	N·m	ft·lb	In·lb	Kgf·m	Kgf·cm
Display Resolution	0.1	0.1	1	0.01	1
Operation Mode	Torque / Angle / Torque+Angle				
Battery	DC3V, CR2032				
Battery Life	4hrs (continuous operation)				
Operating Ambient Temperature	-10°C - 60°C (14°F - 140°F)				
Storage Temperature	-20°C - 70°C (-4°F - 158°F)				
Operating Relative Humidity	15 to 90% noncondensing				
Switch Off Automatically	100 seconds				
Warning Light	Green, Yellow, Red				
Overload Alarm	200 N·m (147.5 ft·lb)				

4 PC.



Calibration adapter

Torque Angle Adapter

- The LED screen is backlit for easier reading



- The ring-shaped warning light can provide an immediate visual cue for the torque values



- The body can be rotated 240° for easier reading

Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb & kgf·m)

KT NO.	Square drive	Torque range				
		N.m	ft.lb	kgf.m	g	
34417-1A	1/2"	40 ~200 N.m	29.5~147.5 ft.lb	4.08~20.38 kgf.m	620	1 / 12

Electronic Torque Wrench

- Electronic torque value readout
- Peak and trace mode selection
- Buzzer and LED indicator for presetting target torque
- Engineering units (N·m, ft·lb, in·lb, kgf·m) adjustment
- Switch off automatically after 60 seconds
- DIN ISO 6789:2017 & ASME B107.300-2010
- CW ± 2% and CCW ± 2.5% operation

- Electronic Torque Wrench

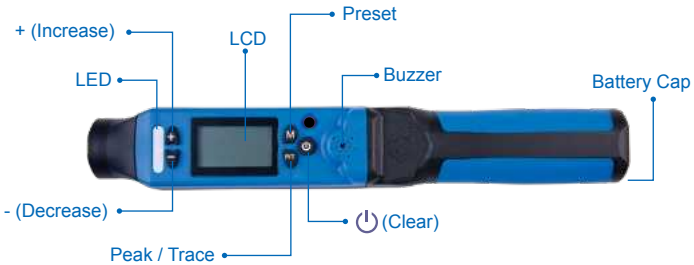

- 34367-2DK
- 34467-2DK

Torque Accuracy	CW ± 2% / CCW ± 2.5%
Preset Function	10
Display Resolution	0.1 N·m/ ft·lb , 1.0 in·lb, 0.01 kgf·m
Operation Mode	Peak/Trace
Battery	AAAx3 (Battery not included)
Backlight	Yes (Nagative)
Alert	LED & Buzzer
Operating Amblent Temperature	-10°C ~ 60°C
Storage Temperature	-20°C ~ 70°C
Operation Relative Humidity	15 to 90% noncodensing

- Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / in·lb / ft·lb & kgf·m)

KT NO.	Gear teeth	Square drive	Torque range N.m	Torque range in.lb	Torque range ft.lb	Torque range kgf.m	Overall length mm	g	
● **34367-2AG**	72	3/8"	27-135 N.m	239~1195 in.lb	19.9-99.6 ft.lb	2.75~13.76 kgf.m	460	1400	3 / 6
● **34467-1AG**	36	1/2"	40-200 N.m	354~1770 in.lb	29.5-147.5 ft.lb	4.08~20.38 kgf.m	530	1500	3 / 6

Electronic Torque Adapter

34207-1A

34307-1A

34407-1A

- Specifications:

Accuracy	± 2%
Memory	50
Display Resolution	0.1 N·m /ft·lb ,0.01 kgf·m
Operation Mode	Peak/Trace
Unit Selection	kgf·m, ft·lb, N·m
Battery	AAA x 2 PC.(Battery not included)
Battery Life	110hrs (continuous operation)
Operating Ambient Temperature	-10°C - 60°C (13.9°F - 139.9°F)
Storage Temperature	-20°C - 70°C (-4°F - 157.9°F)
Operating Relative Humidity	15 to 90% noncondensing
Switch Off Automatically	70 seconds (if do not use electronic torque adapter.)
LED Indicator	Green. Red
Overload Alarm	34207-1A: 37.5 N·m (27.6 ft·lb) 34307-1A: 168.8 N·m(124.5 ft·lb) 34407-1A: 250 N·m (184.4 ft·lb)

Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb & kgf·m)

KT NO.	Square drive	Torque range N·m	Torque range ft·lb	Torque range kgf·m	Size mm	g	
34207-1A	1/4"	6~30 N·m	4.4~22.1 ft·lb	0.61~3.06 kgf·m	L75 x W45 x H40	124	12 / 48
34307-1A	3/8"	27~135 N·m	19.9~99.6 ft·lb	2.75~13.76 kgf·m	L75 x W45 x H40	198	12 / 48
34407-1A	1/2"	40~200 N·m	29.5~147.5 ft·lb	4.08~20.38 kgf·m	L75 x W45 x H40	199	12 / 48

34407T-1A

Accuracy	± 2%
Memory	50
Display Resolution	0.1 N·m /ft·lb ,0.01 kgf·m 1Psi /0.001 Bar /0.001 kgf·cm² /0.01 Kpa
Operation Mode	Peak/Trace
Unit Selection	in·lb, ft·lb, Kgf·m, Kgf·cm, N·m Kpa, Bar, psi, kgf·cm²
Battery	AAA x 2 PC.(Battery not included)
Battery Life	50hrs (continuous operation)
Operating Ambient Temperature	-10°C - 60°C (13.9°F - 139.9°F)
Storage Temperature	-20°C - 70°C (-4°F - 157.9°F)
Operating Relative Humidity	15 to 90% noncondensing
Auto Shut Off	60 seconds

Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / lbf·ft & kgf·m)

KT NO.	Square drive	Torque range N·m	Torque range ft·lb	Torque range kgf·m	Pressure range	Size mm	g	
34407T-1A	1/2"	40-200 N·m	29.5-147.5 ft·lb	4.08~20.38 kgf·m	1-100 psi (0.069~6.6bar)	L75 x W67 x H46 mm	343	1 / 24

Electronic Torque Adapter

34607-1A

- Specifications:

Accuracy	± 2%
Memory	50
Display Resolution	0.1 N·m / ft·lb , 0.01 kgf·m
Operation Mode	Peak/Trace
Unit Selection	kgf·m, ft·lb, N·m
Battery	AA x 2 PC.(Battery not included)
Battery Life	110hrs (continuous operation)
Operating Ambient Temperature	-10°C - 60°C (13.9°F - 139.9°F)
Storage Temperature	-20°C - 70°C (-4°F - 157.9°F)
Operating Relative Humidity	15 to 90% noncondensing
Switch Off Automatically	70 seconds (if do not use electronic torque adapter.)
LED Indicator	Green. Red
Overload Alarm	1250 N·m (922 ft·lb)

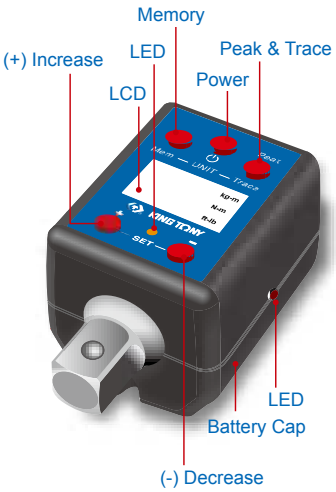

- Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb & kgf·m)

KT NO.	Square drive	Torque range N·m	Torque range ft·lb	Torque range kgf·m	Size mm	g	
34607-1A	3/4"	200 ~1000 N·m	147.6~738 ft·lb	20.4~102 kgf·m	L110 x W56 x H60	585	6 / 24

Torque Screwdriver

34211

- Suitable for 1/4" Hex insert bit; 1/4" socket
- Automatic adjustment knob design
- Easy-to-read laser scale
- Ergonomic comfort rubber grip
- Tolerance of torque ± 6%(CW)
- Quality meets DIN ISO 6789:2017 & ASME B107.300-2010

5,000 Precision in use

± % Tolerance

- Quick-Release

34011

34211

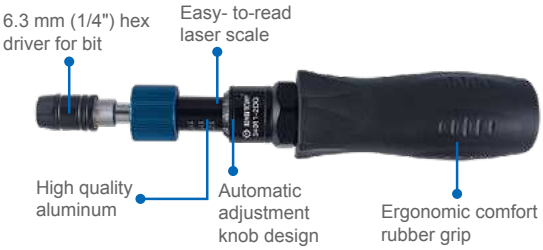

34011

KT NO.	Spec.	Torque range cN·m / N·m / in·lb	Incr.	Overall length mm	g	
34211-3DG	■	4~9 N·m	0.1 N·m	196	475	1 / 24
34011-1DG	○	30~120 cN·m	1 cN·m	180	207	1 / 24
34011-1EG	○	3~15 in·lb	0.1 in·lb	180	207	1 / 24
34011-2DG	○	1.5~6.5 N·m	0.1 N·m	196	475	1 / 24
34011-2EG	○	10~50 in·lb	1.0 in·lb	196	475	1 / 24
34011-3DG	○	0.5~2.5 N·m	0.1 N·m	180	207	1 / 24

Torque Angle Gauge

34440 | 34440A | 34660 | 34660A

- Square Drive :
  34440 (1/2" x 1/2")
  34660 (3/4" x 3/4")
- 360° angle scale- clearly marked in 2° increments, and in intervals of 10° and 30°
- Indicator etched on clear plastic plate, protects angle scale from dirt and grease
- Adjustable arm keeps angle scale stationary
- Arm has two lengths for additional flexibility in placement against components
- Tough composite dial and rotating index allow operator to accurately tighten to meet standard

KT NO.	Spec.	g	
34440	1/2"F x 1/2"M	190	12 / 48
34440A	1/2"F x 1/2"M	375	6 / 24
34660	3/4"F x 3/4"M	666	6 / 12
34660A	3/4"F x 3/4"M	908	6 / 12



- Step 1 : Set up the torque value by torque wrench
- Step 2 : Adjust the angle by angle gauge

Torque Multiplier

34486 | 34488 | 34688

- Torque multiplication with 5:1, accuracy guaranteed better than ± 5%
- Reaction bar supplied in two styles for maximum versatility
- Ideal construction offers minimal maintenance and extended life
- Portable package brings convenience for use in different working places









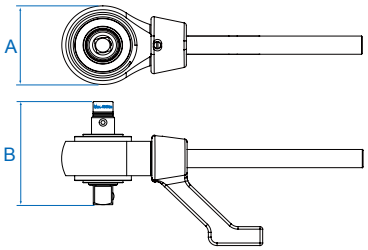

Contents

	34486-05A 34488-05A 34688-05A	Multiplier head 1 PC.
	34688-P01	Reaction bar 1 PC.
	34688-P02	Reaction bar 1 PC.
	34486-P03 34488-P03 34688-P03	Torque-Limit Adapter 1 PC.

KT NO.	Ratio	Input square	Output square	Max input torque N·m /ft·lb	Max output torque N·m / ft·lb	A mm	B mm	kg	
34486	5 : 1	1/2"	3/4"	300 / 220	1500 / 1100	108	136.3	7.1	1 / 2
34488	5 : 1	1/2"	1"	400 / 290	2000 / 1450	108	140.3	7.5	1 / 2
34688	5 : 1	3/4"	1"	540 / 400	2700 / 2000	108	161.0	7.7	1 / 2

Torque Multiplier

34488-26

- Torque multiplication with 26:1, accuracy guaranteed better than ± 5%
- Reaction bar supplied in two styles for maximum versatility
- High ratios offers an idea to replace long lever arm and heavy wrench
- Ideal construction offers minimal maintenance and extended life
- Portable package brings convenience for use in different working places
- Anti-backlash device

34488-26DK

Contents

Multiplier head 1 PC.

Reaction bar 2 PC.

KT NO.	Ratio	Input square	Output square	Max input torque N·m / ft·lb	Max output torque N·m / ft·lb	kg	
34488-26	26 : 1	1/2"	1"	175 / 130	4500 / 3300	15.7	1 / 1

Universal Torque Converter Set

New

3488B03MP

- Suitable for heavy vehicles such as trucks and buses.
- With less effort, it can achieve enough torque to easily remove screws.
- t has two adjustable gear ratios (1:64) and (1:4.2).
- The adjustable support stand provides convenience for users.

- Includes 8835M socket

I	Pull out	1 : 64
II	Push in	1 : 4.2

- Built-in with two gear ratios to enhance efficiency

- The axle can also be removed to function as a 1:1 transmission device

- The support stand can be adjusted forward and backward to secure various objects

Torque Tester

ZV011

7.7 kg | 1 / 1

Calibration Range	2~60 N·m
Accuracy	± 0.5%
Units of Measurement	in·lb, ft·lb, Kgf·m, Kgf·cm, N·m, N·cm
Input Hex A/F (mm)	10mm
Square Drive Adaptor (inch)	1/4", 3/8", 1/2"
Operating Temperature Range	+5°C~ +40°C
Storage Temperature Range	+0°C~ +70°C
Power Input	100-240V DC9.0V···1.66A, 15W MAX
Base Material / Finish	Aluminum Alloy / Painting
Dimension	210(L) x 150(W) x 140(H) mm

233510M 333510M 433510MR

ZV011A	Europe
ZV011B	America & Asia
ZV011D	Australia & New Zealand

ZV012

8.1 kg | 1 / 1

Calibration Range	8~400 N·m
Accuracy	± 0.5%
Units of Measurement	in·lb, ft·lb, Kgf·m, Kgf·cm, N·m, N·cm
Input Hex A/F (mm)	22mm
Square Drive Adaptor (inch)	3/8", 1/2", 3/4"
Operating Temperature Range	+5°C~ +40°C
Storage Temperature Range	+0°C~ +70°C
Power Input	100-240V DC9.0V···1.66A, 15W MAX
Base Material / Finish	Aluminum Alloy / Painting
Dimension	210(L) x 150(W) x 140(H) mm

333522M 433522MR 633522M

ZV012A	Europe
ZV012B	America & Asia
ZV012D	Australia & New Zealand

ZV013

8.9 kg | 1 / 1

Calibration Range	100~1500 N·m
Accuracy	± 0.5%
Units of Measurement	in·lb, ft·lb, Kgf·m, Kgf·cm, N·m
Input Hex A/F (mm)	36mm
Square Drive Adaptor (inch)	3/4"
Operating Temperature Range	+5°C~ +40°C
Storage Temperature Range	+0°C~ +70°C
Power Input	100-240V DC9.0V···1.66A, 15W MAX
Base Material / Finish	Aluminum Alloy / Painting
Dimension	210(L) x 150(W) x 140(H) mm

633536M

ZV013A	Europe
ZV013B	America & Asia
ZV013D	Australia & New Zealand

WRENCHES

Ø12mm - 28mm
KING TONY 3616S-08P
KING TONY 3754
19
19
19
17

KING TONY UNIT DRIVE Profile

1. A large contact surface provides a secure force closure even for bolts whose sizes are out of the tolerances.
2.Radiate distribution of the force on the bolt flanks, reducing notch effect, which prevents the bolt from being rounded.
3.Gentle torque transfer enables worn bolts to be loosened.
4.Optimally distributed force up to 20 % higher torques can be transferred.

The KING TONY UNIT DRIVE prevents the bolts from being damaged by using of a wave form without any tipped or sharp edges.
Enlarged, round contact surfaces ensure that torque is reliably transferred - acting radiately, as it does, on the bolt.
Minimising notch effect prevents any damage to the bolt.

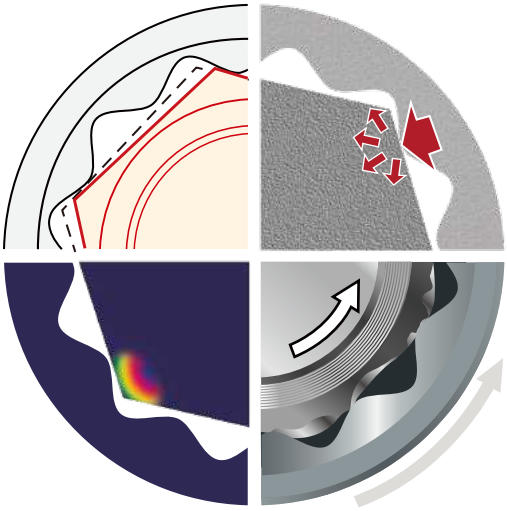

Wrench Made

1 Raw material

2 Hot forge

3 Barreling

4 Polishing

5 Punching & Broaching

6 Marking

7 Heat treatment

8 Vibrating

9 Sand blast

10 Plating

Advanced structure saves time

There are more and more improved tool structures come out every year. King Tony selects useful idea and engineering function on developing new product within quality and economic concern. Every piece of component is designed for the comfort to users.

• King Tony

• Other brand

Exceed other brands 20%

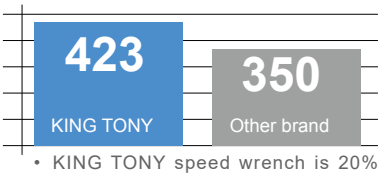

• KING TONY speed wrench is 20% stronger than others.

Ultra-Light & Long Combination Wrench & Set

PAT. KT No. & D1

1061

- New forge technologies I-Beam shank offers 20% lightweight and better strength
- 15° open slimline type
- 13° ring end offset from shaft
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3113 from A / ISO 7738

TAIWAN EXCELLENCE 2016

Lightweight 20%

10%

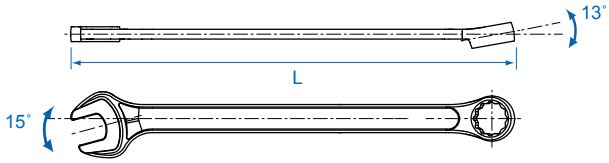



New slimline I-Beam shank offers superior strength with less effort

More powerful open end with big thumb point delivers more torque



13 degree offset ring provides better accessibility

- Pouch material : Tetoron

KT NO.	Size mm	L mm	g	
1061-06	6	128	19	12 / 768
1061-07	7	148	31	12 / 576
1061-08	8	148	29	12 / 576
1061-09	9	167	46	12 / 384
1061-10	10	167	47	12 / 384
1061-11	11	186	58	12 / 240
1061-12	12	196	62	12 / 192
1061-13	13	205	85	12 / 192
1061-14	14	223	101	12 / 120
1061-15	15	233	121	12 / 144
1061-16	16	243	135	12 / 144
1061-17	17	262	168	12 / 96
1061-18	18	272	187	12 / 96
1061-19	19	281	203	12 / 96
1061-20	20	301	273	8 / 48
1061-21	21	301	269	8 / 48
1061-22	22	319	304	8 / 48
1061-23	23	319	301	8 / 48
1061-24	24	338	370	5 / 40
1061-25	25	358	450	5 / 40
1061-26	26	358	431	5 / 40
1061-27	27	383	510	5 / 40
1061-28	28	383	508	5 / 40
1061-29	29	408	617	5 / 20
1061-30	30	408	599	5 / 20
1061-32	32	433	789	5 / 20

1061

KT NO.	PC.	Contents	Kg	
12C7MRN01	7	8, 10, 12, 13, 14, 17, 19	0.77	1 / 24
12C8MRN	8	6, 7, 8, 9, 10, 11, 12, 13	0.77	1 / 24
12A0MRN	10	10, 11, 12, 13, 14, 15, 16, 17, 18, 19	1.35	1 / 12
12A1MRN	11	8, 10, 12, 13, 14, 16, 17, 18, 19, 22, 24	2.06	1 / 12
12A3MRN	13	8, 10, 11, 12, 13, 14, 15, 16 ,17, 18, 19, 22, 24	2.16	1 / 12
12A4MRN	14	8, 10, 11, 12, 13, 14, 15, 16 ,17, 18, 19, 21, 22, 24	2.44	1 / 8
12B4MRN	24	6, 8, 10, 11, 12, 13, 14, 15, 16 ,17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	7	1 / 2

Combination Wrench

PAT.

12D06MRS



- 15° open end reinforcement design in slim profile
- 13° ring end high relief zone design with thin wall access ability
- Chrome vanadium alloy steel
- Metric - DIN 3113 from A, ISO 7738

KT NO.	Size mm	L mm	g	
1062-06	6	105	17	12 / 504
1062-07	7	115	19	12 / 504
1062-08	8	125	27	12 / 504
1062-09	9	135	28	12 / 504
1062-10	10	145	36	12 / 504
1062-11	11	155	45	12 / 504
1062-12	12	165	58	12 / 216
1062-13	13	175	73	12 / 216
1062-14	14	185	88	12 / 216
1062-15	15	195	94	12 / 192
1062-16	16	205	108	12 / 192
1062-17	17	215	129	12 / 192
1062-18	18	225	151	12 / 144

KT NO.	Size mm	L mm	g	
1062-19	19	235	159	12 / 144
1062-20	20	245	186	12 / 144
1062-21	21	255	203	12 / 96
1062-22	22	265	221	12 / 96
1062-23	23	275	262	12 / 96
1062-24	24	285	281	6 / 54
1062-25	25	295	309	6 / 54
1062-26	26	305	343	6 / 54
1062-27	27	315	393	6 / 54
1062-28	28	325	416	6 / 48
1062-29	29	335	456	6 / 48
1062-30	30	345	491	6 / 48
1062-32	32	365	573	6 / 48

Combination Wrench Set

- MRN / SRN : Tetoron pouch bag

- 12D21MRN

Protection cover

KT NO.	PC.		Contents	Package	kg	
12D09MRN	9		8, 9, 10, 11, 12, 13, 14, 17, 19	Tetoron	0.80	1 / 24
12D10MRN	10		8, 10, 12, 13, 14, 17, 19, 21, 22, 24	Tetoron	1.44	1 / 16
12D13MRN	13		6, 8, 10, 11, 12, 13, 14, 15, 17, 19, 21, 22, 24	Tetoron	1.68	1 / 12
12D14MRN05	14		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	Tetoron	1.27	1 / 12
12D15MRN	15	1062	10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32	Tetoron	3.32	1 / 8
12D15MRN01	14		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	Tetoron	1.96	1 / 12
12D18MRN	18		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24	Tetoron	2.36	1 / 8
12D21MRN	21		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	Tetoron	4.10	1 / 6
12D26MRN	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Tetoron	5.20	1 / 4

Portable Wrench Set

12D06MRS

6 PC.

KT NO.	PC.		Contents	Package	Kg	
12D06MRS	6	1062	10, 12, 13, 14, 17, 19	color box	0.82	1 / 16
New 12D06MRS01	6		10, 11, 13, 14, 17, 19	color box	0.82	1 / 16

Portable Wrench Set

12 PC.

• Easy to recognize

• One-handed carry

• Quick storage

• Elastic structure design

• Hanging hole

• Wrench safely locked in support

KT NO.	PC.		Contents	Package	Kg	
12A2MRS02	12	1061	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22	color box	1.8	1 / 8
12A09MRS01	9		6, 8, 10, 11, 13, 14, 15, 17, 19	color box	1.20	1 / 20
12D12MRS	12	1062	8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22	color box	1.4	1 / 12
12D12MRS01	12		8, 9, 10, 11, 12, 13, 14, 16, 17,18, 19, 21	color box	1.4	1 / 12
12D09MRS01	9		6, 8, 10, 11, 13, 14, 15, 17, 19	color box	0.85	1 / 24
12112MRS02	12	3731M	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22	color box	1.6	1 / 12
12109MRS01	9		8, 10, 11, 12, 13, 14, 15, 17, 19	color box	0.95	1 / 24
122A12MRS02	12	373AM	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22	color box	1.6	1 / 12
122A09MRS01	9		8, 10, 11, 12, 13, 14, 15, 17, 19	color box	1.00	1 / 24
New 122A06MR	6		10,12, 13, 14, 17, 19	color box	1.12	1 / 10
New 122A06MR01	6		8, 10, 12, 13, 14, 17	color box	1.12	1 / 10
12208SRS	8	3732S	5/16", 3/8", 7/16",1/2", 9/16", 5/8", 11/16", 3/4"	color box	0.90	1 / 24

Combination Wrench

KT No. & D1

1060

- European slimline type
- 15° open end angle
- 15° ring end offset from shaft
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 3113 from A, ISO 7738
- Inch - ANSI / ASME B107.6

KT NO.	Size mm	L mm	g	
1060-55	5.5	105	17	12 / 504
1060-06	6	105	16	12 / 504
1060-07	7	115	22	12 / 504
1060-08	8	125	24	12 / 504
1060-09	9	135	32	12 / 504
1060-10	10	145	41	12 / 504
1060-11	11	155	46	12 / 504
1060-12	12	165	59	12 / 216
1060-13	13	175	70	12 / 216
1060-14	14	185	87	12 / 216
1060-15	15	195	96	12 / 192
1060-16	16	205	111	12 / 192
1060-17	17	215	131	12 / 192
1060-18	18	225	156	12 / 144
1060-19	19	235	163	12 / 144
1060-20	20	245	189	12 / 144
1060-21	21	255	206	12 / 96
1060-22	22	265	243	12 / 96
1060-23	23	275	258	12 / 96
1060-24	24	285	290	6 / 54
1060-25	25	295	312	6 / 54
1060-26	26	305	349	6 / 54
1060-27	27	315	367	6 / 54
1060-28	28	325	415	6 / 48
1060-29	29	335	463	6 / 48
1060-30	30	345	492	6 / 48
1060-32	32	365	566	6 / 48

1071

- Jumbo type
- 15° open end angle
- 15° ring end offset from shaft
- Polished, chrome plated
- Metric - DIN 3113 from A, ISO 7738
- Inch - ANSI / ASME B107.6

KT NO.	Size mm	L mm	g	
1071-33	33	410	802	5 / 20
1071-34	34	410	819	5 / 20
1071-35	35	425	920	5 / 20
1071-36	36	425	918	5 / 20
1071-38	38	455	1079	5 / 20
1071-41	41	495	1464	5 / 15
1071-42	42	495	1448	5 / 15
1071-44	44	495	1584	5 / 15
1071-46	46	495	1581	5 / 15
1071-48	48	563	2235	5 / 10
1071-50	50	563	2180	5 / 10

KT NO.	Size mm	L mm	g	
1071-55	55	610	2260	5
1071-60	60	645	3523	5
1071-65	65	670	3346	5
1071-70	70	708	5672	2
1071-75	75	708	5770	2
1071-80	80	730	7778	2
1071-85	85	730	7575	2

5060

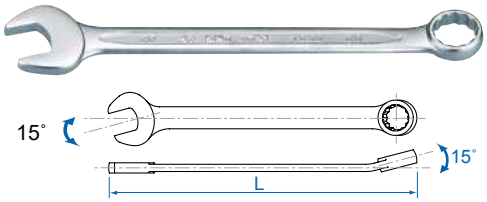

KT NO.	Size inch	L mm	g	
5060-08	1/4	105	17	12 / 504
5060-10	5/16	125	24	12 / 504
5060-12	3/8	145	40	12 / 504
5060-14	7/16	155	47	12 / 504
5060-16	1/2	175	70	12 / 216
5060-18	9/16	185	87	12 / 216
5060-20	5/8	205	113	12 / 192
5060-22	11/16	215	136	12 / 192
5060-24	3/4	235	175	12 / 144
5060-26	13/16	255	214	12 / 96
5060-28	7/8	265	234	12 / 96
5060-30	15/16	285	280	6 / 54
5060-32	1	295	309	6 / 54
5060-34	1-1/16	315	370	6 / 54
5060-36	1-1/8	335	462	6 / 48
5060-38	1-3/16	345	470	6 / 48
5060-40	1-1/4	365	560	6 / 48

5071

1071-33~50
5071-42~64

1071-55~85

KT NO.	Size inch	L mm	g	
5071-42	1-5/16	410	816	5 / 20
5071-44	1-3/8	425	951	5 / 20
5071-46	1-7/16	425	920	5 / 20
5071-48	1-1/2	455	1085	5 / 20
5071-50	1-9/16	495	1532	5 / 15
5071-52	1-5/8	495	1520	5 / 15
5071-54	1-11/16	495	1598	5 / 15
5071-56	1-3/4	495	1609	5 / 15
5071-58	1-13/16	495	1554	5 / 15
5071-60	1-7/8	563	2317	5 / 10
5071-62	1-15/16	563	2245	5 / 10
5071-64	2	563	2248	5 / 10
5071-72	2-1/4"	610	2600	5 / 5
5071-80	2-1/2"	645	3200	5 / 5
5071-88	2-3/4"	708	5500	2 / 2
5071-96	3"	708	5500	2 /2

Combination Wrench Set

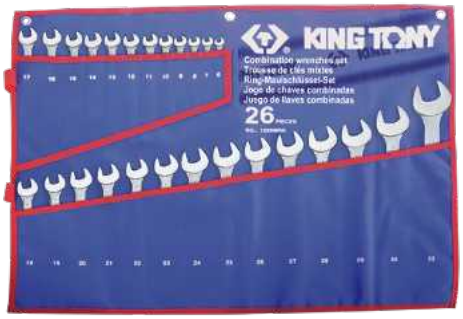

• MRN / SRN : Tetoron pouch bag

• MR / SR : Nylon pouch bag

KT NO.	PC.		Contents	Package	Kg	
1207MR	7		10, 11, 12, 13, 14, 17, 19	Nylon	0.71	1 / 30
1208MR	8		10, 11, 12, 13, 14, 17, 19, 22	Nylon	0.95	1 / 24
1210MR	10		8, 10, 12, 13, 14, 17, 19, 21, 22, 24	Nylon	1.38	1 / 16
1211MR	11		8, 9, 10, 11, 12, 13, 14, 17, 19, 22, 24	Nylon	1.33	1 / 16
1212MR	12		8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 22	Nylon	1.28	1 / 16
1212MR01	12		6, 8, 10, 12, 13, 14, 17, 19, 24, 27, 30, 32	Nylon	3.23	1 / 8
1214MR	14		10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 24, 27, 30, 32	Nylon	3.18	1 / 8
1214MRN	14		10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 24, 27, 30, 32	Tetoron	3.31	1 / 8
1214MR01	14		10, 11, 13, 14, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	Nylon	3.25	1 / 8
1215MR	14	1060	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24	Nylon	1.86	1 / 12
1215MR01	14		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	Nylon	3.22	1 / 12
1215MR02	15		6, 7, 8, 10, 11, 12, 13, 14, 17, 19, 22, 24, 27, 30, 32	Nylon	2.92	1 / 8
1211MRN	11		8, 9, 10, 11, 12, 13, 14, 17, 19, 22, 24	Tetoron	1.33	1 / 16
1214MRN05	14		6, 7 ,8 ,9 ,10 ,11 ,12 ,13 ,14 ,15, 16, 17, 18, 19	Tetoron	1.24	1 / 12
1215MRN01	14		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	Tetoron	1.92	1 / 12
1215MRN02	15		6, 7, 8, 10, 11, 12, 13, 14, 17, 19, 22, 24, 27, 30, 32	Tetoron	2.92	1 / 8
1218MR01	18		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24	Nylon	2.5	1 / 9
1218MRN	18			Tetoron	1.34	1 / 9
1226MR	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Nylon	5.67	1 / 4
1226MRN	26			Tetoron	5.67	1 / 4
1207SR	7		3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	Nylon	0.61	1 / 30
1211SR	11		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 11/16, 3/4, 13/16, 7/8, 15/16	Nylon	1.48	1 / 16
1211SR01	11		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 7/8, 1	Nylon	1.46	1 / 16
1211SR02	11		3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1	Nylon	1.63	1 / 12
1214SR	14	5060	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-1/4	Nylon	3.02	1 / 8
1216SR	16		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	Nylon	3.44	1 / 8
1216SRN	16		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	Tetoron	3.63	1 / 6
1213SRN	13		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1	Tetoron	1.96	1 / 10
1214SRN01	14		3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	Tetoron	3.54	1 / 8
1296MRN	6	1071	34, 36, 38, 41, 46, 50	Tetoron	8.87	1 / 2
1224CRN	24	1060	7, 8, 10, 11, 12, 13, 14, 15, 16, 17 19, 22	Tetoron	2.93	1 / 6
		5060	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16			

Offset Combination Wrench & Set

1067

- Chrome vanadium alloy steel
- Offset ring ideal for deep-seated nuts or bolts
- 15° open end angle
- Chrome plated
- DIN 3113 from B, ISO 7738, ISO 3318



KT NO.	Size mm	L mm	g	
1067-06	6	105	18	10 / 640
1067-07	7	115	23	10 / 640
1067-08	8	125	32	10 / 640
1067-09	9	135	37	10 / 480
1067-10	10	145	45	6 / 288
1067-11	11	155	56	12 / 240
1067-12	12	165	61	10 / 200
1067-13	13	175	73	8 / 160
1067-14	14	185	96	10 / 160
1067-15	15	195	105	10 / 160
1067-16	16	205	122	10 / 160
1067-17	17	215	138	8 / 128
1067-18	18	225	161	12 / 144

KT NO.	Size mm	L mm	g	
1067-19	19	235	192	10 / 120
1067-20	20	235	256	10 / 80
1067-21	21	265	248	10 / 80
1067-22	22	265	252	10 / 80
1067-23	23	290	316	8 / 64
1067-24	24	290	307	8 / 64
1067-25	25	300	327	10 / 60
1067-26	26	320	423	10 / 40
1067-27	27	320	402	10 / 40
1067-28	28	330	494	10 / 40
1067-29	29	350	402	6 / 48
1067-30	30	350	522	6 / 48
1067-32	32	370	621	4 / 32

- MRN / SRN : Tetoron pouch bag

- MR / SR : Nylon pouch bag

KT NO.	PC.		Contents	Package	Kg	
1272MR	12		6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22	Nylon	1.21	1 / 15
1275MR	15	 1067	6, 7, 8, 10, 11, 12, 13, 14, 17, 19, 22, 24, 27, 30, 32	Nylon	3.3	1 / 8
1275MRN	15			Tetoron		
1266MR	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Nylon	6.85	1 / 2

Stubby Combination Wrench & Set

KT No. & D1

10D0

- Short pattern design enables greater access in confined spaces
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3113 from A



KT NO.	Size mm	D1	D2	H1	H2	L mm	g	
10D0-08	8	18.1	13.8	4.6	6.0	85	20	20 / 360
10D0-09	9	19.3	14.5	4.8	6.4	90	23	20 / 360
10D0-10	10	20.5	15.1	4.8	6.4	95	28	20 / 360
10D0-11	11	22.7	16.7	5.9	7.9	100	45	20 / 360
10D0-12	12	24.7	18.0	6.2	8.3	105	46	20 / 360
10D0-13	13	27.2	19.1	6.5	8.7	110	56	20 / 360
10D0-14	14	28.8	21.4	7.0	9.2	115	69	15 / 270
10D0-15	15	31.0	22.4	7.4	9.7	120	76	15 / 270
10D0-16	16	33.0	23.8	7.8	10.3	125	93	15 / 270
10D0-17	17	35.0	26.2	8.1	10.7	130	106	15 / 180
10D0-18	18	37.0	27.3	8.6	11.3	135	126	15 / 180
10D0-19	19	39.0	28.6	9.0	11.8	140	143	12 / 144

1282MR

	Contents	Kg	
10D0	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	1.03	1 / 24

12 PC.

- Nylon pouch bag

Single Open End Wrench

CAUTION Please wear proper safety gear while working.

10F0

- Features : The open end is thicker for very high tightening torques. Examples : public work, rail worksite, naval construction, agriculture, oil platforms, metallic construction
- Hanging hole at end of handle: wrenches stored on panel or hung to avoid loss or fall
- Chrome vanadium alloy steel
- Finished with phosphate sunk
- DIN 894



KT NO.	Size mm	L mm	g	
10F0-17P	17	178	107	10 / 120
10F0-19P	19	178	107	10 / 120
10F0-21P	21	203	161	10 / 100
10F0-22P	22	203	161	10 / 100
10F0-23P	23	220	203	8 / 80
10F0-24P	24	220	203	8 / 80
10F0-26P	26	240	290	6 / 60
10F0-27P	27	240	290	6 / 60
10F0-29P	29	267	341	6 / 48
10F0-30P	30	267	335	6 / 48
10F0-32P	32	285	410	5 / 30

KT NO.	Size mm	L mm	g	
10F0-36P	36	317	556	5 / 30
10F0-38P	38	320	740	5 / 30
10F0-41P	41	340	875	4 / 24
10F0-46P	46	395	1060	3 / 12
10F0-50P	50	425	1402	1 / 12
10F0-55P	55	425	1403	1 / 12
10F0-60P	60	470	2544	1 / 6
10F0-65P	65	470	2441	1 / 6
10F0-70P	70	500	3457	1 / 6
10F0-75P	75	500	3333	1 / 6

Open End Wrench & Set

1900

- European slimline type
- 15° open end angle
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 3110
- Inch - ANSI / ASME B107.6



5900

KT NO.	Size mm	L mm	g	
19005507	5.5 x 7	123	20	12 / 576
19000607	6 x 7	123	23	12 / 576
19000708	7 x 8	140	33	12 / 576
19000809	8 x 9	140	32	12 / 576
19000810	8 x 10	140	33	12 / 576
19000911	9 x 11	156	56	12 / 288
19001011	10 x 11	156	46	12 / 288
19001012	10 x 12	156	45	12 / 288
19001013	10 x 13	172	65	12 / 288
19001113	11 x 13	172	65	12 / 288
19001213	12 x 13	172	80	12 / 288
19001214	12 x 14	172	64	12 / 288
19001314	13 x 14	172	81	12 / 288
19001317	13 x 17	195	104	12 / 192
19001415	14 x 15	188.5	89	12 / 192
19001417	14 x 17	195	106	12 / 192
19001617	16 x 17	204	122	12 / 192
19001618	16 x 18	221	158	12 / 144
19001719	17 x 19	221	158	12 / 144
19001819	18 x 19	221	160	12 / 144
19001921	19 x 21	237	207	12 / 144
19001922	19 x 22	237	203	12 / 144
19002022	20 x 22	237	209	12 / 144
19002123	21 x 23	247	241	6 / 72
19002224	22 x 24	247	235	6 / 72
19002326	23 x 26	263	305	6 / 72
19002426	24 x 26	263	295	6 / 72
19002427	24 x 27	263	301	6 / 72

KT NO.	Size mm	L mm	g	
19002430	24 x 30	263	306	6 / 72
19002528	25 x 28	279	348	6 / 48
19002632	26 x 32	285	438	6 / 48
19002729	27 x 29	279	348	6 / 48
19002730	27 x 30	285	431	6 / 48
19002732	27 x 32	285	434	6 / 48
19003032	30 x 32	298	439	6 / 48
19003036	30 x 36	351	715	6 / 36
19003236	32 x 36	351	723	5 / 30
19003436	34 x 36	351	717	5 / 30
19003641	36 x 41	380	998	4 / 24
19004146	41 x 46	410	1337	4 / 16

KT NO.	Size inch	L mm	g	
59000810	1/4 x 5/16	123	23	12 / 576
59001012	5/16 x 3/8	140	32	12 / 576
59001214	3/8 x 7/16	156	45	12 / 288
59001416	7/16 x 1/2	172	69	12 / 288
59001618	1/2 x 9/16	172	70	12 / 288
59001820	9/16 x 5/8	188.5	88	12 / 192
59002022	5/8 x 11/16	204	120	12 / 192
59002224	11/16 x 3/4	221	163	12 / 144
59002628	13/16 x 7/8	237	202	12 / 144
59003032	15/16 x 1	247	311	6 / 72
59003034	15/16 x 1-1/16	263	304	6 / 72
59003236	1 x 1-1/8	279	341	6 / 48
59003640	1-1/8 x 1-1/4	298	431	6 / 48

- MRN / SRN : Tetoron pouch bag

- MR / SR : Nylon pouch bag

KT NO.	PC.		Contents	Package	Kg	
1106MR	6	1900	8 x 9, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 21 x 23	Nylon	0.83	1 / 24
1106MR01	6	1900	8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19	Nylon	0.81	1 / 24
1108MR	8	1900	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22	Nylon	0.91	1 / 24
1110MR	10	1900	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 24 x 27, 25 x 28	Nylon	1.67	1 / 16
1112MR	12	1900	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27, 25 x 28, 30 x 32	Nylon	2.37	1 / 10
1112MRN	12	1900		Tetoron	2.45	
1108SR	8	5900	1/4 x 5/16, 5/16 x 3/8, 3/8 x 7/16, 7/16 x 1/2, 9/16 x 5/8, 5/8 x 11/16, 11/16 x 3/4, 13/16 x 7/8	Nylon	0.91	1 / 24
1112SR	12	5900	1/4 x 5/16, 5/16 x 3/8, 3/8 x 7/16, 7/16 x 1/2, 9/16 x 5/8, 5/8 x 11/16, 11/16 x 3/4, 13/16 x 7/8, 15/16 x 1, 15/16 x 1-1/16, 1 x 1-1/8, 1-1/8 x 1-1/4	Nylon	2.5	1 / 10

45° Offset Ring Wrench & Set

KT No. & D1

1960

- 45° offset ring
- Thin wall rings
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 838
- Inch - ANSI / ASME B107.6



KT NO.	Size mm	L mm	g	
19600607	6 x 7	165	47	12 / 360
19600809	8 x 9	175	55	12 / 360
19600810	8 x 10	185	70	12 / 360
19601011	10 x 11	195	90	12 / 360
19601012	10 x 12	185	90	12 / 360
19601113	11 x 13	205	105	12 / 240
19601213	12 x 13	205	103	12 / 240
19601214	12 x 14	220	126	12 / 240
19601415	14 x 15	235	138	12 / 144
19601417	14 x 17	235	156	12 / 144
19601617	16 x 17	240	180	12 / 144
19601719	17 x 19	250	204	6 / 72
19601819	18 x 19	250	210	6 / 72

5960

KT NO.	Size mm / inch	L mm	g	
19601921	19 x 21	270	253	6 / 72
19602022	20 x 22	270	242	6 / 72
19602123	21 x 23	320	460	6 / 48
19602224	22 x 24	320	372	6 / 48
19602326	23 x 26	360	451	6 / 48
19602426	24 x 26	360	460	6 / 48
19602427	24 x 27	360	437	6 / 48
19602732	27 x 32	385	658	6 / 36
19603032	30 x 32	392	697	6 / 36
59601214	3/8 x 7/16	185	79	12 / 360
59601618	1/2 x 9/16	220	122	12 / 240
59602022	5/8 x 11/16	240	167	12 / 144
59602428	3/4 x 7/8	270	243	6 / 72
59603032	15/16 x 1	360	420	6 / 48

- Nylon pouch bag

KT NO.	PC.		Contents	Kg	
1606MR	6	1960	10 x 12, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 23 x 26	1.6	1 / 16
1611MR	11		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 26, 30 x 32	3.0	1 / 16

1961

- Mini type
- 45° offset ring
- Thin wall rings
- Chrome vanadium steel
- Chrome plated
- Metric - DIN 838



KT NO.	Size mm	L mm	g	
19611415	14 x 15	140	87	12 / 240
19611617	16 x 17	150	96	10 / 200
19611819	18 x 19	157	115	6 / 120

75° Offset Ring Wrench & Set

KT No. & D1

1970

- European slimline type
- 75° deep ring offset
- Thin wall rings
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 838
- Inch - ANSI / ASME B107.6

KT NO.	Size mm	L mm	g	
19700607	6 x 7	168	46	12 / 360
19700809	8 x 9	183	69	12 / 360
19700810	8 x 10	183	68	12 / 360
19701011	10 x 11	198	95	12 / 240
19701012	10 x 12	198	87	12 / 240
19701113	11 x 13	217	129	12 / 144
19701213	12 x 13	217	125	12 / 144
19701214	12 x 14	217	125	12 / 144
19701314	13 x 14	217	124	12 / 144
19701415	14 x 15	239	175	12 / 144
19701417	14 x 17	260	191	6 / 96
19701617	16 x 17	260	225	6 / 96
19701719	17 x 19	292	297	6 / 72
19701819	18 x 19	292	289	6 / 72
19701921	19 x 21	318	340	6 / 60
19701922	19 x 22	318	318	6 / 60
19702022	20 x 22	318	319	6 / 60
19702123	21 x 23	330	379	6 / 60
19702224	22 x 24	330	370	6 / 60
19702326	23 x 26	345	451	6 / 48
19702426	24 x 26	345	477	6 / 48
19702427	24 x 27	345	469	6 / 48
19702528	25 x 28	350	503	6 / 48
19703032	30 x 32	362	638	6 / 36

5970

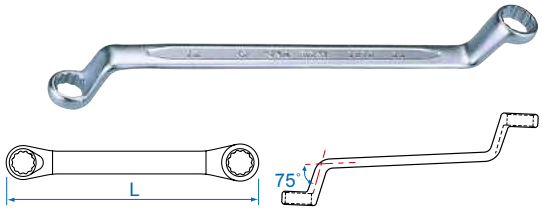

KT NO.	Size inch	L mm	g	
59700810	1/4 x 5/16	168	49	12 / 360
59701012	5/16 x 3/8	183	63	12 / 360
59701214	3/8 x 7/16	198	93	12 / 240
59701416	7/16 x 1/2	217	123	12 / 144
59701618	1/2 x 9/16	217	126	12 / 144
59701820	9/16 x 5/8	260	158	12 / 96
59702022	5/8 x 11/16	260	223	6 / 96
59702224	11/16 x 3/4	292	277	6 / 96
59702428	3/4 x 7/8	318	319	6 / 60
59702628	13/16 x 7/8	330	377	6 / 60
59703032	15/16 x 1	345	460	6 / 48
59703436	1-1/16 x 1-1/8	350	515	6 / 48
59703640	1-1/8 x 1-1/4	362	703	6 / 48
59703842	1-3/16 x 1-5/16	375	750	5 / 30

- MRN / SRN : Tetoron pouch bag

- MR / SR : Nylon pouch bag

KT NO.	PC.		Contents	Package	Kg	
1706MR	6		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17	Nylon	0.88	1 / 24
1708MR	8		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 21 x 23	Nylon	1.64	1 / 12
1708MR01	8		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22	Nylon	1.52	1 / 12
1710MR	10	1970	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 21 x 23, 24 x 27, 30 x 32	Nylon	2.83	1 / 8
1712MR	12		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 26, 25 x 28, 30 x 32	Nylon	3.78	1 / 6
1712MRN	12			Tetoron	3.78	1 / 6
1712MRN01	12		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27, 25 x 28, 30 x 32	Tetoron	3.78	1 / 6
1707SR	7	5970	1/4 x 5/16, 3/8 x 7/16, 1/2 x 9/16, 5/8 x 11/16, 3/4 x 7/8, 15/16 x 1, 1-1/16 x 1-1/8	Nylon	2.0	1 / 12

Straight Ring Wrench & Set

KT No. & D1

19C0

- Thin wall rings
- Chrome vanadium alloy steel
- Chrome plated
- DIN 837







KT NO.	Size mm	L mm	g	
19C00607	6 x 7	121	20	20 / 480
19C00809	8 x 9	137	33	20 / 480
19C01011	10 x 11	154	52	20 / 320
19C01213	12 x 13	164	69	20 / 240
19C01415	14 x 15	182	85	20 / 240
19C01617	16 x 17	211	127	12 / 144
19C01819	18 x 19	226	160	12 / 144
19C02022	20 x 22	240	208	10 / 120
19C02123	21 x 23	255	238	10 / 120
19C02426	24 x 26	270	316	6 / 72
19C02528	25 x 28	285	368	6 / 72
19C03032	30 x 32	335	540	5 / 40

- Nylon pouch bag

KT NO.	PC.		Contents	Kg	
1C08MR	8	19C0	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22	0.79	1 / 24
1C12MR	12		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 26, 25 x 28, 30 x 32	2.23	1 / 12

0° Offset Ring Wrench

19B0

- Ideal for crowded or confined spaces
- Ultra-compact ring head
- Chrome molybdenum alloy steel
- Chrome plated
- DIN 3113



KT NO.	Size mm	D1 mm	D2 mm	L mm	g	
19B00810	8 x 10	12.5	15	235	72	12 / 240
19B01011	10 x 11	14.3	17	291	95	12 / 192
19B01012	10 x 12	14.3	17	291	95	12 / 192
19B01113	11 x 13	17.8	20.3	328	157	12 / 120
19B01214	12 x 14	17.8	20.3	328	157	12 / 120
19B01315	13 x 15	20.2	23.3	368	217	12 / 96
19B01417	14 x 17	20.2	23.3	368	217	12 / 96
19B01618	16 x 18	23.7	26.6	407	284	12 / 72
19B01719	17 x 19	23.7	26.6	407	284	12 / 72
19B01921	19 x 21	27.5	29.7	415	376	8 / 64
19B02224	22 x 24	31.3	34.0	430	482	6 / 48

1F06MRN

	Contents	Kg	
19B0	10 x 11, 12 x 14, 13 x 15, 16 x 18, 17 x 19, 22 x 24	1.81	1 / 8

6 PC.

- Tetoron pouch bag

Half Moon Ring Wrench & Set

1950

- Short pattern design enables greater access in confined spaces
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3113





KT NO.	Size mm	D1 mm	D2 mm	L mm	H1 mm	H2 mm	H mm	g	
19500810	8 x 10	15.6	14.3	137	6.5	6.2	42	40	12 / 288
19501012	10 x 12	15.6	18.2	141	6.6	6.5	50	61	12 / 288
19501113	11 x 13	18.2	21.0	166	8.2	8.0	63	101	8 / 128
19501214	12 x 14	18.2	21.0	166	8.2	8.0	63	95	8 / 128
19501315	13 x 15	22.0	25.0	190	9.2	8.2	75	133	6 / 72
19501417	14 x 17	22.0	25.0	190	9.2	8.2	75	130	6 / 72
19501618	16 x 18	25.5	28.0	220	9.6	8.8	79	164	6 / 72
19501719	17 x 19	25.5	28.0	220	9.6	8.8	79	163	6 / 72
19501922	19 x 22	28.6	32.5	256	11.1	10.1	91	257	6 / 48

KT NO.	PC.		Contents	Kg	
9-1905MR	5	1950	10 x 12, 11 x 13, 14 x 17, 16 x 18, 19 x 22	0.82	1 / 10

Crowfoot Wrench & Set

1031

- 12 points
- For union nuts and tube connections
- With square mount

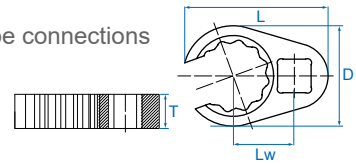

KT NO.	Size mm	Drive square	D mm	T mm	L mm	Lw mm	g	
1031-10R	10	3/8"	27.0	9.2	36.5	17.1	40	12 / 192
1031-11R	11	3/8"	27.0	9.2	36.5	17.0	40	12 / 192
1031-12R	12	3/8"	27.5	9.2	36.5	16.8	40	12 / 192
1031-13R	13	3/8"	27.2	9.3	36.5	16.7	40	12 / 192
1031-14R	14	3/8"	29.8	9.6	42.0	20.0	42	12 / 192
1031-15R	15	3/8"	31.4	9.2	42.0	19.2	44	12 / 192
1031-16R	16	3/8"	30.2	10.1	42.0	19.5	48	12 / 192
1031-17R	17	3/8"	34.0	11.4	45.6	23.5	68	12 / 192
1031-18R	18	3/8"	33.6	10.0	45.6	22.5	63	12 / 192
1031-19R	19	3/8"	33.7	10.8	45.8	23.0	63	12 / 192
1031-22R	22	1/2"	38.5	13.0	55.0	23.0	82	15 / 180
1031-24R	24	1/2"	38.5	12.5	55.0	24.5	74	15 / 180
1031-26R	26	1/2"	42.5	13.5	60.0	24.0	105	15 / 180
1031-27R	27	1/2"	42.5	13.5	61.0	25.0	98	15 / 180
1031-30R	30	1/2"	49.0	14.0	68.5	30.0	136	12 / 144
1031-32R	32	1/2"	50.0	14.0	70.0	30.0	136	12 / 144

- Use to reach limit place with extension bar
- Use with torque wrench and 90° extension bar, will not effectively change the torque value

KT NO.	Size mm	Drive square	D mm	T mm	L mm	Lw mm	g	
1031-34R	34	3/4"	55.6	22.5	84.5	38.0	345	12 / 60
1031-35R	35	3/4"	55.6	22.5	84.5	39.0	334	12 / 60
1031-36R	36	3/4"	55.6	22.5	84.5	39.0	315	12 / 60
1031-38R	38	3/4"	61.7	23.0	90.5	43.0	346	12 / 60
1031-41R	41	3/4"	61.7	23.0	90.5	43.0	357	12 / 60
1031-46R	46	3/4"	70.0	25.0	101	47.0	517	12 / 24
1031-48R	48	3/4"	75.5	28.5	104	47.0	482	12 / 24
1031-50R	50	3/4"	75.5	28.5	104	48.0	587	12 / 24

KT NO.	PC.		Contents	Kg	
1E10MR	10	1031	10, 11, 12, 13, 14, 15, 16, 17, 18, 19	0.59	1 / 30
1E11MR	11		10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22	0.68	1 / 30

Star Box End Wrench & Set

1920

- Chrome vanadium alloy steel
- Chrome plated
- ANSI / ASME B107.6



KT NO.	Size	L mm	g	
19200608	E6 x E8	114.0	21	12 / 504
19200711	E7 x E11	126.5	31	12 / 504
19201012	E10 x E12	142.5	43	12 / 384
19201418	E14 x E18	183.0	90	12 / 240
19201622	E16 x E22	205.0	114	12 / 192
19202024	E20 x E24	225.0	159	12 / 144

1406PR

- Metal case size (mm):
- 280 x 130 x 41 (0.053 cuft)

6 PC.

Contents	Kg 0.46	1 / 15
1920	E6 x E8, E7 x E11, E10 x E12, E14 x E18, E16 x E22, E20 x E24	

Flare Nut Wrench

1930

- 6 points
- 12° ring offset
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 3118
- Inch - ANSI / ASME B107.6

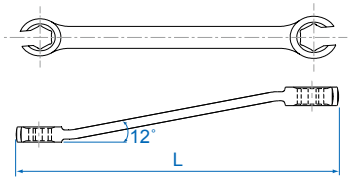

KT NO.	Size mm	L mm	g	
19300810	8 x 10	130	56	12 / 216
19300911	9 x 11	150	74	12 / 216
19301011	10 x 11	150	76	12 / 192
19301012	10 x 12	150	73	12 / 192
19301113	11 x 13	170	96	12 / 144
19301213	12 x 13	170	102	12 / 144
19301214	12 x 14	170	100	12 / 144
19301315	13 x 15	178	122	12 / 144
19301417	14 x 17	190	138	12 / 144
19301719	17 x 19	210	170	8 / 128
19301922	19 x 22	230	245	9 / 108

5930

KT NO.	Size inch	L mm	g	
59301012	5/16 x 3/8	130	60	12 / 216
59301214	3/8 x 7/16	150	76	12 / 192
59301416	7/16 x 1/2	170	106	12 / 144
59301618	1/2 x 9/16	170	125	12 / 144
59301820	9/16 x 5/8	190	169	12 / 144
59302224	11/16 x 3/4	210	184	6 / 96
59302428	3/4 x 7/8	230	249	6 / 72

- MRN / SRN : Tetoron pouch bag

- MR / SR : Nylon pouch bag

- 1305SR : Nylon pouch bag

KT NO.	PC.		Contents	Package	Kg	
1306MR	6	1930	8 x 10, 10 x 12, 11 x 13, 12 x 14, 17 x 19, 19 x 22	Nylon	0.90	1 / 30
1306MRN	6			Tetoron	0.90	1 / 30
1305SR	5	5930	5/16 x 3/8, 7/16 x 1/2, 9/16 x 5/8, 11/16 x 3/4, 3/4 x 7/8	Nylon	0.82	1 / 24

Flare Nut Wrench & Set

KT No. & D1

1931

- 12 points
- 12° ring offset
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3118

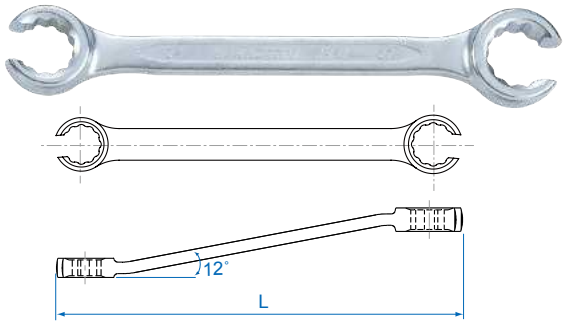

KT NO.	Size mm	L mm	g	
19312224	22 x 24	250	309	6 / 72
19312427	24 x 27	270	406	6 / 48
19313032	30 x 32	290	546	5 / 40

Flexible Head Wrench & Set

1020

- Combination flexible head wrench with 12 points thin wall socket
- 180° swivel head for better accessibility
- Chrome vanadium alloy steel
- Chrome plated



KT NO.	Size mm	L mm	g	
1020-08	8	170	64	10 / 180
1020-09	9	170	68	10 / 180
1020-10	10	180	81	10 / 160
1020-11	11	188	106	10 / 160
1020-12	12	190	107	10 / 120
1020-13	13	206	135	10 / 120

KT NO.	Size mm	L mm	g	
1020-14	14	225	167	10 / 120
1020-15	15	225	193	6 / 72
1020-16	16	234	224	6 / 72
1020-17	17	234	237	4 / 48
1020-18	18	252	295	4 / 48
1020-19	19	250	290	4 / 48

1910

- Double end flexible head wrench with 12 points thin wall socket
- 180° swivel head for better accessibility
- Chrome vanadium alloy steel
- Chrome plated



KT NO.	Size mm	L mm	g	
19100607	6 x 7	182	76	12 / 216
19100809	8 x 9	182	81	12 / 216
19100810	8 x 10	185	88	10 / 160
19101011	10 x 11	200	109	10 / 160
19101012	10 x 12	205	122	10 / 120
19101213	12 x 13	220	158	10 / 120
19101214	12 x 14	225	178	10 / 80
19101415	14 x 15	240	232	10 / 120
19101417	14 x 17	244	256	10 / 120
19101617	16 x 17	259	317	10 / 80

KT NO.	Size mm	L mm	g	
19101719	17 x 19	260	341	10 / 80
19101819	18 x 19	275	393	6 / 54
19102022	20 x 22	305	579	6 / 36
19102123	21 x 23	305	631	6 / 36
19102427	24 x 27	335	797	6 / 24

KT NO.	PC.	Contents	Kg	
1A06MR	6	1910 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19	1.49	1 / 16

- Nylon pouch bag

Slogging Wrench

CAUTION Please wear proper safety gear while working.

10A0

- Open end slogging
- Finished with phosphate sunk
- DIN 133



KT NO.	Size mm	L mm	D mm	H mm	g	
10A0-24	24	178	52	15	286	6 / 72
10A0-27	27	180	55	16	339	6 / 72
10A0-30	30	190	60	16	416	6 / 60
10A0-32	32	190	61	17	401	6 / 60
10A0-36	36	215	72	17	573	6 / 24
10A0-41	41	233	83	19	855	5 / 20
10A0-46	46	255	94	20	1102	4 / 16
10A0-50	50	275	105	22	1502	2 / 16
10A0-55	55	298	115	24	2161	2 / 12
10A0-60	60	320	127	24	2374	1 / 10
10A0-65	65	340	138	27	3204	1 / 8
10A0-70	70	370	156	32	3785	1 / 5
10A0-75	75	372	153	31	3715	1 / 5
10A0-80	80	395	175	33	6820	1 / 4
10A0-85	85	395	175	33	6300	1 / 4
10A0-90	90	440	197	38	9270	1 / 2
10A0-95	95	440	197	38	8700	1 / 2
10A0-A0	100	480	230	45	10500	1 / 2
10A0-A5	105	480	230	45	10300	1 / 2
10A0-B0	110	505	238	47	14420	1 / 1
10A0-B5	115	505	250	53	14420	1 / 1
10A0-C0	120	530	258	53	15450	1 / 1
10A0-C5	125	530	258	56	15015	1 / 1

10B0

- Ring slogging
- Finished with phosphate sunk
- DIN 7444



KT NO.	Size mm	L mm	D mm	H mm	g	
New **10B0-17**	17	147	33	13	158	6 / 72
New **10B0-19**	19	147	33	13	143	6 / 72
New **10B0-21D1**	21	156	38.5	13	216	6 / 72
New **10B0-22D1**	22	156	38.5	13	195	6 / 72
10B0-24	24	162	42	16	238	6 / 72
10B0-26	26	180	46	17	341	6 / 72
10B0-27	27	180	46	17	330	6 / 72
10B0-30	30	190	52	18	431	6 / 72
10B0-32	32	190	52	18	404	6 / 60
10B0-34	34	195	56	13	471	6 / 36
10B0-36	36	205	58	19	534	6 / 36
10B0-41	41	230	66	21	728	6 / 24
10B0-46	46	240	74	23	877	4 / 16
10B0-50	50	250	82	23	1085	4 / 16
10B0-55	55	265	88	24	1429	2 / 16
10B0-60	60	275	95	26	1644	2 / 12
10B0-65	65	295	104	28	1875	2 / 12
10B0-70	70	325	112	33	2965	1 / 8
10B0-75	75	325	115	33	2735	1 / 8
10B0-80	80	345	128	36	3675	1 / 6
10B0-85	85	345	130	36	3710	1 / 6
10B0-90	90	380	152	40	5850	1 / 4
10B0-95	95	380	152	40	5350	1 / 4
10B0-A0	100	410	161	43	6445	1 / 4
10B0-A5	105	415	172	45	6500	1 / 3
10B0-B0	110	440	172	47	8000	1 / 3
10B0-B5	115	440	172	47	7500	1 / 3
10B0-C0	120	470	194	53	9000	1 / 2

Brake Caliper Slogging Wrench New

10B0B

3/4"

HRC 44

- Use for the assembly and removal of the brake caliper screw connections on commercial vehicles
- Designed with a 3/4" DR., can be used with torque wrenches for tightening operations
- The torque adjustment formula laser etched onto the wrench for calculating the correct setting torque when tightening the fixings



KT NO.	Size mm	Application	L mm	g	
10B0B-24	M24	SAF	215	580	1 / 24
10B0B-26	M26	DAF XF, XF95, XF105, XF106	220	580	1 / 24
10B0B-E18	E18	MAN TGL, TGM	215	580	1 / 24
10B0B-E20	E20	MAN TGL, TGM	215	580	1 / 24
10B0B-E24	E24	MAN TGA, TGS, TGX	220	580	1 / 24

Heavy Duty Offset Ring Wrench

10C0

- To be used with extension tubes item "11"
- Chrome vanadium alloy steel
- Chrome plated

KT NO.	Size mm	L mm	Applied tube	g	
10C0-24	24	178	111946	463	6 / 48
10C0-27	27	188	111946	523	6 / 48
10C0-30	30	198	111946	579	4 / 36
10C0-32	32	233	112261	841	4 / 24
10C0-36	36	241	112261	946	4 / 24
10C0-41	41	260	112261	1099	2 / 16
10C0-46	46	277	112576	1365	2 / 16
10C0-50	50	287	112576	1642	2 / 16
10C0-55	55	298	112576	1766	1 / 12
10C0-60	60	345	113086	2800	1 / 9
10C0-65	65	356	113086	3183	1 / 4

11

- Tube for item 10C0
- Chrome plated

KT NO.	⌀ mm	L mm	Applied wrench size	g	
111946	19	460	24mm, 27mm, 30mm	1050	20
112261	22	610	32mm, 36mm, 41mm	1450	16
112576	24	760	46mm, 50mm, 55mm	2400	6
113086	30	860	60mm, 65mm	2610	4

End Tubular Wrench

19A0

- Chrome vanadium alloy steel
- Chrome plated



- Double end socket wrench for the hollow tube design, a long-type screw may be used.



KT NO.	⬡⬡ mm	D1 mm	D2 mm	L2 mm	L3 mm	L mm	g	
19A00607	6 x 7	10	11	5	6	105	41	30 / 180
19A00809	8 x 9	13	14	6	7	110	55	30 / 180
19A01011	10 x 11	15	16	7.5	8	120	84	24 / 144
19A01213	12 x 13	18	19	9	9.5	140	141	18 / 144
19A01415	14 x 15	20	22	10	11	145	137	12 / 96
19A01617	16 x 17	23	24	11	12	155	186	10 / 90
19A01819	18 x 19	25	26	13	15	165	240	8 / 72

KT NO.	⬡⬡ mm	D1 mm	D2 mm	L2 mm	L3 mm	L mm	g	
19A02022	20 x 22	28	30	15	16	170	291	8 / 72
19A02123	21 x 23	29	31	15	17	185	346	6 / 54
19A02426	24 x 26	33	35	19	21	190	425	4 / 36
19A02528	25 x 28	34	37	19	21	205	497	4 / 24
19A02729	27 x 29	37	39	21	22	210	590	2 / 12
19A03032	30 x 32	40	42	22	26	210	680	2 / 12

19A0-09

19A0-15

KT NO.	L mm	Ø mm	Ø1 mm	Ø2 mm	Ø3 mm	Ø4 mm	Applied to socket wrench sizes
19A0-09	220	7.8	6.75	4.75	5.75	2.8	19A00607~19A02022
19A0-15	300	12.7	11.75	9.75	-	-	19A02123~19A03032



Flexible Speed Wrench & Set

KT No. & D1

3730M

- Flexible head, open end and ratchet ring - wrench
- 5° gear action (72 teeth)
- Chrome vanadium alloy steel
- Chrome plated

KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373008M	8	16.2	16.7	4.3	6.5	127.0	35	12 / 432
373009M	9	18.2	18.6	4.6	6.9	131.5	42	12 / 384
373010M	10	20.3	20.0	5.0	7.3	136.0	55	12 / 384
373011M	11	22.5	21.8	5.4	7.7	141.0	65	10 / 320
373012M	12	24.3	23.0	5.8	8.2	147.5	80	10 / 240
373013M	13	26.8	25.2	6.1	8.6	154.0	93	10 / 240
373014M	14	28.7	26.8	6.4	9.0	160.0	109	10 / 200
373015M	15	30.5	28.3	6.9	9.4	169.0	129	10 / 160

KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373016M	16	32.9	29.8	7.2	9.9	179.0	149	10 / 160
373017M	17	34.5	31.8	7.6	10.3	190.0	178	10 / 160
373018M	18	37.0	32.8	8.0	10.7	203.0	201	10 / 160
373019M	19	39.2	33.9	8.6	11.2	215.0	231	10 / 80
373021M	21	46.0	40.0	9.0	13.0	274.0	392	6 / 54
373022M	22	46.0	40.0	9.0	13.0	274.0	392	6 / 54
373024M	24	52.2	46.0	10.0	14.5	296.0	547	6 / 54

13012MR

Blow case size (mm) :
275 x 310 x 65 (1.68 Cuft)

12 PC.

Contents

2.17 | 1 / 6

3730M 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19

13013MR

Blow case size (mm) :
303 x 228 x 50 (1.35 Cuft)

13 PC.

Contents

1.66 | 1 / 8

3730M 8, 10, 12, 13, 14, 16, 17, 18, 19

02H 02R 03R 04R

Speed Wrench & Set

KT No. & D1

3731M

- Open end and ratchet ring - wrench
- 5° gear action (72 teeth)
- Chrome vanadium alloy steel
- Chrome plated



KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373108M	8	16.7	17.0	4.0	6.5	140.0	30	12 / 384
373109M	9	18.7	18.6	4.4	6.9	149.0	39	12 / 384
373110M	10	20.8	20.2	4.8	7.3	158.0	49	12 / 240
373111M	11	23.0	22.0	5.2	7.7	165.0	60	12 / 240
373112M	12	24.6	23.4	5.5	8.2	171.0	74	12 / 240
373113M	13	26.8	25.5	5.8	8.6	178.0	83	10 / 160
373114M	14	29.0	26.9	6.2	9.0	190.0	98	10 / 160
373115M	15	31.0	28.3	6.5	9.4	199.0	123	10 / 160
373116M	16	33.0	29.8	6.8	9.9	208.0	134	10 / 160

KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373117M	17	35.5	31.8	7.2	10.3	225.0	164	6 / 60
373118M	18	37.5	32.7	7.7	10.7	236.0	193	6 / 60
373119M	19	39.4	34.0	8.2	11.2	247.0	215	6 / 60
373121M	21	45.8	40.1	9.0	13.0	287.8	322	6 / 54
373122M	22	45.8	40.1	9.0	13.0	287.8	315	6 / 54
373124M	24	51.8	46.5	10.0	14.5	321.0	476	6 / 54
373127M	27	56.4	52.4	10.5	15.5	356.6	637	6 / 36
373130M	30	62.7	58.1	11.4	17.0	400.7	856	4 / 24
373132M	32	66.4	61.9	12.5	17.5	423.5	1011	4 / 24

KT NO.	PC.		Contents		
12107MRN	7	3731M	10, 11, 12, 14, 15, 17, 19	0.91	1 / 24
12107MRN01	7		8, 10, 11, 12, 13, 17, 19	0.84	1 / 24
12114MRN	14		8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24	2.50	1 / 12
12112MRN	12		8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22, 24	1.95	1 / 8

- etoron pouch bag

13113MR

Blow case size (mm) :
303 x 228 x 50 (1.35 Cuft)

Contents — 1.64 Kg — 1 / 8

3731M: 8, 10, 12, 13, 14, 16, 17, 18, 19

02H, 02R, 03R, 04R

13 PC.

Reversible Speed Wrench

373AM

- Ringstop function
- Open end and ratchet ring - wrench
- 5° gear action (72 teeth)
- Reversible
- Take - up : 13°
- Chrome vanadium alloy steel
- Chrome plated



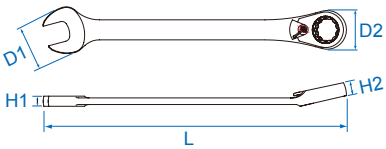

KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	
373A07M	7	16.7	16.6	4.6	6.5	140	12 / 384
373A08M	8	16.7	16.6	4.6	6.5	140	12 / 384
373A09M	9	18.8	18.4	4.9	6.9	150	12 / 384
373A10M	10	20.8	20.0	5.3	7.3	159	12 / 240
373A11M	11	23.0	21.8	5.6	7.7	165	12 / 240
373A12M	12	25.0	22.7	6.0	8.2	172	12 / 240
373A13M	13	27.1	24.7	6.4	8.6	178	10 / 160
373A14M	14	29.2	27.0	6.8	9.0	191	10 / 160
373A15M	15	31.3	28.3	7.0	9.4	200	10 / 160
373A16M	16	33.4	30.0	7.2	9.9	208	10 / 60
373A17M	17	35.5	31.8	7.7	10.3	226	6 / 60
373A18M	18	37.6	32.6	8.2	10.7	237	6 / 60
373A19M	19	39.7	33.8	8.8	11.2	248	6 / 60
373A21M	21	46.0	40.0	9.0	13.0	290	6 / 54
373A22M	22	46.0	40.0	9.0	13.0	290	6 / 54
373A24M	24	52.2	46.0	10.0	14.5	323	6 / 54

Speed Wrench

KT No. & D1

3732S

- Open end and ratchet ring - wrench
- 5° gear action (72 teeth)
- Reversible
- Take - up : 13°
- Chrome vanadium alloy steel
- Chrome plated

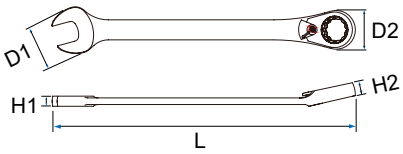

KT NO.	Size inch	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373210S	5/16	16.7	16.6	4.6	6.5	140	32	12 / 384
373212S	3/8	20.8	20.0	5.3	7.3	159	48	12 / 240
373214S	7/16	23.8	21.8	5.6	7.7	165	60	12 / 240
373216S	1/2	27.1	24.7	6.4	8.6	178	86	10 / 160
373218S	9/16	29.2	27.0	6.8	9.0	191	102	10 / 160
373220S	5/8	33.4	30.0	7.2	9.9	208	146	10 / 60
373222S	11/16	35.5	31.8	7.7	10.3	226	169	6 / 60
373224S	3/4	39.7	33.8	8.8	11.2	248	216	6 / 60
373228S	7/8	46.0	40.0	9.0	13.0	290	364	6 / 54
373230S	15/16	52.5	46.0	10.0	14.5	323	496	6 / 54

Reversible Speed Wrench Set

KT NO.	PC.		Contents	Kg	
122A07MRN01	7	373AM	8, 10, 11, 12, 13, 17, 19	0.91	1 / 24
122A07MRN02	7		8, 10, 12, 13, 14, 17, 19	0.97	1 / 16
122A14MRN	14		8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24	2.50	1 / 12
122A12MRN	12		8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22, 24	2.06	1 / 8
12207SRN	7	3732S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	0.91	1 / 24

- Tetoron pouch bag

132A13MR

Blow case size (mm) :
303 x 228 x 50 (1.35 Cuft)

Contents — 1.64 kg — 1 / 8

373AM — 8, 10, 12, 13, 14, 16, 17, 18, 19

02H 02R 03R 04R

13 PC.

132A13MR01

New

Blow case size (mm) :
303 x 228 x 50 (1.35 Cuft)

Contents — 1.64 kg — 1 / 8

373AM — 8, 10, 11, 13, 14, 16, 17, 18, 19

02H 02R 03R 04R

13 PC.

Double End Speed Wrench

3736M

- 5° gear action (72 teeth)
- Chrome vanadium alloy steel
- Chrome plated



KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
37360809M	8 x 9	16.8	20.2	6.5	6.9	128	42	10 / 320
37361011M	10 x 11	20.2	21.8	7.3	7.7	150	61	10 / 200
37361013M	10 x 13	20.2	24.8	7.3	8.6	150	75	10 / 200
37361213M	12 x 13	23.0	24.8	8.2	8.6	170	88	10 / 200
37361415M	14 x 15	26.5	29.5	9.0	9.4	190	126	10 / 160
37361618M	16 x 18	29.5	33.5	9.9	10.7	210	182	10 / 120
37361719M	17 x 19	31.5	33.5	10.3	11.2	230	206	10 / 120

Double End Speed Wrench & Set

3737M

- 5° gear action (72 teeth)
- Reversible
- Take-up :13°
- Chrome vanadium alloy steel
- Chrome plated



KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
37370607M	6 x 7	14.2	17.2	6.3	6.5	115	32	10 / 320
37370809M	8 x 9	16.8	20.2	6.5	6.9	128	42	10 / 320
37371011M	10 x 11	20.2	21.8	7.3	7.7	150	59	10 / 200
37371213M	12 x 13	23.0	24.8	8.2	8.6	170	87	10 / 200
37371415M	14 x 15	26.5	29.5	9.0	9.4	190	127	10 / 160
37371618M	16 x 18	29.5	33.5	9.9	10.7	210	178	10 / 120
37371623M	21 x 23	40.0	46.0	13	14.5	260	413	8 / 64

Stubby Speed Wrench & Set

3738M

- Open-ended and ratchet ring-wrench
- 5° gear action (72 teeth)
- Chrome vanadium alloy steel
- Chrome plated



KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373811M	11	23.8	23.0	5.1	8.0	103	55	15 / 360
373812M	12	26.0	24.8	5.3	8.5	106	65	15 / 360

KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373814M	14	30.5	27.6	6.0	9.3	115	88	15 / 360
373815M	15	31.8	29.2	6.3	9.9	119	104	15 / 360

4 in1 Ratcheting Wrench & Set

3739N

70% All screw applications

72T

- 4 sizes combined in 1 wrench; common sizes cover 70% of work applications
- 72 fine teeth make it suitable for use in narrow spaces
- High-quality Chrome Vanadium meets DIN standards
- The 12-point ring design offers better flexibility

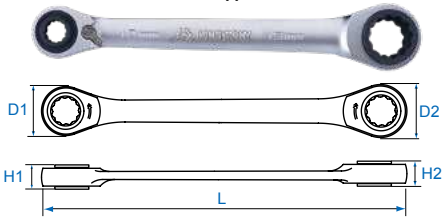

KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
3739N0813M	8 x 10 x 12 x 13	20.2	24.8	13.8	16.8	150	89	12 / 192
3739N0811M	8 x 9 x 10 x 11	20.2	21.8	13.8	14.6	150	68	12 / 192
3739N1215M	12 x 13 x 14 x 15	26.5	29.5	17.1	18.0	190	150	10 / 160
3739N1619M	16 x 17 x 18 x 19	31.5	33.5	20.2	21.9	230	233	6 / 72

14902MR01

14903MR01

KT NO.	PC.		Contents	Kg	
14902MR01	2	3739N	8 x 9 x10 x 11 16 x 17 x 18 x 19	4.2	1 / 6
14903MR01	3	3739N	8 x 9 x10 x 11 12 x 13 x 14 x 15 16 x 17 x 18 x 19	4.2	1 / 6

Open-side Speed Wrench & Set

KT No. & D1

3721M

- Open-side speed wrench
- Torque rating exceeds ANSI specifications by 30% plus
- The special ratcheting open end design will not slip off the screw when torque is applied
- hrome vanadium alloy steel
- Chrome plated



- Combinati on wrench 17mm

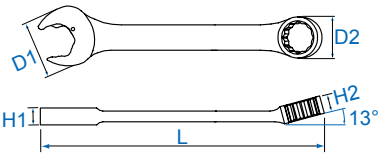



KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
372111M	11	25.4	17.5	6.6	7.4	168	68	12 / 288
372112M	12	26.3	19.2	7.5	7.9	174	83	12 / 288
372115M	15	32.8	23.6	8.5	9.7	200	143	10 / 120
372116M	16	34.9	23.6	9.0	10.8	207	171	10 / 120
372118M	18	39.0	28.0	9.8	11.2	239	220	10 / 100

Speed Wrench Adapter

H / R

KT NO.	Apply to speed wrench		Function
02H		10 mm	1/4" Bit
02R		10 mm	1/4" drive
03R		13 mm	3/8" drive
25H		13 mm	5/16" Bit
04R		19 mm	1/2" drive

Podger Ratchet Wrench

1500

- Double sizes ratchet head
- Reversible switch for tightening and loosening the screw
- Taper end bar
- For scaffolding construction work
- 32 teeth

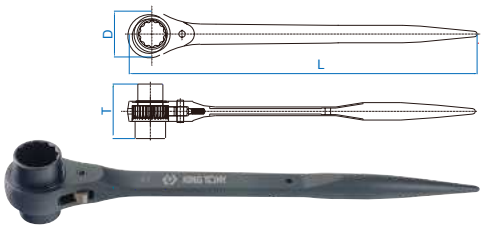

KT NO.	mm	T mm	D mm	L mm	g	
15001012P	10 x 12	38	31	241	209.4	2 / 120
15001113P	11 x 13	38	31	241	209.4	2 / 120
15001214P	12 x 14	38	31	241	220	2 / 120
15001317P	13 x 17	45	34	280	280	2 / 80
15001415P	14 x 15	45	34	280	280	2 / 80
15001417P	14 x 17	45	34	280	280	2 / 80
15001719P	17 x 19	50	42	320	506	2 / 40
15001721P	17 x 21	50	42	320	506	2 / 40
15001921P	19 x 21	50	42	320	506	2 / 40
15001922P	19 x 22	50	42	320	506	2 / 40
15001924P	19 x 24	56	51.5	365	820	2 / 24
15002123P	21 x 23	56	51.5	365	820	2 / 24
15002224P	22 x 24	56	51.5	365	830	2 / 24
15002326P	23 x 26	56	51.5	365	830	2 / 24
15002427P	24 x 27	56	51.5	365	870	2 / 24
15002430P	24 x 30	63	61.5	402	1110	2 / 16
15002632P	26 x 32	63	61.5	402	1150	2 / 16
15002730P	27 x 30	63	61.5	402	1150	2 / 16
15002732P	27 x 32	63	61.5	402	1150	2 / 16
15003032P	30 x 32	63	61.5	402	1150	2 / 16
15003236P	32 x 36	67	67	450	1525	2 / 8
15003638P	36 x 38	67	67	450	1525	2 / 8
15003641P	36 x 41	67	67	450	1525	2 / 8
15003841P	38 x 41	67	67	450	1470	2 / 8

Angled Socket Wrench & Set

1084 | 5084

- Conic profile and thin walled
- Convenient to facilitate the force-depth objects
- Chrome plated

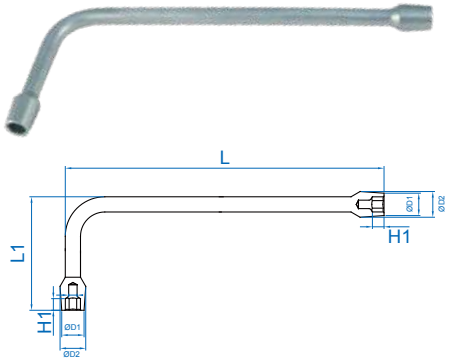

KT NO.	mm	D1 mm	D2 mm	H1 mm	L1 mm	L mm	g	
1084-08	8	12.5	14.0	10	88	230	152	12 / 48
1084-09	9	14.0	15.5	10	88	230	153	12 / 48
1084-10	10	15.0	16.5	10	88	230	187	10 / 40
1084-11	11	16.0	17.5	11	88	230	192	10 / 40
1084-12	12	17.4	19.5	12	98	245	298	6 / 30
1084-13	13	18.9	21.0	12	98	245	313	6 / 30
1084-14	14	19.8	22.0	12	98	260	332	6 / 24
1084-15	15	21.7	24.0	13	98	260	344	6 / 24
1084-16	16	22.2	24.5	13	98	260	350	6 / 24
1084-17	17	24.5	27.0	14	98	260	475	6 / 24
1084-18	18	25.5	28.0	15	98	260	484	6 / 24
1084-19	19	27.1	30.0	15	98	260	588	6 / 24

KT NO.	inch	D1 mm	D2 mm	H1 mm	L1 mm	L mm	g	
5084-16	1/2	18.9	21.0	23	12	245	315	6 / 30
5084-18	9/16	19.8	22.0	23	12	260	338	6 / 24

- Nylon pouch bag

KT NO.	PC.		Contents	Kg	
1842MR	12	1084	8, 9, 10, 11, 12, 13, 14 ,15, 16, 17, 18, 19	4.2	1 / 6

Angled Socket Wrench & Set

1080

- Angle and through-hole design
- Deep concave at one side and open end socket at the other, easily fit over protruding studs
- Chrome plated
- ISO 2236







1081

KT NO.	mm	B mm	P mm	H mm	C mm	L mm	g	
1080-06	6	11.0	7.0	18.5	29	110	43	12 / 240
1080-07	7	11.5	8.0	21.0	30.5	114	57	12 / 240
1080-08	8	13.0	10.0	21.5	30	120	68	12 / 216
1080-09	9	14.0	10.0	22.0	33	125	85	12 / 216
1080-10	10	15.0	11.0	25.5	35	131	102	6 / 60
1080-11	11	16.5	12.0	26.5	37	137	125	6 / 60
1080-12	12	17.5	12.0	27.0	40	144	143	6 / 60
1080-13	13	19.0	14.0	30.0	47	152.5	173	6 / 60
1080-14	14	20.0	14.0	33.0	48	160	191	6 / 60
1080-15	15	21.5	15.0	35.0	50	174	236	6 / 60
1080-16	16	22.5	17.0	39.5	54	185	281	6 / 60
1080-17	17	24.0	18.0	39.5	56	197	314	6 / 60
1080-18	18	25.0	19.5	42.0	58	211	336	4 / 40
1080-19	19	26.5	20.5	45.0	62	218	374	4 / 40
1080-20	20	27.5	21.5	45.0	63	222	445	2 / 20
1080-21	21	29.0	23.5	49.0	65	231	488	2 / 20
1080-22	22	30.0	23.5	49.0	67	247	537	2 / 16
1080-23	23	31.5	24.5	54.0	74	255	600	2 / 16
1080-24	24	32.5	25.5	56.0	77	266	657	2 / 16
1080-25	25	34.0	25.5	58.0	79	278	692	2 / 16
1080-26	26	35.0	25.5	59.0	80	289	863	2 / 16
1080-27	27	36.5	27.5	59.0	84	299	942	2 / 16
1080-28	28	37.5	27.5	60.0	86	310	1080	2 / 16
1080-29	29	39.0	28.5	62.0	90	319	1167	2 / 16
1080-30	30	40.0	28.5	65.0	93	332	1194	2 / 12
1080-32	32	42.5	28.5	69.0	95	353	1355	2 / 12

KT NO.	mm	B mm	P mm	H mm	C mm	L mm	g	
1081-06	6	11.0	7.0	18.5	29	110	44	12 / 240
1081-07	7	11.5	8.0	21.0	30.5	114	54	12 / 240
1081-08	8	13.0	10.0	21.5	30	120	69	12 / 216
1081-09	9	14.0	10.0	22.0	33	125	88	12 / 216
1081-10	10	15.0	11.0	25.5	35	131	105	6 / 60
1081-11	11	16.5	12.0	26.5	37	137	132	6 / 60
1081-12	12	17.5	12.0	27.0	40	144	148	6 / 60
1081-13	13	19.0	14.0	30.0	47	152.5	178	6 / 60
1081-14	14	20.0	14.0	33.0	48	160	185	6 / 60
1081-15	15	21.5	15.0	35.0	50	174	245	6 / 60
1081-16	16	22.5	17.0	39.5	54	185	285	6 / 60
1081-17	17	24.0	18.0	39.5	56	197	315	6 / 60
1081-18	18	25.0	19.5	42.0	58	211	355	4 / 40
1081-19	19	26.5	20.5	45.0	62	218	425	4 / 40
1081-20	20	27.5	21.5	45.0	63	222	441	2 / 20
1081-21	21	29.0	23.5	49.0	65	231	483	2 / 20
1081-22	22	30.0	23.5	49.0	67	247	589	2 / 16
1081-23	23	31.5	24.5	54.0	74	255	661	2 / 16
1081-24	24	32.5	25.5	56.0	77	266	658	2 / 16
1081-25	25	34.0	25.5	58.0	79	278	798	2 / 16
1081-26	26	35.0	25.5	59.0	80	289	825	2 / 16
1081-27	27	36.5	27.5	59.0	84	299	914	2 / 16
1081-28	28	37.5	27.5	60.0	86	310	1005	2 / 16
1081-29	29	39.0	28.5	62.0	90	319	1161	2 / 16
1081-30	30	40.0	28.5	65.0	93	332	1214	2 / 12
1081-32	32	42.5	28.5	69.0	95	353	1362	2 / 12

- MRN / SRN : Tetoron pouch bag

- MR / SR : Nylon pouch bag

- Color box

KT NO.	PC.		Contents	Package	Kg	
1805MR	5		10, 11, 13, 14, 17	Color box	1.12	1 / 22
1808MR	8	1080	8, 10, 11, 12, 13, 14, 17, 19	Nylon	1.73	1 / 18
1812MR	12		8, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22, 24	Nylon	3.38	1 / 4
1826MR	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Color box	14.0	1 / 2
1912MR	12	1081	8, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22, 24	Nylon	3.38	1 / 4
1912MRN	12			Tetoron	3.38	1 / 4
1926MR	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Color box	15.0	1 / 2

Adjustable Wrench

3611

- Chrome vanadium alloy steel
- Polish, phosphate & chrome plated
- DIN 3117

3611R

3611HR

3611P

3611HP

KT NO.	mm	H1 mm	L mm	g	
3611-06R	20	7	150	136	12 / 108
3611-08R	25	8	200	245	12 / 48
3611-10R	30	11	250	415	10 / 60
3611-12R	35	13	300	713	5 / 40
3611-06P	20	7	150	127	12 / 108
3611-08P	25	8	200	246	12 / 48
3611-10P	30	11	250	415	10 / 60
3611-12P	35	13	300	691	5 / 40

KT NO.	mm	H1 mm	L mm	g	
3611-15HR	43	13	365	1351	1 / 20
3611-18HR	52	18	450	1877	1 / 6
3611-24HR	62	23	600	3720	1 / 6
3611-15HP	43	13	365	1348	1 / 20
3611-18HP	52	18	450	1750	1 / 6
3611-24HP	62	23	600	3669	1 / 6

Reversible Jaw Adjustable Wrench

3614-08R

- Chrome vanadium alloy steel
- Dual function wide jaws can be used as an adjustable wrench or pipe Wrench. On one side, the jaw is flat for traditional usage to avoid damaging the parts.
- On the other side, the jaw is finely serrated for powerful tightening on tubes and other parts requiring strong grip and high torque.
- Super wide jaw opening, 50% wider than regular adjustable wrenches
- Deep throat, 30% longer jaws than traditional adjustable wrenches
- Screw pin with front side metric or SAE scale
- 15° , perfectly matched knurl and teeth of jaw for smooth running
- TPR handle with end hole button

Reversible Jaw

50% Wider Jaw



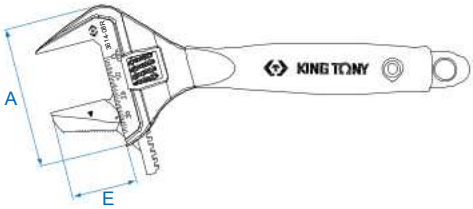

KT NO.	mm	A mm	E mm	H1 mm	H2 mm	L mm	g	
3614-08R	38	69	32.4	5.7	13.9	212	298.6	4 / 40

Ratcheting Adjustable Wrench

3631-10R

- Chrome vanadium alloy steel
- Magic button to switch ratchet function on/ off
- Wider jaw opening, comfortable & durability
- Excellent in each movement of knurl, tension enhanced and precise
- Patented, more than 130% of ASME standard

Button for release & lock function

Ratchet function

KT NO.	mm	Overall length mm	g	
3631-10R	32	257	470	6 / 36

Double Sides Self-Adjusting Wrench

3616-10

- Self-locking function grip, ideal for fastener 8~32mm
- Anti-slip teeth effective on worn screws
- Slim jaw allows for working in confined area
- Multi-purpose to all shape of fastener

KT NO.	Capacity mm	g	
3616-10	8~17 14~32	466	6 / 36

Rapid Pipe Wrench

3616S

- Multi-purpose for all shape of fasteners and pipes
- Anti-slip teeth effective on worn screws
- Strong and durable CR-MO material

KT NO.	Capacity mm	g	
3616S-08P	12-28	345	1 / 48
3616S-14P	20-48	883	1 / 20

- One-handed operation, fast and convenient

- Three-point clamping anti-slip designeffectively enhances gripping force

- Special tooth profile design allows for reversible use like a ratchet

Adjustable Hook Wrench

3641

- The joint is equipped with a spring washer to ensure smooth and reliable operation
- Chrome vanadium alloy steel

KT NO.	Capacity mm	L	g	
3641-35	13-35	174	104	12 / 144
3641-50	35-50	212	170	12 / 108
3641-80	50-80	285	395	10 / 60
3641-C0	80-120	348	689	5 / 30
3641-I0	120-180	480	1554	4 / 16



Chain Wrench

3204

- Chain wrench for oil filter

KT NO.	Overall length inch	mm	Capacity(M) mm	g	
3204	8-3/4	225	Ø 60~140	411	50

Strap Wrench

3203

- Strap wrench for oil filter

KT NO.	Overall length inch	mm	Capacity(M) mm	g	
3203	8-3/4	223	Ø 60~140	276	50
320300		Strap		46	80
3203A0	8-3/4	223	Ø 60~260	300	45
320301		Strap		73	80

Nylon Strap Wrench

New

32067A

- Aluminum alloy handle and strong nylon strap for tight grip
- Suitable for oil filter or any polished pipe

KT NO.	Overall Length inch	Overall Length mm	Capacity mm	g	
32067A	12	279	Ø 60~180	361	4 / 48
3206A00	Spare	Nylon strap		35	25 / 50

Wheel Nut Wrench

1991

- For most car wheel nuts in metric
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3119, ISO 6788

KT NO.	■ inch	⬡ mm	L mm	g	
19911722	1/2	17, 19, 21, 22	400	1700	6
199104R	1/2	19	34	84	10 / 240



1993

- Designed for removing wheel nuts on cars and heavy vehicles
- Replaceable bit on wrenches featuring a square drive
- Chrome vanadium alloy steel
- Chrome plated





KT NO.	■ inch	⬡ mm	L mm	g	
19932427	3/4	24, 27, 32	700	4333	4



KT NO.	■ inch	⬡ mm	L mm	g	
19932433	3/4	24, 27, 30, 33	700	5.02	2
199306R	3/4	30	48	0.21	-

- T-type 90° universal joint driver

Assembling Wheel Nut Wrench

1996

PAT. 192461

- For most car wheel nuts in metric
- Chrome vanadium alloy steel
- Chrome plated

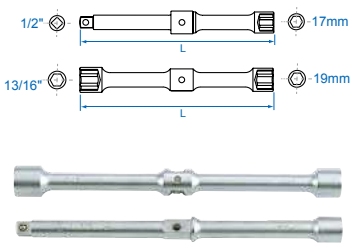

KT NO.	⬡ inch	■ inch	⬡ mm	L mm	g	
19961721	13/16	1/2	17, 19	300	1100	20

Double-End Truck Wrench & Set

1999A

- Chrome vanadium alloy steel
- Chrome plated

1999

1999R

Set KT NO.	g		Wrench KT NO.	Size mm	ø mm	Overall length mm	Tommy Bar KT NO.	Overall length mm
19991921A	1183	1 / 20	**19991921**	19 x 21	16	300	**19980016**	300
19992224A	2330	1 / 8	**19992224**	22 x 24	20	406	**199920R**	400
19992427A	2673	1 / 8	**19992427**	24 x 27	20	406	**199920R**	400
19992432A	2360	1 / 8	**19992432**	24 x 32	20	406	**199920R**	400
19992730A	2740	1 / 8	**19992730**	27 x 30	20	406	**199920R**	400
19992732A	2762	1 / 8	**19992732**	27 x 32	20	406	**199920R**	400
19992733A	2796	1 / 8	**19992733**	27 x 33	20	406	**199920R**	400
19992833A	2440	1 / 8	**19992833**	28 x 33	20	406	**199920R**	400
19993032A	2853	1 / 8	**19993032**	30 x 32	20	406	**199920R**	400
19993233A	2875	1 / 8	**19993233**	32 x 33	20	406	**199920R**	400
19993238A	3055	1 / 4	**19993238**	32 x 38	20	406	**199920R**	400
19993821A	3794	3	**19993821**	○ 38 x ▢ 21 SQ.	25	406	**199925R**	595
19993822A	3794	3	**19993822**	○ 38 x ▢ 22 SQ.	25	406	**199925R**	595
19994121LA	4074	3 / 3	**19994121L**	○ 41 x ▢ 21 SQ.	25	450	**199925R**	595

T-Spin Lug Wrench Set

4503MR01

- Fast spinning action extension wrench
- Reach deep area with soft grip handle
- Suitable for passenger vehicles



4506MR

4 PC.

4503MR01

6 PC.

4056MR

KT NO.	Size	ℓ mm	L mm	Kg	
4503MR01	■ 1/2"	300	265	1.36	12
	○ 19, 21 mm (4335MR)				
4506MR	■ 1/2"			1.56	10
	○ 17, 19, 21, 23 mm (4335MR)				

T-type Deep Socket Wrench

115HM

- Shank material - chrome vanadium alloy steel
- Shank finishing - chrome plated
- Grip material - PP

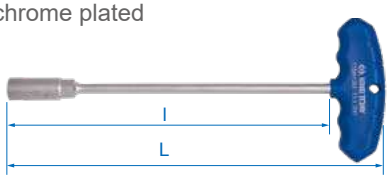

KT NO.	mm	l mm	L mm	g	
115H05M-10	5	260	300	127	12 / 96
115H06M-10	6	260	300	147	12 / 96
115H07M-10	7	260	300	162	12 / 96
115H08M-10	8	260	300	158	12 / 96
115H09M-10	9	260	300	161	12 / 96
115H10M-10	10	260	300	170	12 / 96
115H11M-10	11	260	300	203	12 / 96
115H12M-10	12	260	300	205	12 / 96
115H13M-10	13	260	300	205	12 / 96
115H08M-14	8	350	394	212	10 / 60
115H10M-14	10	350	394	221	10 / 60
115H13M-14	13	350	394	233	8 / 32

1184M

- T-shaped deep socket wrench
- Chrome vanadium alloy steel
- DIN 475

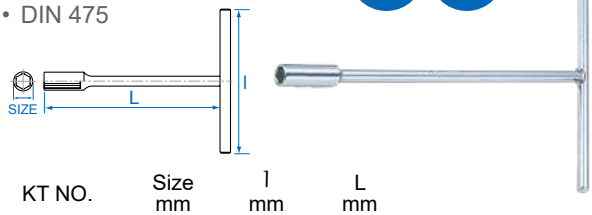

KT NO.	Size mm	l mm	L mm	g	
118406M	6	120	190	59	10 / 40
118407M	7	120	190	77	10 / 40
118408M	8	200	300	306	10 / 60
118409M	9	200	300	306	10 / 60
118410M	10	200	300	317	10 / 60
118411M	11	200	300	323	10 / 60
118412M	12	200	300	326	10 / 60
118413M	13	200	300	333	10 / 60
118414M	14	200	300	344	10 / 60
118417M	17	250	300	599	6 / 36

T-type Standard Socket Wrench

1185M

- T-shaped standard socket wrench
- Chrome vanadium alloy steel
- DIN 475

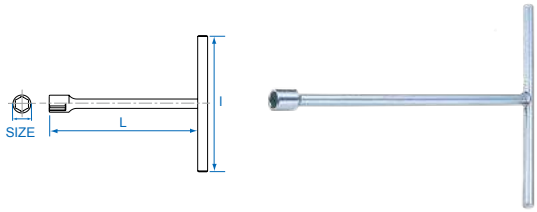

KT NO.	Size mm	l mm	L mm	g	
118508M	8	200	250	186	10 / 100
118509M	9	200	250	230	10 / 100
118510M	10	200	250	230	10 / 100
118511M	11	200	250	234	10 / 100
118512M	12	250	250	390	10 / 60

KT NO.	Size mm	l mm	L mm	g	
118513M	13	250	300	425	10 / 60
118514M	14	250	300	429	10 / 60
118517M	17	300	360	710	6 / 36
118519M	19	300	360	727	6 / 36

T-type Spark Plug Socket

1563

- T-type 25° universal spark plug socket (rubber)
- Chrome vanadium alloy steel

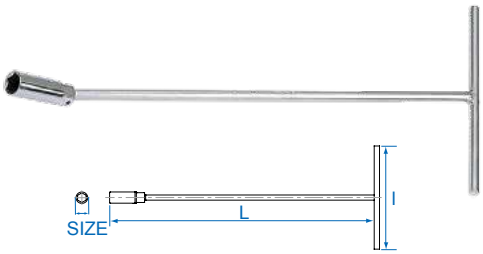

KT NO.	Size mm	l mm	L mm	g	
15631612	16	200	300	363	10 / 40
15631615	16	200	385	400	10 / 40
15631618	16	200	460	450	10 / 40
15631818	18	200	460	450	10 / 40
15632112	21	200	300	388	10 / 40
15632115	21	200	385	438	10 / 40
15632118	21	200	460	488	10 / 40

T-type Universal Standard Socket Wrench

5774M

- T-type 90° universal standard socket wrench
- 2 PC. sliding handle for easy storage

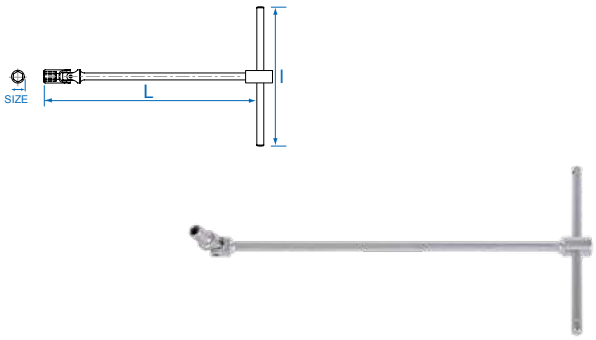

KT NO.	Size mm	l mm	L mm	g	
577407M	7	200	390	420	10 / 30
577408M	8	200	390	420	10 / 30
577410M	10	200	500	480	10 / 30
577412M	12	200	500	480	10 / 30
577413M	13	200	500	480	10 / 30
577414M	14	200	500	500	10 / 30
577417M	17	200	500	500	10 / 30
577419M	19	200	500	500	10 / 30

T-shaped Driver

- Chrome vanadium alloy steel
- Chrome plated

3511 3/8"

- Chrome vanadium alloy steel

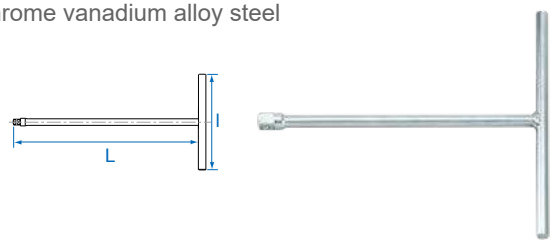

KT NO.	l mm	L mm	g	
3511-06	170	268	324	5 / 30
3511-10	250	268	383	6 / 30

T-shaped Driver

- Chrome vanadium alloy steel
- Chrome plated

4795 1/2"

- T-type 90° universal joint driver
- Chrome vanadium alloy steel

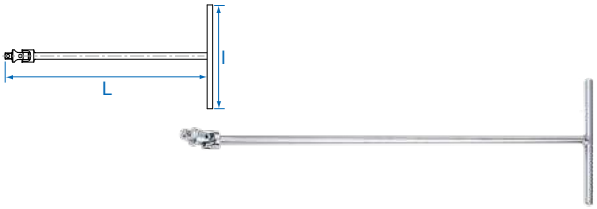

KT NO.	l mm	L mm	g	
4795-18	200	460	567	10 / 30

4511 1/2"

- Chrome vanadium alloy steel

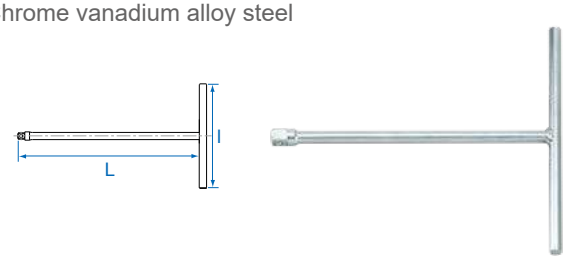

KT NO.	l mm	L mm	g	
4511-06	170	268	396	5 / 30
4511-10	250	268	463	6 / 30

21A107

- Applied with power bit

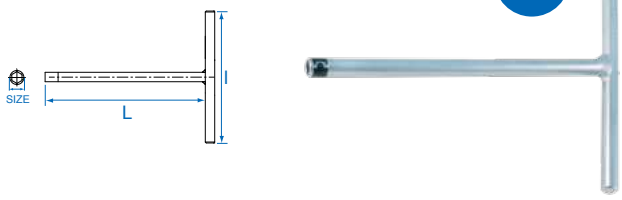

KT NO.	Size inch	l mm	L mm	g	
21A107	1/4	150	175	194	10 / 60

KING TONY
1062
12D12MRS
KING TONY
1062
32
KING TONY
KING TONY
KING TONY
KING TONY
KING TONY 3616S-08P

PLIERS

6653-07
6133-08
KING TONY 6518-10
66HS-07

CUTTING EDGES TECHNICAL BASICS

High performance for cutting

A greater hardness at the edge makes it very sharp and easy to cut. Wear-resistant design is for different purposes pliers and cutters. Our high leverage combination pliers quality is tested by cutting piano wire with sharp performance.

Over 2000 times cutting result for 1.6mm piano wire (2200N/mm2, HRC48)



King Tony Brand: Wore down 0.19mm (good)

Other Brand: Wore down 0.33mm (not good)

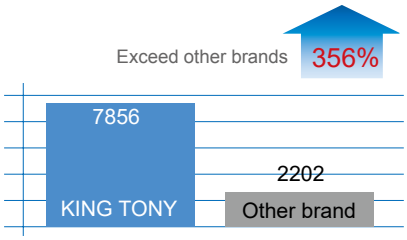

KING TONY combination pliers are sharp and triple of its life for cutting than others.

CUTTING EDGE SHAPES

With bevel (outside bevel)

With very small bevel (outside bevel)



With small bevel (outside bevel)

Without bevel (outside bevel)



WIRE CLASSES

Soft wire

- Copper / Aluminium

Medium hard wire

- Steel nail

Hard wire

- Spring wire / Steel nail

Piano wire

- Hardend spring steel

TECHNICAL BASICS

Thin serrated

Coarse serrated

With opening spring

JAWS TYPES

Round jaws

Half-round jaws

Flat & point jaws

GRIP MATERIAL

PP + TPR

item no. with "C" is made of PVC

Mini Combination Pliers

6114

- Mini type
- DIN ISO 5746



KT NO.	L inch	L mm	Cutting capacities ⊙ (ø mm)	◉	●	g	📦/📦
6114-05	5	122	3.0	2.0	87	8 / 160	

Combination Pliers

6111

- Polished head
- DIN ISO 5746



KT NO.	L inch	L mm	Cutting capacities ⊙ (ø mm)	◉	●	⬤	g	📦/📦
6111-06	6-1/2	164	4.0	2.8	1.8	1.6	220	8 / 96
6111-07	7-1/2	180	4.0	3.0	2.0	1.6	294	8 / 48
6111-08	8-1/4	205	4.0	3.0	2.0	1.6	396	8 / 48

Hi-leverage Combination Pliers

6112

- Hi-leverage type
- Polished head



KT NO.	L inch	L mm	Cutting capacities ⊙ (ø mm)	◉	●	⬤	g	📦/📦
6112-09	9	232	4.0	3.0	2.2	2.0	395	6 / 60

Plastic Cutting Pliers

CAUTION

In order to get a normal product life of pliers, do not cut steel wire.

6921

- European type
- Polished head



KT NO.	L inch	L mm	g	📦/📦
6921-05	5	122	106	6 / 120
6921-06	6	155	171	6 / 72
6921-07	7	170	268	6 / 60

Diagonal Cutting Pliers

6214

- Mini type



KT NO.	L inch	L mm	Ø Max. mm ◉ (ø mm)	g	📦/📦
6214-45	4-1/2	115	0.6	83	8 / 160
6214-05	5	125	1.25	94	8 / 160

6211

- European type
- DIN 5749



KT NO.	L inch	L mm	Cutting capacities ⊙ (ø mm)	◉	●	⬤	g	📦/📦
6211-06	6-1/2	160	4.0	2.8	2.0	1.6	194	8 / 96

6213

- Japanese type



KT NO.	L inch	L mm	Cutting capacities ◉ (ø mm)	Wire stripper mm	g	📦/📦
6213-06	6-1/2	168	1.25	1.4 / 1.6	175	8 / 96

Heavy Duty Diagonal Cutting Pliers

6232



KT NO.	L inch	L mm	Cutting capacities ⊙ (ø mm)	◉	●	⬤	g	📦/📦
6232-08	8	196	5.0	3.5	2.2	2.0	285	8 / 80

6231

Heavy duty type
DIN ISO 5749



KT NO.	L inch	L mm	Cutting capacities ⊙ (ø mm)	◉	●	⬤	g	📦/📦
6231-07	7-1/2	180	4.0	3.0	2.2	2.0	243	8 / 80

Mini Long Nose Pliers

6314

- Mini type
- DIN ISO 5745



KT NO.	L inch	L mm	Cutting capacities ⌀ mm				
6314-05	5-1/2	136	3.0	2.0	1.6	94	8 / 160

Long Nose Pliers

6311

- European type
- DIN ISO 5745



KT NO.	L inch	L mm	Cutting capacities ⌀ mm					
6311-06	6-1/2	160	4.0	2.8	1.8	1.6	155	10 / 120
6311-08	8	200	4.0	3.0	2.0	1.6	220	8 / 80

6313

- Japanese type
- DIN ISO 5745



KT NO.	L inch	L mm	Cutting capacities ⌀ mm					
6313-06	6-1/2	170	4.0	2.8	1.8	1.6	146	10 / 120

Extra Long Nose Pliers

6319

- Slim jaws design for gripping components in recessed areas



KT NO.	L inch	L mm		
6319-11C	11	280	292	6 / 48

Double Joint Long Nose Pliers

6329

- Double joint and slim profile, for working a greater width in a narrow space, even single-handed
- Serrated nose for good grip



KT NO.	L inch	L mm	A Up on jaw capacity (mm)	B Grip width (mm)		
6329-13C	13	340	50	110	355	5 / 40

Double Joint Bent Nose Pliers

6339

- Double joint and slim profile, for working a greater width in a narrow space, even single-handed
- Serrated nose for good grip

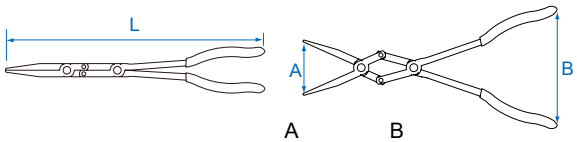

KT NO.	L inch	L mm	A Up on jaw capacity (mm)	B Grip width (mm)		
6339-13C	13	335	50	110	369	5 / 40

Mini Bent Nose Pliers

6334

- Mini type
- DIN ISO 5745



KT NO.	L inch	L mm	Cutting capacities ⌀ mm				
6334-05	5	136	3.0	2.0	1.6	95	8 / 160

Bent Nose Pliers

6331

- European type
- DIN ISO 5745

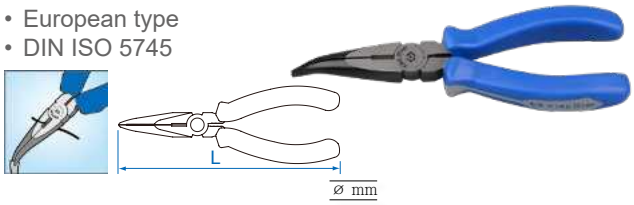

KT NO.	L inch	L mm	Cutting capacities ⊙	⊙	◉	●	g	
6331-06	6-1/2	160	4.0	2.8	1.8	1.6	142	10 / 120
6331-08	8	200	4.0	3.0	2.0	1.6	222	8 / 80

End Cutting Pliers

6411

- European type
- DIN ISO 5748

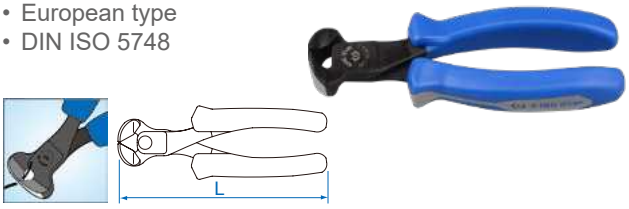

KT NO.	L inch	L mm	Cutting capacities ⊙	⊙	◉	●	g	
6411-06	6-1/2	164	4.0	3.0	1.6	1.6	273	8 / 96

6431

- European type
- DIN ISO 9242

KT NO.	L inch	L mm	Cutting capacities ◉	◉	g	
6431-10C	10	254	2.0	1.6	441	6 / 48
6431-11C	11	280	2.2	1.8	507	6 / 48

Stripping Pliers

6711

- With spring and adjusting screw

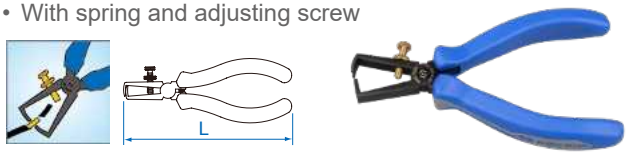

KT NO.	L inch	L mm	ø mm	Wire stripper mm²	g	
6711-06	6	170	5	10	196	8 / 96

Slip Joint Pliers

6463

- 2 positions adjustment
- Serrate jaws

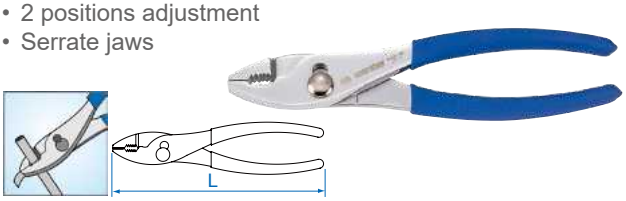

KT NO.	L inch	L mm	g	
6463-08C	8	210	290	8 / 80

Quick-Lock Groove Joint Pliers

6517

QUICK LOCK

- Quick lock
- Grip material-PVC
- DIN ISO 8976

KT NO.	L inch	L mm	mm	A mm	B mm	g	
6517-08C	8	200	40	54	44	190	10 / 40
6517-10C	10	250	60	68	56	361	6 / 48
6517-12C	12	310	70	89	73	570	5 / 40

Groove Joint Pliers

6516

- German type
- 7 positions opening
- DIN ISO 8976

KT NO.	L inch	L mm	mm	A mm	B mm	g	
6516-10	10	250	36	58	61	383	6 / 48
6516-10C	10	250	36	58	61	347	6 / 48

Groove Joint Pliers

6511

- 7 positions opening
- DIN ISO 8976



6511-10

6511C

6511-17C

KT NO.	L inch	L mm	mm	A mm	B mm	g	
6511-10	10	253	50	33	61.5	435	6 / 48
6511-10C	10	253	50	33	58.5	400	6 / 48
6511-13C	13	325	65	43	74.0	808	2 / 16
6511-17C	17	425	100	58	55.0	1150	2 / 12

Bolt Cutter

6131

GS / TUV

- Chrome vanadium alloy steel
- Center cut



KT NO.	L inch	L mm	Cutting capacity 15(ø mm) HRC	Cutting capacity 35(ø mm) HRC	kg	
6131-12	12	300	ø5	ø4	0.74	1 / 20
6131-14	14	350	ø7	ø5	1.04	1 / 20
6131-18	18	450	ø8	ø6	1.45	1 / 12
6131-24	24	600	ø10	ø8	2.32	1 / 10
6131-30	30	750	ø13	ø10	3.74	1 / 6
6131-36	36	900	ø16	ø11	5.50	1 / 5
6131-42	42	1050	ø18	ø13	8.56	1 / 3

6131P01

- Spare blade for 6131
- Center cut

KT NO.	Overall length mm	Cutting capacity 15(ø mm) HRC	Cutting capacity 35(ø mm) HRC	kg	
6131-12P01	95 x 57	ø5	ø4	0.26	1 / 40
6131-14P01	110 x 65	ø7	ø5	0.40	1 / 40
6131-18P01	125 x 72	ø8	ø6	0.85	1 / 20
6131-24P01	150 x 86	ø10	ø8	0.87	1 / 20
6131-30P01	170 x 97	ø13	ø10	1.25	1 / 10
6131-36P01	190 x 112	ø16	ø11	1.85	1 / 10
6131-42P01	205 x 122	ø18	ø13	3.10	1 / 5

Compact Bolt Cutter

6133

- Heavy duty type
- DIN ISO 5749
- Center cut



399.6 8/48

KT NO.	L inch	L mm	Cutting capacities ø mm	ø mm	ø mm	ø mm
6133-08	8	212	6.0	5.0	4.0	3.5

Pliers Wrench

6518-10C

- Smooth jaws for the gentle assembly of plated fittings .
- Excellent for gripping, holding, pressing and bending work pieces .
- Suitable for gripping, holding, pressing and bending workpieces .
- Strong gripping power, 8:1 great lever transmission .



- Ratchet function allows quick and easy tighten or release bolts.

- Parallel jaws provide a more solid grip.

- 17 positions quick lock design with 42mm Max. jaws capacity.

KT NO.	L inch	L mm	mm	A mm	B mm	g	
6518-10C	10	267.5	42	35.5	57	509	4 / 32

Pliers Set

• Nylon pouch bag

• Color box

KT NO.	PC.	Contents				Package	Kg	
42104GP	4	6511-10	6111-06	6211-06	6311-08	Nylon	1.17	1 / 18
42104GP01	4	6516-10C				Nylon	1.17	1 / 18
42124GP	4	6511-10C	6111-08	6311-08	6232-08	Nylon	1.48	1 / 18
42124GP01	4	6516-10C				Nylon	1.48	1 / 18
42124GP04	4	6111-08	6311-08	6232-08	6517-10C	Nylon	1.48	1 / 18
42213GP01	3	6111-08	6311-08	6232-08		Color box	1.05	1 / 20

Circlip Pliers

10x
Service life

• Grip material - PVC

66HS

• Design of hidden spring
• Straight and angled pattern
• High strength of tip
• DIN 5254, DIN 5256



66HB

66SS

66SB

• Internal type

• External type

KT NO.	Tips	Overall length inch	Overall length mm	Ø-tips	Capacity Ø mm	g	
66HS-05		5	145	1.3	10~25	96	10 / 80
66HB-05		5	135	1.3	10~25	96	10 / 80
66SS-05		5	145	1.3	10~25	104	10 / 80
66SB-05		5	135	1.3	10~25	104	10 / 80
66HS-07		7	188	1.8	19~60	176	8 / 48
66HB-07		7	175	1.8	19~60	176	8 / 48
66SS-07		7	188	1.8	19~60	195	8 / 48
66SB-07		7	175	1.8	19~60	195	8 / 48
66HS-10		10	252	2.3	40~100	429	6 / 48
66HB-10		10	235	2.3	40~100	429	6 / 48
66SS-10		10	252	2.3	40~100	448	6 / 48
66SB-10		10	225	2.3	40~100	448	6 / 48

Circlip Pliers

- Grip material - PVC

67HS | 67HB | 67SS | 67SB

68HS | 68HB | 68SS | 68SB

- For internal retaining rings
- Straight and angled pattern
- DIN 5254, DIN 5256

- Internal type

- For external retaining rings
- Straight and angled pattern
- DIN 5254, DIN 5256

- External type

Japanese type | European type

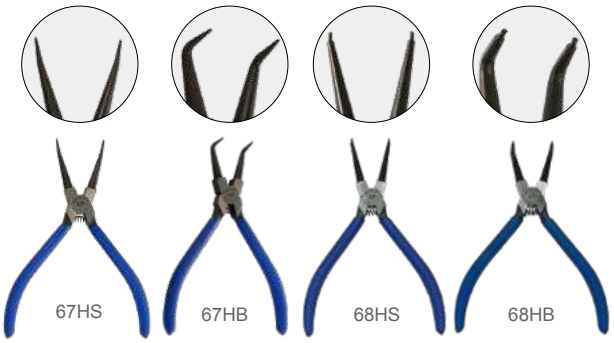

Japanese type | European type

KT NO.	Tips	Overall length inch	Overall length mm	Ø tips	Capacity Ø mm	g	
67HS-07		7	180	1.8	19~60	129	12 / 144
67HB-07		7	180	1.8	19~60	131	12 / 144
68HS-05		5	125	1.3	12~28	83	10 / 80
68HS-07		7	180	1.8	19~60	134	12 / 144
68HS-10		10	250	2.3	40~100	322	8 / 64
68HB-05		5	125	1.3	12~28	94	10 / 80
68HB-07		6-3/4	170	1.8	19~60	131	12 / 144
68HB-10		9-1/2	241	2.3	40~100	317	6 / 48

KT NO.	Tips	Overall length inch	Overall length mm	Ø tips	Capacity Ø mm	g	
67SS-07		7	180	1.8	19~60	151	12 / 144
67SB-07		7	180	1.8	19~60	150	12 / 144
68SS-05		5	125	1.3	12~28	97	10 / 80
68SS-07		7	180	1.8	19~60	154	12 / 144
68SS-10		10	250	2.3	40~100	323	8 / 64
68SB-05		5	125	1.3	12~28	96	10 / 80
68SB-07		6-3/4	170	1.8	19~60	152	12 / 144
68SB-10		9-1/2	241	2.3	40~100	316	6 / 48

Circlip Pliers Set

KT NO.	PC.	Contents	Kg	
42154GP	4	66HS-07, 66SB-07, 66HB-07, 66SS-07	0.84	1 / 32
42114GP	4	68HS-07, 68SS-07, 68HB-07, 68SB-07	062	1 / 32
42116GP	6	68HS-07, 68HB-07, 68HS-10, 68SS-07, 68SB-07, 68SS-10	1.33	1 / 18

- Nylon pouch bag

- Finishing - option 1 : chrome plated (R) / option 2 : nickel plated (N)

Circlip Pliers

- Grip material - PVC

65SS

- Design of hidden spring
- DIN 5254 & DIN 5256

KT NO.	Overall length inch	Overall length mm	Capacity Ø mm	g	
65SS-07	7	188	19~60	195	8 / 48

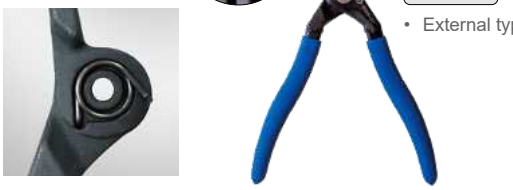

- External type

Circlip Pliers

68HB-07L

- For removing or installing the intimal retaining rings
- 90 angel and extra long tip design for narrow space

KT NO.	L1 inch	L1 mm	L2 (mm)	D1 Capacity Ømm	Ø tips	g	
68HB-07L	7	180	64	12~28	1.2	222	12 / 48

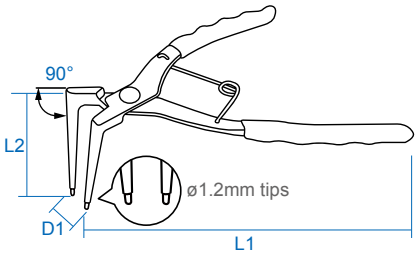

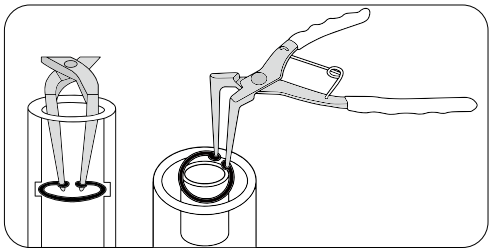

10-1/2" Internal-External Heavy Duty Circlip Pliers Set

- 1.Internal & External circlip pliers 10-1/2" 267 mmL,
- 2.Internal ring 65~140 mm, External ring 65~120 mm

KT NO.	L inch	L mm	Spread inch	Spread mm	Ø	Ømm	kg	
68GS-11	10-1/2	267	2	50	65~140	3	0.31	25 / 50
68RS-11	10-1/2	267	2	50	65~120	2.75	0.32	25 / 50

68GS-11

68RS-11

10-1/2" Internal-External Heavy Duty Circlip Pliers Set

45115PP

- Internal & External circlip pliers 10-1/2" 265 mmL, maximum spread 45 mm
- Interchangeable tips 0° , 15° , 45° , 90°
- Internal ring 65~140 mm, External ring 65~120 mm
- Interchangeable tips 2.75 mm and 3.00 mm
- Heavy duty pliers with ratcheting locking device large rings are easily controlled

15 PC.

	Contents
68GS-11	1 PC. Internal straight circlip pliers 0° Internal interchangeable
68RS-11	1 PC. External straight circlip pliers 0° External interchangeable
68GR-01	1 Set. 15° Internal interchangeable (Ø3mm, Black)
68GQ-01	1 Set. 45° Internal interchangeable (Ø3mm, Black)
68GB-01	1 Set. 90° Internal interchangeable (Ø3mm, Black)
68RR-01	1 Set. 15° External interchangeable (Ø2.75mm, Silver)
68RQ-01	1 Set. 45° External interchangeable (Ø2.75mm, Silver)
68RB-01	1 Set. 90° External interchangeable (Ø2.75mm, Silver)
68ZZ-01	1 Set - Screws (6 PC. M5x0.8)





KT NO.	L inch	L mm	Spread inch	Spread mm	Ø	Ømm	kg	
45115PP	10-1/2	267	2	50	-	-	1.30	1 / 10
68GS-11	10-1/2	267	2	50	65~140	3	0.31	25 / 50
68RS-11	10-1/2	267	2	50	65~120	2.75	0.32	25 / 50

16" Internal-External Heavy Duty Circlip Pliers Set

- 1.Internal & External circlip pliers 16″ 406 mmL, maximum spread 85 mm
- 2.Internal ring 78-155 mm, External ring 88~165 mm

KT NO.	L inch	L mm	Spread inch	Spread mm	Ømm	Ømm	kg	
68GS-16	16	406	3-1/4	85	78~155	3	0.93	1 / 25
68RS-16	16	406	3-1/4	85	88~165	3	0.97	1 / 25

68GS-16

68RS-16

16" Internal-External Heavy Duty Circlip Pliers Set

45211PP

- Internal & External circlip pliers 16″ 400 mmL, maximum spread 85 mm
- Interchangeable tips 0° , 45° , 90°
- Internal ring 78-155 mm, External ring 88~165 mm
- Interchangeable tips 3.00 mm
- Heavy duty pliers with ratcheting locking device large rings are easily controlled

Contents

68GS-16 1 PC. internal straight circlip pliers
68GZ-02 (0° internal interchangeable)

68GS-16 1 PC. external straight circlip pliers
68GZ-02 (0° internal interchangeable)

68GQ-02 2 Set(4 PC.) 45° internal interchangeable

68GB-02 2 Set(4 PC.) 90° internal interchangeable

68ZZ-02 1 Set screws (4 pc. m6x1.0)

External Use



Internal Use



11 PC.

KT NO.	L inch	L mm	Spread inch	Spread mm	Ømm	Ømm	kg	
45211PP	16	406	3-1/4	85	-	-	3.32	1 / 6
68GS-16	16	406	3-1/4	85	78~155	3	0.93	1 / 25
68RS-16	16	406	3-1/4	85	88~165	3	0.97	1 / 25

Locking Pliers

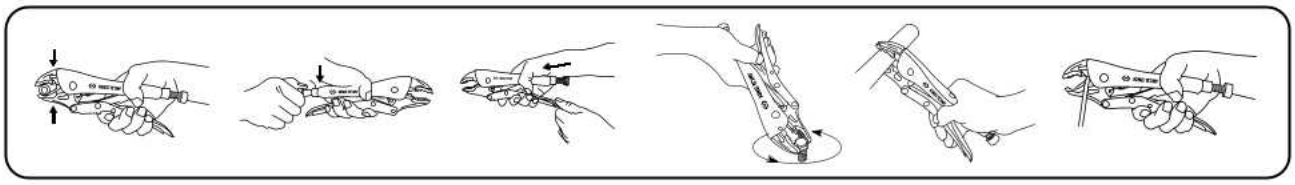

6011

2X

- Locking pliers curved jaw straight tip with wire cutter
- With adjusting screw and release lever
- 2X more grinpping power hold object tighter
- ASME B107.500-2010

CR-MO

MATERIAL - Jaw : Spring alloy steel
Handle : Chrome molybdenum alloy steel

6011R

6011

KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6011-05	5-1/2	142	29	173	6 / 48
6011-07R	7	185	38	352	8 / 32
6011-07	7	185	38	351	8 / 32
6011-10R	10	254	48	542	8 / 32
6011-10	10	254	48	506	8 / 32

6012

- V jaw with wire cutter
- With adjusting screw and release lever
- ASME B107.500-2010

MATERIAL - Jaw : Chrome molybdenum alloy steel
Handle : Chrome molybdenum alloy steel

KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6012-07	7	175	33	357	8 / 32
6012-10	10	254	45	541	8 / 32

Locking Pliers

6013-10

- Large curved jaw
- 3X more grinpping power hold object tighter
- Turn hexagon screw adjust pressure
- Quick trigger release lever
- ASME B107.500-2010

MATERIAL - Jaw : Chrome molybdenum alloy steel
Handle : Chrome molybdenum alloy steel

KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6013-10	10	254	50	550	8 / 32

6031

- Locking pliers straight jaw
- With adjusting screw and release lever
- ASME B107.500-2010

MATERIAL - Jaw : Spring alloy steel
Handle : Chrome molybdenum alloy steel

KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6031-07	7	185	33	371	8 / 32
6031-10	10	254	45	535	8 / 32

Long Nose Pliers

6315

- Locking pliers straight long nose with wire cutter
- ASME B107.500-2010

MATERIAL - Jaw : Spring alloy steel
Handle : Chrome molybdenum alloy steel

KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6315-06	6	166	51	186	8 / 80
6315-09	9	221	70	393	6 / 36

Locking Pliers Set

KT NO.	PC.	Contents		Kg	
42503PR	3	6011-10	6031-07	1.24	1 / 20
42504PR	4	6011-05 6013-10	6315-06	1.43	1 / 15

- Nylon pouch bag

Lock Sheet Metal Clamp

6605

- Locking pliers sheet metal bending and forming
- With adjusting screw and release lever
- Makes bending, forming, and crimping sheet metal easier

MATERIAL - Chrome molybdenum alloy steel

KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6605-08	8	206	13	475	1 / 18

Locking Welding Clamp

6665

- Locking pliers U jaw for odd shape welding
- U-shaped jaws allow enhanced visibility and more working space
- Holds work in proper alignment
- For use in welding or holding awkward shapes in place

MATERIAL - Chrome molybdenum alloy steel



KT NO.	Overall length inch	Overall length mm	Throat depth mm	Jaw width mm	g	
6665-09	9	230	45	70	662	1 / 18

Locking Chain Clamp

6655

- Locking pliers chain grip for round shape
- Chain can hold around any shape or size
- Convenient for awkward shaped pieces
- With adjusting screw and release lever

- MATERIAL - Handle : Chrome molybdenum alloy steel

KT NO.	Overall length inch	Overall length mm	Capacity mm	g	
6655-09	9	225	Ø 60~140	733	1 / 18

C-clamp Grip Pliers

6615

- Locking pliers wide open C jaw with regular tips

MATERIAL -
Jaw : Chrome vanadium alloy steel
Handle : Chrome molybdenum alloy steel

KT NO.	Overall length inch	Overall length mm	Throat depth mm	jaw Capacity mm	g	
6615-06	6-3/4	170	35	50	247	6 / 72
6615-11	11	280	75	100	790	1 / 20
6615-18	18	456	250	200	1136	1 / 10

6625

- Locking pliers wide open C jaw with swivel pads

MATERIAL -
Jaw : Chrome vanadium alloy steel
Handle : Chrome molybdenum alloy steel

KT NO.	Overall length inch	Overall length mm	Throat depth mm	jaw Capacity mm	g	
6625-06	7	175	32	54	274	6 / 72
6625-11	11	280	65	96	840	1 / 20
6625-18	18-1/2	457	240	200	1220	1 / 10

Wire Twisting Pliers

6121

- Simple pull action twisting wires into a tight uniform fastener
- Material : Chrome vanadium alloy steel
- Twist wire up to 0.04 inch

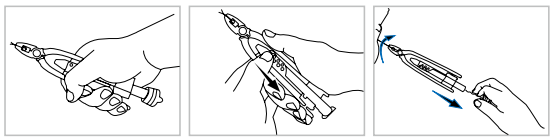

- Grip wire and pull down the bar
- Pull the lock
- Pull the knob

KT NO.	Twist wire mm	L	g	
6121-06X	Ø1.0	215	250	12 / 48
6121-09X	Ø1.5	262	380	12 / 48

KINGTONY
CHROME VANADIUM
KING TONY
6133-08

PIPE TOOLS

KING TONY
KING TONY
3~35mm
1/8"~1-3/8" O.D.
TUBE CUTTER FOR BRASS PIPE Ø 22mm
KING TONY

Tube Cutter for Steel

7918-A0

- For steel pipes
- Strong cast housing
- Extra-long shank provides for quick & easy adjustment
- Possible for large pipe sizes
- Perfectly balanced

KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7918-A0	1-11/32~3-9/16	43~114	3	28-1/8	900	5020	1 / 4
7918-A011			Spare cutting blade			66	1 / 200

Ratchet Tubing Cutter for Stainless Steel

7912-21

7912-22

- Cuts without having to rotate tool completely around tubing
- Ratchet mechanism allows for tight area operation
- Cuts through some of the toughest surfaces: stainless steel, wall conduit, copper and aluminum
- Exclusive one hand operation, limited risks of hand-fatigue and injuries

- Comes with spare blade.
- Provided with foldable reamer.

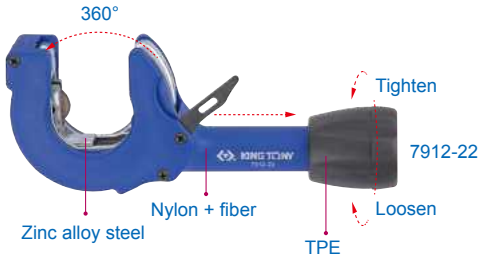



●Use Phillips screwdriver to take out the back-up blade located in the handle base.



●Deploy foldable reamer provided to smoothen sharp edges. (only 7912-22)

KT NO.	Capacity ø mm	Max. cutting thickness (mm) Stainless	Max. cutting thickness (mm) Other	Remark	g	
7912-21	8-28	2	3.0	spare blade	389	1 / 40
7912-22	12-35	2	3.0	spare blade / reamer	452	1 / 40
7912-0111		Spare cutting blade			5	25 / 250

7912-23

•Apply to cut car's exhaust pipe.







●Use Phillips screwdriver to take out the back-up blade located in the handle base.

KT NO.	Capacity ø mm	Max. cutting thickness (mm) Stainless	Max. cutting thickness (mm) Other	g	
7912-23	28-67	2	3.0	1122.6	1 / 10
7912-2311		Spare cutting blade		5	25 / 250

Tube Cutter for Copper

7914A-35

- For copper, brass, aluminum pipes
- rgonomic handle design for comfortable operation
- Includes one piece spare cutting wheel
- With four guide rollers
- Full-stop feed system prevents wheels and rollers from coming into contact
- Quick adjustment and easy to change the cutting wheel

KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7914A-35	1/8~1-3/8	3~35	1.2	5-1/2	140	333	10 / 60
7914A-0111			Spare cutting blade			13	25 / 250

7914C-70

- For copper, brass, aluminum pipes
- Ergonomic handle design for comfortable operation
- Includes one piece spare cutting wheel & retractable deburring tool
- With four guide rollers
- Full-stop feed system prevents wheels and rollers from coming into contact
- Quick adjustment and easy to change the cutting wheel

KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7914C-70	1/4~2-3/4	6~70	1.2	8-3/4	222	802	4 / 24
7914A-0111			Spare cutting blade			13	25 / 250
7914C-7021			Spare deburring tool			17	1 / 300

7915-30

KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7915-30	1/8~1-1/8	3~30	1.2	5-1/2	140	231	1 / 20
7915-3011			Spare cutting blade			10	25 / 250

7916M

- For copper pipes
- Easy to use in restricted space
- Self-alignment for adjustment



•Ideal for hard to reach places

KT NO.	mm	max. (mm)	Overall length mm	g	
7916-12M	12	1.2	52	176	10 / 100
7916-15M	15	1.2	56	207	10 / 100
7916-21M	21	1.2	68	248	10 / 60
7916-0111		Spare cutting blade		11	25 / 250

Mini Tube Cutter for Copper

- Full-stop feed system prevents wheels and rollers from coming into contact
- Ergonomic handle design for comfortable operation
- Quick adjustment and easy to change the cutting wheel
- For copper, brass, aluminum pipes
- Specifically design for using in restricted place
- With two guide rollers

7915A-19

7915A-28

KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7915A-19	1/8~3/4	3~19	1.2	2-1/2	62	152	10 / 100
7915A-28	1/8~1-1/8	3~28	1.2	2-3/4	70	205	10 / 100
7914A-0111	Spare cutting blade					13	25 / 250

Tube Cutter for PVC Soft Plastic Pipe

7913B-35

- For PVC, PP, PE, PEX, PB
- For soft plastic pipe
- Aluminum body
- One-hand operation
- Burr-free cutting
- Reversible blade

KT NO.	inch	mm	Overall length inch	Overall length mm	g	
7913B-35	1/8~1-3/8	3~35	8-1/4	211	215	20 / 60
7913B-3511	Spare cutting blade				36	1 / 100

Ratchet Tubing Cutter for PVC Pipe

7913

- For PVC, PP, PE, PEX, PB pipes
- Ratchet design for quick cutting

KT NO.	inch	mm	Overall length inch	Overall length mm	g	
7913-42	1/2~1-5/8	6~42	8	201	360	10 / 50
7913-4211	Spare cutting blade				60	10 / 200

2-in-1 Ratchet Tubing Cutter for PVC Pipe

7913A-63

- Easy one-hand operation
- Cut into thick pipe and thin pipe
- Easily apply for max. 63 O.D.
- Comfortable TPR handle
- For unitary material tube: PE, PP, PVDF, PB, PVC or similar tube
- Advanced tool steel blade and aluminum body
- Ratchet design for quick cutting

KT NO.	inch	mm	Overall length inch	Overall length mm	g	
7913A-63	1/4~2-1/2	6~63	11-1/2	293	802	6 / 24
7913A-6311	Spare cutting blade				190	1 / 100

Swedish Pipe Wrench S-type 45° New

6521

- Swedish pipe wrench with thin S type 45° jaws grip complex shape
- For nuts, bolts, flat material
- A non-detachable adjusting nut with round thread ensures a wide adjustment
- For working in confined space
- DIN 5234



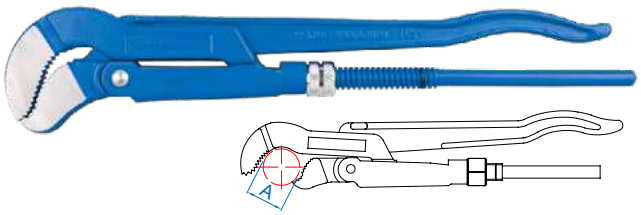

KT NO.	A mm	Size inch	Overall length inch	Overall length mm	g	
6521-13	40	1	13	330	791	1 / 20
6521-16	55	1-1/2	16-1/2	420	1450	1 / 12
6521-21	67	2	21	535	2404	1 / 6
6521-26	103	3	25-5/8	652	5030	1 / 2

Swedish Pipe Wrench 90º New

6522

- 90° Angle Clamping Jaws
- Swedish pipe wrench with thin 90°
- jaws grip bolt in parallel forces
- I-beam handle design
- Special hardened teeth
- DIN 5234

KT NO.	A mm	Size inch	Overall length inch	Overall length mm	g	
6522-12	45	1-3/4"	12-1/2"	320	693	1 / 20
6522-16	55	2-3/8"	16-1/2"	425	1265	1 / 20
6522-22	67	2-15/16"	22"	560	2210	1 / 10
6522-25	110	4-5/16"	24-1/2"	630	3000	1 / 4
6522-29	130	5-1/8"	29"	735	5290	1 / 2

Pipe Wrench

6531

- Professional stillson type
- High quality steel

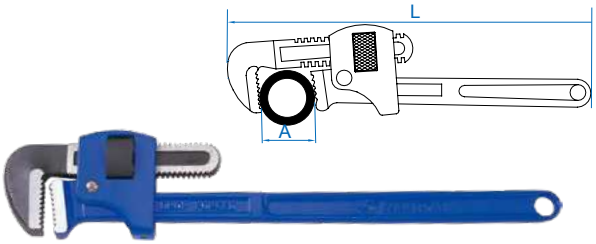

KT NO.	A inch	A mm	Overall length inch	Overall length mm	g	
6531-10	1-3/16	34	10	231	600	1 / 24
6531-12	1-9/16	42	12	271	780	1 / 24
6531-14	1-7/8	48	14	315	1050	1 / 12
6531-18	2-3/8	60	18	407	1720	1 / 12
6531-24	2-15/16	76	24	539	3150	1 / 6
6531-36	4	102	36	825	6280	1 / 2
6531-48	5-1/2	140	48	1034	9750	1 / 2

6532

- Extra heavy straight type
- Forged parts tempered
- Teeth offset against direction of rotation and induction-hardened

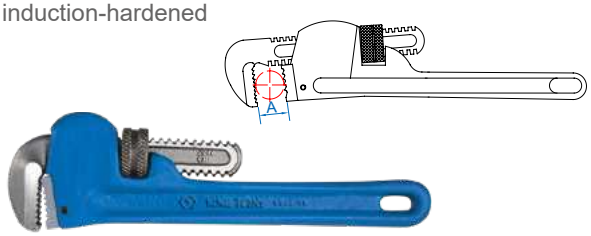

KT NO.	A mm	Overall length inch	Overall length mm	g	
6532-08	27	8	180	380	1 / 40
6532-10	30	10	245	700	1 / 20
6532-12	40	12	275	1050	1 / 20
6532-14	50	14	315	1340	1 / 12
6532-18	60	18	395	1960	1 / 12
6532-24	75	24	525	3640	1/ 6
6532-36	85	36	765	6300	1 / 2
6532-48	110	48	1025	9100	1 / 2

Aluminum Pipe Wrench

6533L

- 25% lighter than heavy-duty models, easy to use
- Straight pipe wrench is suitable for all types of pipe work
- Drop-forged jaw is heat-treated to resist distortion
- Easy-spin adjusting nut, quick to adjust size

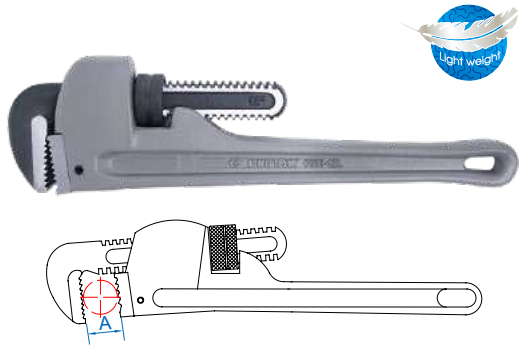

KT NO.	A mm	Overall length inch	Overall length mm	g	
6533-10L	30	10	254	530	6 / 24
6533-12L	40	12	300	790	6 / 18
6533-14L	50	14	356	940	6 / 12
6533-18L	60	18	455	1480	3 / 6
6533-24L	75	24	600	2470	2 / 4
6533-36L	85	36	910	4670	1 / 2
6533-48L	110	48	1200	7960	1 / 2

Flaring Tool Set

7CA0107M

- For producing precision flares on copper, brass, aluminium pipes up to 1 mm wall thickness
- Suitable for pipes in refrigeration, air conditioning



7 PC.

Contents — Kg 1.07 — 1 / 18

	7CA22BP10M	4.75, 5, 6, 8, 10 mm
	7CA22BP01	
	Adapters for expander	4.75, 5, 6, 8, 10 mm

7CA0110S

- For producing precision flares on copper, brass, aluminium pipes up to 1 mm wall thickness
- Suitable for pipes in refrigeration, air conditioning



10 PC.

Contents — Kg 1.68 — 1 / 12

	7915-30	3-30 mm 1/8~1-1/8"
	7CA22P20S	3/16", 1/4", 5/16", 3/8", 7/16",1/2", 5/8"
	7CA22P01	
	Adapter for expander	3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 5/8"

Type of the flares

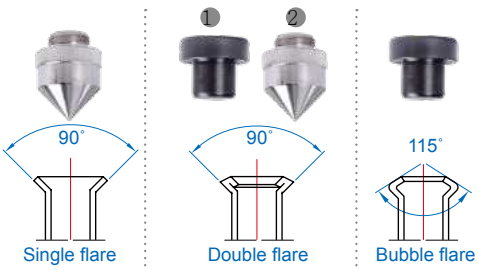

Ratchet Pipe Threader Set

7CA0606S

- Use to thread pipe for attach fitting and connector
- Thread sizes:
  4pcs interchangeable dies 1/2", 3/4", 1" and 1-1/4"
- Ratchet threader assembly with extension handle

7CA0606S1

7 PC.

Contents

7.1 | 1 / 2

KT NO.	Thread Plug Gauge	Capacity					
7CA0606S	BSPT	1/2"	7CA61-A01		7CA61-A011		7CA61P01
		3/4"	7CA61-A02		7CA61-A021		
		1"	7CA61-A03		7CA61-A031		
		1-1/4"	7CA61-A04		7CA61-A041		7CA61P02
7CA0606S1	NPT	1/2"	7CA61-B01		7CA61-B011		
		3/4"	7CA61-B02		7CA61-B021		7CA61P03
		1"	7CA61-B03		7CA61-B031		
		1-1/4"	7CA61-B04		7CA61-B041		

180° Tube Bender

7CA11M

7CA11S

- Suitable for use in refrigeration and air-conditioning, oil supply, heating installations, floor heating
- Able to accurately bend soft copper pipes, brass pipes, aluminum pipes, and thin-walled iron pipes (walls less than 0.6 mm) up to 180°
- Bending with the bending radius display and measurement scale

7CA11-12S
7CA11-16S

7CA11-15M / 7CA11-16M
7CA11-20S / 7CA11-24S

KT NO.	mm	max. (mm)	R(radius) inch	R(radius) mm	Overall length inch	Overall length mm	g	
7CA11-15M	15	1.2	2-1/4	57	30	758	2832	1 / 8
7CA11-16M	16	1.2	2-1/4	57	30	758	2832	1 / 8

KT NO.	inch	max. (inch)	R(radius) inch	R(radius) mm	Overall length inch	Overall length mm	g	
7CA11-12S	3/8	0.035	15/16	24	13	334	964	1 / 20
7CA11-16S	1/2	0.049	1-1/2	38	20	493	1833	1 / 12
7CA11-20S	5/8	0.049	2-1/4	57	30	758	2832	1 / 6
7CA11-24S	3/4	0.049	3	76	30	758	3500	1 / 6

90° Tube Bender

7CA15-10M

- 4 in 1 design, easy and quick to change the bend size
- Bend 5mm, 6mm, 8mm and 10mm outside diameter brass, copper or aluminum tubing
- Unique design allows bending in tight spaces
- Comfort grip handles reduce hand fatigue and slippage

KT NO.	inch	max. (mm)	Overall length inch	Overall length mm	g	
7CA15-10M	3/16, 1/4, 5/16, 3/8	0.9	10-7/8	275	958	6 / 24

Stepped Ratchet Radiator Key Set

7HA03

- Suitable for installation and removal of most radiator valves and tank connectors
- Key has fittings from small to large, stepped along the length of the key, for different internal hexagon and internal lug valve sizes
- Stepped hexagon key with 3/8", 7/16", 1/2", 3/4", 1"
- 1/2"DR. ratchet makes installations quickly and easily
- 4724-11G can be used as general ratchet, DIN 3122, 11° gear action degree (32 teeth)

Contents	Kg 0.74	set / 1 / 24
4724-11G		
7HA11		
4724-01		

4724DK



4-way Control Cabinet Key

7HA21

- For all standard cabinets and shut-off systems
- For control cabinets and shut-off systems in the supply of gas, water and electricity
- For technical installations in buildings, e. g. air conditioning and ventilation systems, shut-off valves, mains switch-boards, etc.

- Outer ring : diameter 11.9 mm
- Inner ring : 6 x 6 mm

- Outer ring : diameter 14 mm
- Inner ring : 8 x 8 mm

- Outer ring : diameter 14 mm
- Inner ring : triangle height 9 mm

- Outer ring : 14 x 9 mm
- Inner ring : diameter 5.5 mm

KT NO.	mm	mm	mm	No.	mm	g	
7HA21	6, 8	9	3-5	PH2	1.0 x 7	89	20 / 200



KING TONY
KING TONY
KING TONY
KING TONY
KING TONY
KING TONY
KING TONY
KING TONY
KING TONY 6641-14L
KING TONY
KING TONY

SCREWDRIVERS & L-WRENCHES & BITS

21557
KING TONY

Screwdriver

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip

1421

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14210023	PH0	60	2-3/8	3.2	35	12 / 144
14210132	PH1	80	3-1/8	4.5	57	12 / 96
14210104	PH1	100	4	4.5	59	12 / 96
14210214	PH2	38	1-1/2	6.5	45	12 / 144
14210204	PH2	100	4	6.0	84	12 / 96
14210206	PH2	150	6	6.0	94	12 / 144
14210306	PH3	150	6	8.0	142	12 / 144

KT NO.	No.	mm	inch	mm	g	
14210112	PH1	300	12	4.5	85	12 / 96
14210212	PH2	300	12	6.0	129	
14210116	PH1	400	16	4.5	97	
14210216	PH2	400	16	6.0	151	

1421xx12
1421xx16

1422

- Slotted head, round shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	g	
14220303	3	1/8	0.5	75	3	3.2	38	12 / 144
14220404	4	5/32	0.8	100	4	4.0	56	12 / 96
14220503	5	3/16	0.8	75	3	5.0	59	12 / 96
14220504	5	3/16	0.8	100	4	5.0	63	12 / 96
14225503	5.5	7/32	1.0	75	3	5.0	71	12 / 96
14225504	5.5	7/32	1.0	100	4	5.0	75	12 / 96
14225505	5.5	7/32	1.0	125	5	5.0	79	12 / 144
14225506	5.5	7/32	1.0	150	6	5.0	83	12 / 144
14226514	6.5	1/4	1.2	38	1-1/2	6.5	46	12 / 144
14226504	6.5	1/4	1.2	100	4	6.0	83	12 / 96
14226506	6.5	1/4	1.2	150	6	6.0	95	12 / 144
14220806	8	5/16	1.2	150	6	8.0	141	12 / 144
14220807	8	5/16	1.2	175	7	8.0	153	12 / 144
14220808	8	5/16	1.2	200	8	8.0	163	12 / 144
14221008	10	3/8	1.6	200	8	10.0	214	12 / 72

KT NO.	mm	inch	mm	mm	inch	mm	g	
14220512	5	3/16	0.8	300	12	5.0	94	12 / 96
14220516	5	3/16	0.8	400	16	5.0	109	
14226512	6.5	1/4	1.2	300	12	6.0	129	
14226516	6.5	1/4	1.2	400	16	6.0	150	

1422xx12
1422xx16

Screwdriver

KT No. & D1

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip

1423

- For torx head screw, round shank

14232010, 14232510, 14233010 at the dashboard, car body, engine compartment as well as in industry.

KT NO.	Size	mm	inch	mm	g	
14230602	T6	48	2	3.2	35	12 / 144
14230702	T7	48	2	3.2	35	12 / 144
14230803	T8	75	3	3.2	37	12 / 144
14230903	T9	75	3	3.2	37	12 / 144
14231003	T10	75	3	3.2	37	12 / 144
14231503	T15	75	3	4.0	54	12 / 144
14231510	T15	250	10	5.0	86	12 / 96
14232004	T20	100	4	5.0	63	12 / 144
14232010	T20	250	10	5.0	87	12 / 96
14232504	T25	100	4	6.0	84	12 / 144
14232510	T25	250	10	6.0	118	12 / 96
14232704	T27	100	4	6.0	84	12 / 144
14233005	T30	125	5	6.0	91	12 / 144
14233010	T30	250	10	6.0	119	12 / 96
14234006	T40	150	6	8.0	143	12 / 144

1424

- Square head

KT NO.	Size	mm	inch	mm	g	
14240206	RB2	150	6	6.0	94	12 / 144

1427

- For torx head screw, round shank
- Tamper-resistant type

KT NO.	Size	mm	inch	mm	g	
14270803	T8H	75	3	3.2	36	
14270903	T9H	75	3	3.2	36	
14271003	T10H	75	3	3.2	36	
14271503	T15H	75	3	4.0	54	
14272004	T20H	100	4	5.0	63	12 / 144
14272504	T25H	100	4	6.0	84	
14272704	T27H	100	4	6.0	84	
14273005	T30H	125	5	6.0	89	
14274006	T40H	150	6	8.0	142	

1428

- Pozidriv head, round shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14280023	PZ0	60	2-3/8	3.2	37	12 / 96
14280132	PZ1	80	3-1/8	4.5	57	12 / 96
14280104	PZ1	100	4	4.5	59	12 / 96
14280204	PZ2	100	4	6.0	83	12 / 96
14280306	PZ3	150	6	8.0	142	12 / 144

Screwdriver Set

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip

KT NO.	PC.		Contents	Kg	
31107MR	7	1421	PH0 x 60, PH1 x 80, PH1 x 100, PH2 x 38, PH2 x 100, PH2 x 150, PH3 x 150	0.70	
30118MR	8	1422	3 x 75, 5 x 75, 5 x 100, 8 x 150, 8 x 200, 6.5 x 100, 6.5 x 150, 6.5 x 38	0.90	
30115MR	5	1421	PH1 x 80, PH2 x 100	0.54	
		1422	4 x 100, 5.5 x 125, 6.5 x 150		
31116MR	6	1421	PH0 x 60, PH1 x 80, PH2 x 100	0.56	
		1422	3 x 75, 5.5 x 100, 6.5 x 150		
31216MR	6	1421	PH1 x 80, PH2 x 100	0.65	
		1422	5 x 75, 5 x 100, 6.5 x 100, 6.5 x 150		
30117MR	7	1421	PH1 x 80, PH2 x 100	0.77	1 / 20
		1422	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175		
33108MR	8	1421	PH0 x 60, PH1 x 100, PH2 x 100, PH2 x 38	1.30	
		1422	3 x 75, 5.5 x 100, 6.5 x 38, 6.5 x 100		
30127MR	7	1428	PZ1 x 80, PZ2 x 100, PZ3 x 150	0.82	
		1422	4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175		
30315PR	5	1423	T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125	0.37	
30316PR	6	1423	T10 x 75, T15 x 75, T20 x 100, T25 x 100, T30 x 125, T40 x 150	0.48	
30317PR	7	1423	T10 x 75, T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125, T40 x 150	0.78	
30319PR	9	1423	T8 x 75, T9 x 75, T10 x 75, T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125, T40 x 150	0.88	
30307PR	7	1427	T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	0.78	
30309PR	9	1427	T8H x 75, T9H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	0.88	

Screwdriver & Set

KT No. & D1

- Shank material - S2 alloy steel
- Grip material - PP + TPR
- Finishing - Magnet chrome plated with black tip

14A1

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14A10132	PH1	80	3-1/8	5.0	60	12 / 96
14A10214	PH2	38	1-1/2	6.0	45	12 / 144
14A10204	PH2	100	4	6.0	88	12 / 96
14A10306	PH3	150	6	8.0	144	12 / 144

14A2

- Slotted head, round shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	g	
14A20303	3	1/8	0.6	75	3	3.0	37	12 / 144
14A20404	4	5/32	0.8	100	4	4.0	56	12 / 96
14A25504	5.5	5/32	1.0	100	4	5.5	82	12 / 96
14A25505	5.5	7/32	1.0	125	5	5.5	86	12 / 144
14A26514	6.5	1/4	1.2	38	1-1/2	6.5	47	12 / 144
14A26506	6.5	1/4	1.2	150	6	6.5	105	12 / 144
14A20808	8	5/16	1.6	200	8	8.0	166	12 / 144

14A8

- Pozidriv head, round shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14A80132	PZ1	80	3-1/8	5.0	60	12 / 96
14A80204	PZ2	100	4	6.0	89	

KT NO.	PC.		Contents	Kg	
30106AMRB	6	14A1	PH1 x 80, PH2 x 100	0.56	1 / 12
		14A2	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150		
30116AMRB	6	14A8	PZ1 x 80, PZ2 x 100	0.56	
		14A2	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150		
30107AMRB	7	14A1	PH1 x 80, PH2 x 100, PH3 x 150	0.82	
		14A2	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150		

Screwdriver & Set

- Shank material - Chrome vanadium alloy steel
- Grip material - PP
- Finishing - chrome plated

1411

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14110003	PH0	75	3	3.0	28	12 / 240
14110104	PH1	100	4	5.0	41	12 / 240
14110214	PH2	38	1-1/2	6.5	30	12 / 144
14110204	PH2	100	4	6.0	68	12 / 96
14110204-E*	PH2	100	4	6.0	86	12 / 96
14110205-E*	PH2	125	5	6.0	92	12 / 144
14110206	PH2	150	6	6.0	80	12 / 144
14110206-E*	PH2	150	6	6.0	96	12 / 144
14110208-E*	PH2	200	8	6.0	108	12 / 144
14110306	PH3	150	6	8.0	123	12 / 144
14110308	PH3	200	8	8.0	146	12 / 144

*Enlarged handle

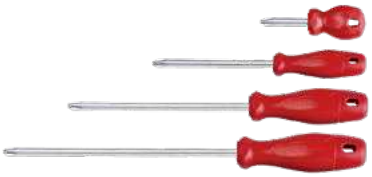

1412

- Slotted head, round shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	g	
14120303	3	1/8	0.5	75	3	3.0	27	12 / 240
14120404	4	5/32	0.8	100	4	4.0	33	12 / 240
14125504	5.5	7/32	0.8	100	4	5.0	40	12 / 240
14126514	6.5	1/4	1.2	38	1-1/2	6.5	30	12 / 144
14126504	6.5	1/4	1.2	100	4	6.0	71	12 / 96
14126504-E*	6.5	1/4	1.2	100	4	6.0	86	12 / 96
14126506	6.5	1/4	1.2	150	6	6.0	79	12 / 144
14126506-E*	6.5	1/4	1.2	150	6	6.0	105	12 / 144
14120806	8	5/16	1.2	150	6	8.0	126	12 / 144
14120808	8	5/16	1.2	200	8	8.0	142	12 / 144

*Enlarged handle

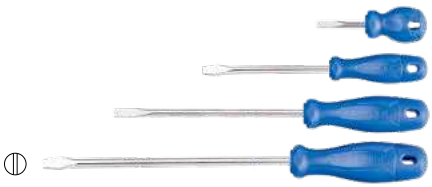

2411

- Two-way screwdriver hex shank

KT NO.	No.	mm	mm	mm	inch	g	
24110204	PH2	7	1.2	100	4	89	20 / 240
24110214	PH2	7	1.2	38	1-1/2	42	

24110204 24110214

KT NO.	PC.		Contents	Kg	
35105MR	5	1411	PH1 x 100, PH2 x 100	0.54	1 / 20
		1412	4 x 100, 5.5 x 100, 6.5 x 150		
35116MR01	6	1411	PH1 x 100, PH2 x 100, PH3 x 150	0.65	
		1412	4 x 100, 5.5 x 100, 6.5 x 150		
35107MR	7	1411	PH1 x 100, PH2 x 100, PH3 x 150	0.72	
		1412	4 x 100, 5.5 x 100, 6.5 x 150, 8 x 150		

KT NO.	PC.		Contents	Kg	
32503MR	4	1360012P	PH1,PH2	0.8	4 / 64
		1360703P	PH3,SL7		
		1360552Z	PZ2,SL5.5		

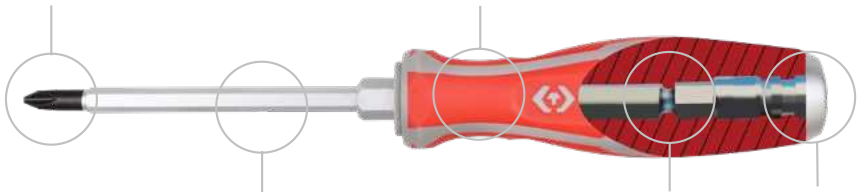

Go Thru Screwdriver & Set

KT No. & D1

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tips

1461

- Phillips head, hex-shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	mm	g	
14610103	PH1	75	3	5.0	10	121	12 / 96
14610204	PH2	100	4	6.0	10	135	12 / 96
14610206	PH2	150	6	6.0	10	148	12 / 144
14610306	PH3	150	6	8.0	13	219	12 / 96

1462

- Slotted head, hex-shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	mm	g	
14625504	5.5	7/32	1.0	100	4	5.0	10	125	12 / 96
14626504	6.5	1/4	1.2	100	4	6.0	10	134	12 / 96
14626506	6.5	1/4	1.2	150	6	6.0	10	147	12 / 144
14620806	8	5/16	1.2	150	6	8.0	13	217	12 / 144
14620807	8	5/16	1.2	175	7	8.0	13	228	12 / 144
14621008	10	3/8	1.6	200	8	10.0	16	310	12 / 72
14621012	10	3/8	1.6	300	12	10.0	16	391	10 / 40
14621210	12	15/32	2.0	250	10	10.0	16	347	10 / 40

30206MR

Contents		Kg 1.20	1 / 20
1461	PH1 x 75, PH2 x 100, PH3 x 150		
1462	5.5 x 100, 6.5 x 150, 8.0 x 175		

6 PC.

35208MR

- Blow case size (mm) :
- 430 x 300 x 50 (1.29 cuft)

Contents		Kg 2.16	1 / 4
1461	PH1 x 75, PH2 x 100, PH3 x 150		
1462	6.5 x 100, 8.0 x 175, 10 x 300		
1421	PH2 x 38		
1422	6.5 x 38		

8 PC.

Go Thru Screwdriver & Set

- Shank material - S2 alloy steel
- Grip material - PP + TPR
- Finishing - Magnet chrome plated with black tip

14B1

- Phillips head, hex-shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm		
14B10103	PH1	75	3	5.0	130	12 / 96
14B10204	PH2	100	4	6.0	134	12 / 96
14B10206	PH2	150	6	6.0	145	12 / 144
14B10306	PH3	150	6	8.0	241	12 / 96

14B2

- Slotted head, hex-shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm		
14B25504	5.5	7/32	1.0	100	4	5.5	139	12 / 96
14B26506	6.5	1/4	1.2	150	6	6.5	164	12 / 144
14B20807	8	5/16	1.6	175	7	8.0	252	12 / 96

30206AMRB

Contents	1.20	1 / 12
14B1	PH1 x 75, PH2 x 100, PH3 x 150	
14B2	5.5 x 100, 6.5 x 150, 8.0 x 175	

6 PC.

Go Thru Screwdriver

- Shank material - Chrome vanadium alloy steel
- Grip material - PP
- Finishing - chrome plated

1481

- Phillips head, hex-shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm		
14810103	PH1	75	3	5.0	55	12 / 240
14810204	PH2	100	4	6.0	93	12 / 144
14810204-E*	PH2	100	4	6.0	112	12 / 96
14810205	PH2	125	5	6.0	99	12 / 144
14810205-E*	PH2	125	5	6.0	118	12 / 144
14810306	PH3	150	6	8.0	175	12 / 144
14810412	PH4	300	12	10.0	328	10 / 40

*Enlarged handle

Go Thru Screwdriver & Set

KT No. & D1

- Shank material - Chrome vanadium alloy steel
- Grip material - PP
- Finishing - chrome plated

1482

- Slotted head, hex-shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	g	
14825503	5.5	7/32	0.8	75	3	5.0	54	12 / 240
14826504	6.5	1/4	1.2	100	4	6.0	93	12 / 144
14826504-E*	6.5	1/4	1.2	100	4	6.0	112	12 / 96
14826505-E*	6.5	1/4	1.2	125	5	6.0	116	12 / 144
14826506	6.5	1/4	1.2	150	6	6.0	103	12 / 144
14820806	8	5/16	1.2	150	6	8.0	174	12 / 144
14821012	10	12/32	1.6	300	12	10.0	326	10 / 40

*Enlarged handle

36206MR

6 PC.

Contents — 0.97 kg — 1 / 20

1481	PH1 x 75, PH2 x 100, PH3 x 150
1482	5.5 x 75, 6.5 x 150, 8.0 x 150

35114MR

- Standard & insulated & go thru screwdriver set

35114MR01

14 PC.

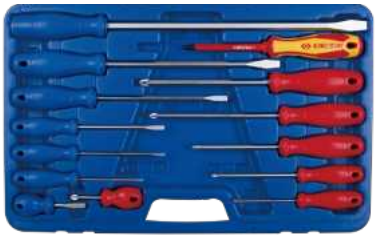

KT NO. — Contents — 2.40 kg — 1 / 4

KT NO.			Contents	
35114MR	1472	6.5 x 150	1411	PH0 x 75, PH1 x 100, PH2 x 100, PH2 x 150, PH2 x 38, PH3 x 150
			1412	3 x 75, 4 x 100, 5.5 x 100, 6.5 x 150, 6.5 x 38, 8 x 200
35114MR01	1478	PZ2 x 100	1482	10 x 300

Screwdriver Set

31416MR

- Standard screwdriver set

KT NO.		Contents	Each Q'ty
31416MR	1421	PH0 x 60, PH1 x 80, PH1 x 100, PH2 x 38, PH2 x 100, PH2 x 150, PH3 x 150	6
	1422	3.0 x 75, 4.0 x 100, 5.5 x 75, 5.5 x 100, 5.5 x 125, 6.5 x 38, 6.5 x 100, 6.5 x 150, 8.0 x 150	

96 PC.

Screwdriver shelf size (mm) : 600 x 240 x 210

KT NO.	Kg	CUFT
87105	3.30	1.97
31416MR-D	6.20	0.71

31516MR

- Standard & go thru screwdriver set

KT NO.		Contents	Each Q'ty
31516MR	1427	T8H x 75, T9H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	6
	1461	PH1 x 75, PH2 x 100, PH3 x 150	
	1462	5.5 x 100, 6.5 x 100, 6.5 x 150, 8.0 x 175	

96 PC.

Screwdriver shelf size (mm) : 600 x 240 x 210

KT NO.	Kg	CUFT
87105	3.30	1.97
31516MR-D	10.10	0.71

31427MR

- Standard screwdriver set

KT NO.		Contents
31427MR	1421	PH0 x 60, PH1 x 80 x2, PH1 x 100 x2, PH2 x 38 x2, PH2 x 100 x2, PH2 x 150 x2, PH3 x 150 x2
	1422	3.0 x 75 x3, 4.0 x 100 x2, 5.5 x 100 x2, 5.5 x 125 x2, 5.5 x 150 x2, 6.5 x 38 x2, 6.5 x 100 x2, 6.5 x 150 x2
	1423	T10 x 75, T15 x 75, T20 x 100, T25 x 100, T30 x 125
	1427	T10H x 75, T15H x 75, T20H x 100, T25H x 100, T30H x 125

40 PC.

Screwdriver shelf size (mm) : 325 x 205 x 270

KT NO.	Kg	CUFT
87104	1.40	0.30
31427MR-D	2.66	0.27

Screwdriver Display

87104

- Overall size -W 325 x D 205 x H 270 mm
- Weight - 1.4 Kg / Cuft - 0.3

Compact Magnetizer / Demagnetizer New

76MBH

76MBH-S2

- Use to catch the screw with a strong magnet power
- Hold screwdriver bit 4 ~ 6.35mm round or hex shank
- Mini length 24mmL
- Function as magnetizer / demagnetizer / storage
- Demagnetize by slide outer shallow groove
- X30 powerful magnet compare to wearing magnet tip

KT NO.	PC	Size(mm)	g	
76MBH	1	24 x 14 x 13	25	12 / 144
76MBH-S2	2	24 x 14 x 13	50	60 / 360

1 PC.

76MBH

2 PC.

76MBH-S2

X 30

Strong Magnet

- Magnet powert est (Unit: Gz)

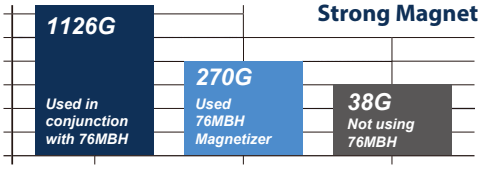

79B1-01

Size -95%

76MBH

- Compact size: Only 5% size of 79B1-01



- Applicable size: 4.0~6.35mm can be adjusted by tools size



- High efficiency ❶ Spare screws can be placed on the magnetic attractor for convenient retrieval and to prevent loss

- High efficiency ❷ The front-end is designed with a screw fixation groove to prevent screws from falling

Functions Combined



- Fast demagnetize: Side groove to demagnetize the tools

- Fast magnetize:Put in to magnetize the tools

- Suitable for various tool combinations, such as screwdrivers, hex wrenches, Power Bits, and more

- Easy storage:
- The magnetic attraction feature allows the screwdriver to be stored on a metal surface, effortlessly solving the screwdriver storage issue

79B1-01

- Quickly magnetize / demagnetize screwdriver tips or screw bits
- Magnetize your screwdrivers to allow them to grab small screws
- Demagnetize your screwdrivers to safely work on sensitive electronics

- Magnetizer

- Demagnetizer

KT NO.	Size (mm)	g	
79B1-01	52 x 50 x 30	88.6	20 / 80

Interchangeable Handle

91232

KT NO.	mm	inch	mm	inch	g	
91232	6.35	1/4	135	5-1/4	84	12 / 144

Power Bit

1317

- Bits for screwdriver handle 91232
- Material - SNCM - V alloy steel

KT NO.	Size	mm	inch	g	
1317012PN	PH1 PH2	175	7	45	40 / 400
1317012ZN	PZ2 PZ1	175	7	45	
1317046SN	4.0 6.0	175	7	43	
1317057SN	5.0 7.0	175	7	43	
1317115TN	T10 T15	175	7	42	
1317225TN	T20 T25	175	7	45	
1317340TN	T30 T40	175	7	45	
1317401PN	4.0 PH1	175	7	43	
131744BHN	B4 H4	175	7	45	
1317501ZN	5.0 PZ1	175	7	43	
131755BHN	B5 H5	175	7	45	
1317602PN	6.0 PH2	175	7	43	
131766BHN	B6 H6	175	7	46	
1317702ZN	7.0 PZ2	175	7	44	

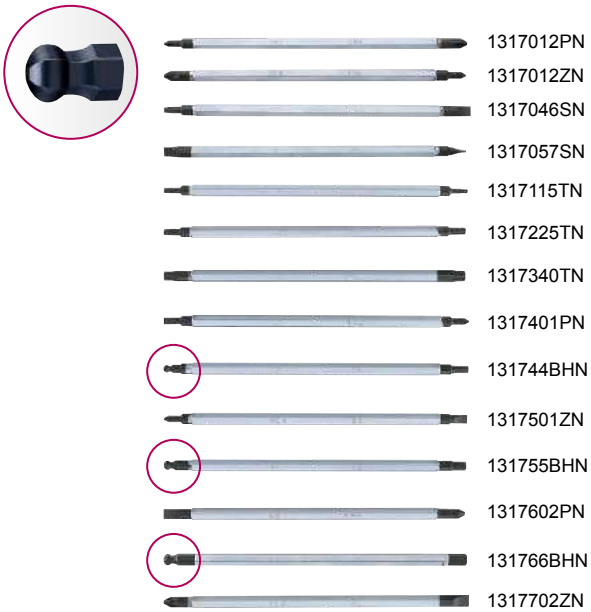

Screwdriver Set

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Shank finishing - chrome plated

32518MR

- Two-way screwdriver set

Contents			
	Kg	0.70	1 / 24
1317012PN	PH1		PH2
1317012ZN	PZ2		PZ1
1317046SN	4.0		6.0
1317057SN	5.0		7.0
1317115TN	T10		T15
1317225TN	T20		T25
1317340TN	T30		T40
131744BHN	B4		H4
131755BHN	B5		H5
131766BHN	B6		H6
91232			

11 PC.

Blow case size (mm) : 233 x 120 x 43 (0.04cuft)

Screwdriver Set

32518MR01

- Two-way screwdriver set

11 PC.

Blow case size (mm) : 233 x 120 x 43 (0.04cuft)

Contents			0.76	1 / 20
1317115TN	T10			T15
1317225TN	T20			T25
1317340TN	T30			T40
1317401PN	4.0			PH1
131744BHN	B4			H4
1317501ZN	5.0			PZ1
131755BHN	B5			H5
1317602PN	6.0			PH2
131766BHN	B6			H6
1317702ZN	7.0			PZ2
91232				

32518MR02

- Two-way screwdriver set

11 PC.

Blow case size (mm) : 233 x 120 x 43 (0.04cuft)

Contents			0.70	1 / 24
1317115TN	T10			T15
1317225TN	T20			T25
1317340TN	T30			T40
1317401PN	4.0			PH1
131744BHN	B4			H4
1317012PN	PH1			PH2
131755BHN	B5			H5
1317602PN	6.0			PH2
131766BHN	B6			H6
1317057SN	5.0			7.0
91232				

Nut Spinner

- Shank material - chrome vanadium alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated

1450

KT NO.	mm	mm	mm	mm	g	
1450-04	4	4.5	125	225	74	
1450-45	4.5	4.5	125	225	75	
1450-05	5	5.0	125	225	75	
1450-55	5.5	5.0	125	225	82	
1450-06	6	6.0	125	225	81	
1450-07	7	6.0	125	235	103	12 / 144
1450-08	8	7.0	125	235	108	
1450-09	9	7.0	125	235	110	
1450-10	10	8.0	125	235	114	
1450-11	11	9.0	125	245	165	
1450-12	12	10.0	125	245	169	
1450-13	13	10.0	125	245	172	10 / 120

5450

KT NO.	inch	mm	mm	mm	g	
5450-08	1/4	12.0	125	223	81	12 / 144
5450-10	5/16	8.2	125	223	109	

Flexible Nut Spinner

1453

- For the hose clamps on radiator hoses

KT NO.	mm	mm	mm	mm	g	
1453-05	5	14.3	190	300	132	
1453-06	6	14.1	190	300	132	
1453-07	7	14.5	190	300	137	12 / 144
1453-08	8	13.2	190	300	133	
1453-10	10	12.7	190	300	135	

Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted
- Total length : 25 mm

1/4" Hex size shank driver

order unit :one box

Item No.xxxxxxx.B

1025P

- DIN ISO 2351-2
- PHILLIPS head

KT NO.	No.	g	set / box
102500P (102500P.B)	PH0	5	20 / 300 (50 / 1000)
102501P (102501P.B)	PH1	5	
102502P (102502P.B)	PH2	6	
102503P (102503P.B)	PH3	6	
102504P (102504P.B)	PH4	6	

102512P

- Reduced for dry-wall
- DIN ISO 2351-2

KT NO.	No.	g	set / box
102512P (102512P.B)	PH2	6	20 / 300 (50 / 1000)

1025S

- DIN ISO 2351-1

KT NO.	Tip width (mm)	Tip thickness (mm)	g	set / box
102503S1 (102503S1.B)	3.0	0.5	5	20 / 300 (50 / 1000)
102535S1 (102535S1.B)	3.5	0.6	5	
102504S1 (102504S1.B)	4.0	0.5	5	
102504S2 (102504S2.B)	4.0	0.8	5	
102545S1 (102545S1.B)	4.5	0.6	5	
102505S1 (102505S1.B)	5.0	0.8	5	
102555S1 (102555S1.B)	5.5	0.8	5	
102555S2 (102555S2.B)	5.5	1.0	5	
102506S1 (102506S1.B)	6.0	1.0	5	
102565S1 (102565S1.B)	6.5	1.2	6	
102507S1 (102507S1.B)	7.0	1.2	6	
102508S1 (102508S1.B)	8.0	1.2	6	
102508S2 (102508S2.B)	8.0	1.6	6	

1025H / 5025H

- DIN ISO 2351-3

KT NO.	mm	g	set / box
102515H (102515H.B)	H1.5	4	20 / 300 (50 / 1000)
102502H (102502H.B)	H2	5	
102525H (102525H.B)	H2.5	5	
102503H (102503H.B)	H3	5	
102504H (102504H.B)	H4	6	
102505H (102505H.B)	H5	6	
102506H (102506H.B)	H6	6	
102507H (102507H.B)	H7	8	
102508H (102508H.B)	H8	9	
102510H (102510H.B)	H10	12	

KT NO.	inch	g	set / box
502503H (502503H.B)	3/64	4	20 / 300 (50 / 1000)
502504H (502504H.B)	1/16	4	
502505H (502505H.B)	5/64	5	
502506H (502506H.B)	3/32	5	
502507H (502507H.B)	7/64	5	
502508H (502508H.B)	1/8	5	
502509H (502509H.B)	9/64	5	
502510H (502510H.B)	5/32	5	

1025T

- For torx head screw

KT NO.	Size	g	set / box
102506T (102506T.B)	T6	5	20 / 300 (50 / 1000)
102507T (102507T.B)	T7	5	
102508T (102508T.B)	T8	5	
102509T (102509T.B)	T9	5	
102510T (102510T.B)	T10	5	
102515T (102515T.B)	T15	5	
102520T (102520T.B)	T20	5	
102525T (102525T.B)	T25	5	
102527T (102527T.B)	T27	5	
102530T (102530T.B)	T30	5	
102535T (102535T.B)	T35	6	
102540T (102540T.B)	T40	6	
102545T (102545T.B)	T45	7	
102550T (102550T.B)	T50	8	

1025U

- For torx head screw
- Tamper-resistant type

KT NO.	Size	g	set / box
102507U (102507U.B)	T7H	4	20 / 300 (50 / 1000)
102508U (102508U.B)	T8H	5	
102509U (102509U.B)	T9H	5	
102510U (102510U.B)	T10H	5	
102515U (102515U.B)	T15H	5	
102520U (102520U.B)	T20H	5	
102525U (102525U.B)	T25H	5	
102527U (102527U.B)	T27H	5	
102530U (102530U.B)	T30H	6	
102540U (102540U.B)	T40H	6	

1025M

- DIN 65254

KT NO.	size	g	set / box
102504M	M4	5	20 / 300
102505M	M5	5	
102506M	M6	6	
102508M	M8	7	
102510M	M10	10	

1025V

- For inside 5-star screw
- Tamper-resistant type

KT NO.	Size	g	set / box
102508V	IPR 8	5	20 / 300
102509V	IPR 9	5	
102510V	IPR 10	5	
102515V	IPR 15	5	
102520V	IPR 20	5	
102525V	IPR 25	5	
102527V	IPR 27	5	
102530V	IPR 30	5	
102540V	IPR 40	6	

Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1/4" Hex size shank driver

order unit : one blister card

Item No.xxxxxxx.B

5/16" Hex size shank driver

order unit : one box

1025Z

- Pozidriv type
- DIN ISO 2351-2

KT NO.	No.	g	set / box
102501Z (102501Z.B)	PZ1	5	20 / 300 (50 / 1000)
102502Z (102502Z.B)	PZ2	6	
102503Z (102503Z.B)	PZ3	6	

1025R

KT NO.	Size	g	set / box
102500R (102500R.B)	RB0	5	20 / 300 (50 / 1000)
102501R (102501R.B)	RB1	5	
102502R (102502R.B)	RB2	6	
102503R (102503R.B)	RB3	6	

1360Z

KT NO.	No.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	set / box
1360552Z	PZ2	5.5	1.0	60	14	10/150

1360P

KT NO.	No.	Overall length (mm)	g	set / box
1360012P	PH1 / PH2	60	13	10 / 150
1360022P	PH2 / PH2	60	14	
1360023P	PH2 / PH3	60	14	

1360P

KT NO.	No.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	set / box
1360552P	PH2	5.5	0.8	60	14	10 / 150
1360703P	PH3	7.0	1.2	60	14	

1800P

- 36 / 80 / 125mmL
- DIN ISO 2251-2

KT NO.	No.	Overall length (mm)	g	set / box
183601P	PH1	36	12	20 / 200
183602P	PH2	36	12	
183603P	PH3	36	12	
183604P	PH4	36	12	
188002P	PH2	80	31	10 / 100
188003P	PH3	80	31	
188004P	PH4	80	31	
181202P	PH2	125	50	
181203P	PH3	125	50	

1800S

- 36 / 80mmL
- DIN ISO 2351-1

KT NO.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	set / box
183608S	8	1.2	36	12	20 / 300
183609S	9	1.6	36	13	20 / 300
183610S	10	1.6	36	15	20 / 240
183611S	11	2.0	36	16	20 / 240
183612S	12	2.0	36	18	12 / 120
183614S	14	2.5	36	21	12 / 120
188008S	8	1.2	80	32	10 / 150
188010S	10	1.6	80	33	10 / 120
188012S	12	2.0	80	34	6 / 60

1800H

- 32 / 36 mmL

KT NO.	mm	Overall length (mm)	g	set / box
183203H	H3	32	9	20 / 300
183204H	H4	32	10	20 / 300
183205H	H5	32	10	20 / 300
183206H	H6	32	11	20 / 300
183207H	H7	32	12	20 / 300
183208H	H8	32	13	20 / 300
183210H	H10	32	17	20 / 240
183212H	H12	32	22	12 / 120
183604H	H4	36	11	20 / 300
183605H	H5	36	12	20 / 300
183606H	H6	36	13	20 / 300
183607H	H7	36	14	20 / 300
183608H	H8	36	15	20 / 300
183610H	H10	36	19	20 / 240
183612H	H12	36	25	12 / 120
183614H	H14	36	31	12 / 120

Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

5/16" Hex size shank driver

order unit : one box

10mm Hex size shank driver

order unit : one blister card

1800T

- For torx internal screws
  32 / 36 / 70 mmL

KT NO.	Size	Overall length (mm)	g	set / box
183215T	T15	32	10	20 / 300
183220T	T20	32	10	20 / 300
183225T	T25	32	10	20 / 300
183227T	T27	32	11	20 / 300
183230T	T30	32	11	20 / 300
183240T	T40	32	11	20 / 300
183245T	T45	32	11	20 / 300
183250T	T50	32	11	20 / 300
183620T	T20	36	11	20 / 300
183625T	T25	36	11	20 / 300
183627T	T27	36	11	20 / 300
183630T	T30	36	12	20 / 300
183635T	T35	36	12	20 / 300
183640T	T40	36	13	20 / 300
183645T	T45	36	13	20 / 300
183650T	T50	36	14	20 / 300
183655T	T55	36	19	20 / 240
183660T	T60	36	22	20 / 120
187015T	T15	70	22	10 / 150
187020T	T20	70	22	10 / 150
187025T	T25	70	22	10 / 150
187027T	T27	70	22	10 / 150
187030T	T30	70	22	10 / 150
187040T	T40	70	22	10 / 150
187045T	T45	70	22	10 / 150
187050T	T50	70	22	10 / 150

1836Z

- 36 mmL

KT NO.	No.	Overall length (mm)	g	set / box
183602Z	PZ2	36	12	
183603Z	PZ3	36	12	20 / 300
183604Z	PZ4	36	13	

1600H

- 36 / 80mmL

1636xxH

1680xxH

KT NO.	mm	Overall length (mm)	g	set / box
163604H	H4	36	17	12 / 144
163605H	H5	36	19	12 / 144
163606H	H6	36	19	12 / 144
163607H	H7	36	20	12 / 144
163608H	H8	36	21	12 / 144
163609H	H9	36	23	12 / 144
163610H	H10	36	24	12 / 144
163612H	H12	36	31	12 / 120
168004H	H4	80	47	6 / 72
168005H	H5	80	48	6 / 72
168006H	H6	80	49	6 / 72
168007H	H7	80	50	6 / 72
168008H	H8	80	51	6 / 72
168009H	H9	80	52	6 / 72
168010H	H10	80	54	6 / 72
168012H	H12	80	73	6 / 60

1600T

- For torx head screw
- 36 / 80mmL

1636xxT

1680xxT

KT NO.	Size	Overall length (mm)	g	set / box
163610T	T10	36	17	12 / 144
163615T	T15	36	17	12 / 144
163620T	T20	36	18	12 / 144
163625T	T25	36	18	12 / 144
163627T	T27	36	18	12 / 144
163630T	T30	36	18	12 / 144
163640T	T40	36	20	12 / 144
163645T	T45	36	21	12 / 144
163650T	T50	36	23	12 / 144
163655T	T55	36	28	12 / 144
163660T	T60	36	33	12 / 120
168010T	T10	80	46	6 / 72
168015T	T15	80	47	6 / 72
168020T	T20	80	47	6 / 72
168025T	T25	80	47	6 / 72
168027T	T27	80	47	6 / 72
168030T	T30	80	47	6 / 72
168040T	T40	80	48	6 / 72
168045T	T45	80	49	6 / 72
168050T	T50	80	50	6 / 72
168055T	T55	80	52	6 / 72
168060T	T60	80	70	6 / 60

Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1600E

- For torx Plus head screw
- 36 / 80mmL

1636xxE

1680xxE

KT NO.	Size	Overall length (mm)	g	set /
163610E	IP10	36	15	12 / 144
163615E	IP15	36	16	12 / 144
163620E	IP20	36	16	12 / 144
163625E	IP25	36	16	12 / 144
163627E	IP27	36	17	12 / 144
163630E	IP30	36	17	12 / 144
163640E	IP40	36	18	12 / 144
163645E	IP45	36	20	12 / 144
163650E	IP50	36	21	12 / 144
163655E	IP55	36	25	12 / 144
163660E	IP60	36	31	12 / 120
168010E	IP10	80	45	6 / 72
168015E	IP15	80	45	6 / 72
168020E	IP20	80	45	6 / 72
168025E	IP25	80	46	6 / 72
168027E	IP27	80	46	6 / 72
168030E	IP30	80	47	6 / 72
168040E	IP40	80	48	6 / 72
168045E	IP45	80	49	6 / 72
168050E	IP50	80	50	6 / 72
168055E	IP55	80	60	6 / 72
168060E	IP60	80	79	6 / 60

1600M

- 36 / 80mmL

1636xxM

1680xxM

KT NO.	Size	Overall length (mm)	g	set /
163605M	M5	36	18	12 / 144
163606M	M6	36	19	12 / 144
163608M	M8	36	20	12 / 144
163609M	M9	36	21	12 / 144
163610M	M10	36	22	12 / 144
163612M	M12	36	28	12 / 120
163614M	M14	36	30	12 / 120
168005M	M5	80	47	6 / 72
168006M	M6	80	48	6 / 72
168008M	M8	80	49	6 / 72
168009M	M9	80	51	6 / 72
168010M	M10	80	52	6 / 72
168012M	M12	80	70	6 / 60
168014M	M14	80	71	6 / 60

10mm Hex size shank driver

order unit : one blister card

1600U

- For torx head screw
- Tamper-resistant type
- 36 / 80mmL

1636xxU

1680xxU

KT NO.	Size	Overall length (mm)	g	set /
163610U	T10H	36	17	12 / 144
163615U	T15H	36	17	12 / 144
163620U	T20H	36	18	12 / 144
163625U	T25H	36	18	12 / 144
163627U	T27H	36	18	12 / 144
163630U	T30H	36	18	12 / 144
163640U	T40H	36	20	12 / 144
163645U	T45H	36	21	12 / 144
163650U	T50H	36	23	12 / 144
163655U	T55H	36	28	12 / 144
163660U	T60H	36	33	12 / 120
168010U	T10H	80	46	6 / 72
168015U	T15H	80	47	6 / 72
168020U	T20H	80	47	6 / 72
168025U	T25H	80	47	6 / 72
168027U	T27H	80	47	6 / 72
168030U	T30H	80	47	6 / 72
168040U	T40H	80	48	6 / 72
168045U	T45H	80	49	6 / 72
168050U	T50H	80	50	6 / 72
168055U	T55H	80	52	6 / 72
168060U	T60H	80	70	6 / 60

Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1011MQ

- Metal case size (mm) : 198 x 105 x 37 (0.027 cuft)

11 PC.

Contents — 0.82 Kg — 1 / 20

	1636M	M5, M6, M8, M10, M12
	1680M	M5, M6, M8, M10, M12
	414810M	

1015MQ

- Metal case size (mm) : 198 x 105 x 37 (0.027 cuft)

15 PC.

Contents — 0.96 Kg — 1 / 20

	1636H	H4, H5, H6, H7, H8, H10, H12
	1680H	H4, H5, H6, H7, H8, H10, H12
	414810M	

1015PQ

- Metal case size (mm) : 198 x 105 x 37 (0.027 cuft)

15 PC.

Contents — 0.90 Kg — 1 / 20

	1636T	T20,T25, T30, T40, T45, T50, T55
	1680T	T20,T25, T30, T40, T45, T50, T55
	414810M	

1023EQ

- Metal case size (mm) : 244 x 118 x 37 (0.038 cuft)

23 PC.

Contents — 1.60 Kg — 1 / 18

	1636E	10IP, 15IP, 20IP, 25IP, 27IP, 30IP, 40IP, 45IP, 50IP, 55IP, 60IP
	1680E	10IP, 15IP, 20IP, 25IP, 27IP, 30IP, 40IP, 45IP, 50IP, 55IP, 60IP
	414810M	

1042CQ

- Metal case size (mm) : 205 x 80 x 42 (0.024 cuft)

42 PC.

Contents — 0.52 Kg — 1 / 20

	1025H	H1.5, H2, H2.5, H3, H4, H5, H6, H7, H8, H10
	1025T	T6
	1025U	T7H, T8H, T9H , T10H, T15H, T20H, T25H, T27H, T30H, T40H
	1025S	3 x 0.5, 3.5 x 0.6, 4 x 0.5, 4.5 x 0.6, 5 x 0.8, 5.5 x 0.8, 6 x 1.0, 6.5 x 1.2, 7 x 1.2, 8 x 1.2
	1025P	PH0, PH1, PH2, PH3
	1025Z	PZ1, PZ2, PZ3
	1025R	RB0, RB1, RB2, RB3

1043CQ

- Metal case size (mm) : 290 x 130 x 41 (0.056 cuft)

43 PC.

Contents — 2.50 Kg — 1 / 10

	1636H	H4, H5, H6, H7, H8, H10, H12
	1636M	M5, M6, M8, M10, M12
	1636T	T20, T25, T27, T30, T40, T45, T50,T55, T60
	1680H	H4, H5, H6, H7, H8, H10, H12
	1680M	M5, M6, M8, M10, M12
	1680T	T20, T25, T27, T30, T40, T45, T50, T55, T60
	414710M	

Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1044CQ

- Metal case size (mm) : 296 x 130 x 41 (0.056 cuft)

44 PC.

Contents — 2.5 Kg — 1 /10

1636H	H4, H5, H6, H7, H8, H10, H12
1636M	M5, M6, M8, M10, M12
1636T	T20, T25, T27, T30, T40, T45, T50, T55, T60
1680H	H4, H5, H6, H7, H8, H10, H12
1680M	M5, M6, M8, M10, M12
1680T	T20, T25, T27, T30, T40, T45, T50, T55, T60
314810M, 414810M	

5169PR

- Metal case size (mm) : 445 x 187 x 50 (0.147 cuft)

69 PC.

Contents — 4.15 Kg — 1 /4

3375M	E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18
1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H
1636H	H4, H5, H6, H7, H8, H10, H12
1636M	M5, M6, M8, M10, M12
1636T	T10, T15, T20, T25, T27, T30, T40, T45, T50, T55, T60
1680H	H4, H5, H6, H7, H8, H10, H12
1680M	M5, M6, M8, M10, M12
1680T	T10, T15, T20, T25, T27, T30, T40, T45, T50, T55, T60
314810M	3792 / 3779-08G

Ratchet Screwdriver & Set

2166DF

- Two position L-handle design for greater torque
- PC+TPR Handle

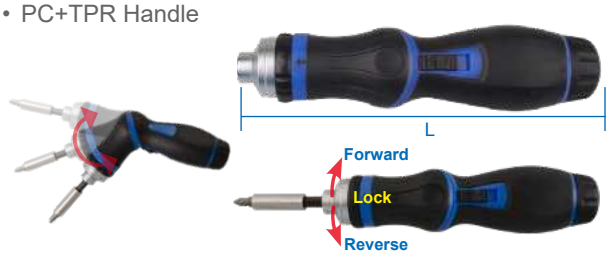

KT NO.	Gear	Overall Length (mm)	Kg	
2166DF	46 teeth	167	0.28	6 / 72

32809MR

- 9-in-1 ratchet screwdriver set
- Reversible ratchet with 1/4" bit holder

9 PC.

Contents — 0.32 Kg — 6 / 72

1025S	4.0, 5.0
1025P	PH1, PH2, PH3
1025Z	PZ1, PZ2
750-60	
2166DF	

2555MR 1/4"

- Ratchet screwdriver set
- Blow case size (mm) : 260 x 160 x 64 (0.094 cuft)

55 PC.

Contents — 1.00 Kg — 1 / 10

1025S	3.0, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 8.0
1025P	PH0, PH1, PH2, PH3
1025Z	PZ0, PZ1, PZ2, PZ3
1025T	T10, T15, T20, T25, T27, T30, T40
1025H	H2, H2.5, H3, H4, H5, H6, H8
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1025R	RB1, RB2
7702-25	
750-60	
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2166DF	

Palm Ratchet Screwdriver & Set

2746

1/4"

- 48 teeth
- With an internal soft structure, it allows the operator to spin fasteners on and off in hard-to-reach areas
- Stubby grip fitting the palm, good to use in a confined space





KT NO.	D (mm)	L (mm)	g	set /
2746	60	72	95	1 / 48

1048MR

1/4"

49 PC.

Contents			Kg 0.53	set / 1 / 12
	1025S	3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0		
	1025P	PH1 x 2, PH2 x 2 ø6mm, PH3, PH2 ø4.7mm		
	1025T	T10, T15, T20 x 2, T25, T27, T30, T40		
	1025H	H3, H4, H5, H6		
	1025U	T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H		
	1025Z	PZ2 x 2		
	7150T	T15, T20, T25,		
	7150P	PH2 x 2		
	7150Z	PZ2		
	7150S	4.0 x 0.8, 6.0 x 1.0		
	7150H	H3, H4, H5, H6, H7, H8		
	750-75	1/4"		
	753-63	1/4"		

2746

Plastic case size (mm) : 150 x 102 x 46 (0.025 cuft)

Ratchet Screwdriver & Set

32808MR

1/4"

- 8-in-1 ratchet screwdriver set
- Reversible ratchet screwdriver with max torque 45 Nm
- 45 teeth
- Magnetic nut setter 1/4" and bit holder
- Extended blades max. 135mmL
- Extended drive gets into hard-to-reach space easily

- Ergonomic grip

8 PC.



- Extended magnetic bit holder

- Forward, reverse and neutral

- 6 bit storage compartment cap

Contents — 0.27 kg — 1 /48

	1025P	PH1, PH2
	1025Z	PZ2
	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2
	2155-06	
	2155DF	

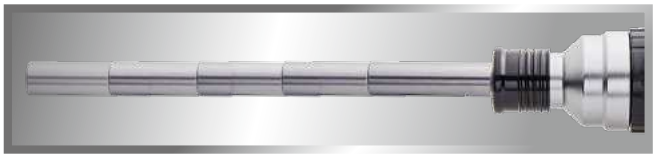

- Telescopic ratchet screwdriver

32526MRN

16 PC.

Contents — 0.7 kg — 1 / 30

PH1	PH2	1317012PN
4.0	6.0	1317046SN
5.0	7.0	1317057SN
T10	T15	1317115TN
T20	T25	1317225TN
B4	H4	131744BHN
B5	H5	131755BHN
B6	H6	131766BHN
		2155DF

Contents

	1025S	4.0, 5.5, 6.5
	1025P	PH1, PH2
	1025Z	PZ2
	2155-06	

Ratchet Screwdriver & Set

3254MR

Contents — 0.58 Kg — 1 / 12

⊖	1025S	3.0, 4.0, 5.0, 6.0
⊕	1025P	PH1, PH2 x 2, PH3
✳	1025Z	PZ1, PZ2 x 2, PZ3
✱	1025T	T10, T15, T20, T25, T27, T30, T40
●	1025H	H3, H4, H5, H6
✡	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
■	7702-25	
○	753-63	
⊖	1025P	PH1, PH2
✳	1025Z	PZ2
⊕	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2
	2155-06	
	2155DF	

- Suitable for fixing, repairing and installation work, and can also be used with power tools, with ratchet driver included to complete the work without power tools

40 PC.

+

2539MRV04

- Suitable for fixing, repair and installation work

39 PC.

Contents — 1.25 Kg — 1 / 16

○	2335M	5, 6, 7, 8, 9, 10, 11, 12, 13, 14
⊖	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2
⊕	1025P	PH1, PH2
✳	1025Z	PZ2
●	1025H	H1.5, H2, H2.5, H3, H4, H5, H6
✡	1025U	T7H, T8H, T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H
■	7702-25	
	2155-06	
	2155DF	

Contents

1317012PN	⊕ PH1	⊕ PH2
1317046SN	⊖ 4.0	⊖ 6.0
1317057SN	⊖ 5.0	⊖ 7.0

Atom Series

PAT.

- Asymmetrical line design

1026CQ-AM

- Plastic case size (mm) :
- 140 x 65 x 36

26 PC.



- Easy to pick up

- Automatic raising bit rack

- Suitable in pocket

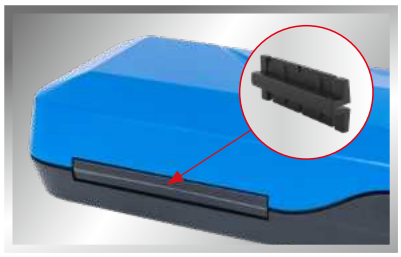

- Built-in rotation axis design

Contents

0.39 | 1 / 40

	1025P	PH1, PH2, PH3
	1025Z	PZ1, PZ2, PZ3
	1025U	T10H, T15H, T20H, T25H, T30H
	1025H	H3, H4, H5, H6, H8
	1025T	T10, T15, T20, T25, T27, T30, T40
	7702-25	
	753-63	
	276B-35	

Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1032CQ

- Plastic case size (mm) :
- 120 x 70 x 42 (0.012 cuft)

32 PC.

Contents — 0.30 Kg — 1 / 20

⊖	1025S	3.0, 4.0, 5.0, 6.0
⊕	1025P	PH1, PH2 x 2, PH3
✳	1025Z	PZ1, PZ2 x 2, PZ3
★	1025T	T10, T15, T20, T25, T27, T30, T40
●	1025H	H3, H4, H5, H6
✪	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
■	7702-25	
○	753-63	

1032CQ01

- Plastic case size (mm) :
- 120 x 70 x 42 (0.012 cuft)

33 PC.

Contents — 0.30 Kg — 1 / 20

⊖	1025S	3.0, 4.0, 5.0, 6.0
⊕	1025P	PH1, PH2 x 2, PH3
✳	1025Z	PZ1, PZ2 x 2, PZ3
★	1025T	T10, T15, T20, T25, T27, T30, T40
●	1025H	H3, H4, H5, H6
✪	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
▣	1025R	RB2
■	7702-25	
○	753-63	

Bit Set

KT NO.	PC.	Contents			g	
102502P-S1	25	⊕	1025P	PH2 x 25 PC.	161	12 / 72
102502Z-S1	25	✳	1025Z	PZ2 x 25 PC.	161	
102510T-S1	25	★	1025T	T10 x 25 PC.	136	
102515T-S1	25	★	1025T	T15 x 25 PC.	140	
102520T-S1	25	★	1025T	T20 x 25 PC.	142	
102525T-S1	25	★	1025T	T25 x 25 PC.	144	
102530T-S1	25	★	1025T	T30 x 25 PC.	146	

Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic

1/4" Hex size shank driver

order unit : one blister card

7100P

- Short neck (9.5 mm) type
- DIN ISO 2351-2

KT NO.	No.	Overall length (mm)	g	set / box
715000P	PH0	50	8	
715001P	PH1	50	9	
715002P	PH2	50	11	
715003P	PH3	50	11	
715004P	PH4	50	14	10 / 150
716502P	PH2	65	15	
717001P	PH1	70	16	
717002P	PH2	70	17	
717003P	PH3	70	17	
719001P	PH1	90	18	
719002P	PH2	90	20	
719003P	PH3	90	20	
711002P	PH2	100	24	10 / 120
711501P	PH1	150	23	
711502P	PH2	150	33	
711503P	PH3	150	33	

7100H

- DIN ISO 2351-3

KT NO.	mm / inch	Overall length (mm)	g	set / box
715002H	H2	50	6	
715025H	H2.5	50	6	
715003H	H3	50	6	
715004H	H4	50	9	
715005H	H5	50	10	
715006H	H6	50	11	
715007H	H7	50	13	
715008H	H8	50	17	10 / 150
715012SH	3/16	50	20	
715014SH	7/32	50	22	
717002H	H2	70	8	
717025H	H2.5	70	8	
717003H	H3	70	9	
717004H	H4	70	13	
717005H	H5	70	15	
717006H	H6	70	18	
717008H	H8	70	25	
711102H	H2	110	11	
711125H	H2.5	110	11	
711103H	H3	110	14	
711104H	H4	110	18	10 / 120
711105H	H5	110	24	
711106H	H6	110	29	
711107H	H7	110	34	
711108H	H8	110	42	
711110H	H10	110	62	8 / 80
711502H	H2	150	16	
711503H	H3	150	18	
711504H	H4	150	25	10 / 120
711505H	H5	150	34	
711506H	H6	150	40	
711508H	H8	150	59	

7150S

- DIN ISO 2351-1

KT NO.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	set / box
715003S1	3.0	0.5	50	6	
715035S1	3.5	0.5	50	6	
715004S2	4.0	0.5	50	7	
715004S1	4.0	0.8	50	7	
715045S1	4.5	0.6	50	7	10 / 150
715005S1	5.0	0.8	50	8	
715055S1	5.5	0.8	50	8	
715006S1	6.0	1.0	50	8	
715065S1	6.5	1.2	50	9	

7100T

- For torx head screw

KT NO.	Size	Overall length (mm)	g	set / box
715006T	T6	50	5	
715007T	T7	50	5	
715008T	T8	50	5	
715009T	T9	50	5	
715010T	T10	50	6	
715015T	T15	50	6	
715020T	T20	50	7	
715025T	T25	50	8	
715027T	T27	50	9	
715030T	T30	50	9	
715040T	T40	50	10	
715050T	T50	50	15	10 / 150
717006T	T6	70	7	
717007T	T7	70	7	
717008T	T8	70	7	
717009T	T9	70	7	
717010T	T10	70	8	
717015T	T15	70	8	
717020T	T20	70	10	
717025T	T25	70	11	
717027T	T27	70	14	
717030T	T30	70	14	
717040T	T40	70	15	
711110T	T10	110	14	
711115T	T15	110	14	
711120T	T20	110	18	
711125T	T25	110	19	
711127T	T27	110	24	
711130T	T30	110	24	
711140T	T40	110	28	
711506T	T6	150	16	
711507T	T7	150	16	10 / 120
711508T	T8	150	16	
711509T	T9	150	16	
711510T	T10	150	17	
711515T	T15	150	18	
711520T	T20	150	24	
711525T	T25	150	24	
711527T	T27	150	32	
711530T	T30	150	33	
711540T	T40	150	39	

Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic

1/4" Hex size shank driver

order unit : one blister card

7100Z

- DIN ISO 2351-2

KT NO.	No.	Overall length (mm)	g	set / box
715001Z	PZ1	50	9	10 / 150
715002Z	PZ2	50	11	
715003Z	PZ3	50	12	
717001Z	PZ1	70	11	
717002Z	PZ2	70	15	
717003Z	PZ3	70	15	
719001Z	PZ1	90	13	10 / 120
719002Z	PZ2	90	19	
719003Z	PZ3	90	19	

7100U

- For torx head screw
- Tamper-resistant type

KT NO.	Size	Overall length (mm)	g	set / box
715009U	T9H	50	5	10 / 150
715010U	T10H	50	7	
715015U	T15H	50	7	
715020U	T20H	50	7	
715025U	T25H	50	8	
715027U	T27H	50	9	
715030U	T30H	50	9	
715040U	T40H	50	11	
717010U	T10H	70	8	
717015U	T15H	70	8	
717020U	T20H	70	10	
717025U	T25H	70	11	
717027U	T27H	70	13	
717030U	T30H	70	13	
717040U	T40H	70	15	
711110U	T10H	110	14	10 / 120
711115U	T15H	110	14	
711120U	T20H	110	18	
711125U	T25H	110	19	
711127U	T27H	110	24	
711130U	T30H	110	24	
711140U	T40H	110	24	
711515U	T15H	150	18	
711520U	T20H	150	24	
711525U	T25H	150	24	
711527U	T27H	150	32	
711530U	T30H	150	33	

7100R

KT NO.	Size	Overall length (mm)	g	set / box
715000R	RB0	50	7	10 / 150
715001R	RB1	50	8	
715002R	RB2	50	8	
715003R	RB3	50	8	
717000R	RB0	70	9	
717001R	RB1	70	11	
717002R	RB2	70	13	
717003R	RB3	70	13	

2128PR

- torx head tamper-resistant & L-type holder set

8 PC.

Contents — 0.17 g — 10 / 60

	7170U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
	158902ERA	

2138PR

- Hexagon head power bits & L-type holder set

8 PC.

Contents — 0.24 kg — 10 / 60

	7150H	H2, H3, H4, H5, H6, H7, H8
	158902ERA	

7400P

- Short head type

KT NO.	No.	Overall length (mm)	g	set / box
745002P	PH2	50	11	10 / 150
747501P	PH1	75	16	10 / 150
747502P	PH2	75	15	10 / 150
747503P	PH3	75	16	10 / 150
741002P	PH2	100	23	10 / 120
741502P	PH2	150	37	10 / 100
742002P	PH2	200	50	10 / 100
743002P	PH2	300	70	10 / 40
743003P	PH3	300	77	10 / 40

7300P

- Long head type

KT NO.	No.	Overall length (mm)	g	set / box
734501P	PH1	45	9	10 / 150
734502P	PH2	45	9	
734503P	PH3	45	10	
736501P	PH1	65	14	
736502P	PH2	65	14	
731101P	PH1	110	26	10 / 120
731102P	PH2	110	26	
731103P	PH3	110	26	
731502P	PH2	150	32	
731503P	PH3	150	33	

5mm Hex size shank driver order unit : one box

Insert Size: The suggested size is according to the depth of bit holder which a bit is inserted.

7200P

- Long head typed

KT NO.	No.	Overall length (mm)	g	set / box
726502P	PH2	65	8	10 / 100
727502P	PH2	75	10	
721102P	PH2	110	14	

Power Driving

- Silicon chrome vanadium alloysteel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic
- 2 PC. bits set

1/4" Hex size shank driver

order unit : one blister card

7100P-S1

- Short neck (9.5 mm) type
- DIN ISO 2351-2

KT NO.	No.	Overall length (mm)	g	set
715000P-S1	PH0	50	16	1 / 20
715001P-S1	PH1	50	18	
715002P-S1	PH2	50	22	
715003P-S1	PH3	50	22	
715004P-S1	PH4	50	28	
716502P-S1	PH2	65	30	
717001P-S1	PH1	70	32	
717002P-S1	PH2	70	34	
717003P-S1	PH3	70	34	
719001P-S1	PH1	90	36	
719002P-S1	PH2	90	40	
719003P-S1	PH3	90	40	
711002P-S1	PH2	100	48	
711501P-S1	PH1	150	46	
711502P-S1	PH2	150	66	
711503P-S1	PH3	150	66	

7100H-S1

- DIN ISO 2351-3

KT NO.	mm / inch	Overall length (mm)	g	set
715002H-S1	H2	50	12	1 / 20
715025H-S1	H2.5	50	12	
715003H-S1	H3	50	12	
715004H-S1	H4	50	18	
715005H-S1	H5	50	20	
715006H-S1	H6	50	22	
715007H-S1	H7	50	26	
715008H-S1	H8	50	34	
715012SH-S1	3/16	50	20	
715014SH-S1	7/32	50	22	
717005H-S1	H5	70	30	
717006H-S1	H6	70	36	
711102H-S1	H2	110	22	
711125H-S1	H2.5	110	22	
711103H-S1	H3	110	28	
711104H-S1	H4	110	36	
711105H-S1	H5	110	48	
711106H-S1	H6	110	58	
711107H-S1	H7	110	68	
711505H-S1	H5	150	68	
711512SH-S1	3/16	150	68	

7150S-S1

- DIN ISO 2351-1

KT NO.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	set
715003S1-S1	3.0	0.5	50	12	1 / 20
715035S1-S1	3.5	0.5	50	12	
715004S2-S1	4.0	0.5	50	14	
715004S1-S1	4.0	0.8	50	14	
715045S1-S1	4.5	0.6	50	14	
715005S1-S1	5.0	0.8	50	16	
715055S1-S1	5.5	0.8	50	16	
715006S1-S1	6.0	1.0	50	16	
715065S1-S1	6.5	1.2	50	18	

7100T-S1

- For torx head screw

KT NO.	Size	Overall length (mm)	g	set
715006T-S1	T6	50	10	1 / 20
715007T-S1	T7	50	10	
715008T-S1	T8	50	10	
715009T-S1	T9	50	10	
715010T-S1	T10	50	12	
715015T-S1	T15	50	12	
715020T-S1	T20	50	14	
715025T-S1	T25	50	16	
715027T-S1	T27	50	18	
715030T-S1	T30	50	18	
715040T-S1	T40	50	20	
715050T-S1	T50	50	30	
717006T-S1	T6	70	14	
717007T-S1	T7	70	14	
717008T-S1	T8	70	14	
717009T-S1	T9	70	14	
717010T-S1	T10	70	14	
717015T-S1	T15	70	16	
717020T-S1	T20	70	16	
717025T-S1	T25	70	20	
717027T-S1	T27	70	22	
717030T-S1	T30	70	28	
717040T-S1	T40	70	28	
711110T-S1	T10	110	30	
711115T-S1	T15	110	28	
711120T-S1	T20	110	28	
711125T-S1	T25	110	36	
711127T-S1	T27	110	38	
711130T-S1	T30	110	48	
711140T-S1	T40	110	48	
711506T-S1	T6	150	56	
711507T-S1	T7	150	32	
711508T-S1	T8	150	32	
711509T-S1	T9	150	32	
711510T-S1	T10	150	34	
711515T-S1	T15	150	36	
711520T-S1	T20	150	48	
711525T-S1	T25	150	48	
711527T-S1	T27	150	64	
711530T-S1	T30	150	66	
711540T-S1	T40	150	78	

Power Driving

- Silicon chrome vanadium alloysteel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic
- 2 PC. bits set

1/4" Hex size shank driver

order unit : one blister card

7100Z-S1

- DIN ISO 2351-2

KT NO.	No.	Overall length (mm)	g	set / box
715001Z-S1	PZ1	50	18	1 / 20
715002Z-S1	PZ2	50	22	
715003Z-S1	PZ3	50	24	
717001Z-S1	PZ1	70	22	
717002Z-S1	PZ2	70	30	
717003Z-S1	PZ3	70	30	
719001Z-S1	PZ1	90	26	
719002Z-S1	PZ2	90	38	
719003Z-S1	PZ3	90	38	

7400P-S1

- Short head type

KT NO.	No.	Overall length (mm)	g	set / box
745002P-S1	PH2	50	22	1 / 20
747501P-S1	PH1	75	32	
747502P-S1	PH2	75	30	
747503P-S1	PH3	75	32	
741002P-S1	PH2	100	46	
741502P-S1	PH2	150	74	

7100U-S1

- For torx head screw
- Tamper-resistant type

KT NO.	Size	Overall length (mm)	g	set / box
715009U-S1	T9H	50	10	1 / 20
715010U-S1	T10H	50	14	
715015U-S1	T15H	50	14	
715020U-S1	T20H	50	14	
715025U-S1	T25H	50	16	
715027U-S1	T27H	50	18	
715030U-S1	T30H	50	18	
715040U-S1	T40H	50	22	
717010U-S1	T10H	70	16	
717015U-S1	T15H	70	16	
717020U-S1	T20H	70	20	
717025U-S1	T25H	70	22	
717027U-S1	T27H	70	26	
717030U-S1	T30H	70	26	
717040U-S1	T40H	70	30	
711110U-S1	T10H	110	28	
711115U-S1	T15H	110	28	
711120U-S1	T20H	110	36	
711125U-S1	T25H	110	38	
711127U-S1	T27H	110	48	
711130U-S1	T30H	110	48	
711140U-S1	T40H	110	56	

7300P-S1

- Long head type

KT NO.	No.	Overall length (mm)	g	set / box
734501P-S1	PH1	45	18	1 / 20
734502P-S1	PH2	45	18	
734503P-S1	PH3	45	20	
736501P-S1	PH1	65	28	
736502P-S1	PH2	65	28	
731101P-S1	PH1	110	52	
731102P-S1	PH2	110	52	
731103P-S1	PH3	110	52	
731502P-S1	PH2	150	64	
731503P-S1	PH3	150	66	

Insert Size: The suggested size is according to the depth of bit holder which a bit is inserted.

5mm Hex size shank driver

order unit : one box

7100R-S1

KT NO.	Size	Overall length (mm)	g	set / box
715000R-S1	RB0	50	14	1 / 20
715001R-S1	RB1	50	16	
715002R-S1	RB2	50	16	
715003R-S1	RB3	50	16	
717000R-S1	RB0	70	18	
717001R-S1	RB1	70	22	
717002R-S1	RB2	70	26	
717003R-S1	RB3	70	26	

7200P-S1

- Long head typed

KT NO.	No.	Overall length (mm)	g	set / box
726502P-S1	PH2	65	16	1 / 20
727502P-S1	PH2	75	20	
721102P-S1	PH2	110	28	

Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Nickel plated
- Magnetic

1/4" Hex size shank driver

order unit : one box

1300P

- Long head type

KT NO.	No.	Overall length (mm)	g	set / box
134501P	PH1	45	8	10 / 300
134502P	PH2	45	9	10 / 300
134503P	PH3	45	9	10 / 300
136501P	PH1	65	14	10 / 200
136502P	PH2	65	14	10 / 200
136503P	PH3	65	14	10 / 200
131101P	PH1	110	26	10 / 150
131102P	PH2	110	26	10 / 150
131103P	PH3	110	26	10 / 150
131501P	PH1	150	36	10 / 100
131502P	PH2	150	36	10 / 100
131503P	PH3	150	37	10 / 100

1500P

- Short head type

KT NO.	No.	Overall length (mm)	g	set / box
155001P	PH1	50	10	10 / 300
155002P	PH2	50	10	10 / 300
155003P	PH3	50	10	10 / 300
157501P	PH1	75	16	10 / 200
157502P	PH2	75	16	10 / 200
157503P	PH3	75	17	10 / 200
151001P	PH1	100	23	10 / 150
151002P	PH2	100	23	10 / 150
151003P	PH3	100	23	10 / 150
151501P	PH1	150	36	10 / 100
151502P	PH2	150	37	10 / 100
151503P	PH3	150	37	10 / 100

7300P

- Long head type

KT NO.	No.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	set / box
734551P	PH1	5.0	0.8	45	8	10 / 300
734552P	PH2	5.0	0.8	45	8	10 / 300
736552P	PH2	5.0	0.8	65	13	10 / 200
731152P	PH2	5.0	0.8	110	25	10 / 150
731552P	PH2	5.0	0.8	150	36	10 / 100

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic

1/4" Hex size shank driver

order unit : one box

13A6502P

- Long head type
- For ironwork screws

KT NO.	No.	Overall length (mm)	g	set / box
13A6502P	PH2	65	8	10 / 100

13B6502P

- Long head type
- For woodwork screws

KT NO.	No.	Overall length (mm)	g	set / box
13B6502P	PH2	65	8	10 / 100

- Chrome vanadium & stainless alloy steel
- Anti-rust oiled , sand-blasted
- Magnetic

1/4" Hex size shank driver

750

- Magnetic bit holder
- 750-50A : with spring clip
- DIN 7427

750-50A

750-60

750-50A

KT NO.	inch	Overall length (mm)	g	set / box
750-60	1/4	60	20	6 / 84
750-50A	1/4	50	22	6 / 84

KT NO.	inch	Overall length (mm)	g	box
750-75	1/4	75	30	1 / 20
750-100	1/4	100	37	1 / 20
750-150	1/4	150	50	1 / 20

751

- Magnetic bit holder
- With spring clip
- DIN 7427

KT NO.	inch	Overall length (mm)	g	set / box
751-60	1/4	60	24	6 / 84
751-75	1/4	75	36	6 / 84

Power Driving

752

- Magnetic bit holder
- With quick-release sleeve
- DIN 7427

KT NO.	inch	Overall length (mm)	g	set /
752-60	1/4	63	33	6 / 72
752-75	1/4	75	32	1 / 12
752-100	1/4	100	38	1 / 12
752-150	1/4	150	52	1 / 12
752-300	1/4	300	92	1 / 12

753

- 753-63
  -Magnetic bit holder
  -With quick-release sleeve
  -For 1025 bit
  -DIN 7427

KT NO.	inch	Overall length (mm)	g	set /
753-63	1/4	63	33	6 / 72

- Chrome vanadium & stainless alloy steel
- Anti-rust oiled , sand-blasted
- Magnetic

1/4" Hex size shank driver

754

- Universal joint bit holder
- 20 degree pivot mode allows for limited space accessibility
- Can be used in straight or pivot mode

KT NO.	inch	Overall Length (mm)	g	set /
754-90	1/4	90	52	1 / 12

755

- Quick release flexible bit holder
- Flexible shaft driver
- The flex shaft accepts any standard hex fitting
- Quick release fits double end power bits and 50mm power bits

KT NO.	inch	Overall length (mm)	g	set /
755-300	1/4	300	293	1 / 12
755-400	1/4	400	385	1 / 8

Angle Driver

- The body is zin alloy steel
- The arm is chrome vanadium alloy steel
- The chuck is aluminum alloy steel
- Magnetic

1/4" Hex size shank driver

759

- Heavy duty right angle bit holder
- This heavy duty 90 degree offset driver with 24 position gripped stabilizer arm is designed for use with power drivers 18-24 Volts
- Its head is shorter than 2.5" which is suitable to use in limited space
- Locking magnetic chuck accepts any 1/4" hex drive accessory such as twist drills, spade drills, step drills, grinding stones, buffer pads, nut drivers and screwdriver bits
- Durable all metal housing and steel gears with ball bearing construction
- Gripped stabilizer arm with 1 screwdriver bit storage
- It' s amazing capacity for up to 500 inch lbs with 2000 RPM

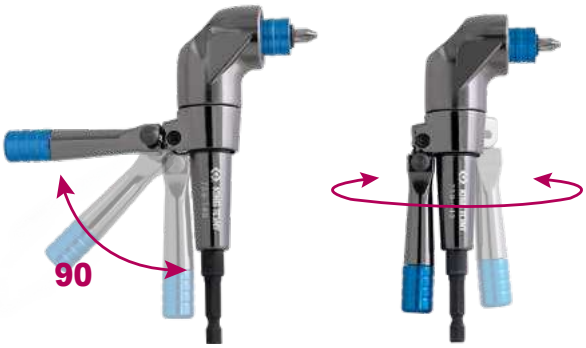

Pressure to change angle

KT NO.	inch	Overall length (mm)	g	/
759-140	1/4	140	305	12 / 48

Telescopic Bit Holder

New

753B-280D1 / 753B-280D1-S

- Quick-release connector design
- Magnetic connector
- Suitable for power bit extension accessories

Quick Release

Adjustable

- Supports auxiliary stabilization, enhancing stability and accuracy

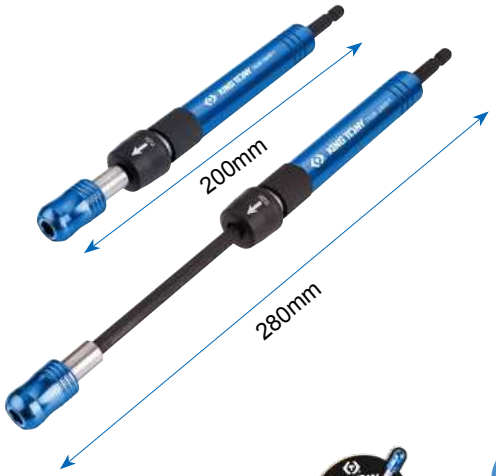

- Quick-release feature enhances work efficiency

- Pull the quick-release ring forward to adjust the length

12 PC.

753B-280D1-S
Paper display stand size(mm)
260 X 190 X 110 (2.49CUFT)

KT NO.	inch	Range mm	g	
753B-280D1	1/4"	200-280	170	1/12

Power Driving

- Chrome vanadium alloy steel
- Anti-rust oiled , sand-blasted

1/4" Hex size shank driver

75A1

- Threaded rod socket
- Fastest tool available to tighten or loosen threaded rods
- Automatic locking cams
- Will not damage the threads when used properly



KT NO.	Size mm	Size inch	D mm	L mm	Capacity Ø mm	g	
75A105M	5	3/16	22	66	4.6~5.0	60	10 / 72
75A106M	6	1/4	24	66	5.6~6.35	75	10 / 80
75A108M	8	5/16	24	66	7.6~8.0	74	10 / 80
75A110M	10	3/8	28	66	9.0~10.0	99	10 / 107
75A112M	12	1/2	28	66	11.4~12.7	98	10 / 103
75A114M	14	9/16	32	66	13.2~14.3	126	10 / 127
75A116M	16	5/8	32	66	15.2~16.0	125	10 / 125

760M

- Nut setter
- Non magnetic type
- DIN 3126



760S

KT NO.	mm	ℓ mm	Overall length (mm)	g	set /
7606512M	12	6.8	65	50	6 / 72
7607510M	10	6.0	75	38	6 / 72

KT NO.	inch	ℓ mm	Overall length (mm)	g	set /
7606508S	1/4	4.8	65	15	6 / 84
7606510S	5/16	6.6	65	17	6 / 84
7606512S	3/8	6.8	65	22	6 / 72

761M

- Nut setter
- Magnetic type
- DIN 3126



761S

KT NO.	mm	ℓ mm	Overall length (mm)	g	set /
7616505M	5	2.3	65	27	6 / 84
7616506M	6	2.6	65	26	6 / 84
7616507M	7	2.9	65	25	6 / 84
7616508M	8	3.5	65	30	6 / 84
7616510M	10	4.5	65	37	6 / 72
7616512M	12	5.6	65	52	6 / 72
7616513M	13	6.0	65	54	6 / 72
7616514M	14	6.5	65	52	6 / 20

KT NO.	mm	ℓ mm	Overall length (mm)	g	/
7611006M	6	2.6	100	38	1 / 25
7611008M	8	3.5	100	48	1 / 25
7611010M	10	4.5	100	54	1 / 25
7611012M	12	5.6	100	68	1 / 25
7611013M	13	6.0	100	71	1 / 25
7611014M	14	6.5	100	77	1 / 25
7611506M	6	2.6	150	58	1 / 25
7611507M	7	2.9	150	65	1 / 25
7611508M	8	3.5	150	67	1 / 25
7611510M	10	4.5	150	68	1 / 25
7611512M	12	5.6	150	103	1 / 25
7611513M	13	6.0	150	110	1 / 25
7611514M	14	6.5	150	115	1 / 25
7612006M	6	2.6	200	78	1 / 20
7612008M	8	3.5	200	93	1 / 20
7612010M	10	4.5	200	89	1 / 20
7612012M	12	5.6	200	128	1 / 20
7612014M	14	6.5	200	128	1 / 20

KT NO.	inch	ℓ mm	Overall length (mm)	g	set /
7614208S	1/4	2.7	42	15	6 / 84
7614210S	5/16	3.7	42	17	6 / 84
7614512S	3/8	4.7	45	22	6 / 84
7616508S	1/4	4.8	65	30	6 / 84
7616510S	5/16	6.6	65	31	6 / 84
7616512S	3/8	6.8	65	37	6 / 72
7616514S	7/16	6.8	65	39	6 / 72

Power Driving

- Chrome vanadium alloy steel
- Anti-rust oiled , sand-blasted

1/4" & 3/8" & 1/2"
Hex size shank driver

76B

- Deep well nut setter
- Deep hole for bolt & nut
- Press-fitted high-durability shank
- Use for tightening step clamp in construction



KT NO.	mm	D1 mm	ℓ mm	d mm	L mm	g	
76B808M	8	13	6	6	80	41	15 / 300
76B809M	9	13	6	7	80	40	15 / 300
76B812M	12	17	8	9	80	57	12 / 240
76B813M	13	18	9	10	80	62	12 / 240
76B814M	14	20	9	12	80	70	12 / 240
76B815M	15	21	10	12	80	77	12 / 240
76B816M	16	22	10	14	80	76	12 / 240
76B819M	19	26	13	15	80	112	10 / 120
76B821M	21	28	13	19	80	113	10 / 120

76C

- 110mm length easy to reach at confined spaces
- Extra depth dimension 63mm perfectly go through various bolts
- Press-fit structure with durability socket suitable for 18V power tools
- Ideal for construction assembling, scaffolding and roof work



KT NO.	mm	D1 mm	ℓ mm	d mm	L mm	g	
76C1108M	8	14.0	12	7	110	71	12 / 216
76C1109M	9	14.0	14	8	110	64	12 / 216
76C1110M	10	15.0	15	9	110	67	12 / 216
76C1111M	11	17.0	17	10	110	84	10 / 180
76C1112M	12	17.0	18	11	110	74	10 / 180
76C1113M	13	18.0	20	12	110	79	10 / 180
76C1114M	14	20.0	21	13	110	99	10 / 180
76C1117M	17	24.0	26	16	110	139	10 / 180
76C1119M	19	26.0	29	18	110	158	10 / 180
76C1121M	21	28.0	30	20	110	161	8 / 144
76C1123M	23	29.8	30	22	110	200	8 / 96
76C1124M	24	32.0	30	23	110	216	8 / 96

Impact Construction Socket Set

1010CMR

- Plastic case size (mm) :
- 257 x200 x 52 (0.095 cuft)

10 PC.

Contents		Kg 1.66	1 / 8
	76C	8, 10, 12, 13, 14, 17, 19, 21, 23, 24	

770

- Socket adapter
- Ball retainer type
- DIN 7428



KT NO.	Size	Overall length (mm)	g	set /
7702-25	1/4"	25	6	20 / 200
7702-50	1/4"	50	13	10 / 100
7702-75	1/4"	75	23	10 / 100
7703-50	3/8"	50	23	6 / 84
7704-50	1/2"	50	24	6 / 72

774

- Bit adapter
- Wobble function provides up to 15° accessibility

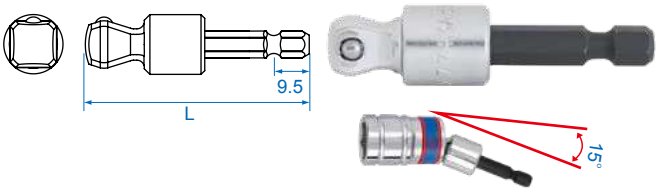

KT NO.	Size	L mm	g	set /
7743-56	3/8"	56	30	6 / 72
7744-60	1/2"	60	42	6 / 72

Power Bit Pocket Case

PAT.

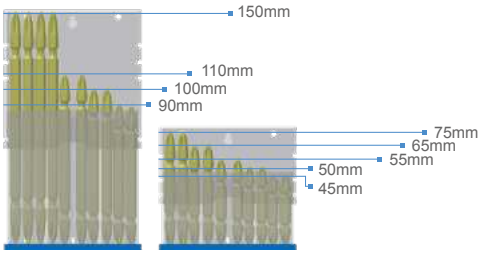

Spot Weld Drill Bit

7E511

- Material : HSS M35
- Special drill bit for removal of spot welds effectively
- Two cutting edge

KT NO.	Diameter mm	Length mm	g	
7E51180-60	8	60	32	100 / 600
7E51180-80	8	80	35	100 / 600

Titanium Coated HSS Drill Bit Set

11101SQ

1/4"

- Titanium coated HSS drill set with standard 1/4" hex shank that will fit cordless screwdrivers, hand drills and impact drivers etc. or use in standard drill chuck
- Suitable for use with steel, wood, plastic etc
- Titanium nitride drill bits run cooler, drill smoother and last longer than standard bits
- High speed steel
- 120 deg. tips
- 1/4" hex shank for fast changes

Ø mm	Overall length mm
1.5	62
2	69
2.5	77
3	82
3.2	85
3.5	90
4	95
4.5	100
4.8	105
5	106

10 PC.

Power Driving Set

1035MR 1/4"

• Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents — 0.62 Kg — set / 1 / 32

	1025S	3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
	1025P	PH1 x 2, PH2 x 2 ø6mm, PH2 ø4.7mm, PH3
	1025T	T15, T20 x 2, T25 x 2, T30 x 2, T40
	1025H	H3, H4, H5, H6
	1025Z	PZ2 x 2
	7E111	2.5, 3.0, 3.5, 4.0, 5.0
	754-90	1/4"
	7400P	PH2
	761M x 65L	8, 10, 13
	752-60	1/4"

35 PC.

1036MR 1/4"

• Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents — 0.59 Kg — set / 1 / 32

	1025S	3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
	1025P	PH1 x 2, PH2 x 2 ø6mm, PH2 ø4.7mm, PH3
	1025T	T15, T20 x 2, T25 x 2, T30 x 2, T40
	1025H	H3, H4, H5, H6
	1025Z	PZ2 x 2
	7150T	T20, T25, T30
	7150Z	PZ2 x 2
	7150S	5.5 x 0.8
	7450P	PH2 x 2
	761M x 65L	8, 10, 13
	753-63	1/4"

36 PC.

1044MR 1/4"

• Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents — 0.63 Kg — set / 1 / 32

	1025S	3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
	1025P	PH1 x 2, PH2 x 2 ø6mm, PH2 ø4.7mm, PH3
	1025T	T10, T15, T20 x 2, T25, T27, T30, T40
	1025H	H3, H4, H5, H6
	1025U	T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H
	1025Z	PZ2 x 2
	7170T	T15, T20, T25,
	7170P	PH2 x 2
	7170Z	PZ2
	7150S	4.0 x 0.8, 6.0 x 1.0
	761M x 65L	6, 8, 10
	753-63	1/4"

44 PC.

Power Driving Set

1045MR 1/4"

• Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents 0.64 / 1 / 32

	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2
	1025P	PH2 x 2 ø4.7mm
	1025T	T10, T15, T20, T25, T27, T30, T35, T40
	1025H	H2, H3, H4, H5, H6
	1025U	T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H
	1025Z	PZ1, PZ2, PZ3
	1025R	RB1, RB2, RB3
	1550P	PH1, PH2 x 2, PH3
	7150P	PH2
	7E111	3, 4, 5
	761M x 65L	8, 10, 13
	750-50A	1/4"
	7702-50	1/4" DR.

45 PC.

1049CQ 1/4"

• Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents 0.51 / 1 / 32

	1025P	PH1 x 2, PH2 x 2 ø6mm, PH2 x 2 ø4.7mm, PH3 x 2
	1025S	4.0 x 0.5 x 2, 5.5 x 0.8 x 2, 6.5 x 1.2 x 2
	1025H	H2, H2.5, H3, H4, H5, H6, H7, H8
	1025Z	PZ1 x 2, PZ2 x 2, PZ3 x 2
	1025U	T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H
	1025T	T9, T10, T15, T20, T25, T27, T30,T40
	1025R	RB1, RB2,
	2141	1/4" DR. x 1/4"H
	750-50A	1/4"
	7702-25	1/4" DR.

49 PC.

Power Driving Set

1045MR01-EB

45 PC.

Contents — 0.97 Kg — 1 / 12

	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2
	1025P	PH2 x 2 ø4.7mm
	1025T	T10, T15, T20, T25, T27, T30, T35, T40
	1025H	H2, H3, H4, H5, H6
	1025U	T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H
	1025Z	PZ1, PZ2, PZ3
	1025R	RB1, RB2, RB3
	1550P	PH1, PH2 x 2, PH3
	7150P	PH2
	7E111	3, 4, 5
	761M x 65L	8, 10, 13
	750-50A	1/4"
	7702-50	1/4"
	759-140	

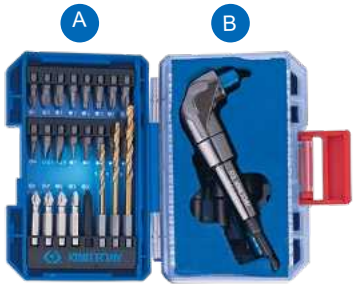

2547MR-EB

47 PC.

Contents — 1.0 Kg — 1 / 12

	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
	2375M	E4, E5, E6, E7, E8, E10
	2031	PH1, PH2, PH3
	2032	3.5, 4, 5.5, 6.5, 8
	2033	T8, T9, T10, T15, T20, T25, T27, T30, T40
	2035	H3, H4, H5, H6, H8
	2038	PZ1, PZ2
	2813	1/4"F x 3/8"M
	7702-50	1/4" DR.
	7703-50	3/8" DR.
	7704-50	1/2" DR.

Power Driving Set

1041CQ-EB

Contents — 2.1 Kg — 1 / 12

1636M	M5, M6, M8, M9, M10, M12, M14
1636U	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H, T55H, T60H
1636H	H5, H6, H8, H10
1680M	M5, M6, M8, M9, M10, M12, M14
1680U	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H, T55H, T60H
414810M	





41 PC.

Hex Key & Set

KT No. & D1

- Material - SNCM - V alloy steel
- Finishing - chrome plated

1145MR

- Standard arm type
- Allen head
- DIN ISO 2936

KT NO.	mm	mm	mm	g	
114515MR	H1.5	16	47	1	20 / 400
114502MR	H2	18	52	1	20 / 400
114525MR	H2.5	21	59	3	20 / 400
114503MR	H3	24	66	5	20 / 400
114504MR	H4	30	74	10	20 / 400
114505MR	H5	33	85	18	20 / 400
114555MR	H5.5	36	91	23	10 / 200
114506MR	H6	38	97	29	10 / 200
114507MR	H7	41	102	43	10 / 200
114508MR	H8	44	108	58	10 / 200
114510MR	H10	50	122	101	10 / 200

1145SR

KT NO.	inch	mm	mm	g	
114502SR	1/16	18	49	1	20 / 400
114525SR	5/64	20	52	1.5	20 / 400
114503SR	3/32	21	56	3	20 / 400
114504SR	1/8	25	63	5	20 / 400
114505SR	5/32	28	70	9	20 / 400
114506SR	3/16	31	77	15	20 / 400
114508SR	1/4	37	91	31	10 / 200
114510SR	5/16	42	106	55	10 / 200
114512SR	3/8	47	120	93	10 / 120
114518SR	9/16	59	160	267	6 / 72
114520SR	5/8	64	175	362	6 / 72

1125MR

- Extra long arm type
- Allen head
- DIN ISO 2936

KT NO.	mm	mm	mm	g	
112515MR	H1.5	16	92	1	20 / 400
112502MR	H2	18	102	3	20 / 400
112525MR	H2.5	21	115	5	20 / 400
112503MR	H3	23	129	9	20 / 480
112504MR	H4	29	144	17	20 / 300
112505MR	H5	33	165	31	20 / 300
112506MR	H6	38	186	51	20 / 400
112507MR	H7	41	197	74	20 / 240
112508MR	H8	44	208	100	10 / 100
112510MR	H10	50	234	176	10 / 100
112512MR	H12	57	262	286	8 / 48
112514MR	H14	70	294	445	8 / 48
112517MR	H17	80	337	770	4 / 32
112519MR	H19	89	380	863	4 / 16
112522MR	H22	102	422	1590	2 / 16

1125SR

KT NO.	inch	mm	mm	g	
112502SR	1/16	16	92	2	20 / 400
112525SR	5/64	18	102	3	20 / 400
112503SR	3/32	21	115	5	20 / 400
112504SR	1/8	23	129	9	20 / 400
112505SR	5/32	29	144	17	20 / 300
112506SR	3/16	33	165	28	20 / 300
112508SR	1/4	38	186	57	10 / 100
112510SR	5/16	44	208	100	10 / 100
112512SR	3/8	50	234	160	10 / 100
112516SR	1/2	57	262	319	8 / 48
112518SR	9/16	70	294	459	8 / 48

KT NO.	PC.	Spec.		Contents	Kg	
20218MR	8	Knife type		H2, H2.5, H3, H4, H5, H6, H8, H10	0.29	12 / 72
20219MR	9	Standard arm	1145MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.33	6 / 48
20219SR	9		1145SR	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.33	6 / 48
20208MR	8	Extra long arm	1125MR	H2, H2.5, H3, H4, H5, H6, H8, H10	0.43	8 / 48
20209MR	9		1125MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.49	8 / 48
20209SR02	9		1125SR	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.47	8 / 48

Hex Key Set

20208MR01 | 20208SR01

8 PC.

KT NO.	Spec.	Contents	1.25 / 1 / 20
20208MR01	Extra long arm	1125MR	H3, H4, H5, H6, H8, H10, H12, H14
20208SR01		1125SR	1/8, 5/32, 3/16, 1/4, 5/16, 3/8, 1/2, 9/16

20210MR

- Metal case size (mm) :
- 372 x 153 x 40 (0.08 cuft)

10 PC.

Spec.	Contents		3.03 / 1 / 6
Extra long arm	1125MR	H3, H4, H5, H6, H7, H8, H10, H12, H14, H17	

L- wrench Set With Display Stnad

2020H0MR

- 5mm durable acrylic sheets to increase structural strength
- Transparent design for demonstrating product feature
- Great capacity, suitable for multi-size
- Size : 220 x 260 x 270mm

KT NO. 87125

80 PC.

Spec.	Contents		7.68 / 1 / 4	Each Q'ty
Extra long arm	1125MR	H2, H2.5, H3, H4, H5, H6, H7, H8, H10, H12		8

Spline L- wrench & Set

1146MR

- Standard arm type
- For spline head screw

KT NO.	Size	mm	mm		
114605MR	M5	29	83	15	20 / 320
114606MR	M6	33	90	24	20 / 320
114608MR	M8	39	98	47	10 / 300
114610MR	M10	44	111	82	10 / 200
114612MR	M12	53	126	127	10 / 180

1126MR

- Extra long arm type

KT NO.	Size	mm	mm		
112605MR	M5	33	165	29	20 / 300
112606MR	M6	38	186	47	20 / 300
112608MR	M8	44	208	91	10 / 100
112610MR	M10	50	234	160	10 / 100
112612MR	M12	53	264	239	10 / 80

20505PR01 | 20515PR01

5 PC.

20505PR01

20515PR01

KT NO.	Spec.	Contents		
20505PR01	Standard arm type	1146MR	M5, M6, M8, M10, M12	0.33 6 / 54
20515PR01	Extra long arm type	1126MR	M5, M6, M8, M10, M12	0.63 4 / 32

Ball Hex Key & Set

KT No. & D1

- Material - SNCM - V alloy steel
- Finishing - chrome plated

1130MR

- Long arm with ball point type
- DIN ISO 2936

KT NO.	mm	mm	mm	g	
113015MR	H1.5	16	64	1	20 / 400
113002MR	H2	18	77	2	20 / 400
113025MR	H2.5	21	88	4	20 / 400
113003MR	H3	23	93	7	20 / 400
113004MR	H4	29	104	14	20 / 400
113005MR	H5	33	120	25	20 / 300
113006MR	H6	38	141	41	10 / 160
113008MR	H8	44	158	84	10 / 150
113010MR	H10	50	180	145	10 / 150

1130SR



KT NO.	inch	mm	mm	g	
113002SR	1/16	18	80.0	2	20 / 400
113025SR	5/64	19	85.0	2	20 / 400
113003SR	3/32	21	90.0	4	20 / 400
113004SR	1/8	24	101.0	8	20 / 400
113005SR	5/32	27	111.0	14	20 / 400
113006SR	3/16	30	121.0	24	20 / 300
113007SR	7/32	34	131.0	31	10 / 150
113008SR	1/4	36	142.0	44	10 / 150
113010SR	5/16	42	162.5	78	10 / 150
113012SR	3/8	46	183.0	138	10 / 150

1120MR

- Extra long arm with ball point type
- DIN ISO 2936

KT NO.	mm	mm	mm	g	
112015MR	H1.5	16	92	1	20 / 400
112002MR	H2	18	102	3	20 / 400
112025MR	H2.5	21	115	5	20 / 400
112003MR	H3	23	129	9	20 / 480
112004MR	H4	29	144	17	20 / 300
112005MR	H5	33	165	31	20 / 300
112006MR	H6	38	186	51	20 / 400
112007MR	H7	41	197	73	20 / 400
112008MR	H8	44	208	99	10 / 100
112010MR	H10	50	234	174	10 / 100

20107MR01

20109MR

20119MR01

KT NO.	PC.	Spec.		Contents	Kg	
20107MR01	7	Long arm / ball	1130MR	H2.5, H3, H4, H5, H6, H8, H10	0.37	10 / 60
20107SR	7		1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.36	10 / 60
20108MR	8	Extra long arm / ball	1120MR	H2, H2.5, H3, H4, H5, H6, H8, H10	0.43	8 / 48
20109MR	9		1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.49	8 / 48
20119MR01	9		1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H7, H8	0.36	6 / 48
20110MR	9	Long arm / ball	1130MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.39	6 / 60
20129SR	9		1130SR	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.39	6 / 60

9 PC. Color Coded Extra Long Arm Ball End Hex Key Set

20109MW

- Color coded according to size makes it easy to distinguish and allows for faster work
- This professional ball hex key is made of S2 material
- The unique design at the bottom of the ball head has an inclination angle of 25 degrees that allows for easy operation in narrow spaces
- The rack can be opened, and the wrenches are easy to take out
- Easy to identify with the internal engravings



color	mm	L mm
	H1.5	92
	H2	102
	H2.5	115
	H3	129
	H4	144
	H5	165
	H6	186
	H8	208
	H10	234

KT NO.	PC.	Spec.	Contents	Kg	
20109MW	9	Extra long arm / ball	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.45	6 / 36

20109MW-S

- Paper display stand size(mm) :
- 238 x 95 x 303 (0.24 CUFT)

8 Sets

Contents		Kg	
20109MW	x 8 Sets	3.57	1 / 4

Star L- wrench

KT No. & D1

- Material - SNCM - V alloy steel
- Finishing - chrome plated

1143R

- Standard arm type
- For torx head screw

KT NO.	Size	mm	mm	g	
114310R	T10	19	49	3	20 / 400
114315R	T15	19.5	56.5	5	20 / 400
114320R	T20	23	62	7	20 / 400
114325R	T25	24.5	69.5	10	20 / 400
114327R	T27	29	77	14	20 / 400
114330R	T30	35	86	23	10 / 200
114340R	T40	42	97	37	10 / 200
114345R	T45	47	110	54	10 / 200
114350R	T50	50	124	76	10 / 200

1147R

- Standard arm type
- Tamper-resistant type
- For torx head screw



KT NO.	Size	mm	mm	g	
114710R	T10H	19	49	3	20 / 400
114715R	T15H	19.5	56.5	5	20 / 400
114720R	T20H	23	62	7	20 / 400
114725R	T25H	24.5	69.5	10	20 / 400
114727R	T27H	29	77	14	20 / 400
114730R	T30H	35	86	23	10 / 200
114740R	T40H	42	97	36	10 / 200
114745R	T45H	47	110	54	10 / 200
114750R	T50H	50	124	75	10 / 200

1123R

- Extra long arm type
- For torx head screw

KT NO.	Size	mm	mm	g	
112310R	T10	19	91	6	20 / 400
112315R	T15	19.5	103.5	9	20 / 400
112320R	T20	22	114	12	20 / 400
112325R	T25	24.5	129.5	18	20 / 300
112327R	T27	29	145	25	20 / 300
112330R	T30	34	166	40	20 / 300
112340R	T40	39	182	61	10 / 100
112345R	T45	44	202	89	10 / 100
112350R	T50	49	226	126	10 / 100

1127R

- Extra long arm type
- Tamper-resistant type
- For torx head screw

KT NO.	Size	mm	mm	g	
112710R	T10H	19	91	5	20 / 400
112715R	T15H	19.5	103.5	8	20 / 400
112720R	T20H	22	114	12	20 / 400
112725R	T25H	24.5	129.5	17	20 / 300
112727R	T27H	29	145	25	20 / 300
112730R	T30H	34	166	40	20 / 300
112740R	T40H	39	182	60	10 / 100
112745R	T45H	44	202	89	10 / 100
112750R	T50H	49	226	126	10 / 100

Star L-wrench Set

knife type

Standard arm

Extra long arm

KT NO.	PC.	Spec		Contents	Kg	
20307PR	7	Standard arm	1143R	T10, T15, T20, T25, T27, T30, T40	0.13	15 / 120
20407PR	7	Standard arm / Tamper-resistant	1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H	0.13	15 / 120
20308PR	8	Knife type		T9, T10, T15, T20, T25, T27, T30, T40	0.20	12 / 72
20318PR	8			T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H	0.20	12 / 72
20309PR	9	Standard arm	1143MR	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.30	6 / 48
20319PR	9	Extra long arm	1123R	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.45	8 / 48
20409PR	9	Standard arm / Tamper-resistant	1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H,T50H	0.34	6 / 48
20419PR	9	Extra long arm / Tamper-resistant	1127R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H,T50H	0.47	8 / 48

Extension Pipe

- Material - Extension pipe: iron
  L-wrench: SNCM - V alloy steel
- Finishing - chrome plated

20002UB

128 g 6/ 36

Contents	Overall length (mm)	AØ mm	BØ mm
S : 5 x 6mm	110	11	10
L : 8 x 10mm	150	16	14

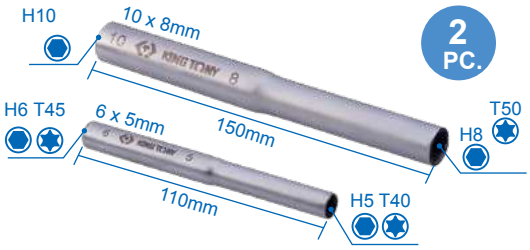

L- wrench & Extension Pipe Set



Caution :
Please be careful not to overtighten.
Do not use any other L-wrench that is incompatible with the pipe size.

KT NO.	PC.	Spec.		Contents	Kg	
20109MRU	11	Extra long arm / ball	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.62	11 / 66
			20002UB	5 x 6, 8 x 10		
20319PRU	11	Extra long arm	1123R	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.67	11 / 66
			20002UB	5(T40) x 6(T45), 8(T50) x 10		

Stubby L- wrench Set

- The "SPECIAL SHORT ARM" L1 length is designed to be 1/3 as short as other wrenches to allow easy work in cramped places
- The "SPECIAL SHORT ARM" is made with a 90 degree bend for high workability in small spaces without risk of pinched fingers

33% shorten



KT NO.	PC.	Spec.	Contents	Kg	
201A09MR	9	Extra long arm / ball	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.45	10 / 60
203A19PR	9	Extra long arm	T10, T15, T20, T25, T27, T30 T40, T45, T50	0.45	10 / 60

Ball Hex Key & Set

201B09MR

- Set of ball head offset key wrench, extra long arm



KT NO.	PC.	Spec.	Contents	Kg	
201B09MR	9	Extra long arm / ball	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.45	8 / 48

Ball End Star L-wrench Set

204B29PR

- Set of ball head offset key wrench, long modle, for torx internal screw



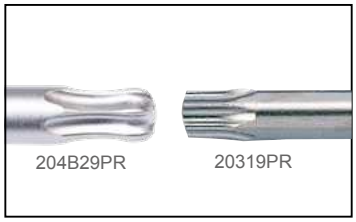

KT NO.	PC.	Spec.	Contents	Kg	
204B29PR	9	Standard arm / ball	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.37	6 / 48

Bicycle Repair Tool

20A16MR

- 16-in-1 bicycle repair tool set

Contents	300 g	10 / 60
H2, H2.5, H3, H4, H5, H6		
8, 9, 10 mm		
PH2		
5.0		
Spoke Wrench: 14GE	Extension bar 1/4" DR.	
Wrench: 8 / 10 / 15 mm		

20A17MR

- 20-in-1 bicycle repair tool set

Contents	305 g	10 / 60
H2, H2.5, H3, H4, H5, H6		
9, 10, 12, 13, 15		
PH2		
5.0		
Socket : 8mm		
Spoke Wrench: 14GE / 15GE / 0.136"		
Chain Wrench x 1	Tire Lever x 2	

Aluminum Folding Hex Key Wrench Set

20317MR

- 7-in-1 aluminum folding hex key wrench set

Spec	Contents	90 g	10 / 200
knife type	H1.5, H2, H2.5, H3, H4, H5, H6		

L- type Wrench

KT No. & D1

- Material - SNCM - V alloy steel
- Finishing - chrome plated with black tip

1160MR

- Hexagon with ball point head

KT NO.	mm	mm	mm	g	
116002MR	H2	95	145	14	10 / 200
116025MR	H2.5	95	145	17	10 / 200
116003MR	H3	95	145	20	10 / 200
116004MR	H4	95	145	29	10 / 200
116005MR	H5	150	215	66	10 / 200
116006MR	H6	150	215	84	10 / 200
116007MR	H7	150	215	105	10 / 200
116008MR	H8	200	280	188	10 / 80
116010MR	H10	200	280	265	10 / 80

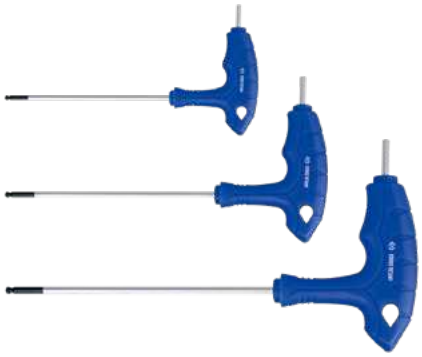

1165MR

- For hexagon head screw

KT NO.	mm	mm	mm	g	
116502MR	H2	95	145	14	10 / 200
116525MR	H2.5	95	145	17	10 / 200
116503MR	H3	95	145	20	10 / 200
116504MR	H4	95	145	29	10 / 200
116505MR	H5	150	215	66	10 / 200
116506MR	H6	150	215	84	10 / 200
116507MR	H7	150	215	107	10 / 200
116508MR	H8	200	280	190	10 / 80
116510MR	H10	200	280	289	10 / 80

1163TR

- For torx internal screw
- Tamper-resistant type

KT NO.	Size	mm	mm	g	
116310TR	T10	95	145	22	10 / 200
116315TR	T15	95	145	23	10 / 200
116320TR	T20	95	145	31	10 / 200
116325TR	T25	95	145	31	10 / 200
116327TR	T27	150	215	78	10 / 200
116330TR	T30	150	215	78	10 / 200
116340TR	T40	150	215	97	10 / 200
116345TR	T45	200	280	176	10 / 80
116350TR	T50	200	280	209	10 / 80

1163R

- For torx internal screw
- Tamper-resistant type

KT NO.	Size	mm	mm	g	
116310R	T10H	95	145	22	10 / 200
116350R	T50H	200	280	209	10 / 80

L- type Wrench Set

▶Tray

▶Shelf

KT NO.	PC.	Spec		Contents	Package	Kg	
22106MR	6	Ball & hex two way type	1160MR	H3, H4, H5, H6, H7, H8	Tray	0.68	1 / 20
22108MR	8		1160MR	H2, H2.5, H3, H4, H5, H6, H8, H10	Tray	0.97	1 / 10
22208MR	8	Hex head	1165MR	H2, H2.5, H3, H4, H5, H6, H8, H10	Tray	0.97	1 / 10
22306TR	6	torx head	1163TR	T10, T15, T20, T25, T30, T40	Tray	0.46	1 / 20
22309TR	9		1163TR	T10, T15, T20, T25, T27, T30, T40, T45, T50	Tray	1.00	1 / 10
22118MR	8	Ball & hex two way type	1160MR	H2, H2.5, H3, H4, H5, H6, H8, H10	Shelf	1.10	1 / 12
22218MR	8	Hex head	1165MR	H2, H2.5, H3, H4, H5, H6, H8, H10	Shelf	1.10	1 / 12
22319TR	9	torx head	1163TR	T10, T15, T20, T25, T27, T30, T40, T45, T50	Shelf	1.12	1 / 12

T - type Wrench

- Material - SNCM - V alloy steel
- Finishing - chrome plated with black tip

1150MR

- Hexagon with ball point head

KT NO.	mm	mm	mm	mm	g	
115002MR	H2	100	137	90	28	10 / 200
115025MR	H2.5	100	137	90	30	10 / 200
115003MR	H3	100	137	90	32	10 / 200
115004MR	H4	100	137	90	38	10 / 200
115005MR	H5	150	188	100	65	10 / 200
115006MR	H6	150	188	100	79	10 / 200
115008MR	H8	200	240	120	159	10 / 120
115010MR	H10	200	240	120	217	10 / 120

1155MR

- Hexagon head

1155SR

KT NO.	mm / inch	mm	mm	mm	g	
115502MR	H2	100	137	90	28	10 / 200
115525MR	H2.5	100	137	90	30	10 / 200
115503MR	H3	100	137	90	32	10 / 200
115504MR	H4	100	137	90	38	10 / 200
115505MR	H5	150	188	100	65	10 / 200
115506MR	H6	150	188	100	79	10 / 200
115508MR	H8	200	240	120	159	10 / 120
115510MR	H10	200	240	120	217	10 / 120
115525SR	5/64	100	137	90	19	10 / 200
115503SR	3/32	100	137	90	21	10 / 200
115504SR	1/8	100	137	90	25	10 / 200
115505SR	5/32	100	137	90	30	10 / 200
115506SR	3/16	150	188	100	56	10 / 200
115508SR	1/4	150	188	100	78	10 / 200
115510SR	5/16	200	240	120	158	10 / 120
115512SR	3/8	200	240	120	202	10 / 120

T - type Wrench & Set

KT No. & D1

- Material - SNCM - V alloy steel
- Finishing - chrome plated with black tip

1153R

- For torx head screw

KT NO.	Size	mm	mm	mm	g	
115310R	T10	100	137	90	40	10 / 200
115315R	T15	100	137	90	40	10 / 200
115320R	T20	100	137	90	40	10 / 200
115325R	T25	100	137	90	40	10 / 200
115327R	T27	150	188	100	73	10 / 200
115330R	T30	150	188	100	74	10 / 200
115340R	T40	150	188	100	88	10 / 200
115345R	T45	200	240	120	173	10 / 120
115350R	T50	200	240	120	173	10 / 120

11A3R

- For torx head screw

KT NO.	Size	mm	mm	mm	g	
11A310R	T10	200	237	90	53	12 / 192
11A315R	T15	200	237	90	53	12 / 192
11A320R	T20	200	237	90	53	12 / 192
11A325R	T25	200	237	90	53	12 / 192
11A327R	T27	200	238	100	86	10 / 160
11A330R	T30	200	238	100	86	10 / 160
11A340R	T40	200	238	100	105	10 / 160

KT NO.	PC.	Spec		Contents	Kg	
21108MR	8	Ball hex type	1150MR	H2, H2.5, H3, H4, H5, H6, H8, H10	1.10	1 / 12
21208MR	8	Hexagon type	1155MR	H2, H2.5, H3, H4, H5, H6, H8, H10	1.10	1 / 12
21208SR	8		1155SR	5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	1.10	1 / 12
21309PR	9	torx head type	1153R	T10, T15, T20, T25, T27, T30, T40, T45, T50	1.20	1 / 12

1195AM

- Hexagon head
- Perfect for when you need more leverage than a standard hex, or space is limited and you can't get a good swing on a standard wrench
- Spring and ball detent to secure the Sliding T
- It turns fasteners quickly and continuously with free spinning collar

- Speed & Efficiency

- Locking Stopper

- Extension

KT NO.	mm	mm	mm	g	
1195A02M	H2	65	125	25	10 / 200
1195A25M	H2.5	65	125	25	10 / 200
1195A03M	H3	65	125	25	10 / 200
1195A04M	H4	90	180	64	10 / 100
1195A05M	H5	90	180	70	10 / 100
1195A06M	H6	105	210	140	6 / 48
1195A08M	H8	125	250	230	4 / 48
1195A10M	H10	145	300	415	5 / 50

23208MR

KT NO.	PC.	Spec		Contents	Kg	
23208MR	8	Hexagon type	1195AM	H2, H2.5, H3, H4, H5, H6, H8, H10	1.64	1 / 6

T - handle Wrench

- Material - Chrome vanadium steel
- Finishing - chrome plated

1195M

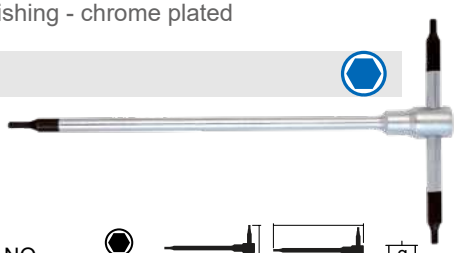

- 6 Points
- For hexagon head screw
- The handle pin can be removed for another wrench
- The 10mm size is with chrome plated end

KT NO.	mm	mm	mm		
119502M	H2	64	127	22	10 / 200
119525M	H2.5	64	127	22	10 / 200
119503M	H3	64	127	22	10 / 200
119504M	H4	90	181	64	10 / 200

KT NO.	mm	mm	mm		
119505M	H5	90	182	65	10 / 200
119506M	H6	105	210	135	6 / 48
119508M	H8	124	250	224	4 / 32
119510M	H10	145	300	386	5 / 50

2 in 1 Slide T-handle Wrench

New

577302

- Available for use with 1/4 DR. socket or 1/4" hex bit
- Aluminum sleeve for fast spin
- Slide T-handle design, flexible to use in many occasions

KT NO.	inch	mm	mm		
577302	1 / 4	150	250		

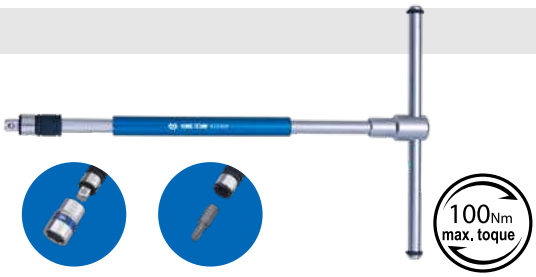

Available for use with 1/4"DR. socket and 1/4" hex bit

Wing Handle torx Screwdriver & Set

1153A

KT NO.	Size	mm	mm	mm		
1153A05R	T5	45	84	35	7	20 / 200
1153A06R	T6	45	84	35	7	20 / 200
1153A07R	T7	45	84	35	7	20 / 200
1153A08R	T8	45	84	35	7	20 / 200
1153A09R	T9	45	84	35	10	20 / 200
1153A10R	T10	45	84	35	10	20 / 200
1153A15R	T15	45	84	35	10	20 / 200
1153A20R	T20	45	84	35	10	20 / 200

23308PR

8 PC.

Contents 0.26 1 / 20

1153A T5, T6, T7, T8, T9, T10, T15, T20

Flag Handle torx Screwdriver & Set

1163A

KT NO.	Size	mm	mm	mm		
1163A05R	T5	45	84	31	6	20 / 200
1163A06R	T6	45	84	31	6	20 / 200
1163A07R	T7	45	84	31	6	20 / 200
1163A08R	T8	45	84	31	6	20 / 200
1163A09R	T9	45	84	31	9	20 / 200
1163A10R	T10	45	84	31	9	20 / 200
1163A15R	T15	45	84	31	9	20 / 200
1163A20R	T20	45	84	31	9	20 / 200

24308PR

8 PC.

Contents 0.27 1 / 20

1163A T5, T6, T7, T8, T9, T10, T15, T20

SCREWDRIVERS & L-WRENCHES & BITS

VDE INSULATED TOOLS

Notice. VDE insulated ratchet and VDE insulated socket and accessory series must be used with KING TONY VDE insulated tools.

They cannot be used with hand tools or other brands of VDE insulated tools.

GENUINE HICKORY
KING TONY
KING TONY
KING TONY

Standard Socket

2335VE 1/4"

- IEC 60900:2012

KT NO.	mm	L mm	g	
2335VE05M	5	41	14	5 / 45
2335VE06M	6	41	15	5 / 45
2335VE07M	7	41	15	5 / 45
2335VE08M	8	41	15	5 / 45
2335VE09M	9	41	16	5 / 45
2335VE10M	10	41	18	5 / 45
2335VE11M	11	41	21	5 / 45
2335VE12M	12	41	23	5 / 45
2335VE13M	13	41	23	5 / 45
2335VE14M	14	41	26	5 / 45

Bit Socket

2035VE 1/4"

- IEC 60900:2012

KT NO.	mm	L mm	g	
2035VE03	H3	54	18	5 / 45
2035VE04	H4	54	18	5 / 45
2035VE05	H5	54	19	5 / 45
2035VE06	H6	54	20	5 / 45

Ratchet

2771VE 1/4"

- IEC 60900:2012

KT NO.	Overall length mm	g	
2771VE-55	150	140	2 / 32

Accessory

2221VE 1/4"

- IEC 60900:2012

KT NO.	Overall length mm	g	
2221VE-04	100	47	4 / 36
2221VE-06	150	68	4 / 48

2178VE 1/4"

- IEC 60900:2012

KT NO.	mm	g	
2178VE-05	125	82	4 / 40

Insulated Tool Set

25VE01MRV 1/4"

- IEC 60900:2012
- Handy case size (mm) :
- 294 x 231 x 66 (1.835cuft)

18 PC.

Contents 1.30 kg 1 / 10

2335VE	5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2035VE	H3, H4, H5, H6
2221VE	4, 6
2771VE-55	2178VE-05

Standard Socket

3335VE 3/8"

- IEC 60900:2012

KT NO.	mm	L mm	g	
3335VE06M	6	44.5	25	5 / 45
3335VE07M	7	44.5	26	5 / 45
3335VE08M	8	44.5	27	5 / 45
3335VE09M	9	44.5	27	5 / 45
3335VE10M	10	44.5	28	5 / 45
3335VE11M	11	44.5	29	5 / 45
3335VE12M	12	44.5	29	5 / 45
3335VE13M	13	44.5	32	5 / 45
3335VE14M	14	44.5	35	5 / 45
3335VE15M	15	46	40	5 / 45
3335VE16M	16	46	42	5 / 45
3335VE17M	17	46	47	5 / 45
3335VE18M	18	46	48	5 / 60
3335VE19M	19	46	51	5 / 60
3335VE20M	20	46	55	5 / 60
3335VE21M	21	46	59	5 / 60
3335VE22M	22	46	63	5 / 60
3335VE24M	24	46	66	5 / 60

Deep Socket

3235VE 3/8"

- IEC 60900:2012

KT NO.	mm	L mm	g	
3235VE08M	8	79	52	5 / 50
3235VE10M	10	79	60	5 / 50
3235VE12M	12	79	68	5 / 50
3235VE14M	14	79	76	5 / 50

Bit Socket

3025VE 3/8"

- IEC 60900:2012

KT NO.	mm	Overall length mm	g	
3025VE04	H4	65	37	5 / 50
3025VE05	H5	65	38	5 / 50
3025VE06	H6	65	39	5 / 50
3025VE08	H8	65	42	5 / 50
3025VE10	H10	65	51	5 / 50

Ratchet

3771VE 3/8"

- IEC 60900:2012

KT NO.	Overall length mm	g	
3771VE-08	200	300	2 / 20

Accessory

3221VE 3/8"

- IEC 60900:2012

KT NO.	Overall length mm	g	
3221VE-06	150	150	4 / 48
3221VE-10	250	250	4 / 24

3178VE 3/8"

- IEC 60900:2012

KT NO.	mm	g	
3178VE-08	200	240	2 / 12

Insulated Tool Set

30VE31MRV 3/8"

- Handy case size (mm) : 372 x 422 x 92 (0.51cuft)

Contents 4.21 1 / 3

	3335VE	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19
	10F0VE	7, 8, 10, 12, 14
	3221VE	6, 10
	3771VE-08	
	1471	VDE PH1 x 100, PH2 x 100
	1472	VDE 3 x 75, 4 x 100, 5.5 x 125
	6116-07A	6216-06A
	6318-08A	6CB02

31 PC.

35VE01MRV 3/8"

- IEC 60900:2012
- Handy case size (mm) :389 x 229 x 66 (1.49cuft)

Contents 2.16 1 / 6

	3335VE	10, 11, 12, 13, 14, 17, 19
	3025VE	5, 6, 8
	3221VE	6, 10
	3771VE-08	3178VE-08

14 PC.

Standard Socket

4335VE 1/2"

- IEC 60900:2012

KT NO.	mm	L mm	g	
4335VE08M	8	55	54	5 / 40
4335VE10M	10	55	55	5 / 40
4335VE11M	11	55	57	5 / 40
4335VE12M	12	55	58	5 / 40
4335VE13M	13	55	59	5 / 40
4335VE14M	14	55	62	5 / 40
4335VE15M	15	55	60	5 / 40
4335VE16M	16	55	60	5 / 40
4335VE17M	17	55	70	5 / 50
4335VE18M	18	55	77	5 / 50
4335VE19M	19	55	72	5 / 50
4335VE20M	20	55	80	5 / 50
4335VE21M	21	55	73	5 / 50
4335VE22M	22	55	87	5 / 50
4335VE24M	24	55	96	5 / 50
4335VE27M	27	59	125	5 / 50
4335VE30M	30	59	146	5 / 50
4335VE32M	32	59	170	5 / 50

Bit Socket

4025VE 1/2"

- IEC 60900:2012

KT NO.	mm	Overall length mm	g	
4025VE04	H4	75	78	5 / 50
4025VE05	H5	75	78	5 / 50
4025VE06	H6	75	79	5 / 50
4025VE08	H8	75	80	5 / 50
4025VE10	H10	75	89	5 / 50

4035VE 1/2"

- IEC 60900:2012

KT NO.	mm	Overall length mm	g	
4035VE04	H4	120	99	5 / 50
4035VE05	H5	120	99	5 / 50
4035VE06	H6	120	100	5 / 50
4035VE08	H8	120	102	5 / 50
4035VE10	H10	120	121	5 / 50

Ratchet

4771VE 1/2"

- IEC 60900:2012

KT NO.	Overall length mm	g	
4771VE-10	250	570	2 / 20

Accessory

4251VE 1/2"

- IEC 60900:2012

KT NO.	Overall length mm	g	
4251VE-05	125	210	4 / 40
4251VE-10	250	410	4 / 40

4178VE 1/2"

- IEC 60900:2012

KT NO.	mm	g	
4178VE-08	200	330	2 / 12

Insulated Tool Set

45VE01MRV 1/2"

- IEC 60900:2012
- Handy case size (mm) : 389 x 229 x 66 (1.49cuft)

Contents			Kg 3.22	1 / 6
	4335VE	8, 10, 12, 13, 14, 17, 19, 21, 22, 24		
	4025VE	H8, H10		
	4251VE	5, 10		
	4771VE-10	4178VE-08		

16 PC.

Open End Wrench & Set

10F0VE

- IEC 60900:2012

KT NO.	Size mm	L mm	g	
10F0VE-07	7	88	20	5 / 50
10F0VE-08	8	104	26	5 / 50
10F0VE-09	9	104	26	5 / 50
10F0VE-10	10	114	40	5 / 50
10F0VE-11	11	124	60	5 / 50
10F0VE-12	12	124	60	5 / 50
10F0VE-13	13	154	90	5 / 50
10F0VE-14	14	154	90	5 / 50
10F0VE-16	16	170	125	5 / 50
10F0VE-17	17	170	125	5 / 50

KT NO.	Size mm	L mm	g	
10F0VE-18	18	180	150	5 / 50
10F0VE-19	19	180	150	5 / 50
10F0VE-20	20	202	215	5 / 50
10F0VE-21	21	202	215	5 / 50
10F0VE-22	22	202	215	5 / 50
10F0VE-23	23	238	323	5 / 40
10F0VE-24	24	237	318	5 / 40

▶MRN : Tetoron pouch bag

KT NO.	PC.		Contents	Package	Kg	
12FVE08MRN	8	10F0VE	10, 11, 12, 13, 14, 17, 18, 19	Tetoron	0.91	1 / 10
12FVE10MRN	10		10, 11, 12, 13, 14, 16, 17, 18, 19, 22	Tetoron	1.28	1 / 10

75° Offset Ring Wrench

10G0VE

- IEC 60900:2012

KT NO.	Size mm	L mm	g	
10G0VE-07	7	149	62	5 / 50
10G0VE-08	8	164	70	5 / 50
10G0VE-09	9	164	70	5 / 50
10G0VE-10	10	174	80	5 / 50
10G0VE-11	11	184	90	5 / 50
10G0VE-12	12	184	90	5 / 50
10G0VE-13	13	205	140	5 / 40
10G0VE-14	14	205	140	5 / 40
10G0VE-15	15	218	164	5 / 40

KT NO.	Size mm	L mm	g	
10G0VE-16	16	221	185	5 / 40
10G0VE-17	17	221	185	5 / 40
10G0VE-18	18	237	235	5 / 50
10G0VE-19	19	237	235	5 / 50
10G0VE-21	21	257	295	5 / 40
10G0VE-22	22	257	295	5 / 40
10G0VE-24	24	287	390	5 / 40

Adjustable Wrench

3611VE

- IEC 60900:2012

KT NO.	mm	L mm	g	
3611VE-06	24	164	167	4 / 32
3611VE-08	28	212	273	4 / 32
3611VE-10	32	260	497	4 / 32
3611VE-12	38	310	679	4 / 24

VDE Insulated Cable Knife With Straight Blade New

7939VE-01

- IEC DIN EN 60900
- Straight blade design
- Ergonomically shaped insulating handle for more comfortable grip
- With blade protection sheath, more convenient to store and carry
- The blade is made of 420 stainless steel material
- TPR handle material

- Suitable for stripping thick wires and cables

KT NO.	Blade length mm	L mm	g	
7939VE-01	50	200	106	10/50

VDE Insulated Cable Knife With Hooked Blade New

7939VE-07

- IEC DIN EN 60900
- Hook type, sickle shaped blade design
- Ergonomically shaped insulating handle for more comfortable grip
- With blade protection sheath, more convenient to store and carry.
- The blade is made of 420 stainless steel material
- TPR handle material

- Suitable for stripping thick wires and cables

- Elliptical Streamline, No Damage to the inner core of the wire

KT NO.	Blade length mm	L mm	g	
7939VE-07	45	190	117	10/50

VDE Insulated Electricians Scissors New

6AB13VE-06

- IEC DIN EN 60900
- High hardness blades and anti-slip serrated edge for making precise cuts
- Ergonomically shaped insulating handle for more comfortable grip
- The blade is made of 420 stainless steel material with serrated edges
- TPR handle material

- Strip notch in the blade for effective wire and cable stripping

KT NO.	Overall length mm		Cutting Length mm	g	
	inch	mm			
6AB13VE-06	6"	160	45	100	6/48

- Grip material-TPR
- Polished head
- Chrome vanadium steel
- IEC DIN EN 60900

Combination Pliers

6116

KT NO.	L inch	L mm	ø mm Cutting capacities				g	
6116-07A	7-1/2	185	4.0	3.0	2.0	1.6	290	10 / 60
6116-08A	8	200	4.0	3.0	2.0	1.6	386	10 / 60

Cable Cutting Pliers

6146

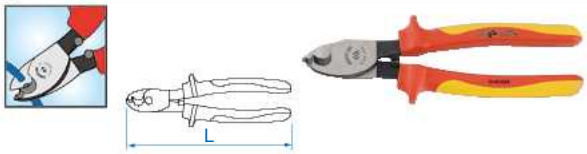

KT NO.	L inch	L mm	ø mm	g	
6146-08A	8-1/4	214	14	360	10 / 60

Diagonal Cutting Pliers

6216



KT NO.	L inch	L mm	ø mm Cutting capacities				g	
6216-06A	6-1/2	167	4.0	2.8	2.0	1.6	230	10 / 60

Heavy Duty Diagonal Cutting Pliers

6236



KT NO.	L inch	L mm	ø mm Cutting capacities				g	
6236-07A	7-1/2	190	5.0	3.5	2.4	2.0	280	10 / 60

Long Nose Pliers

6318



KT NO.	L inch	L mm	ø mm Cutting capacities				g	
6318-08A	8-1/4	210	4.0	2.8	2.0	1.6	230	10 / 60

Bent Nose Pliers

6336

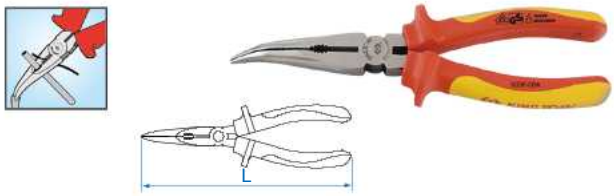

KT NO.	L inch	L mm	ø mm Cutting capacities				g	
6336-08A	8	200	4.0	3.0	2.0	1.6	250	10 / 60

Groove Joint Pliers

6516

- Box joint

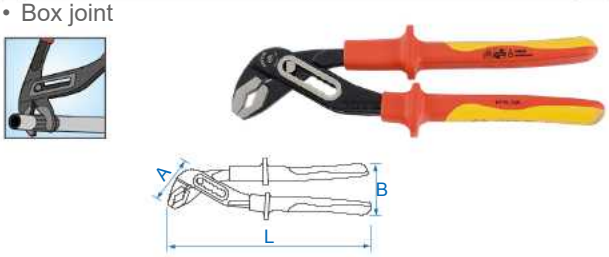

KT NO.	A mm	B mm	L inch	L mm	mm	g	
6516-10A	55	63	10	250	36	420	10 / 50

Stripping Pliers

6716

- With spring

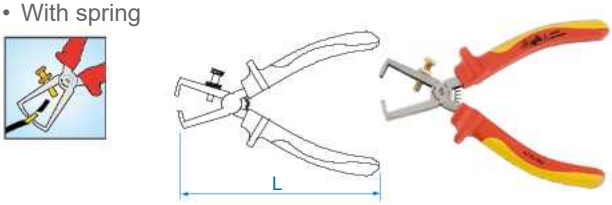

KT NO.	L inch	L mm	ø mm	Wire stripper mm²	g	
6716-06A	6-1/4	160	5	10	205	10 / 60

Insulated Pliers Set

40603GP

3 PC.

Contents — 0.89 kg — 1 / 20

6116-07A — 6318-08A — 6216-06A

Insulated Screwdriver

KT No. & D1

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip

1471

- Phillips head, round shank
- IEC 60900:2012

KT NO.	No.	mm	inch	mm	g	
14710003	PH0	75	3	3.0	37	12 / 144
14710104	PH1	100	4	4.5	54	12 / 216
14710204	PH2	100	4	6.0	77	12 / 144
14710306	PH3	150	6	8.0	135	12 / 144

147E

- Terminal Block Screwdriver
- Phillips / Slotted hand, round shank
- IEC 60900:2012

KT NO.	No.	mm	inch	mm	g	
147E0104	SL/PH1	100	4	4.5	61	12 / 216
147E0204	SL/PH2	100	4	6.0	85	12 / 144

1472

- Slotted head, round shank
- IEC 60900:2012

KT NO.	mm	inch	mm	mm	inch	mm	g	
14722503	2.5	3/32	0.4	75	3	2.5	35	12 / 144
14720303	3	1/8	0.5	75	3	3.0	38	12 / 144
14720404	4	3/16	0.8	100	4	4.0	44	12 / 96
14723504	3.5	1/8	0.6	100	4	3.5	54	12 / 144
14725505	5.5	7/32	1	125	5	5.5	72	12 / 144
14726506	6.5	1/4	1.2	150	6	6.5	87	12 / 144
14720807	8	5/16	1.2	175	7	8.0	143	12 / 144

1474

- Square head, round shank
- IEC 60900:2012

KT NO.	Size	mm	inch	mm	g	
14740105	RB1	125	5	5.5	72	12 / 144
14740206	RB2	150	6	6.5	87	12 / 144

1478

- Pozidriv head, round shank
- IEC 60900:2012

KT NO.	Size	mm	inch	mm	g	
14780104	PZ1	100	4	4.5	54	12 / 96
14780204	PZ2	100	4	6.0	77	12 / 144
14780306	PZ3	150	6	8.0	135	12 / 144

Insulated Screwdriver Set

New

30618MR

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip
- Testing Screwdriver

8 PC.

Contents			Kg	
14710104	⊕	PH1 x 100	0.85	1 / 15
14710204	⊕	PH2 x100		
14710306	⊕	PH3 x150		
14720404	⊖	4 x 100		
14725505	⊖	5.5 x 125		
14726506	⊖	6.5 x 150		
14720807	⊖	8 x 175		
6CB02		100~250V(testingrange)		

Insulated Screwdriver Set

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip

KT NO.	PC.	Contents		Kg 0.86 / 1 / 20
30606MR	6	⊕	1471	PH0 x 75, PH2 x 100, PH3 x 150
		⊖	1472	3 x 75, 4 x 100, 6.5 x 150
30607MR	7	⊖	1472	4 x 100, 5.5 x 125, 6.5 x 150, 8.0 x 175
		✱	1478	PZ1 x 100, PZ2 x 100, PZ3 x 150
30607MR02	7	⊕	1471	PH1 x 100, PH2 x 100
		⊖	1472	4 x 100, 5.5 x 125, 6.5 x 150
		■	1474	1 x 125, 2 x 150
30617MR	7	⊕	1471	PH1 x 100, PH2 x 100, PH3 x 150
		⊖	1472	4 x 100, 5.5 x 125, 6.5 x 150, 8.0 x 175

KT NO.	PC.			Contents	Kg 0.50 / 1 / 30
30605MR	5	⊖	1472	4 x 100, 5.5 x 125, 6.5 x 150	
		✱	1478	PZ1 x 100, PZ2 x 100	
30615MR	5	⊕	1471	PH1 x 100, PH2 x 100	
		⊖	1472	4 x 100, 5.5 x 125, 6.5 x 150	

Tool Box Set

9052-001MRV

- Plastic case size (mm) :
- 456 x 372 x 155 (0.93 cuft)

37 PC.

Pouch 1

6 PC.

Pouch 2

21 PC.

EVA foam(9-90110GPV)

10 PC.

Pouch 1

Contents

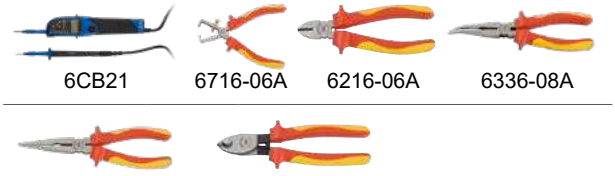

6CB21 | 6716-06A | 6216-06A | 6336-08A

6318-08A | 6146-08A

Pouch 2

Contents

⊕	1471	PH0 x 75, PH1 x 100, PH2 x 100
⊖	1472	3 x 75, 4 x 100, 5.5 x 125, 6.5 X 150
⊛	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
	20002UB	5 x 6mm, 8 x 10mm

6CB02 | 3611VE-08 | 79095-05M

EVA foam(9-90110GPV)

Contents

Kg 8.69 CUFT 1.16

6511-10 | 3611-10R | 76223-08 | 76210-10

7821-50 | 67B3-55 | 9CJ1120 | 6AG11-20

6311-08 | 67A1-07

VDE INSULATED TOOL

IC SPECIALIZED TOOLS & MEASURING TOOLS

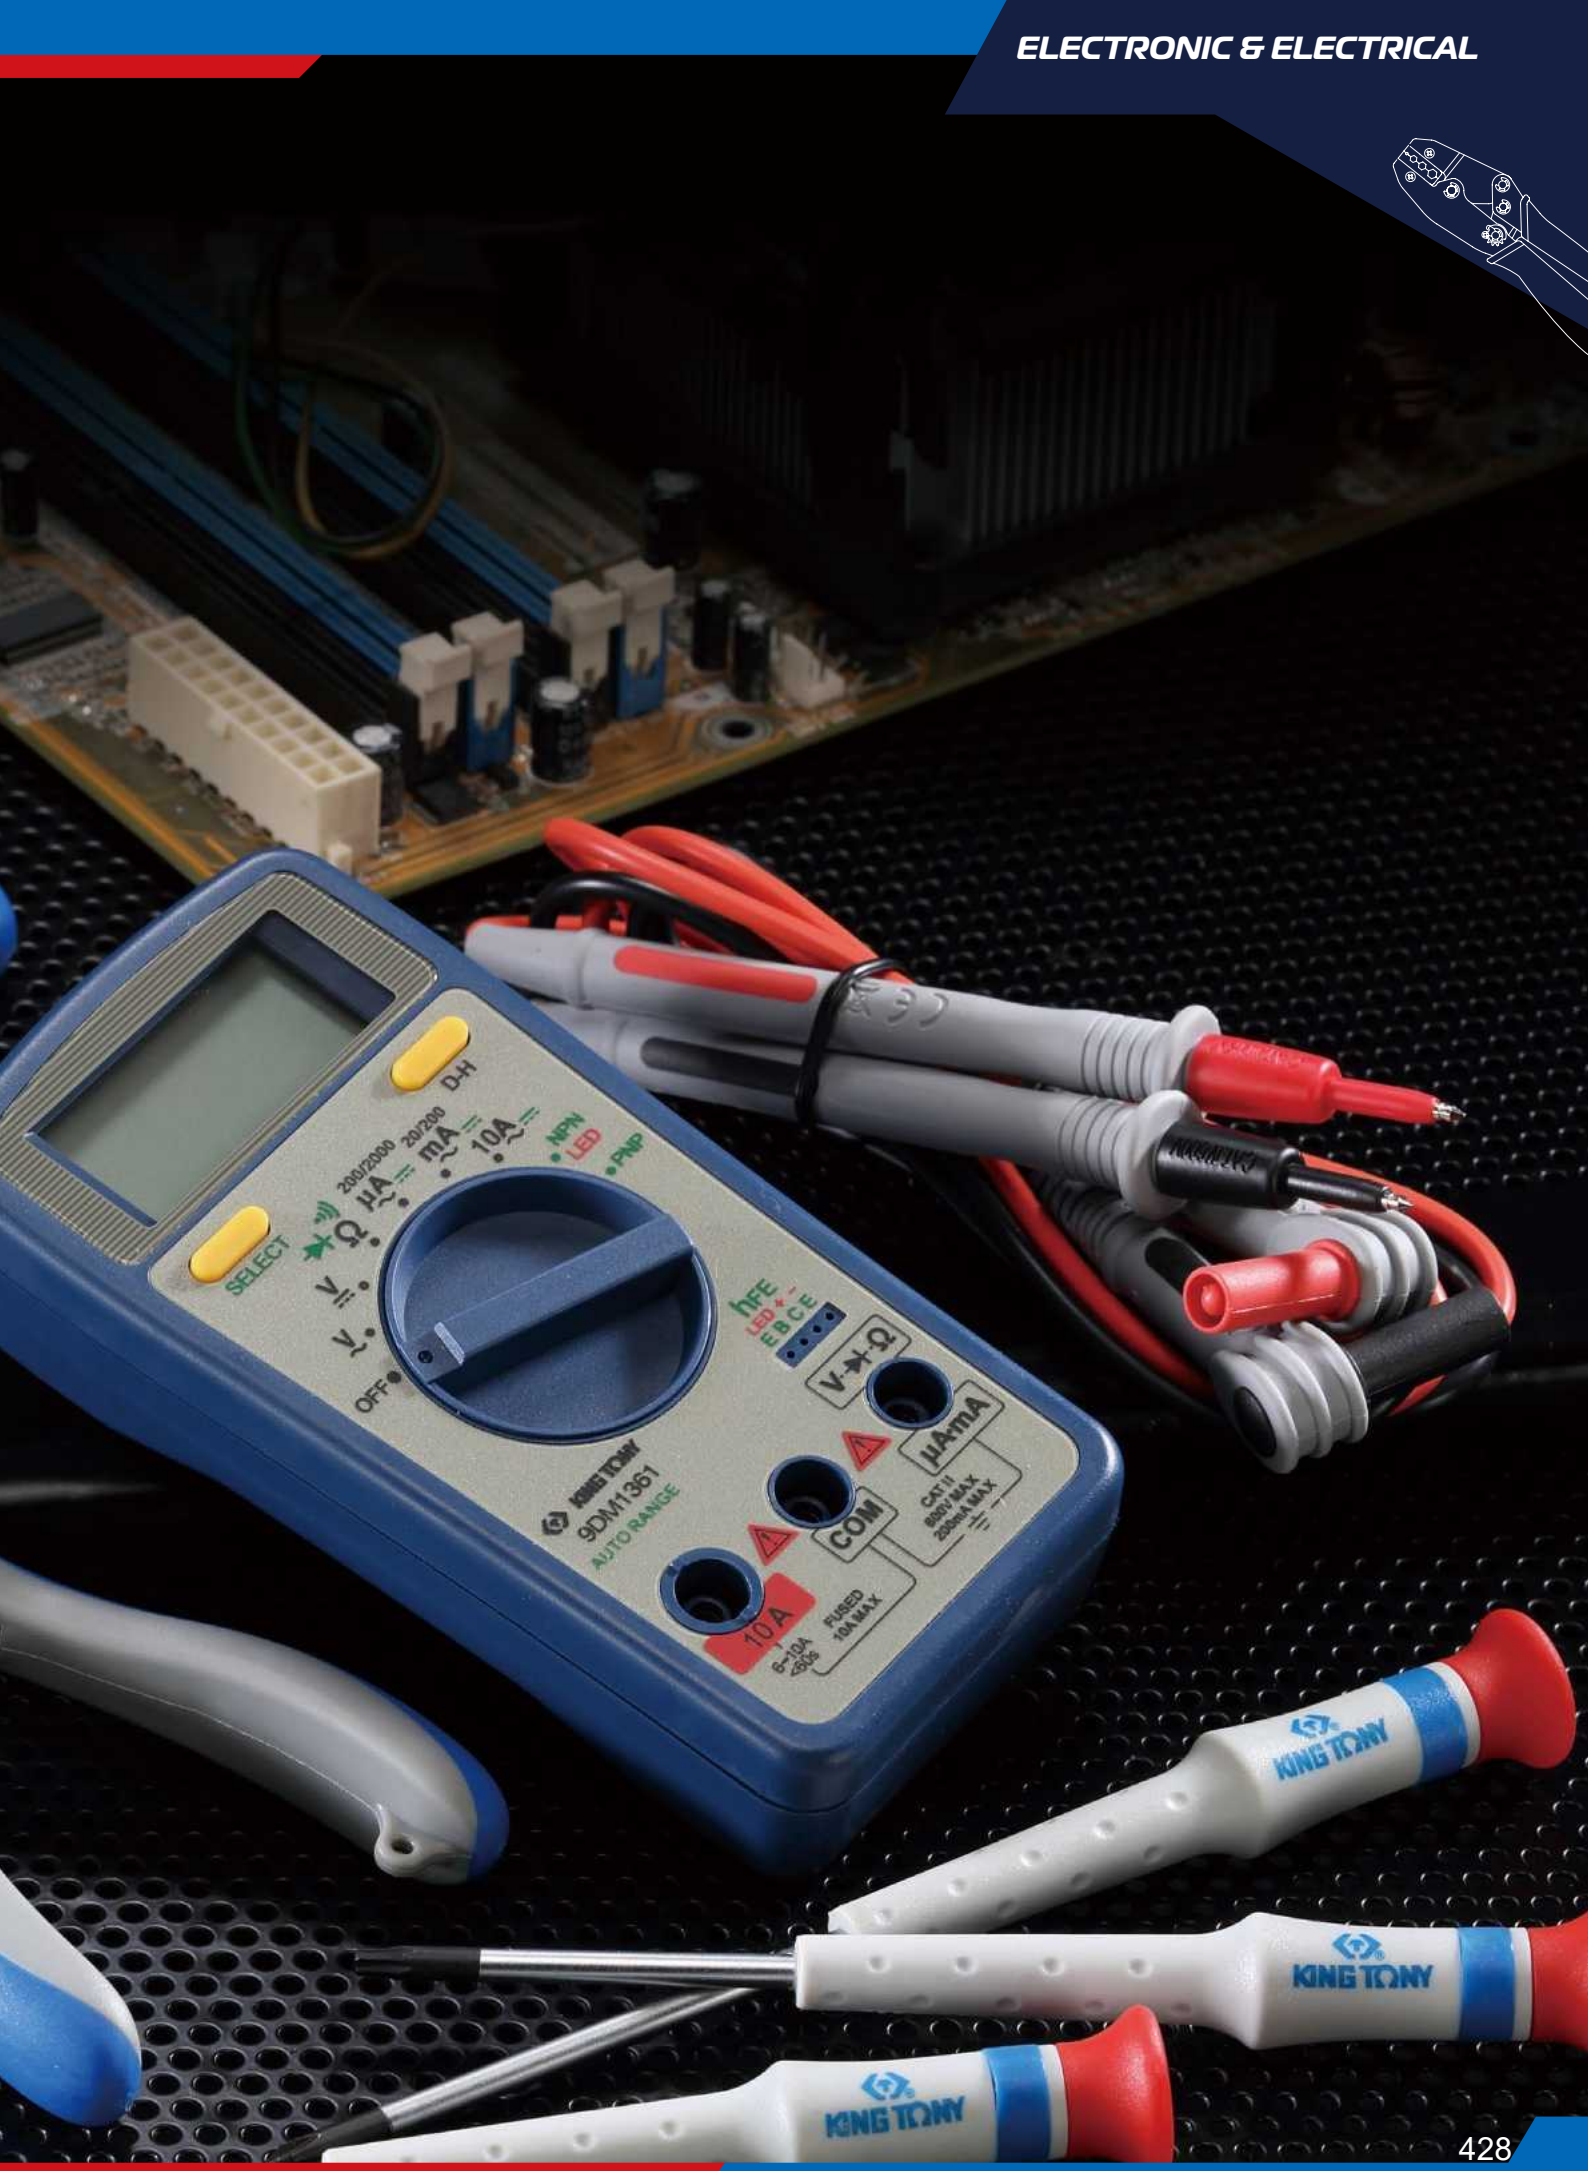
D-H
SELECT
200/2000
20/200
μA
mA
10A
NPN
LED
PNP
Ω
V
OFF
hFE
LED
E B C E
V-Ω
μAmA
COM
10A
KING TONY
9DM1361
AUTO RANGE
CAT II
600V MAX
200mA MAX
FUSED
10A MAX
KING TONY
KING TONY
KING TONY

Precision Pliers

6207-05

Diagonal cutting nippers



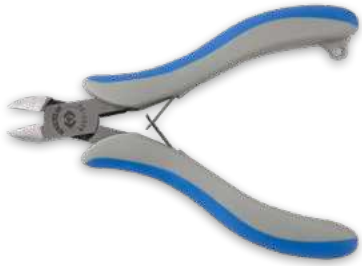

KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	A mm	B mm	C mm	g	
6207-05	4-3/4	118	2.0	1.6	10.8	11.5	7.1	88	6 / 120

6217-05

Diagonal cutting nippers





KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	α	A mm	B mm	C mm	D mm	g	
6217-05	4-3/4	118	2.0	1.0	35°	11.8	17	12.7	17.7	76	6 / 120

6927-05

For plastic

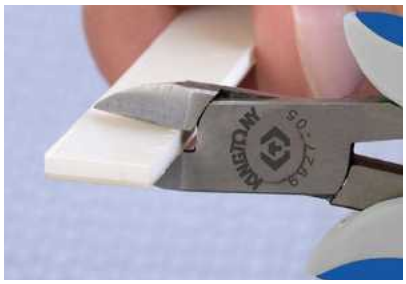



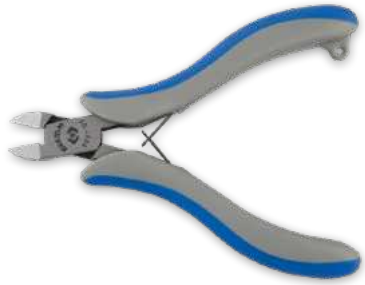

KT NO.	Overall length inch	Overall length mm	A mm	B mm	C mm	g	
6927-05	4-3/4	118	10.3	11.5	7.1	71	6 / 120

6247-05

Diagonal cutting nippers



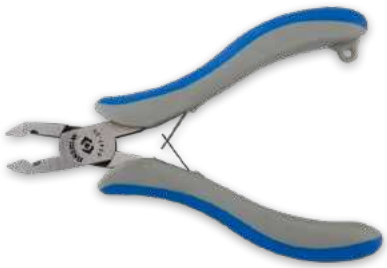

KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	α	A mm	B mm	C mm	D mm	g	
6247-05	5	125	1.0	0.5	45°	11.4	19.4	7.5	55	73	6 / 120

Precision Pliers

6271C Diagonal cutting nippers

- The cutting edge hardness at least 73° HRC up

- The cutting edge is made from tungsten steel for an extremely long service life.



KT NO.	Overall length inch	Overall length mm	●	A mm	B mm	C mm	g	
6271-05C	5	125	0.6	13.2	15	7.1	77	6 / 120
6271-65C	6-1/2	160	0.6	19.2	26	10.7	151	6 / 120

6317-06 Long nose pliers



KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	A mm	B mm	C mm	D mm	E mm	g	
6317-06	6	157	2.0	1.6	11.6	50	7.5	2	2	84	6 / 120

6377-55 Half-round nose pliers



KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	A mm	B mm	C mm	D mm	E mm	g	
6377-55	5-1/2	138	2.0	1.6	11.3	30	7.5	1.5	1.5	97	6 / 120

6337-06 Bent nose pilers



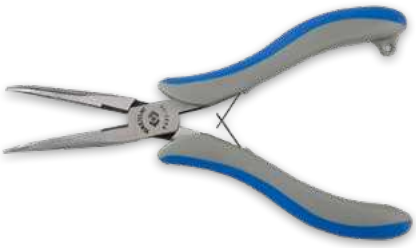

KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	α	A mm	B mm	C mm	D mm	E mm	F mm	g	
6337-06	6	154	2.0	1.6	40°	11.3	50	7.5	2	2.5	14	84	6 / 120

Precision Pliers

6347-05

Round-nose pliers

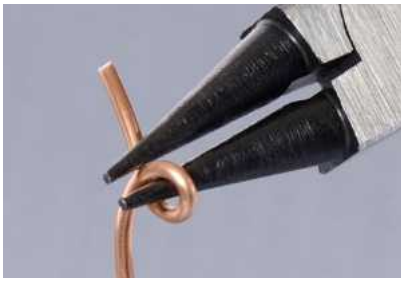



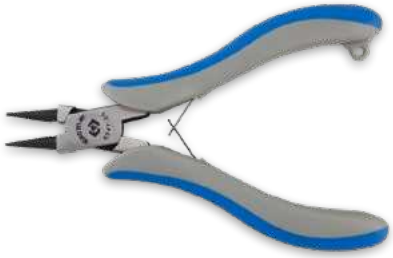

KT NO.	Overall length inch	Overall length mm	A mm	B mm	C mm	D mm	E mm	g	
6347-05	5	128	11.4	24.9	7.5	1	2.14	74	6 / 120

63A7-05

Round-nose pliers



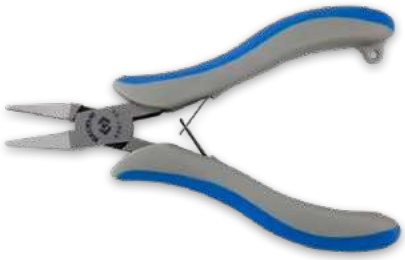

KT NO.	Overall length inch	Overall length mm	A mm	B mm	C mm	D mm	E mm	g	
63A7-05	5	128	11.5	24.7	7.5	3.3	1.8	75	6 / 120

63B7-05

Round-nose pliers

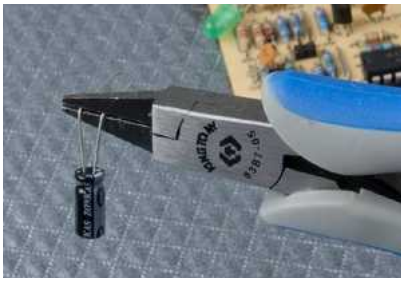



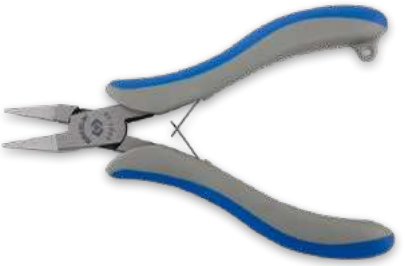

KT NO.	Overall length inch	Overall length mm	A mm	B mm	C mm	D mm	E mm	g	
63B7-05	5	128	11.5	24.7	7.5	1.3	1.8	74	6 / 120

Precision Screwdriver

- Shank material - SNCM - V alloy steel
- Grip material - PP
- Finishing - chrome plated with black tip

1431

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	Ø mm	mm	g	
14313015	PH000	1.5	40	7	10 / 320
14312015	PH00	2.0	40	7	10 / 320
14311015	PH0	3.0	40	13	10 / 100
14311115	PH1	4.0	40	16	10 / 100
14313003	PH000	1.5	75	8	10 / 320
14312003	PH00	2.0	75	8	10 / 320
14311003	PH0	3.0	75	14	10 / 100
14311103	PH1	4.0	75	18	10 / 100

1432

- Slotted head, round shank
- Metric size
- DIN 5263

KT NO.	mm	mm	mm	Ø mm	g	
14320615	0.6	0.15	40	3.0	9	10 / 320
14320815	0.8	0.19	40	3.0	9	10 / 320
14321015	1.0	0.20	40	3.0	9	10 / 320
14321515	1.5	0.23	40	3.0	10	10 / 320
14321815	1.8	0.30	40	3.0	10	10 / 320
14322015	2.0	0.40	40	2.0	11	10 / 100
14322515	2.5	0.40	40	2.5	12	10 / 100
14323015	3.0	0.50	40	3.0	13	10 / 100
14323515	3.5	0.60	40	3.5	14	10 / 100
14324015	4.0	0.80	40	4.0	16	10 / 100
14321003	1.0	0.20	75	3.0	11	10 / 320
14321503	1.5	0.23	75	3.0	11	10 / 320
14321803	1.8	0.30	75	3.0	11	10 / 320
14322003	2.0	0.40	75	2.0	11	10 / 100
14322503	2.5	0.40	75	2.5	13	10 / 100
14323003	3.0	0.50	75	3.0	15	10 / 100
14323503	3.5	0.60	75	3.5	16	10 / 100
14324003	4.0	0.80	75	4.0	18	10 / 100

1433

- For torx head, round shank

KT NO.	Size	Ø mm	mm	g	
14330415	T4	3	40	10	10 / 320
14330515	T5	3	40	10	10 / 320
14330615	T6	3	40	10	10 / 100
14330715	T7	3	40	10	10 / 100
14330815	T8	3	40	10	10 / 320
14330902	T9	4	50	16	10 / 100
14331002	T10	4	50	16	10 / 100
14331502	T15	4	50	16	10 / 100
14332002	T20	4	50	16	10 / 100
14330403	T4	3	75	11	10 / 320
14330503	T5	3	75	11	10 / 320
14330603	T6	3	75	11	10 / 320
14330703	T7	3	75	11	10 / 320
14330803	T8	3	75	11	10 / 320
14330903	T9	4	75	18	10 / 100
14331003	T10	4	75	18	10 / 100
14331503	T15	4	75	18	10 / 100
14332003	T20	4	75	18	10 / 100

Precision Screwdriver & Set

91230

- Screwdriver handle for interchangeable blades 2431, 2433
- Handle material - polypropylene (PP)

KT NO.	mm	g	
91230	100	12	10 / 100

2431

- Combination type
- Phillips / Slotted head, hexagonal shank
- Blade material - SNCM - V alloy steel
- Finishing - chrome plated with black tip

KT NO.	No.	mm	mm	mm	mm	g	
24312020	PH00	2.0	0.30	4	120	11	20 / 200
24311030	PH0	3.0	0.50	4	120	11	20 / 200
24311140	PH1	4.0	0.60	4	120	11	20 / 200

2433

- Combination type
- Torx head, hexagonal shank
- Blade material - SNCM - V alloy steel
- Finishing - chrome plated with black tip

KT NO.	Size	mm	mm	g	
24330610	T6 x T10	4	120	11	20 / 200
24330715	T7 x T15	4	120	11	20 / 200
24330820	T8 x T20	4	120	11	20 / 200
24330915	T9 x T15	4	120	11	20 / 200

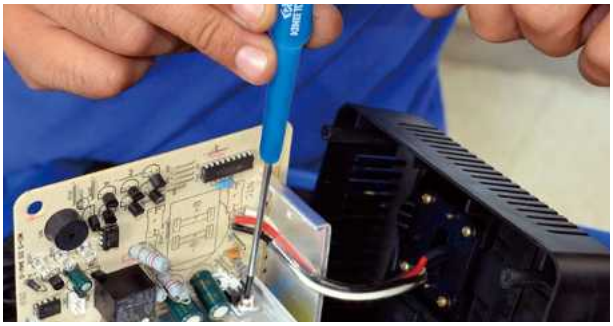

KT NO.	PC.	Contents	Kg	
32218MR	8	1432 1.0 x 75, 1.5 x 75, 1.8 x 75, 2.0 x 75, 2.5 x 75, 3.0 x 75, 3.5 x 75, 4.0 x 75	0.32	1 / 30
32209MR	9	1432 0.8 x 40, 1.0 x 40, 1.5 x 40, 1.8 x 40, 2.0 x 40, 2.5 x 40, 3.0 x 40, 3.5 x 40, 4.0 x 40	0.26	1 / 30
32108MR	8	1431 PH000 x 40, PH00 x 40,PH0 x 40, PH1 x 40 1432 1.5 x 40, 2.0 x 40, 2.5 x 40, 3.0 x 40	0.29	1 / 30
32118MR	8	1431 PH000 x 75, PH.00 x 75, PH0 x 75, PH1 x 75 1432 1.5 x 75, 2.0 x 75, 2.5 x 75, 3.0 x 75	0.36	1 / 30
32309PR	9	1433 T4 x 40, T5 x 40, T6 x 40, T7 x 40, T8 x 40, T9 x 50, T10 x 50, T15 x 50, T20 x 50	0.26	1 / 30
32607MR	8	91230 2431 PH00 x 2.0, PH0 x 3.0, PH1 x 4.0 2433 T6 x T10, T7 x T15, T8 x T20, T9 x T15	0.22	1 / 30

Precision Screwdriver Set

31419MR

- Precision screwdriver set

114 PC.

KT NO.		Contents	Each Q'ty
31419MR	1431	PH000 x 40, PH00 x 40, PH0 x 40, PH1 x 40	6
	1432	0.6 x 40, 0.8 x 40, 1.0 x 40, 1.5 x 40, 1.8 x 40, 2.0 x 40, 2.5 x 40, 3.0 x 40, 3.5 x 40, 4.0 x 40	
	1433	T4 x 40, T5 x 40, T6 x 40, T7 x 40, T8 x 40	

Screwdriver shelf size (mm) : 383 x 136 x 130

Packing NO.	Spec.	Kg	CUFT
31419MR-A	87107	0.86	0.47
31419MR-D	114 PC. content	1.17	0.14

Soldering Iron

6BC141A

- 220V~240V, 20W / 40W
- For electrical and stained glass work
- Lightweight handle
- Replaceable tip

KT NO.	Voltage V	Rating W	g	
6BC141A	220-240	20 / 40	204	25 / 50
6BC141-1		Soldering iron tip		

KT NO.	Rattlm W	ø mm	Overall length	g	
6BC141-1	20/40	6	81	17	10 / 100

6BC-A

6BC141-1

6BC23 30W

6BC26 60W

- 110V~240V, 30W, 40W, 60W, 100W
- For electrical and stained glass work

KT NO.	Voltage V	Rating W	g	
6BC23A	220-240	30	160	54
6BC24A	220-240	40	125	54
6BC26A	220-240	60	166	54
6BC26B	220-240	60	166	54
6BC26C	220-240	60	216	32
6BC26F	110-120	60	166	54
6BC210A	220-240	100	210	20
6BC210B	220-240	100	210	20
6BC210D	220-240	100	288	20
6BC210F	110-120	100	210	20

6BC24 40W

6BC210 100W

- Lightweight handle
- Replaceable tip
- No CE certification

6BC210

6BC23 / 6BC24 / 6BC26

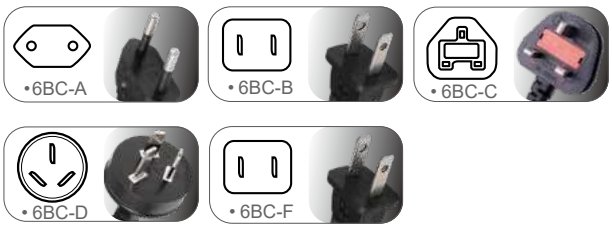

Soldering Iron Tip (Conical Type)

6BC23-1

- Copper-based iron tips are manufactured using patented process which produces a uniform iron and chrome plating thickness

KT NO.	Rating W	Ø mm	g	
6BC23-1	30 / 40	4	13	100 / 4200
6BC26-1	60	6	16	100 / 1600
6BC26-3	60	6	16	100 / 1600

6BC26-1

6BC26-3

- All tips are pre-tinned

3 in 1 Gas Soldering Iron Set

6BC3007

- Gas soldering iron set with four tips, reflector and desolder wire
- Power range: 30W-150W
- Soldering temperature: 400° C~450° C (750° F~840° F)
- Torch temperature: 1300° C (2400° F)
- Fuel capacity: 20ml
- Tank fuel for 90 minutes operation
- Ready to use 45 seconds after ignition

8 PC.

KT NO.	Contents	Kg 0.45	20
6BC372		Gas saldering iron 257mm	
6BC372-1	+	Conical	
6BC372-2		2.5mm round	
6BC372-3		3.5mm chisel	
6BC372-4		4.5mm angle	
6BC372-5		Reflector	
6BF21-17		Desolder wire / Sn 99.3%, Cu 0.7%	
		Foam	

Desolder Wire

6BF11-17

- 40% lead and 60% tin

KT NO.	Size mm	g	
6BF11-17	1.0	17	20 / 480

Desoldering Pump

6BD11

- One-hand operation
- ABS Body, teflon nozzle

KT NO.	Overall length mm	g	
6BD11	195	42	8 / 32

6BD22

- Anti-static solder desoldering pump
- Teflon suction head
- Aluminum body

- Turn down the body

- Clean

- Turn up the body

KT NO.	Overall length mm	g	
6BD22	197	85	50 / 100

Soldering Aid



6BE11-07

- Brush / Scraper :
  For removing flux residue and surplus solder

6BE12-07

- Scraper / Curved Probe :
  For component and lead extraction

6BE16-07

- Pointed / Slotted Probe :
  Fits wire up to 22AWG
  For wrapping and unwrapping etc

KT NO.	Overall length mm	g	
6BE11-07	175	15	1 / 200
6BE12-07	175	15	1 / 200
6BE16-07	180	15	1 / 200




Straight Fine Point Tweezers

6AF11-125

- Stainless steel with straight fine point
- Used for soldering integrated circuit chip, installing or replacing components
- It's suitable for doing precise repairing work

KT NO.	Overall length mm	g	
6AF11-125	124	16	50 / 800

Reverse Action Tweezers

6AF21-165

- Stainless steel with tapered tips and flat points
- For holding small parts when soldering or spraying

KT NO.	Overall length mm	g	
6AF21-165	172	29	30 / 480

Mini Soldering Iron Stand

6BC100

- Lightweight and high temperature bakelite resistance
- Mini size, easy to take
- Used for holding solder iron

12 12 / 240

Soldering Iron Stand with Sponge

6BC200

- Suitable for most pencil type soldering irons
- Convenient for easy storage
- Sponge for tip cleaning
- Double spiral spring construction prevents the hot soldering iron from accidentally burning the surface of other objects when it is inserted into the stand

187 4 / 24

Punch Down Tool

6AH

- For setting wire into terminal blocks or cut off wire end after terminated
- Blade : 66 & 110/88 & Krone type

KT NO.	Type	Overall length inch	Overall length mm	g	
6AH11	110/88	6-3/4	170	140	20 / 80
6AH12	KRONE	6-3/4	170	140	20 / 80
6AH13	66	6-3/4	170	140	20 / 80

6AH01-1
FOR USE ON 110/88 TYPE

6AH01-2
FOR USE ON KRONE TYPE

6AH01-4
FOR USE BOTH 66 & 110/88 TYPE



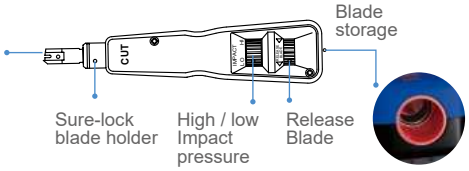

PVC Electrical Insulation Tape

6AG11-20

KT NO.	Width mm	g	
6AG11-20	18	52	1 / 250

Electrician Tool Box Set

97121PQ

- For electrician equipment

21 PC.

87407
Overall size :
445 x 240 x 206 mm

Contents		kg 4.9	1	CUFT 0.79
⊕	1471	VDE PH0 x 75, PH1 x 100, PH2 x 100, PH3 x 150		
⊖	1472	VDE 3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175		
	6116-07A	VDE 7-1/2"		
	6146-08A	VDE 8-1/4"		
	6216-06A	VDE 6-1/2"		
	6318-08A	VDE 8-1/4"		
	6516-10A	VDE 10"		
	6716-06A	VDE 6-1/4"		
	6214-45	4-1/2"		
	6334-05	5"		
	6721-10			
	6751-44			
	6AB12-55			
	7932-04			

Electrician Tool Bag Set

91333MQ

- For electrician equipment

33 PC.

87711C
Overall size :
510 x 255 x 345 mm / 39 inner pockets

Contents		kg 6.02	1
⊕	1421	PH1 x 80, PH2 x 100	
⊖	1422	5 x 75, 5 x 100, 6.5 x 100, 6.5 x 150	
⊕	1471	VDE PH2 x 100	
⊖	1472	VDE 6.5 x 150	
	6116-07A	VDE 7-1/2"	
	6216-06A	VDE 6-1/2"	
	6318-08A	VDE 8-1/4"	
	6716-06A	VDE 6-1/4"	
	20109MR	1.5, 2, 2.5, 3, 4, 5, 6, 8, 10	
	20129SR	1/16, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8, 5/64	
	3611-08R	200mm	
	79093-05C	5M/16FT 19mm	
	7971-07	165mm	

Electrician Tool Bag Set

91038MY01

- For electronic & electrician equipment...etc

38 PC.

Contents		3.13	1
1421	PH0 x 60, PH1 x 80, PH2 x 100		
1422	3 x 75, 5 x 75, 6.5 x 100		
6207-05	6377-55	6AB12-55	
6BF11-17	6BD11	6313-06	
7976-65	6AF11-125	6732-09	
6BC24A 220V / 40W	87137	6BC200	6AG11-20
6BE11-07	6BE12-07	6BE16-07	
9DM1361	1036ZQ	ST20219MR	
87721B			

87721B
Overall size : 360 x 200 x 260 mm

Lit when in DC mode measurement

Lit when in AC mode measurement

Negative polarity indicator-lit when the polarity is negative

AUTO — Auto range indicator

Lit when in continuity check

Lit when in diode check

D-H — Date hold indication

Lit when the battery is low

MΩ KΩ Ω — Unit for resistance measurement

mV V — Unit for voltage measurement

1.8.8.8 — Numeral date display

hFE — Lit when in transistor hFE check

μA mA A — Unit for current measurement

LCD DISPLAY

SELECT KEY

DATA HOLD KEY

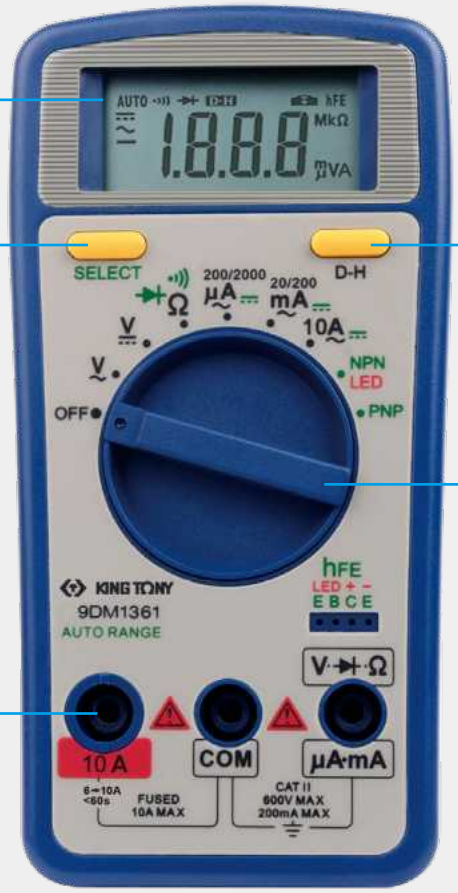

INPUT TERMINAL 10A USEAGE ONLY

- The Max. protective fuse for
- μA, μA, mA, mA is 0.5A/250V
- The Max.protective fuse for
- 10A, 10A is 15A/250V

POWER & FUNCTION SWITCH

AC voltage measurement

DC voltage measurement

AC/DC current measurement in micro-amperes

AC/DC current measurement in milli-amperes

AC/DC current measurement in 10 amperes

NPN — Transistor in NPN hFE measurement

LED — LED test

AC or DC measurement

OFF — Turn off the power

PNP — Transistor in PNP hFE measurement

Resistance measurement / Diode test / Continuity check

Digital Multimeter

9DM1361

- Date hold, auto range, auto power off selection, auto power off cancelation
- Unit & function indication, Maximum reading value 1999 digits. Negative polarity indicator (no indication is given for positive polarity)
- Low power consumption
- Fuse with : 500mA / 600V & 10A / 600V
- AAA battery x 2 PC. (Battery not included)
- CE approval IEC61010-1 (2010), CAT.II 600V, CAT.III 300V

Specification	
DC Voltages (0.1mV ~ 1V)	200mV / 2V / 20V / 200V / 600V
AC Voltages (0.001V ~ 1V)	2V / 20V / 200V / 600V
DC Ampere (0.1uA ~ 0.01A)	200uA / 2000uA / 20mA / 2A / 10A
AC Ampere (0.1uA ~ 0.01A)	200uA / 2000uA / 20mA / 2A / 10A
Resistance (0.1Ω ~ 0.01MΩ)	200Ω / 2kΩ / 20kΩ / 200kΩ / 2MΩ / 20MΩ
Continuity check	Yes
Diode test	Yes
hFE(NPN, PNP)	Yes
LED check	Yes
Low battery indicator	Yes
LCD Display	3 1/2 digits 2000 counts
Sampling rate	3 times / sec

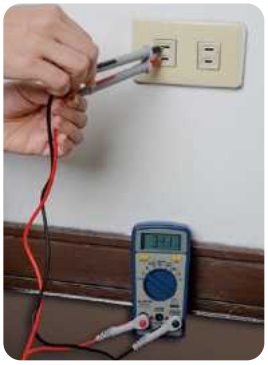

KT NO.	Size (mm) L x W x H	g	
9DM1361	138 x 70 x 32	85	10 / 60

Digital Multimeter

9DM1381

- Pocket size with flip cover design
- Approx. 4300 counts LCD display
- Auto range, auto power off selection
- Low power consumption
- LR44 battery x 2 PC. (Battery not included)
- CE approval EN61010-1, CAT.II 600V, CAT.III 300V
- Attachable test leads, easy operation

Specification	
DC Voltages (0.1mV ~ 1V)	400mV / 4V / 40V / 400V / 600V
AC Voltages (0.001V ~ 1V)	4V / 40V / 400V / 600V
Resistance (0.1Ω ~ 0.01MΩ)	400Ω / 4kΩ / 40kΩ / 400kΩ / 4MΩ / 40MΩ
Continuity check	Yes
Diode test	Yes
Overload indicator	OL
Low battery indicator	Yes
Sampling rate	Approx. 2 times / sec

KT NO.	Size (mm) L x W x H	g	
9DM1381	117 x 76 x 18	121	20 / 80

Digital Clamp Meter

9DM2351

- Max clamp size : Ø 30mm
- Unit & function indication, maximum reading value 1999 digits
- Negative polarity indicator (no indication is given for positive polarity)
- Auto power off selection approx. 15 minutes
- Low power consumption
- AAA battery x 2 PC. (Battery not included)
- CE approval IEC 61010-1, IEC 61010-2-032
  CAT.III 600V Pollution Degree 2
- Attachable test leads, easy operation

Specification	
AC Ampere (0.1A - 1A)	200A / 600A
AC Voltages (0.001V - 1V)	2V / 20V / 200V / 600V
DC Voltages (0.1mV - 1V)	200mV / 2V / 20V / 200V / 600V
Resistance (0.1Ω - 0.01MΩ)	200Ω / 2kΩ / 20kΩ / 200kΩ / 2MΩ / 20MΩ
Continuity check	Yes
Diode test	Yes
Low battery indicator	Yes
LCD Display	3 1/2 digits 1999 counts
Sampling rate	3 times / Sec.
Overload indicator	OL



KT NO.	Size (mm) L x W x H	g	
9DM2351	189 x 71 x 37	354	5 / 40

AC Non-contact Voltage Tester

6CB31

- Voltage ranges : 80 to 1000V AC.(50~60Hz)
- Application :
  AC voltage in outlets, lighting, circuit breakers, wires and cables etc..
- Adjustable sensitivity voltage detection
- Visible LED light voltage indicator in tip
  (Green light is high gear, red light is low gear)
- AAA battery x 2 PC. (Battery not included)
- Standard category :
  EN 61000-6-3 / EN 61000-6-1 CAT III

KT NO.	Overall size (mm) L x W x H	g	
6CB31	160 x 20 x 24	72	10 / 100

Measurement level

The input voltage should not exceed the maximum value.

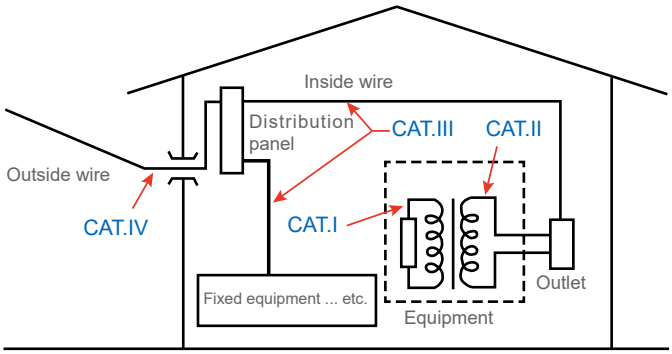

Measurement level	Description	Example
CAT.I	Measurement directly connected to the power supply circuit board	The secondary of the transformer measured
CAT.II	Measurement board directly connected to the low voltage devices	Equipment, portable devices
CAT.III	Equipment within the building	Distribution panels, circuit breakers
CAT.IV	Sources of all low voltage installations	Overhead lines, cable facilities

9 in 1 Multifunctional Wire Stripper

6CB41

- Non-contact voltage detection 80 - 1000V, 3 minutes auto power off
- Application: AC voltage in outlets, lighting, circuit breakers, wires and cables etc
- Illumination: COB LED
- Magnetic pads which can be useful for holding small components like nuts and bolts
- Screwdriver No. PH2 x1
- Battery: 3V (AAA 1.5V x2) (Battery not included)
- Standard category: CAT IV 1000,
  EN 61010-1 : 2010/A1 : 2019, EN 62471 : 2008,
  EN 61326-1 : 2013, EN 61326-2-2 : 2013

- Magnetic

- Lock

- Cut

- Stripper(romex cable type NM-B)

- Stripper

- Stripper

- Volt tester

- Measurement

- Screwdriver (Use 65mm-70mm)

KT NO.	Wire stripper	Stripping romex cable	Stripping round cable Ø mm	Wire cutter Ø mm	g	
6CB41	mm^2-0.5, 0.8, 1.3, 2.0, 3.3, 5.0, 8.0 AWG-20, 18, 16, 14, 12, 10, 8	12~2	8~10	7	220	1 / 50

Infrared Thermometer

9DN12

- Not necessary to contact with the object
- IR point can be displayed clearly
- ° C and ° F interchangeable functions
- Selection of different materials
- Dark screen backlight test board functions
- 15 seconds automatically turn off the screen
- 9V battery x 1 PC. (Battery not included)

Technical data	
Temperature range	-30~550°C (-22~1022°F)
Operating temperature	0~50°C
Resolution	0.1°C / 0.1°F
Accuracy	±2.5% OR 3°C
Emissivity	Selectable (0.85 / 0.90 / 0.95)
Distance to spot ratio	12 :1
Auto power off	15 seconds
Laser pointer	Class 2 Laser < 1 mW

KT NO.	Overall Size (mm) L x W x H	g	
9DN12	193 x 47 x 126	313	5 / 20

Testing Screwdriver

6CB02

- Testing range : 100~250V
- CE approval
- Don't use the testing screwdriver as screwdriver
- Neon indicator

KT NO.	mm	mm	mm	mm	Testing range	g	
6CB02	3	0.6	65.5	140	100~250V	15	12 / 288

Digital Voltage Tester

6CB21

- Self-Diagnostic test
- Built-in LED flashlight
- LCD Display
- Protection IP64
- AAA 1.5V x 2 PC.(Battery not included)
- Standard category : EN 61243-3 / IEC 61243-3 EN 61010-1 / IEC 61010-1 CAT.III 690V / CAT.IV 600V

KT NO.	Overall Size (mm) L x W x H	g	
6CB21	255 x 66 x 30	250	5 / 20

Specification	
DC Voltage Test	12, 24, 50, 120, 230, 400, 690V
Polarity indication	Yes
AC Voltage Test	12, 24, 50, 120, 230, 400, 690V
Phase rotation test	Yes
High voltage indication	≧ 50V
Frequency range	0-70Hz
Continuity test	0~550KΩ
Operation condition	-10~55°C

KING TONY
6G841
KING TONY
Distance ratio
12:1
-30~550°C
SELECT
D-H
OFF
KING TONY
9DM1361
AUTO RANGE
COM
10A
μA·mA
AC/DC
CLAMP METER
HOLD
SEL./REL.
OFF
Hz
KING TONY
9DM2352
COM
CAT III
600V

WIRE & CABLE TOOLS



Electrician Scissors

6AB13-06

- High cutting performance by low cutting force

- 38mm² wire

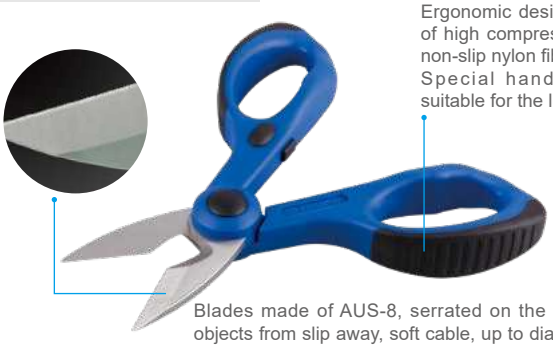

Ergonomic design, handles made of high compressive strength and non-slip nylon fiber + TPV
Special handle design, also suitable for the left-hander

Blades made of AUS-8, serrated on the edge can prevent objects from slip away, soft cable, up to dia 38mm², insulation materials, electrical tape cable tie

KT NO.	Overall length inch	Overall length mm	Cutting length mm	Cutting capacity AWG	Cutting capacity mm²	g	
6AB13-06	6	150	26	2	38	114	12 / 72

6AB21-65

- Curved mouth cable cutter
- Safety blade locking system

KT NO.	Overall length inch	Overall length mm	Cutting length mm	Cutting capacity mm²	g	
6AB21-65	6-1/2	158	22	10	156	12 / 72

Multi-purpose Scissors

6AB12-55

- Stainless steel with serrated edges
- Grip material - PP + TPR

KT NO.	Overall length mm	(mm)	Cutting capacities (mm²) Electric	Cardboard cable	Rubber	Leather	Rolled	Copper steel	Aluminum (soft)	g	
6AB12-55	145	55	10	10	10	10	0.5	0.5	0.5	94	12 / 72

6AB31-75

- Even mouth cable cutter
- Safety blade locking system

KT NO.	Overall length inch	Overall length mm	Cutting capacity mm	AWG	mm²	Cutting capacity (mm²) Leather	Copper(soft)	Aluminum	g	
6AB31-75	7-1/2	185	52	16-12	1.5-4.0	2.0	0.5	0.5	160	12 / 72

- Cut cable , cardboard , rubber , leather , rolled steel , copper (soft) , aluminum , carpet , branch and so on.

5 in 1 Multi-functional Electrician Scissors

6AB14-06

- Professional scissors with special steel frame for high resistance and durability
- High hardness blades and anti-slip serrated edge for making precise cuts
- Light and strong handles are made from impact-resistant plastic material
- Ergonomically-designed handles are suitable for a comfortable grip
- PP+TPR handle material
- The blade is made of 4034 stainless steel

- Crimping terminal of cable

- Scraping

- Welding cable 100mm^2

- Wire stripper 1.5-4mm^2

KT NO.	Overall length inch	Overall length mm	Cutting length mm	Cutting capacity AWG	Cutting capacity mm^2	Wire stripper AWG	Wire stripper mm^2	Pin terminal insulated/ Non-insulated terminal crimping AWG	Pin terminal insulated/ Non-insulated terminal crimping mm^2	g	
6AB14-06	6-3/8	161	24	1/0	50	14, 12	1.5, 2.5	14	2.5	193	12 / 48

6AB14-65

- Professional scissors with special steel frame for high resistance and durability
- High hardness blades and anti-slip serrated edge for making precise cuts
- Light and strong handles are made from impact-resistant plastic material
- Ergonomically-designed handles are suitable for a comfortable grip
- PP+TPR handle material
- The blade is made of 4034 stainless steel

- Wire stripper 1.5-4mm^2

- Crimping terminal of cable

- Crimping terminal of cable

- Welding cable 80mm^2

- Scraping

KT NO.	Overall length inch	Overall length mm	Cutting length mm	Cutting capacity AWG	Cutting capacity mm^2	Wire stripper AWG	Wire stripper mm^2	Pin terminal insulated/ Non-insulated terminal crimping AWG	Pin terminal insulated/ Non-insulated terminal crimping mm^2	g	
6AB14-65	6-3/4	170	21	3/0	80	16, 14, 12	1.5, 2.5, 4	14	2.5	228	12 / 48

Multi-purpose Scissors

6AB33-95

- Ergonomically-designed handles are comfortable and durable during usage
- For cutting soft materials such as tin sheets, plastics, CD, cards and papers...etc
- The stainless steel blade and the curve-blade design makes it steady and saves strength while cutting
- The big angle design between blades and the handles of the scissors makes it so your hand never touches any object while operating
- Designed to conveniently adjust blades
- The blade is made of 420J2 stainless steel material
- PP+TPR handle material

- Large angle of blades



- Small angle of blades

- Big angle design between blades and the handles of the scissors

Iron wire cutter

KT NO.	Overall length inch	Overall length mm	Cutting length mm	Wire cutting Aluminum / Copper mm	Cutting capacities (mm^2) Cardboard / Carpet / Copper / Aluminium (soft)				g	
6AB33-95	9-3/4	246	73	2.5	10	5	0.5	0.6	312	6 / 48

Retractable Safety Cutter

7946-07

- Multifunctional safety cutters with trapezium blades 61x18.9 mm premium quality robust and resistant
- Upper slider for blade extraction with automatic retraction
- Container with 2 replacement blades integrated in the handle
- Integrated device for cutting nylon threads and films
- Structure in zinc alloy, anti-slip ergonomic grip handle in TPR Soft-Grip
- High quality blades in carbon steel SK5 extremely sharp and long duration

- Auto return butto

- Auto lock button

- 2 blades in storage

- Blade replace button

7945-07P01
(61mm, 10 PC.)

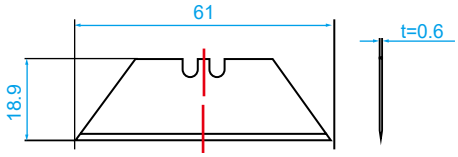

KT NO.	L mm	g	
7946-07	180	200	12 / 72

7946-07-S

Paper display stand size(mm) :
243 x 199 x 217 (0.37 CUFT)

KT NO.	Contents		Kg	
7946-07-S	7946-07	x 12 PC.	2.75	1 / 4

12 PC.

Cable Cutting Pliers

6141C

- Polished head
- For cutting copper and aluminum cables, single and multiple wire



KT NO.	Overall length inch	Overall length mm	Cutting capacity DIN(mm²)	Cutting capacity AWG	Ø mm	g	
6141-06C	6	160	22	4	9.2	169	6 / 120
6141-08C	8-3/8	212	38	2	11.5	282	6 / 60

Cable Cutter

6AD

- Cable cutter for cutting copper and aluminum cable

- Can be use with : 67B3-55 439 / 6AC51 444

KT NO.	Overall length mm	Cutting capacity DIN(mm²)	Cutting capacity AWG(MCM)	Kg	
6AD17-150	435	150	300	1.34	1 / 20
6AD23-400	595	400	800	1.84	1 / 10

Ratcheting Cable Cutter

6AD10-325

- Cut soft copper, aluminum and multiple conductor cable to 325mm² (600MCM)
- Cuts hard drawn copper to 200mm² (400MCM)

KT NO.	Overall length mm	Cutting capacity mm²	Cutting capacity AWG(MCM)	g	
6AD10-325	255	325	600	613.2	10 / 30
6AD10-3P01	Spare cutting blade			58	1 / 100

6AD16-500

- Cut soft copper, aluminum and multiple conductor cable to 500mm² (1000MCM)

KT NO.	Overall length mm	Cutting capacity mm²	Cutting capacity AWG(MCM)	Kg	
6AD16-500	400	500	1000	1.60	1 / 10



Electrician Knife

7932-04

- Electrician knife with wire stripper
- 1 blade with half-moon notch for stripping and vee for cutting

KT NO.	Blade length mm	Closed length mm	Overall length mm	g	
7932-04	85	110	196	75	10 / 180

7933-45

- Straight blade electrician knife

KT NO.	Blade length mm	Closed length mm	Overall length mm	g	
7933-45	85	120	205	111	10 / 180

Cable Stripping Knife

7935-08

- Blades are made from high tensile steel, allowing for excellent strength and performance
- Light and strong handles are made from impact-resistant plastic material
- Ergonomically-designed handles are suitable for comfortable and durable usage
- The Cable Stripping Knife has a protection sheath
- The protection sheath can also be used for assisting stripping wires
- The V-shaped groove can be used to position wires, and can prevent sliding while you peel wires
- Nylon handle
- The blade is made of 4034 stainless steel

KT NO.	L mm	g	
7935-08	204	109	12 / 72

- Cable stripping

- Scraping

- Protection set locked

- Protection set unlocked



Folding Clasp Knife

7941-08

- Suitable for mechanics, outdoor and camping etc
- Blade fixator folded out
- Light and handy to use
- Stainless Blade with blacking coating
- With belt clip

KT NO.	L mm	g	
7941-08	210	166	8 / 48

Utility Cutter

7971-07

- Automatically reloading snap-off blades
- Ergonomic soft ABS TPR handle
- Stainless steel blade guide
- Blade lock knob
- 4-blade cartridge(18mm)

KT NO.	L mm	g	
7971-07	165	180	6 / 72

- 3 blades in storage

7971-07P02
(18mm, 10 PC.)

7978-07

- 3-blade cartridge with automatically reloading function
- Material : SK4 (HRC ≧ 62)
- 0.5mm thickness and 18mm width

KT NO.	L mm	g	
7978-07	175	131	12 / 144

- Quickly remove blade & automatically reload function

- 3 blades in storage

7978-07P02
(18mm, 10 PC.)

7978-07-S

- Paper display stand size(mm) :
- 172 x 1360 x 222mm (2.75CUFT)

12 PC.

KT NO.	Contents		Kg	
7978-07-S	7978-07	x 12 PC.	1.58	1 / 12

7977-07

- Heavy duty 18mm wide cutting knife with snap off blades
- Exceptional cutting performance with SK4 blade (HRC ≧ 65)
- Provides sharper and more stable cutting with a high hardness cutting edge

KT NO.	L mm	N.W	G.W	CUFT	g	
7977-07	180	20	22	2.13	117	12 / 144
7977-07P02	-	10	12	1.06	9	200 / 2400

7977-07P02
(18mm, 10 PC.)

7977-07-S

- Paper display stand size(mm) :
- 265 x 162 x 245 (0.37CUFT)

12 PC.

KT NO.	Contents		Kg	
7977-07-S	7977-07	x 12 PC.	2.23	4



Multi-purpose Wire Stripper

6751-44

- Wire stripper
- Wire cutter
- Cable stripper

Preparation blade

KT NO.	Wire stripper Ø mm	AWG	Cable stripper Ø mm	Wire cutter Ø mm	g	
6751-44	0.8-2.6	20-10	6-10	6	116	10 / 120

Wire Stripper

6762-08

- Insulated terminal crimping

- Wire stripper

- Wire cutter

KT NO.	Wire stripper mm²	AWG	Wire cutter Ø mm	Insulated terminal crimping mm²	AWG	g	
6762-08	0.2-6	24-10	6	0.5-6	22-10	271	15 / 60

67A1-07

KT NO.	Wire stripper mm²	AWG	Wire cutter Ø mm	g	
67A1-07	0.05-3.5	30-12	5	209	12 / 60

Wire Stripper Plier

6761-07

- Aluminum body design for light weight
- Special design of strip length setting function for quickly operate
- SK5 knife

KT NO.	Wire stripper mm²	Overall length mm	g	
6761-07	0.9, 1.25, 2, 3.5, 5.5	178	271	10 / 60

Cable Stripper

6755-05

- UTP/STP, flat cable stripper & cutter
- Material : ABS

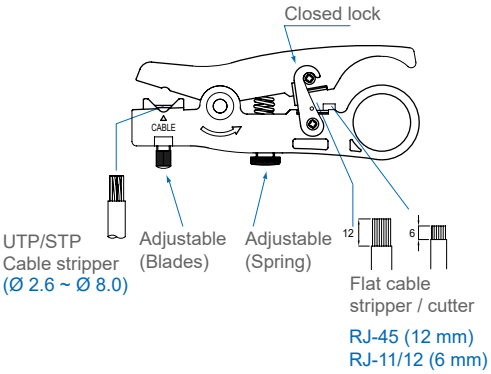

UTP/STP cable stripper	(Ø 2.6 ~ Ø 8.0)
Flat cable stripper / cutter	RJ-45 (12 mm), RJ-11/12 (6 mm)

KT NO.	Overall length inch	Overall length mm	g	
6755-05	5	127	72	20 / 120

Coax. Cable Stripper

6756-05

- 2-Blades model
- Material : ABS



Stripper dimension "d"	6.4 mm D
Stripper distance 2-Blades model	RG-174/58/59/62/6 3C/4C/5C (Ø 2.6 ~ Ø 8.0)

KT NO.	Overall length inch	Overall length mm	g	
6756-05	5	127	68	20 / 120

Fiber Optic Stripper

67B1-06

- Three in one model performs all common fiber stripping functions
- Safety locking system for easy and steady stripping
- Ergonomic handle for comfort grip

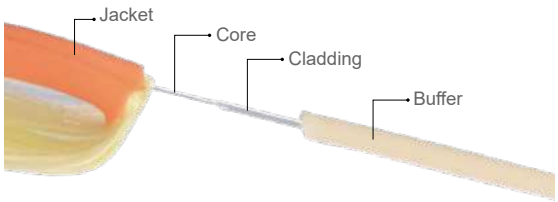

- To strip the 2.0-3.0 mm fiber jacketing

- 600-900 micron buffer layer stripping



- Strips the 250 micron cable down to the glass fiber without scratching or nicking glass fiber

KT NO.	Overall length inch	Overall length mm	Stripping range ◆mm	Stripping range ◆µm	◆µm	g	
67B1-06	6	150	2.0-3.0	600-900	250	130	10 / 100



Multi-stripper

67B2-05

KT NO.	Overall length inch	Overall length mm	g	
67B2-05	4-3/4	120	69	15 / 90

Stripping capacity

- Round cables between : 8-13mm
- Wire cable : 0.5 1.0 1.5 2.5 4.0 6.0mm^2
- AWG : 20 18 16 14 12 10
- Coax.cable : RG-6 / RG-59

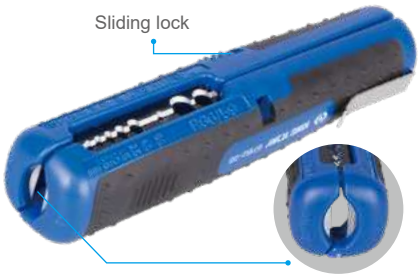

Cable Stripper

67B3-55

- Fast and safe stripping of round cable sheaths made of PVC or rubber from 6-45mm dia
- Adjustable knurled nut for max 6mm sheath

KT NO.	Cable stripper mm^2	Overall length inch	Overall length mm	g	
67B3-55	6-45	5-1/2	140	170	10 / 100

- Can be use with : 6AC51 444 / 6AD 434

- Adjustable cutting depth

- Push cover

- Simple rotating the tool body

- Remove the cable sheaths without damage of the inner conductors

Crimp die profiles

Symbol	
	Phone plugs 6 pin
	Modular plugs 8 pin
	Insulated terminal connectors
	Non-Insulated terminal connectors
	Pin terminal, Insulated & Non-Insulated ferrules
	Non-Insulated terminal, Lug connectors

Symbol	
	CATV “F” , BNC , COAX , and fiber optics connectors

Modular Crimping Tool



67F1-08

- For cutting / stripping / crimping
- 2 types of plugs in 1 tool
- Grip material - PP+TPR

• 6P

• 8P

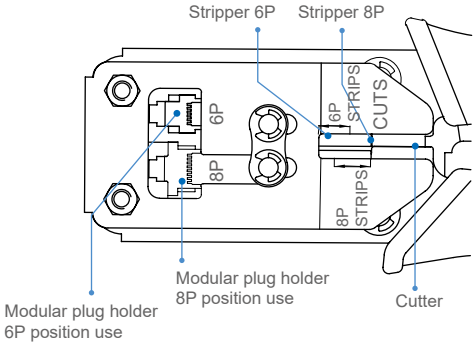

KT NO.	Overall length inch	Overall length mm	g	
67F1-08	8	203	370	10 / 40

Interchangeable Ratchet Crimping Tool Set

42107GX

- Quick interchangeable ratchet function & easy to use
- Crimping jaws with heat treatment
- Blow case size (mm) : 282 x 176 x 52 (0.09 cuft)

Kg 1.16 1 /10

7 PC.

Item No.	Replacement die set	Terminal size	Description	
6781P0A		AWG 12-10 / 16-14 / 22-18 / 0.5-1.0 / 1.5-2.5 / 4-6 mm²	Insulated Terminal	
6781P0B		AWG 1.5 / 2.5 / 8 / 10 mm²	Non-Insulated Terminal	
6781P0C		AWG 0.5-1 / 1.5 / 2.5 / 4-6 mm²	Open Barrel Terminal	
6781P0D		AWG 0.5 / 0.75 / 1 / 1.5 / 2.5 / 4 mm²	Insulated Core-end Terminal	
6781P0F		AWG 6 / 8 / 10 / 16 mm²	Insulated Huge Core-end Terminal	
6781P0H		AWG 0.5 / 2.5 / 8-6 / 8-10 / 14 / 22 mm²	Open Barrel & D-Sub, V.35 Connectors	
6781-85			Ratchet	

Ratchet Crimping Tool Set

67G0005

- Blow case size (mm) : 240 x 70 x 50 (0.07 cuft)

Kg 1 1 / 16

5 PC.

Item No.	Replacement die set	Terminal size	Description	
67GN-09	67GNP01	AWG 12 / 14 / 16 / 18 / 20 / 22/ 0.5 / 0.75 / 1.0 / 1.5 / 2.5 / 4.0 mm²	PIN TERMINAL INSULATED OR NON-INSULATED FERRULES	
67GJP01		AWG 6 / 8 / 10 6 / 10 / 16 mm²	PIN TERMINAL INSULATED OR NON-INSULATED FERRULES	
67GKP01		AWG 12-10 / 16-14 /22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm²	INTER-LOCKING & NON-INSULATED	
67GLP01		AWG 12-10 / 8 / 16-14 / 20-18 1.5 / 2.5 / 6 / 10 mm²	NON-INSULATED TERMINAL	
67GHP01		AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm²	FOR INSULATED TERMINAL	

Ratchet Crimping Tool

67G

- For crimping RG type cable
- CATV "F" connectors
- Interchangeable die

KT NO.	Overall length inch	Overall length mm	g	
67G	8.7	222	480	1 / 30

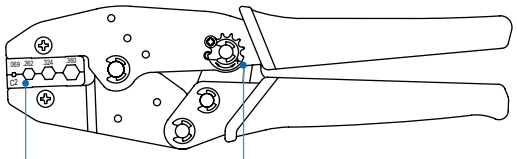

Interchangeable die

Pressure adjustment for actuation force

Item No.	Replacement die set	Terminal size	Description	
67GN-09	67GNP01	AWG 12 / 14 / 16 / 18 / 20 / 22 0.5 / 0.75 / 1.0 / 1.5 / 2.5 / 4.0 mm^2	PIN TERMINAL INSULATED OR NON-INSULATED FERRULES	
67GJ-09	67GJP01	AWG 6 / 8 / 10 6 / 10 / 16 mm^2	PIN TERMINAL INSULATED OR NON-INSULATED FERRULES	
67GK-09	67GKP01	AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm^2	INTER-LOCKING & NON-INSULATED	
67GL-09	67GLP01	AWG 12-10 / 8 / 16-14 / 20-18 1.5 / 2.5 / 6 / 10 mm^2	NON-INSULATED TERMINAL	
67GH-09	67GHP01	AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm^2	FOR INSULATED TERMINAL	
67GG-09	Unchangeable AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm^2		FOR INSULATED TERMINAL	

Crimping Tools

6720-10

- Wire cutter
- Crimps insulated terminals
- Bolt cutter
- Crimps non-insulated terminals (Open barrel)
- Wire stripper
- Grip material -PP+TPR

FUNCTION:

- Wire cutter



- Open barrel terminal crimping



- Non-Insulated terminal Crimping



- Bolt-cutter



- Insulated terminal Crimping



- Wire stripper

KT NO.	Wire cutter Ø mm²	Insulated terminal crimping	Bolt-cutter	Non insulated termind crimp	Open barrel terminal crimping	Wire stripper mm²	g	
6721-10	6	0.5~6	M2.6~5	0.5~6	1.5~6	0.75~6.0	264	6 / 60

6732-09

- Wire cutter
- Crimps insulated terminals
- Bolt cutter
- Crimps non-insulated terminals (Ring)
- Wire stripper

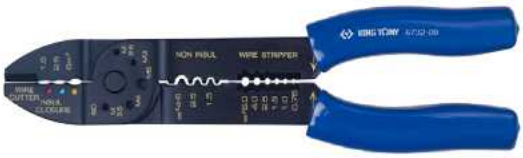

FUNCTION:



- Wire cutter



- Bolt-cutter



- Insulated terminal Crimping



- Wire stripper



- Non-insulated ring terminal crimping

KT NO.	Wire cutter Ø mm²	Insulated terminal crimping	Bolt-cutter	Non-insulated ring terminal crimping	Wire stripper mm²	g	
6732-09	6	1.5~6	M2.6~5	1.5~6	0.75~6.0	261	24 / 72

Wire Stripper

6742-06

- Wire cutter
- Wire stripper

FUNCTION:

- Wire cutter



- Wire stripper

- Holding wire

KT NO.	Wire cutter Ø mm²	Wire stripper mm	Wire stripper AWG (mm²)	g	
6742-06	6	0.5~2.6	24~10 (0.2~5.5)	103	6 / 120

Heavy Duty Crimping Tool

6AC51-26

- For cable lugs from 10mm^2-150mm^2 with non-ratchet screw adjustment

KT NO.	Overall length mm	kg	
6AC51-26	665	3.9	1 / 5

Crimping capacity

AWG	8	6	4	2	1/0	2/0	3/0	4/0	300MCM
JIS(mm^2)	8	14	22	38	60	70	80	100	150
DIN(mm^2)	10	16	25	35	50	70	95	120	150

6AC52-12

- Ratchet designed. For non-insulated terminals

KT NO.	Overall length inch	Overall length mm	g	
6AC52-12	12	300	520	6 / 24

Item No. \ AWG	16	14	10	8	6
JIS mm^2	1.25	2	5.5	8	14
DIN mm^2	1.5	2.5	6	10	16
6AC52-12	●	●	●	●	●

KING TONY
7935-06
KING TONY
KING TONY

HAMMERS & STRIKING TOOLS

KING TONY 7821-30
7841-36
7861-16
GENUINE HICK

Hammer

Convert :
1g = 0.035 oz / 1g = 0.0022 lb

7811

- American style
- Forged and hardened steel
- Wood and metal wedge
- GGG-H86C

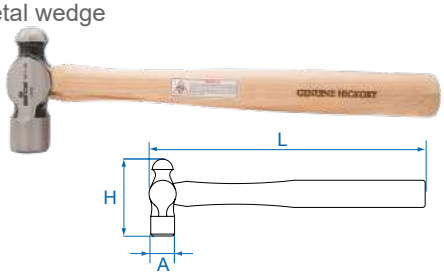

KT NO.	H.W g	A mm	H mm	L mm	g	
7811-08	245	25	80	300	391	6 / 60
7811-12	370	29	93	300	480	6 / 48
7811-16	485	32.5	103	353	651	6 / 36
7811-24	765	35.5	122	405	983	6 / 24
7811-32	925	40.5	125	405	1170	6 / 24
7811-40	1125	42.2	133	405	1344	6 / 12

7821

7821:
- German style
- Forged and hardened steel
- Wood and metal wedge
- DIN 1041

7823

7823:
- Engineer's hammer
- DIN1041

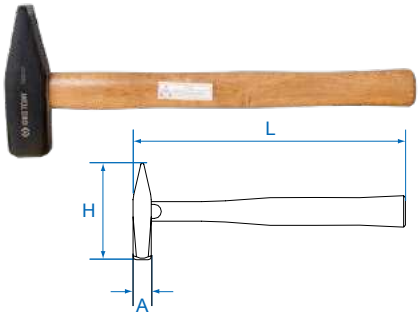

KT NO.	H.W g	A mm	H mm	L mm	g	
7821-30	371	23	103	300	395	12 / 48
7821-50	500	27	120.5	320	615	6 / 36
7821-80	800	33	130	350	990	6 / 24
7823-10	1000	36	135	360	1121	9 / 18
7823-15	1500	42	145	380	1666	6 / 12
7823-20	2000	47	155	400	2197	6 / 12

7822

- Riveting hammer
- NF E71-016

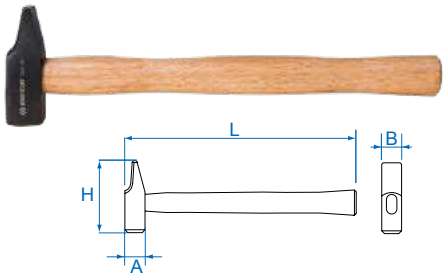

KT NO.	H.W g	A mm	B mm	H mm	L mm	g	
7822-40	800	40	35	115	320	977	8 / 16
7822-45	1250	45	40	124	355	1267	8 / 16
7822-50	1600	50	44	135	382	1856	6 / 12

7833

- Lump hammer
- DIN 6475

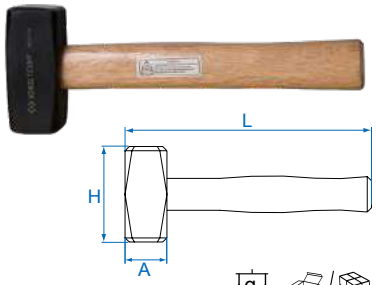

KT NO.	H.W g	A mm	H mm	L mm	g	
7833-10	1000	40	95	260	1066	7 / 14
7833-12	1250	43	100	260	1425	6 / 12
7833-15	1500	45	110	280	1642	6 / 12
7833-20	2000	50	120	300	2142	4 / 8

7834

- Sledge hammer
- Fiberglass handle

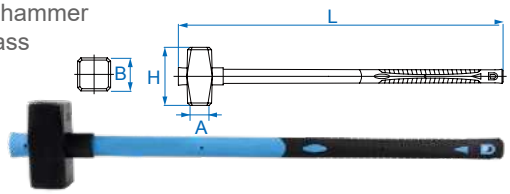

KT NO.	H.W g	A mm	B mm	H mm	L mm	g	
7834-50	5000	68	70	158	908	5850	1 / 2

7852

- Rubber hammer
- Fiberglass handle

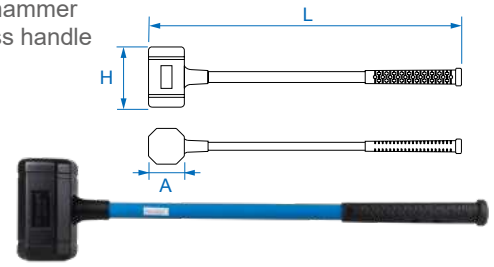

KT NO.	H.W g	A mm	H mm	L mm	g	
7852-23	1650	69.5	142	500	2062	4 / 8
7852-55	4500	104	198	910	5500	2 / 4

7861

- Fiberglass claw hammer

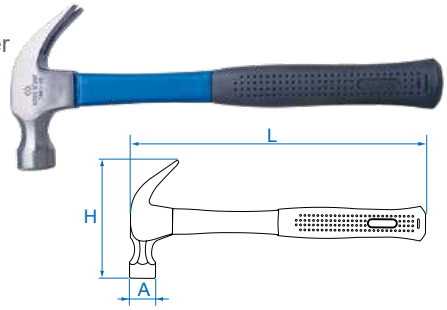

KT NO.	H.W g	A mm	H mm	L mm	g	
7861-08	225	24.8	106	275	374	10 / 40
7861-16	450	30.0	133	335	740	4 / 24
7861-20	565	31.0	144	340	830	4 / 24
7861-24	680	32.0	147	380	920	10 / 20

Hammer

CAUTION Please wear proper safety gear while working.

7848

- Rubber hammer
- Feature : used to lay basalt floors, tires and other materials which are vulnerable

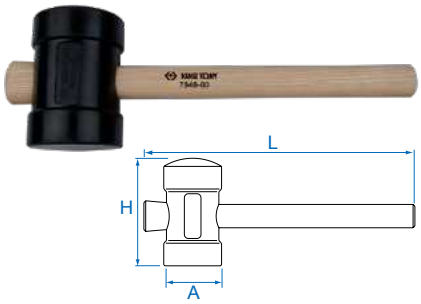

KT NO.	H.W g	A mm	H mm	L mm	g	
7848-60	523	64	119	330	628	6 / 12
7848-80	821	79	119	350	979	5 / 10

7851

- Dead blow hammer

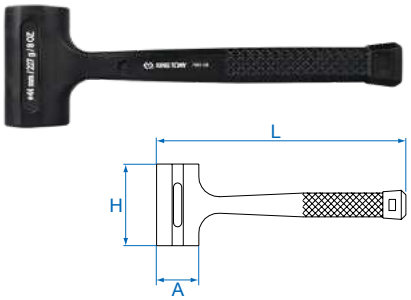

KT NO.	H.W g	A mm	H mm	L mm	g	
7851-08	227	44	81	272	572	6 / 24
7851-16	454	45	100	304	804	6 / 24
7851-24	680	49	100	322	942	6 / 24
7851-32	907	55	100	342	1059	6 / 24
7851-40	1134	58	110	342	1168	6 / 24
7851-48	1361	61	123	355	1321	6 / 12
7851-64	1814	68	136	368	1976	6 / 12

7842

- Soft face hammer
- Replaceable polyurethane face
- Helps minimize marring and surface damage

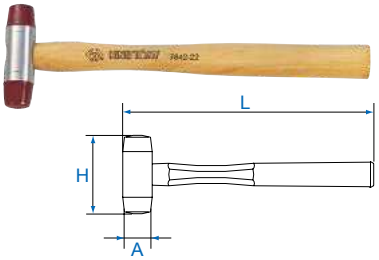

KT NO.	A mm	H mm	L mm	g	
7842-22	22	75	255	110	10 / 40
7842-28	28	85	295	165	10 / 40
7842-35	38	100	325	305	8 / 32
7842-45	45	112	335	420	8 / 32
7842-60	60	135	380	895	6 / 12

915

- Spare faces for item 7842



KT NO.	A mm	g	
91528H/S	28	22	10 / 100
91535H/S	38	38	6 / 120
91545H/S	45	70	6 / 36
91560H/S	60	137	6 / 24

Hammer Hook

91431

- Overall Size - W40 x D210 x H240 mm
- Weight - 411.6 g / Cuft - 0.072

Chisel & Punch

- Material - chrome vanadium alloy steel
- Finishing - phosphate sunk

761 Center punch

KT NO.	Ø mm	L mm	g	
76103-04	3	100	33	12 / 336
76104-05	4	120	58	12 / 336
76105-06	5	150	129	12 / 144

763 Starter punch



KT NO.	Ø mm	L mm	g	
76301-05	1	120	57	12 / 336
76302-05	2	120	55	12 / 336
76303-05	3	120	57	12 / 336
76304-05	4	120	58	12 / 336
76305-05	5	120	59	12 / 336
76306-05	6	120	61	12 / 336
76307-05	7	120	101	12 / 240
76308-05	8	120	110	12 / 240
76309-06	9	150	141	12 / 144
76310-06	10	150	144	12 / 144

Chisel & Punch Set

- Material - chrome vanadium alloy steel
- Finishing - phosphate sunk

CAUTION Please wear proper safety gear while working.

765 Cape chisel

KT NO.	A mm	L mm	g	
76505-05	5	130	66	12 / 240

762 Flat chisel

KT NO.	A mm	L mm	g	
76210-10	10	250	135	12 / 144
76213-04	13	100	52	12 / 336
76213-06	13	150	82	12 / 144
76215-05	15	125	67	12 / 336
76217-06	17	150	140	12 / 144
76220-07	20	175	169	12 / 144
76223-08	23	200	295	12 / 72
76224-10	24	250	376	4 / 40
76226-12	26	300	649	4 / 32

764 Pin punch

KT NO.	Ø mm	L mm	g	
76402-45	2	115	31	10 / 640
76403-05	3	125	33	10 / 640
76403-06	3	150	39	10 / 250
76404-06	4	150	60	10 / 250
76405-65	5	165	68	10 / 280
76406-07	6	180	125	10 / 150
76408-08	8	200	162	10 / 120
76410-85	10	215	222	12 / 120
76412-09	12	230	349	10 / 80
76414-10	14	250	502	6 / 48

1005APR

5 PC.

Contents		Kg 0.32	8 / 48
	76104-05	Ø 4 x 120	
	76215-05	15 x 125	
	76303-05	Ø 3 x 120	
	76404-06	Ø 4 x 150	
	76505-05	5 x 130	

1006APR

6 PC.

Contents		Kg 0.51	5 / 30
	764	Ø 2 x 115, Ø 3 x 125 Ø 4 x 150, Ø 5 x 165 Ø 6 x 180, Ø 8 x 200	

Flat Chisel & Punch Set

1090PR1

- Flat chisel & punch set

KT NO.		Contents	Each Q'ty	Kg	Cuft
1090PR1	761	Ø 4 x 120, Ø 5 x 150	6	13.50	0.34'
	762	17 x 150, 20 x 175, 23 x 200, 24 x 250 mm			
	763	4 x 120, 8 x 120 mm			
	764	Ø 3 x 40, Ø 4 x 50, Ø 5 x 50, Ø 6 x 50, Ø 10 x 65			
	767	150 , 200 mm			
8711B		600 x 240 x 60 mm	1	6.20	0.9'
8711B-1		600 x 232 x 230 mm	1	2.00	1.7'

90 PC.

Shelf size (mm) : 600 x 240 x 290

Punch Set

- Material - chrome vanadium alloy steel
- Finishing - phosphate sunk

- Pouch material : Tetoron

- Pouch material : Nylon

- Pouch material : Tetoron

KT NO.	PC.		Contents	Package	Kg	
1006PR	6	764	Ø 2 x 30, Ø 3 x 40, Ø 4 x 50, Ø 5 x 50, Ø 6 x 50, Ø 8 x 50	Nylon	0.57	1 / 20
1006PRN	6			Tetoron		
1016PR	6	761	Ø4 x 120, Ø5 x 150	Nylon	0.84	1 / 20
		762	20 x 175, 23 x 200			
		764	Ø3 x 125, Ø5 x 165			
1009PR	9	764	Ø 2 x 30, Ø 3 x 40, Ø 4 x 50, Ø 5 x 50, Ø 6 x 50, Ø 8 x 50, Ø10 x 65, Ø12 x 70, Ø14 x 75	Nylon	1.70	1 / 12
1009PRN	9			Tetoron		
1010PR	10	761	Ø 3 x 100, Ø 4 x 120, Ø 5 x 150	Nylon	0.88	1 / 24
		763	Ø 3 x 120, Ø 6 x 120, Ø 8 x 120			
		764	Ø 3 x 40, Ø 4 x 50, Ø 5 x 50, Ø 6 x 50			
1025PRN	5	762	13 x 100, 15 x 125, 17 x 150, 20 x 175, 23 x 200	Tetoron	0.79	1 / 20

Sheathed Chisel & Pin Punch

- Material – chrome molybdenum alloy steel
- Finishing - phosphate sunk
- Safe and comfortable grip

761-G Sheathed center punch

KT NO.	Ø mm	L mm	g	
76125-74G	2.5	185	111	12 / 144
76104-74G	4	185	113	12 / 144
76106-74G	6	185	175	12 / 144
76108-74G	8	185	168	12 / 120
76110-74G	10	185	117	12 / 120

762-G Sheathed flat chisel

KT NO.	A mm	L mm	g	
76218-75G	18	190	181	10 / 100
76219-75G	19	190	180	10 / 100
76220-84G	20	210	268	8 / 80
76222-84G	22	210	269	8 / 80

763-G Sheathed starter punch

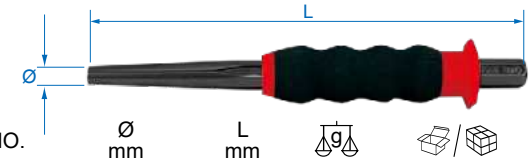

KT NO.	Ø mm	L mm	g	
76302-74G	2	185	111	12 / 144
76303-74G	3	185	111	12 / 144
76304-74G	4	185	112	12 / 144
76305-74G	5	185	115	12 / 144
76306-74G	6	185	118	12 / 144
76308-74G	8	185	166	12 / 120

764-G Sheathed pin punch

KT NO.	Ø mm	L mm	g	
76402-55G	2	140	50	12 / 384
76403-06G	3	150	53	12 / 384
76404-07G	4	180	96	12 / 144
76405-08G	5	200	110	12 / 144
76406-84G	6	210	163	12 / 120
76407-84G	7	220	163	12 / 120
76408-88G	8	220	174	12 / 96
76409-88G	9	230	183	12 / 96
76410-09G	10	250	246	10 / 80
76412-10G	12	290	347	8 / 64
76414-11G	14	350	443	6 / 48
76416-12G	16	310	594	6 / 36
76410-14G	10	350	358	10 / 60
76412-14G	12	350	476	6 / 36
76414-14G	14	350	521	6 / 36
76416-14G	16	350	670	5 / 30

Sheathed Pin Punch Set

- Pouch material : Tetoron

KT NO.	PC.		Contents	Kg	
1014GPN	4	764-G	Ø 10 x 350, Ø 12 x 350, Ø 14 x 350, Ø 16 x 350	2.13	1 / 8
1006GPN	6		Ø 2 x 140, Ø 3 x 150, Ø 4 x 180, Ø 5 x 200, Ø 6 x 210, Ø 8 x 220	0.80	1 / 8
1009GPN	9		Ø 2 x 140, Ø 3 x 150, Ø 4 x 180, Ø 5 x 200, Ø 6 x 210, Ø 8 x 220, Ø 10 x 230, Ø 12 x 250, Ø 14 x 290	1.82	1 / 12

Automatic Center Punch

768

- Material : handle - brass, tip - S2
- Spring-loaded trigger design for useing without a hammer

KT NO.	Ø mm	L mm	g	
76804-05	1.3	130	75.0	30 / 120
76807-06	1.7	155	142	30 / 120

Flat Chisel & Set

767

- Ribbed type

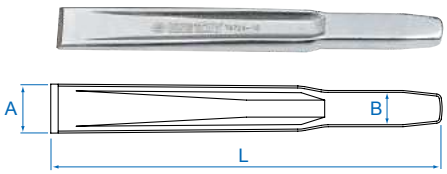

KT NO.	A mm	B mm	L mm	g	
76717-05	17	12.6	125	88	12 / 240
76721-06	20	16.0	150	147	12 / 144
76724-08	25	19.0	200	264	12 / 72
76729-10	29	22.3	250	454	8 / 48

11104PR10

4 PC.

Contents Kg 1.0 1 / 20

76717-05	17 x 125
76721-06	20 x 150
76724-08	25 x 200
76729-10	29 x 250

11104PR

4 PC.

Contents Kg 1.37 1 / 10

76717-05	17 x 125
76721-06	20 x 150
76724-08	25 x 200
76729-10	29 x 250
87108	

87108

- Acrylic display stand



KT NO.	H mm	L mm	g	
87108	140	160	410	12

Marking Punch

CAUTION Please wear proper safety gear while working.

11409SQ

- Chrome vanadium alloy steel
- Hardened and tempered control HRC60 for safe use
- Invert number 6 to be number 9 (For 11409SQ)
- The letter A~Z with extra "&" (ampersand) included (For 11427SQ)

The position hole help to fix the marking punch

11427SQ

11409SQ

11427SQ

KT NO.	Font size mm	Font size inch	Contents	Shank mm²	L mm	Kg	
11409SQ02	2.0	5/64"	9 PCS 0~9	6.35	61	0.18	1 / 80
11409SQ03	3.0	1/8"		6.35	61	0.18	1 / 80
11409SQ04	4.0	5/32"		6.35	59	0.18	1 / 80
11409SQ05	5.0	3/16"		8	61	0.28	1 / 50
11409SQ06	6.0	1/4"		9.53	61	0.43	1 / 36
11409SQ08	8.0	5/16"		12.7	71	0.78	1 / 18
11427SQ02	2.0	5/64"	27 PCS A~Z, &	6.35	61	0.52	1 / 30
11427SQ03	3.0	1/8"		6.35	61	0.52	1 / 30
11427SQ04	4.0	5/32"		6.35	59	0.52	1 / 30
11427SQ05	5.0	3/16"		8	61	0.82	1 / 16
11427SQ06	6.0	1/4"		9.53	61	1.25	1 / 12
11427SQ08	8.0	5/16"		12.7	71	2.33	1 / 6

Heavy Duty Marking Punch

11509SQ

- Chrome vanadium alloy steel
- Hardened and tempered control HRC60 for safe use
- Hardness reduced at striking end HRC40 to have longer life time
- Invert number 6 to be number 9 (For 11509SQ)
- The letter A~Z with extra "&" (ampersand)included (For 11527SQ)

11527SQ

11509SQ05

11527SQ05

KT NO.	Font size mm	Font size inch	Contents	Shank mm²	L mm	Kg	
11509SQ05	5.0	3/16"	9 PCS 0~9	11	61	0.56	1 / 30
11527SQ05	5.0	3/16"	27 PCS A~Z, &	11	61	1.70	1 / 10

WORKSHOP TOOLS

KING TONY
9TBA600
KING TONY
9TD406-19M
9TD406-17M
8:1 HIGH THRUST
KING TONY 7CA82-30
TDM160

Gear Puller & Set

- Material - chrome vanadium alloy steel
- Finishing - chrome plated & phosphate sunk

7962

- Two-Jaw gear puller



KT NO.	Capacity (tons)	HEX (mm)	Jaw (leg)	Spread (A)mm	Reach (B)mm	kg	
7962-03	2	14	2	40~75	60	0.44	1 / 40
7962-04	4	17	2	50~100	95	0.78	1 / 20
7962-06	6	19	2	70~150	150	1.65	1 / 10
7962-08	10	23	2	95~200	235	3.50	1 / 5
7962-12	15	32	2	140~300	280	7.00	1 / 2

7963

- Three-Jaw gear puller



KT NO.	Capacity (tons)	HEX (mm)	Jaw (leg)	Spread (A)mm	Reach (B)mm	kg	
7963-03	3	14	3	40~75	60	0.55	1 / 40
7963-04	6	17	3	50~100	95	1.06	1 / 20
7963-06	9	19	3	70~150	150	2.25	1 / 10
7963-08	15	23	3	95~200	235	4.50	1 / 5
7963-12	22	32	3	140~300	280	11.00	1 / 2

7962B

- Two-Jaw gear puller
- Adjustable sliding arm for efficiency and safety
- Reversible jaws for internal & external options gear, axle, bearing, etc...

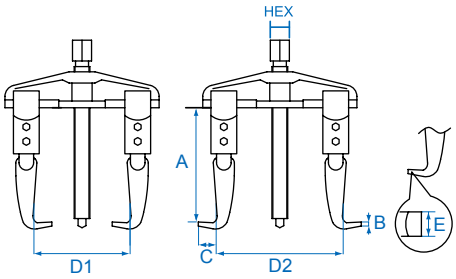

KT NO.	Capacity (tons)	Hex (mm)	Jaw (leg)	Reach A(mm)	B (mm)	C (mm)	Spread D1 (mm)	Spread D2(mm)	E (mm)	kg	
7962B-35	3.0	17	2	100	3.8	14.5	90	60~125	21	1.05	1/12
7962B-05	5.0	17	2	100	3.8	14.5	130	60~160	21	1.15	1/12
7962B-06	7.0	22	2	150	4.6	23.0	150	85~200	30	2.98	1/6
7962B-08	11.0	22	2	150	4.6	23.0	190	105~230	30	3.41	1/6
7962B-10	14.0	27	2	210	7.0	30.0	240	130~300	35	7.11	1/3

7962B1PR

- Two-Jaw gear puller
- Adjustable sliding arm for efficiency and safety
- Reversible jaws for internal & external options gear, axle, bearing, etc…

5 PC.

Contents		kg 18.20	1
7962B	3.5″ , 5″ , 6″ , 8″ , 10″		
87155			

Micro Bearing Puller

7965-02

- Applications include: alternators, generators, domestic appliances, power tools and pumps



- Adjust the jaws by turning the screw

KT NO.	Capacity (Tons)	Spread A(mm)	Reach B(mm)	g	
7965-02	2T	19-45	73	905	1 / 12

Hydraulic Puller Set

9BA01

17.00 1 / 1

22 PC.

- Includes forged steel bearing separator and gear puller
- Operate up to 10 tons hydraulic pulling power
- Special separator design of the strong back puller allows the puller to be used even in the tightest spaces
- Suitable for industry, automotive and a gricultural machine

- 9BA22P01- Set Separator Capacity 75mm ~ 105mm
- 9BA22P03- 1 PC. Beam
- 9BA01P01- 1 PC. 10T Hydraulic Ram
- 9BA01P032- 1 PC. Tripe Head
- 9BA01P031- 1 PC. Twin Head
- 9BA01P033- 1 PC. Ram Part
- 9BA01P012- 1 PC. Centre Adapter
- 9BA01P013- 1 PC. 1"x 2" Extension Rod
- 9BA01P014- 1 PC. 1"x 4" Extension Rod
- 9BA22P02- 2 PC. Main Rod Hex bar 19mm x M12 & 1/2" xL255mm
- 9BA22P04- 2 PC. Extension Rod Hex bar 19mm x M12 x L255mm
- 9BA01P051- 3 PC. 4" Leg
- 9BA01P052- 3 PC. 6" Leg
- 9BA01P053- 3 PC. 8" Leg

Size	Spread A (mm)	Reach B(mm)	Spread C(mm)	Reach D(mm)
4"	240	120	250	120
6"	190	170	310	170
8"	180	220	200	220



Bearing Separator

9BA21P01

9BA21P02

9BA22P01

KT NO.	Capacity	Bolt	kg	
9BA21P01	50mm~75mm	1/2" x 20UNF x L 135mm	1.59	1 / 10
9BA21P02	30mm~50mm	3/8" x 24UNF x L 125mm	0.7	1 / 20
9BA22P01	75mm~105mm	5/8" x 18UNF x L 165mm	-	1 / -

Pressure Screw Bearing Separator Puller Set

9BA22

8.95 1 / 2

- Includes bearing separator & bolts
- Contents:

Bearing Seperator
9BA22P01
Capacity 75mm ~ 105mm
Bolt 5/8" x 18UNF x L 165mm

2 PC. Main rod
9BA22P02
Hex bar 19mm x M12 & 1/2" x L 255mm

2 PC. Extension rod
9BA22P04
Hex bar 19mm x M12 x L 255mm

1 PC. Beam

1 PC. Central bolt
9BA22P011
Hex 21mm x M18 x L292 mm

1 PC. Nut

8 PC.

9BA22

9BA21

5.25 1 / 2

- 2 Sets bearing separator & bolts
- Contents:

Bearing Seperator
9BA21P02
Capacity 30mm ~ 50mm
Bolt 3/8" x 24UNF x L125mm

Bearing Seperator
9BA21P01
Capacity 50mm ~ 75mm
Bolt 1/2" x 20UNF x L 135mm

4 PC. Main rod
9BA21P04
Hex bar 14mm 3/8" x L 102mm x 2 pcs

9BA21P06
Hex bar 17mm 1/2" x L 127mm x 2 pcs

4 PC. Extension rod
9BA21P05
Hex bar 14mm 3/8" x L 102mm x 2 pcs

9BA21P07
Hex bar 17mm 1/2" x L 127mm x 2 pcs

1 PC. Beam
9BA21P03

Central Bolt
9BA21P011

9BA21P011
Hex 18mm x 9/16" x L175mm

12 PC.

9BA21

Ratcheting Gear Puller

New

7963C

- A dual-use ratcheting gear puller can be self-adjusted to 2 or 3 jaws according to usage
- The ratchet-style claw structure enables quicker and more convenient jaws replacement operation
- The ratchet-style jaw structure allows for swift adjustment of the range of use
- Reversible jaws can be used for internal and external gears, axles, bearings, etc

KT NO.	Capacity (Tons)	Jaws (leg)	Spread A(mm)	Reach B(mm)	HEX (mm)	kg	
7963C-03	2T	2&3	50~76	45	13	0.45	1 / 36
7963C-05	5T	2&3	101~127	75	17	1.50	1 / 12
7963C-08	8T	2&3	127~200	172	17	2.89	1 / 6

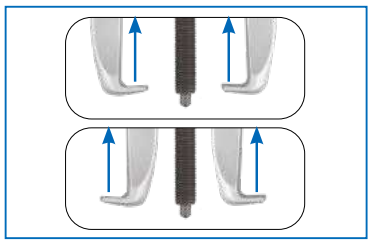

- Quick and easy replacement with ratchet-style jaw structure

Hydraulic Mechanical Pullers

9BA

- Quick and safe removal particularly large and tight gears, bearings, etc...
- Two and three jaws type, use for different space

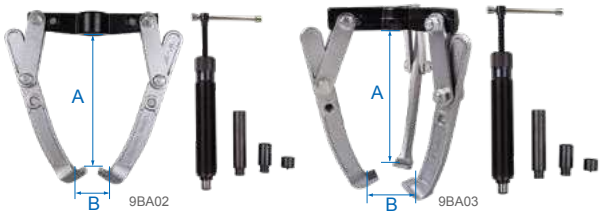

KT NO.	Capacity (Tons)	Jaws (leg)	Reach A(mm)	Spread B(mm)	kg	
9BA02	15T	2	320	500	11.30	1 / 1
9BA03	15T	3	320	500	16.50	1 / 1

Universal Bearing Puller Set

9BA31

- Easy and fast removing ball bearing by using the puller
- Select proper tips by ball diameter

CONTENTS :

- 1 PC. Puller yoke M6 x1.0 and center screw Hex 12mm x160mmL
- 1 PC. Top Nut
- 2 PC. Extension rod x L 105mm Ball ended threaded adapter
- 2 PC. 5.5mm / 2 PC. 6.0mm / 2 PC. 8.0mm

1.33 / 1 / 12

9BA32 1/2"

- Easy and fast removing ball bearing by using the puller
- Select proper tips by ball diameter

CONTENTS :

- 1 PC. Puller yoke 3/8-16UNC and center screw Hex 14mm x175mmL
- 1 PC. Top Nut
- 2 PC. Extension rod x L 100mm Ball ended threaded adapter
- 2 PC. 11.0mm / 2 PC. 12.5mm / 2 PC. 15.0mm

2.00 / 1 / 12

Universal Bearing Puller Set

9BA33

- Easy and fast removing ball bearing by using the puller
- Select proper tips by ball diameter

CONTENTS :

- 1 PC. Puller yoke M14 x2.0 and center screw Hex 21mm x280mmL
- 1 PC. Top Nut
- 2 PC. Extension rod x L 170mm Ball ended threaded adapter :
- 2 PC. 15.0mm / 2 PC. 17.4mm
- 2 PC. 20.0mm / 2 PC. 25.2mm
- 2 PC. 30.0mm / 2 PC. 36.4mm

8.00 / 1 / 3

16 PC.

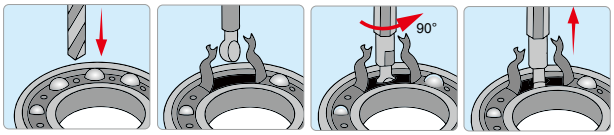

Slide Hammer Gear Puller Set

796401MR

Slide Hammer Puller Set

- For jobs involving pull and grip gears, bearings, outer races, grease retainers, oil seals, etc.
- 2.6 lbs(1.2 kgs) slide hammer
- 400 mm length T-handle puller
- 3-in-1 hammer puller, to handle inside pull such as bearing cups and outer races, as well as regular outside pull jobs

CONTENTS:

- 1 PC. 400 mm T handle shaft
- 1 PC. 2.6 lbs / 1.2 kgs hammer
- 1 PC. Adjustable nut
- 1SET Internal gear puller for Ø15-30mm(A)
- 1SET Internal gear puller for Ø30-80mm(B)
- 1SET External gear puller for Ø15-80mm(C)

6 PC.

4.50 / 1/4

Items		D (mm)	Capacity
Internal gear puller		6	Ø 15-30mm
Internal gear puller		10.5	Ø 30-80mm
External gear puller		10.5	Ø 15-80mm

Riveter & Set

21-20-101

- Stainless steel riveter nozzles
- Drop-forged aluminum body

KT NO.	L inch	L mm	Capacity inch	Capacity mm	g	
21-20-101	10-1/4	260	3 / 32 1 / 8 5 / 32 3 / 16	Ø 2.4 Ø 3.2 Ø 4.0 Ø 4.8	588	12 / 24

21-20-07MR

121 PC.

- Blow case size (mm) :
- 276 x 160 x 46(0.122 cuft)

Contents	kg 1.06	1 / 16	Each Q'ty
4 x 8 mm		4 x 10 mm	20
4 x 8 mm		4 x 10 mm	
4.8 x 8 mm		4.8 x 10 mm	
21-20-101			1

21-20-102

- 4 changeable sizes
- Stainless steel riveter
- The driver can be used in 90° and 180°

KT NO.	L inch	L mm	Capacity inch	Capacity mm	g	
21-20-102	11	278	3 / 32 1 / 8 5 / 32 3 / 16	Ø 2.4 Ø 3.2 Ø 4.0 Ø 4.8	778	6 / 24

Riveter

79711

- Stainless steel riveter nozzles
- Drop-forged aluminum body
- Heavy duty riveter for stainless or aluminum rivets

KT NO.	L inch	L mm	Capacity inch	Capacity mm	g	
79711	18	460	1 / 8 5 / 32 3 / 16 1 / 4	Ø 3.2 Ø 4.0 Ø 4.8 Ø 6.4	1480	1 / 12

Lazy Tong Hand Riveter

79721

- Expander framework design to press riveter
- 4 PC. Interchangeable nozzles
- Heavy duty riveter for stainless or aluminum rivets

KT NO.	L mm(min)	L mm(max)	Capacity inch	Capacity mm	kg	
79721	315	870	1 / 8 5 / 32 3 / 16 1 / 4	Ø 3.2 Ø 4.0 Ø 4.8 Ø 6.4	2.00	1 / 10

Blind Nut Riveter

21-30-09MR

- Designed for fastening object to thin metal
- 4 PC. interchangeable mandrels (M4, M5, M6, M8)
- 80 PC. iron nut rivet

85 PC.

KT NO.	L inch	L mm	Capacity	kg	
21-30-09MR	10-1/2	265	M4 x 0.7 M5 x 0.8 M6 x 1.0 M8 x 1.25	1.32	1 / 12

Nut Riveter

79731

- Stainless steel nut riveter nozzles
- Drop-forged aluminum body
- Heavy duty riveter for stainless or aluminum rivet nuts

KT NO.	L inch	L mm	Capacity	kg	
79731	18	472	M5 M6 M8 M10	1.86	1 / 12

Measuring Tape

79093

- Auto-Lock measuring tape
- Two retrieval buttons
- Nylon coating 3-rivet blade
- Ergonomic & shockproof ABS+TPE case
- Specially red marked each 10cm scale
- EU Class II accuracy standard approval

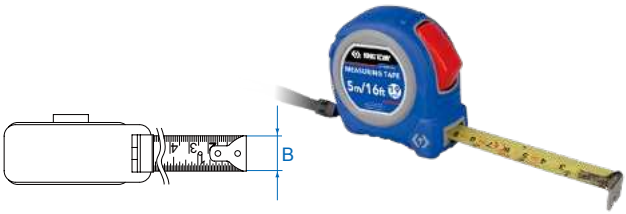

KT NO.	L M / FT	B mm	g	
79093-02M	2M	16	110	16 / 64
79093-03M	3M	16	137	16 / 64
79093-05M	5M	19	210	14 / 56
79093-05M1	5M	25	260	12 / 48
79093-08M	8M	25	420	12 / 48
79093-03C	3M/10FT	16	137	16 / 64
79093-05C	5M/16FT	19	210	14 / 56
79093-08C	8M/26FT	25	420	12 / 48

79094

- Magnetic hook



KT NO.	L M / FT	B mm	g	
79094-02M	2M	16	110	16 / 64
79094-03M	3M	16	137	16 / 64
79094-05M	5M	19	210	14 / 56
79094-08M	8M	25	420	12 / 48
79094-03C	3M/10FT	16	137	16 / 64
79094-05C	5M/16FT	19	210	15 / 60
79094-05C1	5M/16FT	25	260	12 / 48
79094-08C	8M/26FT	25	420	12 / 48

Paper Display Stand

87118

- Capacity : 12 PC.
- For all measuring tape (79093 / 79094 <02M,03M,05M>series)
- Paper display stand size(mm) : 309 x 237 x 189 (0.489 CUFT)

79095-05M

79094-05M 16%

- Magnetic hook

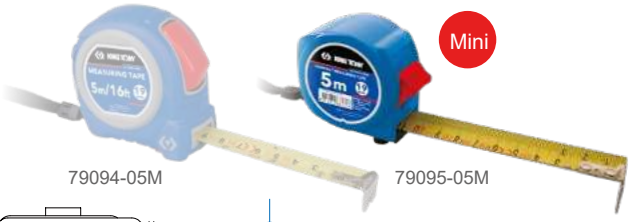



KT NO.	L M / FT	B mm	g	
79095-05M	5M	19	158	12 / 144

79095-05M-S

12 PC.

Contents			kg	
	79095-05M	x 12 PC.	1.90	1 / 10

Full Color Laser Distance 60M

7DM1160

- Colorful LCD display for easily reading
- Functions : Single measure, continuous measure, area, volume, height, stake-out
- Six flexible ways for height measurement
- Universal 8 length units with auto-converting
- 360° inclination sensor for determining the horizontal and vertical distance
- 2 selectable measurement reference points : Front and rear
- Automatic orientation display
- CE Approval IEC 60825-1: 2014, EN 61326-1: 2013

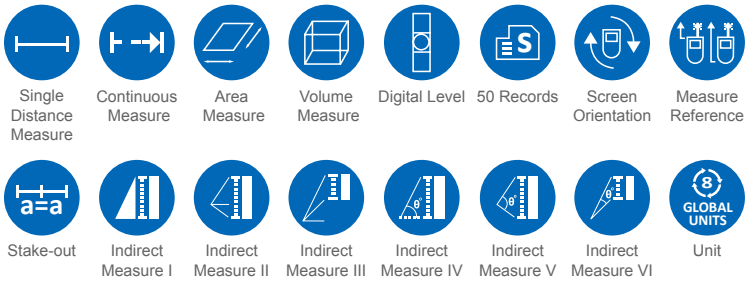

Technical data	
Display	Color LCD
Measuring Range	0.05 m ~ 60 m
Resolution	0.001 m
Accuracy	±1.5 mm
Laser Type	650 nm, Class II, < 1 mw
Unit(Selectable)	m, ft, in, 0'0"1/32, 1/32in, 1/16in, 1/8in, 10/33
Battery Life	Up to 6,000 measures
Operation Temperature	-5° C ~ 40° C
Storage Temperature	-20° C ~ 60° C
Memory	50 set
IP code	54
Automatic Power-Off	Laser-120 seconds Device-180 seconds
Battery	AAA x 2 PC. (Battery not included)

- Color LCD

Overview for device :

- A - LCD
- B - Single Measure
- C - Addition
- D - Subtraction
- E - Clear / Power
- F - Functions Included Single Measure, Continuous Measure, Area, Volume, Six Indirectly Height Measurements, Stake-out, Level, Unit and Setting
- G - Reference
- H - Receiving Lens
- I - Laser Emitted Window

KT NO.	Size (mm) L x W x H	g	
7DM1160	105 x 48 x 21	200	1 / 40

Measuring

79062

- Adjustable square measuring with angle spirit level 305mm
- Sliding combination of square, spirit level, height gauge and steel rule
- 90° and 45° level allow try-square and metre-square work
- Metal scriber pin in the end
- Metric and imperial marking at both sides
- Precision cast zinc alloy and stainless blade
- For woodwork



KT NO.	L mm	L inch	g	
79062-12	305	12	312	12 / 72

Caliper

77133

- Vernier calipers parallax free
- Parallax free bevel scales for easy and accurate measurement
- 4 way measurement capability for outside, inside, depth and step measurement
- The caliperis made of hardened stainless steel

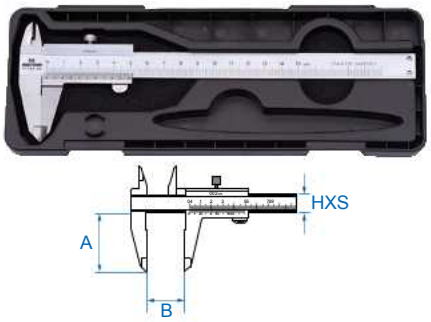

KT NO.	A mm	B max mm	Vernier mm	H x S mm	g	
77133-06	40	150	0.02	16 x 3	282	1 / 20
77133-08	50	200	0.02	20 x 4		

Digital Caliper

77142

- Clear and visible LCD large panel
- Modes: power on/off, unit conversion, reset, and lock
- The lock function efficiently maintains records
- Precision-engineered hardened steel measuring jaws



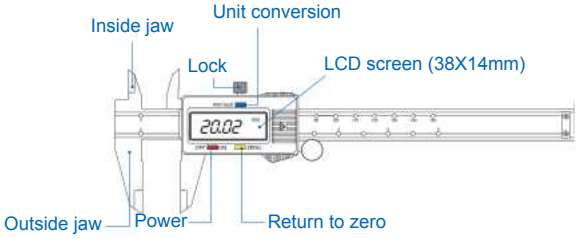

KT NO.	A mm	B max mm	B max inch	Resolution mm	Resolution inch	g	
77142-061	40	150	6	0.01	0.001	320	1 / 20
77142-081	50	200	8	0.01	0.001	485	1 / 36

Stainless Ruler

79063

- Stainless steel deeply etched for easy reading
- Dual scale : metric & imperial marking (mm/inch)



KT NO.	L mm	L inch	W mm	T mm	g	
79063-06	150	6	13	0.6	12	10 / 500
79063-12	300	12	30	0.8	65	10 / 300
79063-20	500	20	30	0.8	105	10 / 250
79063-40	1000	40	30	0.8	360	10 / 100

Metric Feeler Gauge

- Material: blade made of spring steel

77340-20

- 20 blades metric feeler gauge

CONTENTS :

- 0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00 mm

KT NO.	Number of blades	Width x Length of blades (mm)	g	
77340-20	20	10 x 100	105	50 / 200

77335-25

- 25 blades metric feeler gauge

CONTENTS :

- .04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00 mm

KT NO.	Number of blades	Width x Length of blades (mm)	g	
77335-25	25	13 x 85	105	50 / 200

Metric Feeler Gauge

77328-26

- 26 blades inch feeler gauge

CONTENTS :

- 0.0015", 0.002", 0.0025", 0.003",
- 0.004", 0.005", 0.006", 0.007",
- 0.008", 0.009", 0.010", 0.011",
- 0.012", 0.013", 0.014", 0.015", 0.016", 0.017", 0.018", 0.019", 0.020", 0.021", 0.022", 0.023", 0.024", 0.025"
- 0.038, 0.051, 0.063, 0.076, 0.102, 0.127, 0.152, 0.178, 0.203, 0.229, 0.254, 0.279, 0.305, 0.330, 0.356, 0.381, 0.406, 0.432, 0.457, 0.483, 0.508, 0.533, 0.559, 0.584, 0.610, 0.635 mm

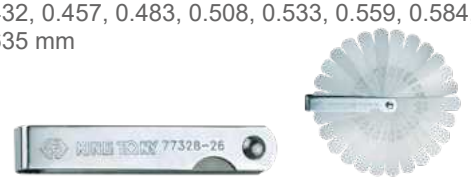

KT NO.	Number of blades	Width x Length of blades (mm)	g	
77328-26	26	12.7 x 76	91	14 / 168

Round Magnetic Tool Holder

9TE11

CAUTION Please wear proper safety gear while working.

- Stainless steel tray resists corrosion
- Can be used horizontally, vertically, and upside down
- Convenient for collecting small parts and tools

KT NO.	Size mm	g	
9TE11	Ø 150	433	1 / 30

Revolving Punch Pliers

74A00

- To punch holes into leather, textiles and soft material
- Revolving steel head has unique waste collection facility

KT NO.	Punch size mm^2	Overall length mm	g	
74A00	2, 2.5, 3, 3.5, 4, 4.5	230	366	10 / 60

Roller Chain Detacher

3214

KT NO.	For chain size ANSI NO.	g	
3214-35	35~50	310	1 / 60
3214-60	60~100	691	1 / 20

Retractable Tool Lanyard

79A21-30 | 79A22-30

- Retractable tool lanyard
- 3 kgs maximum tool weight
- Nylon tether with steel spring inside to absorb the shock of a dropped tool
- Increases safety and productivity
- Ergonomically designed length

79A21-30

79A22-30

KT NO.	Capacity mm	Hook	g	
79A21-30	800~1300	2 lock snaps	106	12 / 144
79A22-30	800~1300	fixed loop	89	12 / 144

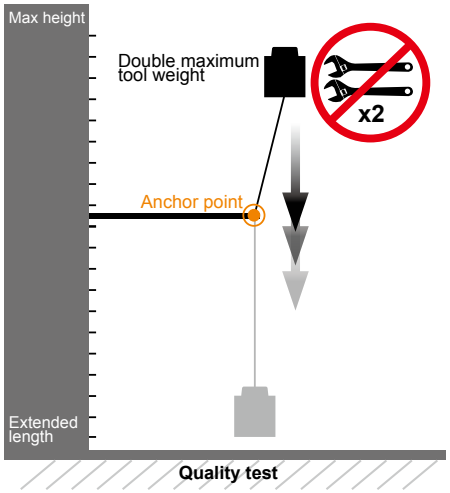

- The retractable tool lanyards are developed according to KING TONY standard. The steel lanyards are tested by double maximum weight and dropped from height. Product quality is approved.

Anti-vibration Protective Gloves

9TH21XL

- Protection from repetitive impact and vibration of pneumatic tools
- Magnet in back of glove for storing metal parts and fasteners

110 100

KT NO.	Size	Width mm	Overall Length mm	g	
9TH21XL	XL	112	235	110	100

Lightweight PU Work Gloves

9TH41

- PU leather offers high dexterity, sensitivity, excellent grip and good comfort
- Mesh fabric provides good breathability
- Elastic band cuff with label velcro provides firm fitting
- EN388 2121X

Non-slip Ventilation Sensitivity

EN 388 2121X

KT NO.	Size	Width mm	Overall Length mm	g	
9TH41-L	L	105	230	67	120
9TH41-XL	XL	110	240	72	120

Vibration Resistant Work Gloves

9TH42

- Goat leather palm provides high dexterity and comfort with EVA padding for anti-vibration
- Touch screen capable fingertips
- Mesh fabric provides good breathability
- Neoprene cuff with velcro adjustment ensures firm fitting
- EN388 2111X

Abrasion Resistance Shock Absorptio ouch Screen Ventilation

EN 388 2111X

KT NO.	Size	Width mm	Overall Length mm	g	
9TH42-XL	XL	115	250	98	120
9TH42-XXL	XXL	120	260	102	120

Silicone Non-slip Work Gloves

9TH43

- Durable palm with anti-slip silicone for excellent grip. EVA padding for anti-vibration
- Reflective piping ensure safe work in dark
- Elastic band cuff with label velcro provides firm fitting
- EN388 2111X

Abrasion Resistance Shock Absorptio Non-slip Ventilation

EN 388 2111X

KT NO.	Size	Width mm	Overall Length mm	g	
9TH43-XL	XL	115	247	102	120
9TH43-XXL	XXL	120	257	108	120

Cold Protection Work Gloves

9TH44

- Nubuck leather palm is breathable, foam insert for extra comfort and anti-vibration
- Reflective piping ensure safe work in the dark
- Neoprene cuff with velcro adjustment ensures firm fitting
- Thinsulate insulation lining offers extra warmth
- EN388 2111X

Shock Absorptio Insulation Ventilation Abrasion Resistance 3M

EN 388 2111X

KT NO.	Size	Width mm	Overall Length mm	g	
9TH44-XL	XL	120	250	105	120
9TH44-XXL	XXL	125	260	113	120

Magnetic Work Gloves

9TH45

- Durable palm with magnetic index finger
- Powerful magnetic on back for storing metal parts & fasteners
- Elastic band cuff with label velcro to ensure firm fitting
- EN388 3111X

Abrasion Resistance Ventilation

EN 388 3111X

KT NO.	Size	Width mm	Overall Length mm	g	
9TH45-XL	XL	120	250	92	120
9TH45-XXL	XXL	125	260	98	120

Silicone Trowel & Scraper

7AA105

- Suitable for removing old caulking and replacing new caulking
- The trowel head with chamfer which is easy for smooth sealing lines
- The stainless tip prevent the surface from being damaged

5 PC.

- Includes Five different nozzle pad head

KT NO.	Size	Overall length mm	g	
7AA105	3R, 6R, 10R, 13R, 17R	204	100	24 / 48

High Thrust Caulking Gun

7CA81-30H

- Cartridge caulk gun
- For 10oz / 300ml cartridges
- 26:1 high thrust ratio provide 450 kgf push force
- Apply extremely thicker materials and adhesives
- Smooth action provide cleaner sealant

- Adjustable screw tightening increases product lifespan

26:1 Thrust ratio

KT NO.	Overall length mm	g	
7CA81-30H	357	814	1 / 10

High Thrust Aluminum Tube Caulking Gun

7CA82-30

- Suitable for 310ml cartridges or bulk
- Professional caulk gun with 18:1 high thrust ratio
- Includes nozzle and pad
- 350kgs maximum thrust power, perfect for applying thicker materials, adhesives
- Application: glass, windowsill, bathroom, etc.

18:1 Thrust ratio

KT NO.	Overall length mm	g	
7CA82-30	352	965	1 / 10

Butane Torch

6BB11

- Adjustable flame length with a maximum temperature of 1300° C /2450° F and will operate on a single fill for 60~90 minutes
- Quick and easy to refill gas only 5 seconds
- A ceramic partition in the nozzle, fast heat dissipation and high safety
- Aluminium body, lightweight and portable
- Built in child proof safety lock system
- Applications include soldering, brazing, heat shrink tubing, frozen locks, fusing rope ends, camping, etc...
- Suitable for workshops, factories and daily professional use
- Anti-flare gas flow tube
- Piezo ignition for instant flame

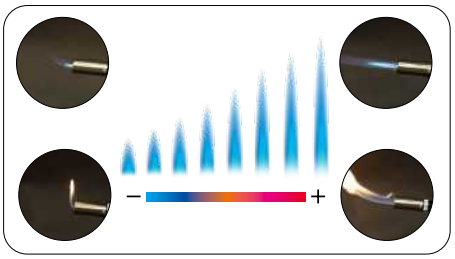

- Refilling gas

- Turn the air flow control switch to change the fire type

- Push the safety latch up

- Turn the gas flow control switch counter-clockwise

- Press the ignition button

KT NO.	Gas Capacity (ml)	Operation Time (min)	Gas Type	flame Temp °C/°F	Dimension L x W x H (mm)	g	
6BB11	34	60~90	Butane	1300 / 2450	122 x 70 x 168	400	12 / 24

Cordless Butane Gas Glue Gun

6BJ21

- Self-regulating temperature system, avoiding the glue keeping coming out to stuck the nozzle or drip everywhere
- Fast-heating in 2 to 3 Minutes
- Quick and easy to refill gas only 3s, keeps running for approximately 1.5 hours
- Front top heater design for safety usage
- Portable and cordless for convenient application
- Passed the 250 hour continuous work durability test
- Included 2 PC. 11mm glue stick
- Suitable for wood workings, household repairs, artficial flowers, models, art and decorations etc...
- Optional glue stick 6BJ901, pack by 10 PC.
- Ergonomic comfort grip

6BJ21



6BJ901



- Refilling gas

- Turn the gas switch on

- Press the ignition button and wait 2-3 min (Make sure the indicator on)

- Automatic temperature control turns off at 180° and turns on under 160°

KT NO.	Gas Capacity (ml)	Operation Time (min)	Glue size (mm)	Gas Type	Operating Temp °C	Dimension(mm) L x W x H	g	
6BJ21	6.8	90	11	Butane	160-180	175 x 36 x 155	241	1 / 10
6BJ901	-	-	11	-	-	Ø11 x 150mm	140	10

360° Cast Steel Bench Vise & Display Rack

9TZ11

- Cast steel body and slide ideal for heavy duty applications
- Ductile cast iron screw pitched acme thread ensures long life and positives action
- Serrated jaws design provides good grip
- 360° swivel base allows operator to approach any direction

- Applicable for round shape objects

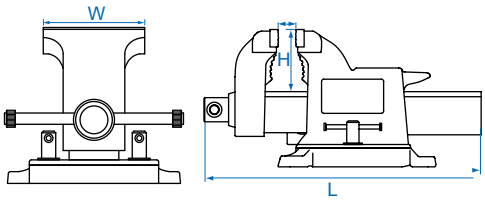

KT NO.	mm	W inch	W mm	H mm	L mm	kg	
9TZ11-04	146	4"	104	57	310	7.50	1
9TZ11-05	166	5"	130	67	365	11.00	1
9TZ11-06	200	6"	155	76	422	14.50	1
9TZ11-08	225	8"	200	89	492	18.00	1
9TZ11-10	250	10"	250	102	572	25.60	1
9TZ11-12	300	12"	305	127	655	33.00	1

Steel Wire Brush Set

9CZ201-S

20 PC.

Contents			kg	
	9CZ201	x 20 PC.	2.70	1 / 8

Broken Screw Extractor Set

11205SQ

- A quick and easy way to remove broken screw, pipe, bolt and stud

100 25 / 100

5 PC.



KT NO.	Capacity mm	Capacity inch	L mm
2127-06M	M3~M6	1/8~1/4	51.5
2127-08M	M6~M8	1/4~5/16	58.0
2127-11M	M8~M11	5/16~7/16	66.0
2127-14M	M11~M14	7/16~9/16	73.5
2127-18M	M14~M18	9/16~3/4	81.0

11208SQ

- Quick and easy to remove broken screw, pipe, bolt and stud

829 6 / 24

8 PC.

KT NO.	Capacity mm	Capacity inch	L mm
2127A-06M	M3~M6	1/8~1/4	51.5
2127A-08M	M6~M8	1/4~5/16	58.0
2127A-11M	M8~M11	5/16~7/16	66.0
2127A-14M	M11~M14	7/16~9/16	73.5
2127A-18M	M14~M18	9/16~3/4	81.0
2127A-24M	M18~M24	3/4~1	91.0
2127A-33M	M24~M33	1~1-3/8	106.0
2127A-50M	M33~M50	1-3/8~2	112.0

Thread Repair File

New

75RF09M

- For the restoration of defective internal and external threads
- Suitable for right and left-handed thread
- Suitable for metric pitch: 0,80 - 1,00 - 1,25 - 1,50 - 1,75 - 2,00 - 2,50 - 3,00

164 12 / 120

Broken Screw Extractor and Drill-Bit Set

11310SQ

- Material : Drill-Bit(HSS), screw extractor(GCr15)
- Metal case size (mm) :149 x 115 x 24 (0.014 cuft)

Contents 0.4 kg 1 / 40

	ø2.5, ø3, ø4.5, ø6, ø8	
	#1	M3 - M6 1/8" - 1/4"
	#2	M6 - M8 1/4" - 5/16"
	#3	M8 - M11 5/16" - 7/16"
	#4	M11 - M14 7/16" - 9/16"
	#5	M14 - M18 9/16" - 3/4"

10 PC.

Speed Out Broken Screw Extractor Set

11406SQ

- For stripped, broken, stuck or damaged screw removal
- Size includes: #0, #1, #2, #2, #3, #4
- High hardness HSS material makes drilling easier and faster
- The screw extractor set is tested with quality, efficiency, durability and stability

82 g 12 / 96

Specifications	Drill Size Ø H1	Suitable for Screw Diameter
	2.5	2-3mm
	3.0	3-5mm
	3.5	4-8mm
	3.5	4-8mm
	4.0	5-10mm
	6.0	6-12mm

6 PC.

3 steps:

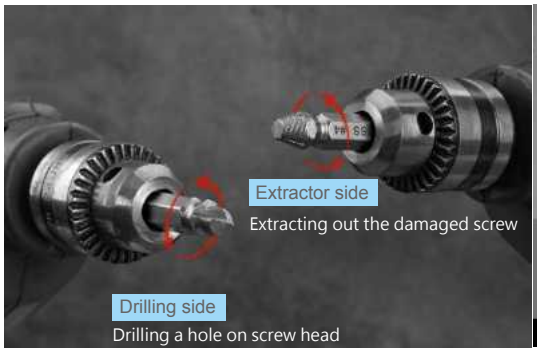



11015SQ

New

- Ideal tool for removing rounded/damaged/stuck bolts
- Material: 8660 steel
- Hardness: HRC49-52



0.53 g 1 / 20

Hex size(H) mm	Size(S) inch	Size(S) mm	Overall length(L) mm
12	1/8", 3/16", 1/4", 3/8"	3, 4, 5, 5.5, 6, 8, 10	29
16	1/2"	11, 12, 14	

15 PC.

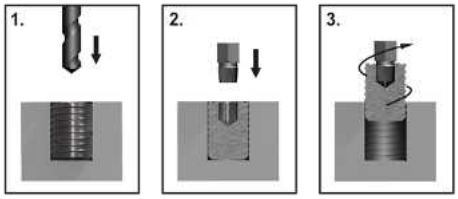

- Operation:
- Drilling a hole which is 0.5mm bigger than the extractor on the bolt
- Insert the extractor in the bolt
- Turn counter clockwise to remove the bolt
  Note: This is a manual operated tool, do not use with impact or power tools

Broken Screw Extractor & Drill Set

11225SQ

25 PC.

- Easy to remove 5~14 mm broken screws
- 15 PC. HSS drill bit & center guide
- 10 PC. extractor pin & nut

0.79 1 / 20





- Use the guide to drill a pilot hole in the center of broken screw

- Put on extractor nut turning out broken screw with wrench

Blow case size (mm) :
260 x 175 x 60 (0.096CUFT)

Nut Splitter Set

9TD062

- For removing stubborn nuts or over tightened bolts without damaging the bolt thread
- Suitable for nuts to a tensile class 6
- Do not overtighten to prevent damage to the threads under the nut

0.61 12 / 36

KT NO.	Capacity inch	Capacity mm	Hex (mm)
9TD602	1/2"~5/8"	12~16	14
9TD603	5/8"~7/8"	16~22	19

2 PC.

9TD064

- Blow case size (mm) :
- 260 x 175 x 60 (0.096CUFT)

1.89 1 / 12

KT NO.	Capacity inch	Capacity mm	Hex (mm)
9TD601	5/16"~1/2"	9~12	12
9TD602	1/2"~5/8"	12~16	14
9TD603	5/8"~7/8"	16~22	19
9TD604	7/8"~1-1/8"	22~27	21

4 PC.

Stud Remover Tool

9TD404-0619M

1/2"

- Stud range: 6-19mm (1/4" - 3/4")
- Allows for easy removal of studs .Turn extractor with a ratchet, wrench or socket to engage the cam and stud, then pull out stud

0.64 1 / 24

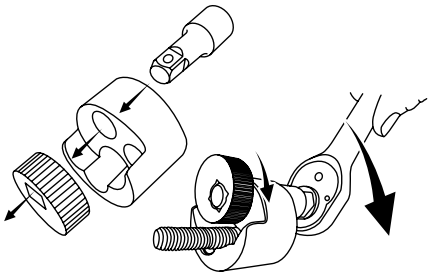

1/2" DR. Damaged Nuts Remover Socket & Set

CAUTION
Can't be used with pneumatic wrench

9TD403 1/2"

- Made of top quality SNCM alloy steel, provide good wear resistance and durability
- Ideal for the removal of rounded, damaged or corroded nuts, bolts, oil drain plugs, marine nuts and bolts, exhaust manifold nuts, pipe nozzele, and studs
- No need for pounding, chisels or torches



KT NO.	D1 mm	D2 mm	ℓ mm	L mm	g	
9TD403-10M	16.0	22	8	50	76	10 / 180
9TD403-12M	18.0	22	11	50	78	10 / 180
9TD403-13M	20.0	22	11	50	85	10 / 180
9TD403-14M	21.0	22	11	50	88	10 / 180
9TD403-17M	24.5	25	15	50	113	10 / 180
9TD403-19M	27.0	27	15	50	124	8 / 80
9TD403-21M	29.4	27	16	50	139	8 / 80
9TD403-22M	30.5	27	17	50	140	8 / 80
9TD403-23M	31.8	27	17	50	119	8 / 80
9TD403-24M	33.0	27	17	50	143	8 / 80
9TD403-27M	36.0	27	18	50	145	8 / 80

9TD 1/2"



KT NO.	Contents				
9TD033MR	9TD403	17,19,21	8740705	0.4	4 / 48
9TD034MR		21, 22, 23 27		0.58	4/36
9TD035MR		12, 13, 14, 17, 19		0.52	
9TD036MR		10, 12, 13 14, 17, 19	8740706	0.60	

Roller Stud Extractor Socket & Set

9TD401 1/2"

- For tightening or loosening studs





KT NO.	● mm	D1 mm	D2 mm	L mm	g	
9TD401-06M	6	24.5	21	60	131	10 / 180
9TD401-08M	8	24.5	21	60	128	10 / 180
9TD401-10M	10	27.5	21	69.5	180	12 / 120
9TD401-12M	12	27.5	21	69.5	179	12 / 120

9TD014MR 1/2"

- 4 stud drivers for sizes M6, M8, M10 and M12

0.83 kg / 1 / 30

Blow case size (mm) :
210 x 111 x 49 (0.04CUFT)

4 PC.

Long Twist sockets set

- For removing damaged wheel nuts and locking nuts. Especially useful on deep seated wheel nuts on modern alloys
- Twisting socket design is easily to remove stripped lug nut
- Straight kick out bar 12x160mmL
- Length:146mm

9TD164MR

4 PC.

Contents — 1.36 kg — 1 / 8

	9TD406	17, 19, 21
	7641206P	

9TD165MR

5 PC.

- Grip and remove damange bolt

- Kick out grip bolt by punch ground or hammer

Contents — 1.70 kg — 1 / 8

	9TD406	17, 19, 21, 22
	7641206P	

Aviation Tin Snips

74010~74060

- Special drop forged CRMO with induction hardened edges 62HRC
- Blades with serrated edges fast cuts in sheet metal, aluminum, and much more
- Cut 1.2mm cold-rolled steel (18GA) low carbon steel
- Non-slip color code grips for superior control
- 74040 Notching bulldog style with higher cutting ability
- 74060 Extra-long compound action style compare to tin snips

- Special laborsaving design
- High tensile strength
- High torsional strength spring
- Solid and comfortable handle with non-slip design
- Hang-up hole for convenient storage
- Safety auto latch (D.PAT.)

74010

74020

74030

74040

74060

KT NO.	Overall length mm	Cutting length mm	Color of handle	Cutting capacities (mm) Copper (soft)	Cold-rolled steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74010	248	35	Red	1.50	1.20	0.80	0.70	375	6 / 48
74020	248	35	Green	1.50	1.20	0.80	0.70	375	6 / 48
74030	250	38	Yellow	1.50	1.20	0.80	0.70	380	6 / 48
74040	230	25	Yellow	2.00	1.60	1.20	1.20	370	6 / 36
74060	290	75	Orange	1.10	0.94	0.70	0.53	450	6 / 36

Figure Tin Snips

74250~74270

- Special drop forged CRMO with induction hardened edges 63HRC
- Blades with serrated edges fast cuts in sheet metal, aluminum, and much more
- Cut 1.5mm cold-rolled steel (16GA) low carbon steel
- Non-slip color code grips for superior control

- Special laborsaving design
- High tensile strength provided
- High torsional strength spring designed
- Solid and comfortable handle with non-slip design
- Hang-up hole for convenient storage
- Safety auto latch (D.PAT.)

74250

74260

74270

KT NO.	Overall length mm	Cutting length mm	Color of handle	Cutting capacities (mm) Copper (soft)	Cold-rolled steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74250	260	35	Orange	1.80	1.50	1.00	0.90	480	6 / 36
74260	260	35	Blue	1.80	1.50	1.00	0.90	480	6 / 36
74270	260	35	Yellow	1.80	1.50	1.00	0.90	480	6 / 36

Straight Pattern Snips

74410~74416

- Drop forged of finest quality steel induction hardened edges 60HRC
- Cuts straight flat face guides tool along straight line
- Blades individually hand edged for maximum cutting efficiency
- Cushion handle for comfort and better grip

74410 ~ 74416

KT NO.	Overall length mm	Cutting length mm	Cutting capacities (mm) Copper (soft)	Cold-rolled Steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74410	254	51	0.94	0.78	0.60	0.45	480	6 / 36
74412	305	70	1.15	0.91	0.70	0.63	650	6 / 24
74414	356	76	1.41	1.20	1.00	0.70	780	6 / 24
74416	415	63	2.00	1.60	1.20	1.00	1700	3 / 12

Curved Tin Snips

74512

74514

- Drop forged of finest quality steel induction hardened edges 60HRC
- Double curved, hollow ground blades reduce friction for easier cutting
- British Gilbow type
- Cushion handle for comfort and better grip

74512 / 74514

KT NO.	Overall length mm	Cutting length mm	Cutting capacities (mm) Copper (soft)	Cold-rolled steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74512	305	60	1.15	0.91	0.70	0.63	670	6 / 24
74514	356	65	1.40	1.20	1.00	0.70	920	6 / 24

Duckbill Pattern Snips

74613

- Drop forged of finest quality steel induction hardened edges 60HRC
- Cuts moderately tight curves left, right or straight in light stock
- Blades individually hand edged for maximum cutting efficiency
- Cushion handle for comfort and better grip

KT NO.	Overall length mm	Cutting length mm	Cutting capacities (mm) Copper (soft)	Cold-rolled steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74613	330	72	1.20	0.84	0.61	0.61	720	6 / 24

Saw

7911-12

- Sliding metal bow
- Lightweight, resistant to oxidization and oil
- Two blade positions 45° and 90° including flush cut
- Ergonomic handle with hand stop
- Handle material : Zinc frame, soft grip TPR handle

KT NO.	Adjustable blade length (mm)	Overall length mm	g	
7911-12	300	400	637	6 / 36

7921-12

- Sliding metal bow
- Handle material : ABS+TPR
- Lightweight & anti-slippery
- Four blade positions 45°, 90°, 135°, 180° including flush cut
- Spare blades can be stored

KT NO.	Adjustable blade length (mm)	Overall length mm	g	
7921-12	300	510	555	12 / 24

File

Cut1 Bastard cut

Cut2 Second cut

7510G

- Flat file

KT NO.	Size inch	Cut	L mm	mm	mm	g	
75101-08G	8	cut1	200	4.8	20.0	188	2 / 40
75101-10G	10		250	5.7	23.6	292	2 / 40
75102-08G	8	cut2	200	4.8	20.0	190	2 / 40
75102-10G	10		250	5.7	23.6	293	2 / 40

7520G

- Half round file

KT NO.	Size inch	Cut	L mm	mm	mm	g	
75201-08G	8	cut1	200	6.7	19.9	190	2 / 40
75201-10G	10		250	7.0	23.5	292	2 / 40
75202-08G	8	cut2	200	6.7	19.9	184	2 / 40
75202-10G	10		250	7.0	23.5	291	2 / 40

7530G

- Round file

KT NO.	Size inch	Cut	L mm	mm	g	
75302-08G	8	cut2	200	7.2	127	2 / 40
75302-10G	10		250	9.2	172	2 / 40

7540G

- Triangle file

KT NO.	Size inch	Cut	L mm	mm	g	
75402-08G	8	cut2	200	13.0	175	2 / 40
75402-10G	10		250	14.9	284	2 / 40

7550G

- Square file

KT NO.	Size inch	Cut	L mm	mm	g	
75501-08G	8	cut1	200	7.5	130	2 / 40
75501-10G	10		250	9.5	210	2 / 40
75502-08G	8	cut2	200	7.5	128	2 / 40
75502-10G	10		250	9.5	205	2 / 40

File Set

1005GQ

- Bastard cut
- Designed for steel, cast iron, brass, and hard plastics
- Pouch material : Nylon

Bastard cut

Cut1



1015GQ

5 PC.

- 1005GQ / 1015GQ

KT NO.	Contents	L inch	kg	
1005GQ (for 8")	▮ 75102-08G ▲ 75402-08G ◖ 75202-08G ■ 75502-08G ● 75302-08G	8"	0.9	1 / 20
1015GQ (for 10")	▮ 75102-10G ▲ 75402-10G ◖ 75202-10G ■ 75502-10G ● 75302-10G	10"	1.4	1 / 8

Needle File Set

- Pouch material : PVC

1036ZQ

- Perfect for filing off sharp edges, reshaping cuts or reaming drilled holes
- #60 grit diamond coating surface

6 PC.

Contents		L mm	g	
▮ 75135-06	▲ 75435-06	160	95	10 / 120
◖ 75235-06	■ 75535-06			
● 75335-06	75035-06			

Tapered Reamer

7E61001

- For deburring and sizing the diameter of holes 1/8" to 3/8"
- Suitable for metal, wood or plastic

70 g 24 / 120





Threaded Coil-Insert Repair Set

11311MQ02

- Thread tap for most common metric size : M5, M6, M8 and M10
- Used for repairing and restoring damaged threads
- Suitable for machine, engine and other automotive repair applications

119 PC.

Metal case size (mm) : 350 x 216 x 40

Contents — kg 2.78 — 1 / 5

Screw-Coil:

M5×0.8×1.5D(L:7.5mm)	25 PC.
M6×1.0×1.5D(L:9mm)	25 PC.
M8×1.25×1.5D(L:12mm)	25 PC.
M10×1.5×1.5D(L:15mm)	25 PC.

Tap:

M5×0.8	1 PC.
M6×1.0	1 PC.
M8×1.25	1 PC.
M10×1.5	1 PC.

Tang Puncher:

M5×0.8	1 PC.
M6×1.0	1 PC.
M8×1.25	1 PC.
M10×1.5	1 PC.

Drill:

5.2mm	1 PC.
6.3mm	1 PC.
8.3mm	1 PC.
10.4mm	1 PC.

Main Tool:

M5×0.8	1 PC.
M6×1.0	1 PC.
M8×1.25	1 PC.
M10×1.5	1 PC.

3571-08	3/8″	drive sliding T-handle
3764-55G	3/8″	drive mini reversible ratchet
39123012M	3/8″	tap holder

Tap Holder

3912M

- Used with reversible ratchet and T-handle
- Chuck mechanism hold compatible tap drills
- Used for metal working screw thread
- DIN352





KT NO.	Drive	S(mm) min.	S(mm) max.	Reference dimensionsmm Tap (mm)	D1 mm	D2 mm	L mm	g	
39123008M	1/4"	2.5	5.0	M3-M8	14.5	20.3	30.5	52	20 / 200
39123010M	3/8"	2.0	6.0	M1-M10	23.0	34.5	53.0	221	4 / 64
39123012M	3/8"	4.0	9.0	M5-M14	23.0	34.0	53.0	223	4 / 64
39124012M	1/2"	6.0	12.0	M10-M20	25.3	38.5	52.4	265	4 / 64
39124016M	1/2"	12.0	17.0	M20-M27	34.0	48.3	52.3	280	1 / 48

Tap Holder Set

New

39104M

1/4" 3/8" 1/2"

- Used with reversible ratchet and T-handle
- Chuck mechanism hold compatible tap drills
- Used for metal working screw thread
- DIN352

4 PC.



KT NO.	Drive	S(mm) min.	S(mm) max.	Reference dimensionsmm Tap (mm)	D1 mm	D2 mm	L mm	Kg	
39122008M	1/4"	2.5	5.0	M3-M8	14.5	20.3	30.5	52	20 / 200
39123010M	3/8"	2.0	6.0	M1-M10	23.0	34.5	53.0	221	4 / 64
39124012M	1/2"	6.0	12.0	M10-M20	25.3	38.5	52.4	265	4 / 64
39124016M	1/2"	12.0	17.0	M20-M27	34.0	48.3	52.3	280	1 / 48

Drill-Bit Set

11325SQ

- Material : HSS
- Metal case size (mm) :
- 197 x 115 x 58 (0.046 cuft)

25 PC.

	Contents	kg 1.23	1 / 20
Drill - Bit		1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13	

Tap and Drill-Bit Set

11328SQ

- Material : Drill-Bit(HSS), Tap(GCr15)
- Metal case size (mm) :
- 195 x 115 x 57 (0.045 cuft)

28 PC.

	Contents	kg 1.05	1 / 20
Drill - Bit		2.5, 3.3, 4.2, 5, 6.8, 8.5, 10.2	
Tap		M3x3, M4x3, M5x3, M6x3, M8x3, M10x3, M12x3	

Tap & Die Set

12916MQ1

- Material : SK5 alloy steel
- 1 PC.Tap wrench(M3-M12, 1/8"~1/2")
- 1 PC. Die stock 25mm(1")
- Tap : M3~M12
- Die : M3~M12

16 PC.

Contents		0.78	1 / 20
12939MQ-A	M3x0.5, M4x0.7, M5x0.8, M6x1.0, M8x1.25, M10x1.5, M12x1.75	12939MQ-A01	25mm (1")
12939MQ-A		12939MQ-A02	M 3 ~ M 1 2 (1/8"~1/2")

12939MQ1

- Material : SK5 alloy steel
- 1 PC. Tap wrench(M3-M12, 1/8"~1/2")
- 1 PC. "T" Type tap wrench(M3-M6, 1/8"~1/4")
- 1 PC. Die stock 25mm(1")
- 1 PC. Screw driver
- 12939MQ1-
  1 PC. Screw pitch gauge (0.5-28)
  Tap : M3~M12 / Die: M3~M12
- 12939SQ1-
  1 PC. Screw pitch gauge(12-40)
  Tap : 1/8"~1/2" / Die : 1/8"~1/2"

12939SQ1

39 PC.

KT NO.		Contents	1.4	1 / 10
12939MQ1	12939MQ-A	12939MQ-A06 / M3x0.5, 12939MQ-A07 / M3x0.6, 12939MQ-A08 / M4x0.7, 12939MQ-A09 / M4x0.75, 12939MQ-A10 / M5x0.8, 12939MQ-A11 / M5x0.9, 12939MQ-A12 / M6x0.75, 12939MQ-A13 / M6x1.0, 12939MQ-A14 / M7x0.75, 12939MQ-A15 / M7x1.0, 12939MQ-A16 / M8x1.0, 12939MQ-A17 / M8x1.25, 12939MQ-A18 / M10x1.25, 12939MQ-A19 / M10x1.5, 12939MQ-A20 / M12x1.5, 12939MQ-A21 / M12x1.75, 12939MQ-A22 / 1/8NPT27	12939MQ-A01	25mm (1")
	12939MQ-A	12939MQ-A23 / M3x0.5, 12939MQ-A24 / M3x0.6, 12939MQ-A25 / M4x0.7, 12939MQ-A26 / M4x0.75, 12939MQ-A27 / M5x0.8, 12939MQ-A28 / M5x0.9, 12939MQ-A29 / M6x0.75, 12939MQ-A30 / M6x1.0, 12939MQ-A31 / M7x0.75, 12939MQ-A32 / M7x1.0, 12939MQ-A33 / M8x1.0, 12939MQ-A34 / M8x1.25, 12939MQ-A35 / M10x1.25, 12939MQ-A36 / M10x1.5, 12939MQ-A37 / M12x1.5, 12939MQ-A38 / M12x1.75, 12939MQ-A39 / 1/8NPT27	12939MQ-A02	M 3 ~ M 1 2 (1/8"~1/2")
			12939MQ-A04	M 3 ~ M 6 (1/8"~1/4")
	12939MQ-A03	0.5, 0.6, 0.7, 0.75, 0.8, 0.9, 1.0, 1.25, 1.5, 1.75, 27, 28	12939MQ-A05	
12939SQ1	12939SQ-A	4NS36, 6NC32, 8NC32, 10NC24, 10NF32, 12NC24, 1/4NC20, 1/4NF28, 5/16NC18, 5/16NF24, 3/8NC16, 3/8NF24, 7/16NC14, 7/16NF20, 1/2NC13, 1/2NF20, 1/8NPT27		
	12939SQ-A			
	12939SQ-A03	12, 13, 14, 16, 18, 20, 24, 27, 28, 32, 36, 40		

LIGHTING

KING TONY
9TA48
KING TONY
9TA48
KING TONY
9TA71W
KING TONY
9TA269
KING TONY
9AT53

High Standard Lamp Testing

IK Impact Resistance Test

What is IK Protection Rating?

The IK code is an international standard used to evaluate the mechanical impact resistance of a product's casing. The higher the number, the greater the protection level. This is particularly important for Products or devices containing batteries used in harsh working environments where high protection is necessary.

Charpy pendulum

Lithium Battery Aging Test

Lithium Battery Life is the Eternal Core of Work Lights

We insist on using brand-new, high-quality lithium batteries that pass MSDS and UN38.3 standard tests. Each work light undergoes at least two aging cycles before leaving the factory to ensure battery life and performance.

Complete Lamp Water and Dust Resistance Test

Reliable Service in Extreme Environments

The IPxx water and dust resistance test ensures that the product can withstand humid and dusty environments. KINGTONY's minimum standard is IP54, which involves placing the test sample in dust for 8 hours and be protected from water sprays from all directions.

Rotational Structure Test

Multi-angle Illumination Depends on Rotational Structure : 3000 Rotation Tests

Each work light is designed with different rotational structures depending on usage needs and scenarios. Regardless of the structure, we conduct at least 3,000 fatigue rotation tests to ensure durability after thousands of uses.

USB Accessory Charging Cable Interface Twist Test

At least 3,000 Fatigue Rotation Tests to be Considered Qualified

USB charging accessories must pass current tests and undergo twisting and plugging tests at the interface to ensure that they do not break or malfunction after a few uses. A qualified accessory must pass at least 3,000 twisting tests.

-10°C ~ 40°C Temperature Test

Adaptability to Various Scenarios

KINGTONY work lights are sold in over 300 countries and regions worldwide, requiring them to be suitable for various conditions. They undergo professional testing from high temperatures of 40°C to low temperatures of -10°C to ensure that the battery and lumen performance are not affected by different temperature conditions.

Switch Press Test

40,000 Press Tests Ensure The Ultimate Experience

Each work light is designed with attention to detail. The switch, made of oil-resistant TPU material, has excellent elasticity and has been tested for 40,000 presses to ensure a perfect user experience.

1.2M Drop Test

100 Tumbles From a Height of 1.2M

Usually, work lights undergo a 1.2M drop test for the battery pack. In addition to this, KINGTONY performs an additional tumble test for the entire lamp, involving 100 tumbles to ensure product quality in extreme conditions. After testing, the lamp can still be used normally.

6W COB LED & 1W SMD LED Rechargeable Inspection Light

New

9TA271

600 Lumen | 6W | 3-12h | Type-C USB | Li-ion 2600mAh 3.7V | 2.5h | IP 54 IK07 | RoHS

- 6W COB LED & 1W SMD LED
- White light color, Kelvin:6500K
- Top light/Main light(low-high)/Off
- Rechargeable battery:3.7V 2600mAh Li-ion battery
- Charging time:3.5hours
- Material: Durable ABS+PC+TPE
- Accessory :Type-C USB charging cable
- 180° Adjustable base + 360° hiding hook + Strong
- magnetic base
- IP54 waterproof and dustproof
- IK07 vandalproof
- EN62471 Photobiological safety
- Working temperature: -10° C to + 40° C

Switch mode	Lumen	Operating hours
Toplight	120 lm	12h
Main light-low	250 lm	6h
Main light-high	600 lm	3h

KT NO.	L mm	g	
9TA271	260	290	1 / 24
9TA271-S	-	2750	1 / 4



- Strong bottom magnet with two functional hooks

- Top light

- Battery indicator



- Top light180° swivel base with 6 positions

- Ergonomic Handle

Wireless Charging Slim Lamp

9TA267W

- 10W COB + 1W SMD (Top)
- White light color, kelvin : 6500K
- One side - Top light / A dimming knob adjusts brightness for dual-
- sided lighting
- Rechargeable battery : 3.7V - 4500mAh Li-ion battery
- Charging time : 4 hours by charger and 6~8 hours by wireless
- charging base
- Material : Nylon+PC+TPE
- Accessory :Type-C USB charging cable
- 360° Adjustable base +180° hiding hook + Strong magnetic base
- Can be charged with wireless charging pad 9TA92W (not included)
- IK07 impact resistance

KT NO.	L mm		
9TA267W	400	335	1 / 20

Switch mode	Lumen	Operating hours
Top light	100 lm	15h
One light	500+500 lm	12~6h
Two light	250~500 lm	3h

- One light source

- Both side can be lit at the same time

- 180° hiding hook


- Top light

- 360° swivel head in vertical

- Wireless charging design

Contents		
Wireless Charging Slim Lamp		x 1 PC.
Type-C USB cable		x 1 PC.

Wireless charging Dual-Light Pocket Lamp

9TA44W

- 8W COB LED + 3W SMD
- White light color, kelvin : 6500K
- Dual light and spot mode, flood mode
- Rechargeable battery : 3.7V - 2600mAh Li-ion battery
- Charging time : 4 hours by USB cable, 6-7 hours by wireless
- Accessory : Type-C USB fast charging cable
- 180° flexible handle + super strong magnet on the handle
- 3 LED battery status indicators
- charging base(The charging time depends on the changing power of
- the wireless charging base)
- Can be charged with wireless charging pad 9TA92W(not included)
- IP65 waterproof and dustproof
- IK07 vandalproof

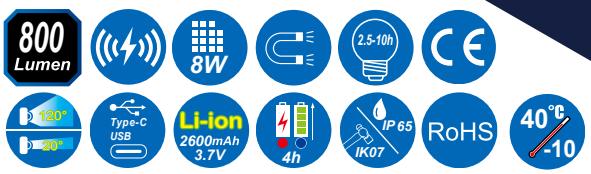

- Wireless charging design

Switch mode	Lumen	Operating hours
Spot light	250 lm	4.5h
Flood light low	160 lm	10h
Flood light mid	400 lm	4.5h
Flood light high	800 lm	2.5h

- LED battery status indicators

- 180° flexible direction

- Super strong magnet on the handle

- Easy to carry

KT NO.	L mm	g	
9TA44W	97 x 83 x 39	218	1 / 24

Contents	
Dual - light pocket lamp	x 1 PC.
Type-C USB cable	x 1 PC.

10W Wireless Charging Flashlight

9TA71W

- Chips: High quality 10w LED,
- White light color, Kelvin: 6500K
- Spot Light mode (Eco-Low-Mid-High)
- Strobe mode: press and hold the switch for two seconds
- (The specific charging time depends on the power of the charging base)
- Battery: rechargeable high quality 3.7V 2600mAh Li-ion
- Charging time: 4 hours by charger and 6~8 hours by wireless charging base
- Accessory: type-C fast charging cable
- Wireless charging function
- Super strong magnets on the light
- Can be charged with wireless charging pad 9TA92W
- Three LED battery indicators show the charging and working
- IP68 waterproof and dustproof
- IK07 vandalproof
- Working temperature: -10° C to +40° C

Switch mode	Lumen	Operating hours
Spot light eco	5 lm	200h
Spot light low	30 lm	25h
Spot light mid	400 lm	4h
Spot light high	1000 lm	2h

- Main switch

- Wireless charging

- Hanging hole

KT NO.	L mm	g	
9TA71W	160	215	1 / 24

Contents	
Flashlight	x 1 PC.
Type-C USB cable	x 1 PC.

- Press and hold the switch for two seconds

- Super strong magnets on the light

7W+4W Inspection Light

9TA242

- 7W COB+4W SMD
- White light color, kelvin : 6500K
- Switch mode: Top Torch-Main Light(Low-Mid-High)-Off
- Battery: rechargeable high quality 3.7V 2600mAh Li-ion
- Charging time: 4hr by charger
- Accessory:Type-C USB Charging cable and 5V 1A USB charger
- Features: 180° swivel base+Two 360° functional hooks
- Two super strong magnets on the back and one on the base
- Three LED battery indicators show the charging and working
- IP65 dustproof and waterproof
- IK09 impact resistance
- Working temperature: -10°C to + 40°C

Switch mode	Lumen	Operating hours
Top light	200 lm	5h
Main light low	150 lm	8h
Main light mid	350 lm	4h
Main light high	700 lm	2h

Contents

Inspection lamp		x 1 PC.
Type-C USB cable		x 1 PC.
USB charger		x 1 PC.

KT NO.		Applicable area	L mm	g	
9TA242A		Europe	260	516	1 / 12
9TA242B		America & Asia	260	516	1 / 12
9TA242D		Australia & New Zealand	260	516	1 / 12



- wo super strong magnets on the back and one on the base
- Two 360° functional hooks



6W COB +1W SMD Slim Inspection Lamp

9TA261

- 6W COB + 1W SMD (Top)
- White light color, kelvin : 6500K
- Switch modes : Top light – Worklight low-Worklight high-Off
- Rechargeable battery : 3.7V - 2600mAh Li-ion
- Charging time : 4 hours
- Materials : ABS plastic + rubber housing + PC lens + aluminium slim housing
- Accessory : Type-C USB Charging cable and 5V 1A USB charger
- Features : 120° Angle rotation & magnetic base
- IP54 dustproof and waterproof
- IK07 impact resistance

600 Lumen | 6W | 3-8h | 8.6 mm | CE | Type-C USB | Li-ion 2600mAh 3.7V | 4h | IP 54 IK07 | RoHS

Switch mode	Lumen	Operating hours
Top light	120 lm	8h
Main light low	250 lm	6h
Main light high	600 lm	3h

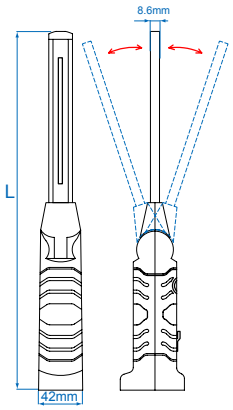

KT NO.		Applicable area	L mm	g	
9TA261A		Europe	340	300	1 / 12
9TA261B		America & Asia	340	300	1 / 12
9TA261D		Australia & New Zealand	340	300	1 / 12

Contents	
COB LED lamp	x 1 PC.
Type-C USB cable	x 1 PC.
USB charger	x 1 PC.

Flexible LED Slim Light

9TA251

- 5W COB + 3W SMD (Top)
- White light color, kelvin : 6000K~6500K
- Rechargeable battery : 3.7V - 2600mAh Li-ion battery
- Charging time : 4 hours
- Material : PA + TPE housing
- Accessory : Type-C USB Charging cable and 5V 1A USB charger
- Features : Flexible Gooseneck + 90° hiding hook + Strong magnetic base
- Three leds battery indicator
- IP54 dustproof and waterproof
- IK07 impact resistance

500 Lumen | 5W | 2-8h | CE | RoHS | Type-C USB | Li-ion 2600mAh 3.7V | 4h | IP 54 IK07

Switch mode	Lumen	Operating hours
Top light	120 lm	9h
Main light Min ~ Max	50~500 lm	16~2h


- Top SMD

- USB charger port + battery indicator

- Strong magnetic + 90° Hook

- Stepless Dimmer Switch

KT NO.		Applicable area	L mm	g	
9TA251A		Europe	475	322	1 / 12
9TA251B		America & Asia	475	322	1 / 12
9TA251D		Australia & New Zealand	475	322	1 / 12

Contents	
Flexible slim lamp	x 1 PC.
USB charger	x 1 PC.
Type-C USB cable	x 1 PC.

Aluminum Folding Slim Lamp

9TA268

- 5W+10W COB
- White light color, kelvin : 6500K
- Rechargeable battery : 3.7V - 2600mAh Li-ion battery
- Charging time : 4 hours
- Material : PA + Rubber + Aluminum housing
- Accessory :Type-C USB Charging cable and 5V 1A USB charger
- Features : 180° swivel head in vertical + Strong magnetic base
- Three leds battery indicator
- IP54 dustproof and waterproof
- IK07 impact resistance

Switch mode	Lumen	Operating hours
Top light	120 lm	8h
Main light low	150 lm	8h
Main light high	800 lm	2.5h
Minor light low	120 lm	9h
Minor light high	400 lm	4h



- 180° swivel head in vertical



- Super strong magnets on the bottom

- Top light

- Three leds battery indicator

KT NO.	Applicable area	L mm	g	
9TA268A	Europe	200	193	1 / 40
9TA268B	America & Asia	200	193	1 / 40
9TA268D	Australia & New Zealand	200	193	1 / 40

Contents	
Pro Aluminium Rechargeable Slimlight	x 1 PC.
Charger	x 1 PC.
Type-C USB cable	x 1 PC.

10W COB LED Work Lamp

New

9TA331

- Light: 10W COB LED, white light,
- color temperature: 5300K
- Mode Switching: Dimming knob 80-1200lm
- Material: Impact-resistant ABS+PU+TPU
- Battery: Rechargeable high-quality 3.7V 4000mAh lithium battery
- Accessories: Type-C USB 5V1A charging cable
- Charging Time: 5 hours
- Features: 180° magnetic rotating base, 360° handle rotation, two 360° hooks
- Certifications: IP44 dust and waterproof test certification
- Operating Temperature: -10° C to +40° C

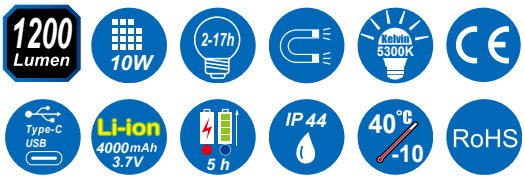

Switch mode	Lumen	Operating hours
Low light	80 lm	17h
High light	1200 lm	2h

KT NO.	L mm	g	
9TA331	520	488	1 / 20



- 180° magnetic rotating base

- 360° rotating handle

- Battery indicator



- Two strong magnetic base+ 360° hook



LED Rechargeable Underhood Light

9TA34

- 20W SMD
- White color, 50x Super bright SMD LED, 6500K
- Battery: 3.6V4800mAh Li-ion battery with Type-C USB socket
- Charging time : 4 hours
- Material : Aluminum body + PA
- Accessory: Type-C USB Charging cable and 5V 2A USB charger
- Features :Durable housing,Hooks with Rubber, and lens
- 3 leds battery level indicator
- IP20 dustproof and waterproof
- IK07 impact resistance

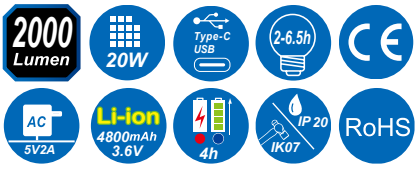

Switch mode	Lumen	Operating hours
Low light	500 lm	6.5h
Mid light	1000 lm	4h
High light	2000 lm	2h

KT NO.	Applicable area	L mm	g	
9TA34A	Europe	1170	1666	1 / 6
9TA34B	America & Asia	1170	1666	1 / 6
9TA34D	Australia & New Zealand	1170	1666	1 / 6
9TA34P01	3.6V4800mAh		70	1 / 1

Contents	
360° Rotational Bar	x 1 PC.
5V/2A charger	x 1 PC.
Type-C USB	x 1 PC.
4800mAh Battery	x 1 PC.

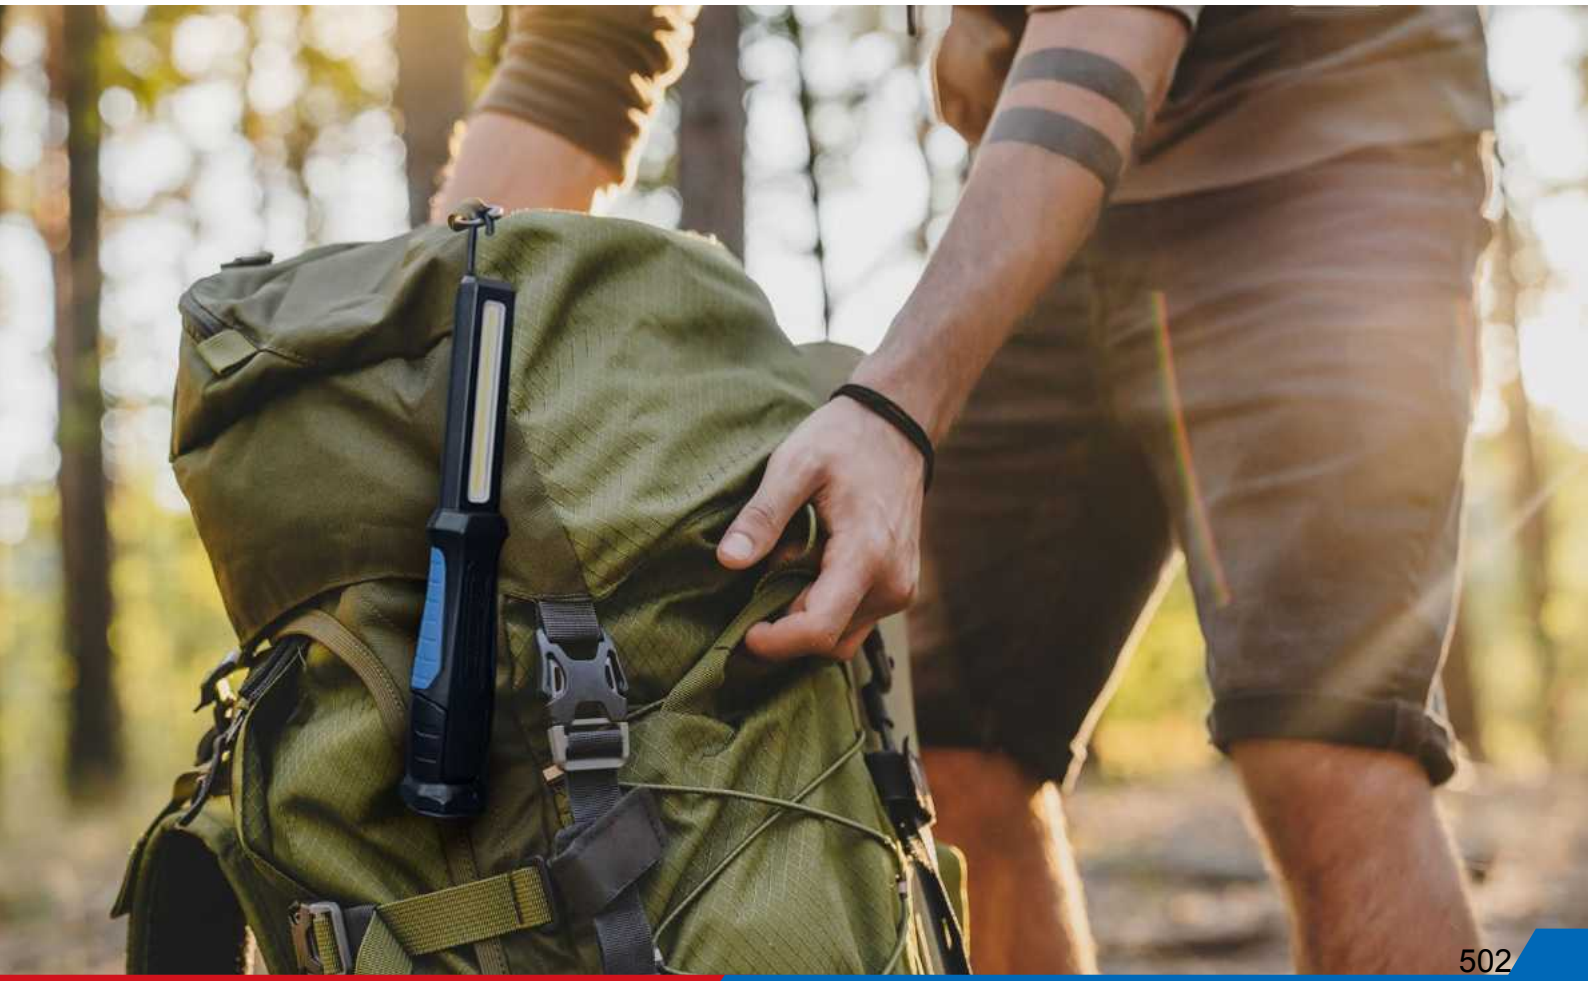

Lightweight Rechargeable Neck Light

9TA54

- 3.5W COB
- White light color, kelvin : 6500K
- Rechargeable battery : Rechargeable high quality 3.7V 700 mAh Li-ion
- Charging time : 2.5 hours
- Accessory : Type-C USB fast charging cable
- Feature : The Neck light is lightweight, adjustable and comfortable around your neck
- The 2 light head can be adjusted independently up to 120° for a wider Lighting
- Red Blinking: Low battery power warning
- Green Blinking: charging
- Green: Fully charged
- IP54 dustproof and waterproof
- IK07 impact resistance
- Temperature: -10° C to + 40° C

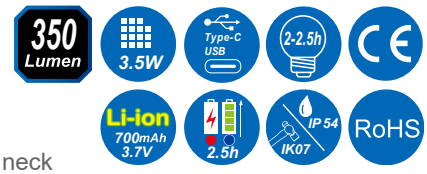

Switch mode	Lumen	Operating hours
Low light	180 lm	5.5h
High light	350 lm	2.2h

- Lightweight, adjustable, comfortable

- 3 Colors LED indicator

- 120° Adjustable light head

KT NO.	L mm	g	
9TA54	230 x 130 x 45	140	1 / 12

Contents

Lightweight Rechargeable Neck Light		x 1 PC.
Type-C USB cable		x 1 PC.

Rechargeable LED Beanie Hat

9TA56

- 1W COB
- Rechargeable battery : 3.7V 250mAh rechargeable Li-Polymer battery
- Charging time : 2 hours
- Feature : Made of 100% acrylic, help you resist the cold wind, keep your head and ear warm
- Elastic material, fits for most of head circumference
- 4 built-in LED bulbs with 3 adjustable brightness level
- With reflective strip to make you easily be noticed in the dark
- Suitable for all kinds of outdoor activities

170 Lumen | USB | 2-6h | Li-ion 250mAh 3.7V | 2h



- Simply pop it out and chargeit

Switch mode	Lumen	Operating hours
Low light	30 lm	6h
Mid light	60 lm	4h
High light	170 lm	2h

KT NO.	L mm	g	
9TA56	210 x 225	100	100 / 100

- Socket

- Laptop

- Car Charger

- Power Bank

- reflective strip

3W COB LED Inductive Head Lamp

9TA52

- 3W COB
- White light color, kelvin : 6500K
- Rechargeable battery : 3.7V - 1500mAh Li-po
- Charging time : 2.5 hours
- Materials : High impact ABS + TPE housing + PC lens & non-skid grip belt
- Accessory : Type-C USB Charging cable and 5V 1A USB charger
- Feature : 10cm Smart motion sensor
- LED battery charging indicator
- IP65 dustproof and waterproof

280 Lumen | 3W | 10CM | 2h | CE | Type-C USB | Li-ion 1500mAh 3.7V | 2.5h | IP 65 | RoHS

Switch mode	Lumen	Operating hours
Low light	100 lm	5.5h
High light	280 lm	2h

- Two step adjustable light

- 60° Adjustable lighting

- Inductive indicator ON

- Inductive light switch



KT NO.		Applicable area	L mm	g	
9TA52A		Europe	65	110	1 / 40
9TA52B		America & Asia	65	110	1 / 40
9TA52D		Australia & New Zealand	65	110	1 / 40

Contents		
COB LED lamp		x 1 PC.
Headband		x 1 PC.
USB charger		x 1 PC.
Type-C USB cable		x 1 PC.

Twin-Beam Multifunctional Head Lamp

9TA53

- 4W COB+2WCOB
- White light color, kelvin: 6500K
- Dual light mode, spot mode, flood mode
- Battery : AAA alkaline battery (Battery not included)
- Materials : High impact ABS + PC housing + PC lens & non-skid grip belt
- Feature : 10 cm Smart motion sensor + 60° adjustment
- IP65 dustproof and waterproof
- IK07 impact resistance

Switch mode	Lumen	Operating hours
Spot light	20~400 lm	60~5h
Flood light	20~200 lm	60~4h
Red LED	0.5~20lm	70~10h
SOS light	strobe	



- Inductive light switch

- 60° Adjustable lighting

- Strobe for signaling

KT NO.	L mm	g	
9TA53	68.8	89	1 / 12

Contents		
COB LED lamp		x 1 PC.
Headband		x 1 PC.
AAA alkaline battery	AAA	x 3 PC.

FLASHLIGHTS

1.5W COB +1 LED Lamp

9TA28

- 1.5W COB + 1W LED
- White light color, kelvin : 7200K
- Rechargeable battery : 3.7V - 800mAh Li-ion
- Charging time : 2 hours
- Materials : ABS+PC
- Accessory : Type-C USB Charging cable
- Feature : 180° magnetic swivel base + 270° magnetic swivel clip
- Overcharge/Discharge protection

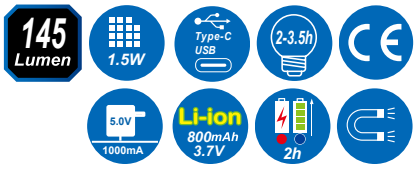

Switch mode	Lumen	Operating hours
Top light	80 lm	3.5h
Main light	145 lm	2h

- magnetic base

- Top light with 1 LED



- 180º swivel clip

- Magnetic swivel clip

KT NO.	L mm	g	
9TA28	180	160	12 / 48

Contents

1.5W COB + 1 LED rechargeable work lamp	x 1 PC.
Type-C USB cable	x 1 PC.

Rechargeable LED Pen Light

9TA281

- 1.5W -7 SMD + 1W SMD (Top)
- White light color, kelvin : 6500K
- Rechargeable battery : 3.7V 750mAh Li-ion
- Charging time : 2 hours
- Material : ABS housing + Rubberized painting + PC lens
- Accessory : Type-C USB Charging cable
- Features :Strong magnet on the clip
- Led charging indicator : Red -Charging, Green –Fulled
- IP20 dustproof and waterproof
- IK07 impact resistance

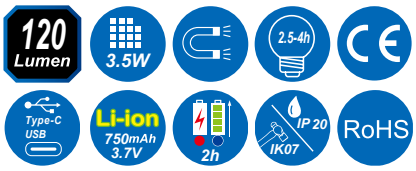

Switch mode	Lumen	Operating hours
Top light	80 lm	4h
Main light	120 lm	2.5h

KT NO.	L mm	g	
9TA281	170	58	1 / 48

Contents		
LED pen light		x 1 PC.
Type-C USB cable		x 1 PC.

LED Pocket Torch

79815

- 3W LED
- Battery : AAA alkaline battery(Battery not included)
- Materials : Aluminum alloy body
- Feature : Safety lanyard included
- Strobe warning lights for maximize visibility

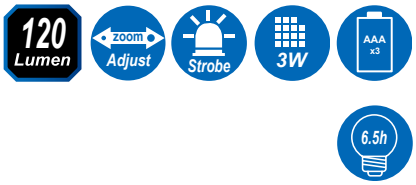

Switch mode	Lumen	Operating hours
Main light	120 lm	6.5h

KT NO.	L x Ø mm	g	
79815	128 x 28	95	1 / 100

LED Pen Light

79831

- 6PC. SMD(surface-mount devices) LED
- Battery :3 x AAA batteries (Battery not included)
- Materials :PE lampshade : avoid nebulization
- Feature : ABS body 360 degree rotation

Switch mode	Lumen	Operating hours
Main light	135 lm	5.5h

KT NO.	L x W x H mm	g	
79831	165 x 25 x 30	58	10 / 120

LED Telescopic Torch

79833

- 3 LEDs
- White light color
- Battery : 4 x LR44 batteries (Battery not included)
- Materials : Magnetic torch with 360° flexible head
- Extends up from 170mm to 560mm



KT NO.	L x Ø mm	g	
79833	170 x 22	100	10 / 120

Telescopic Magnetic Pickup LED Light

New

79834

- 1W SMD LED
- White light. Color temperature: 6000K
- Mode switch: 50%-100%-Off
- Battery: High-quality rechargeable 3.7V 180mAh lithium battery
- Charging time: 2.5 hours
- Material: Body made of nylon + fiber / Telescopic tube made of stainless steel
- Feature : Four-in-one function: rechargeable flashlight,magnetic attraction, telescopic extension, telescopic extension,
- 360° swiveling head
- IP65 dustproof and waterproof
- IK09 impact resistance
- Operating temperature: -10° C to +40° C

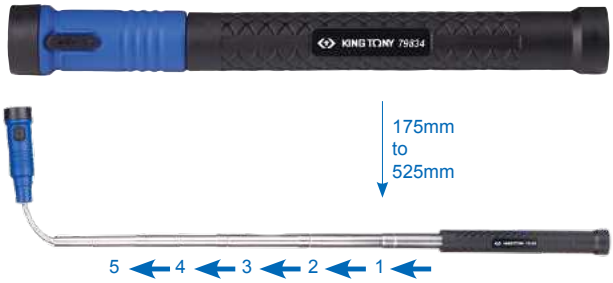

Switch mode	Lumen	Operating hours
light-low	30 lm	6h
light-high	100 lm	2h

KT NO.	L x Ø mm	g	
79834	175 x 21	89	1 /48

Contents		
Telescopic Magnetic Pickup LED Light		x 1 PC.
Type-C USB cable		x 1 PC.

- Multi-angle illumination

- Base with magnetic function

- Magnetically pick up screws in narrow spaces

- High-brightness 1W SMD

- Magnetic attraction up to 1.2Kg



- 360° swivel head

- Enlarged and sturdy pen clip, does not scratch hands

- Type-C charging port

45W Twin Head SMD Site Light

9TA45

- 45W SMD LED
- White light color, kelvin : 5700K
- Rechargeable battery : Replaceable 14.8V 5200 mAh Li-ion battery pack
- Charging time : 4.5 hours
- Material : PA + ABS + PC
- Accessory : 100-240V to 20V 1.1A charger
- Feature : 90 ° vertical rotation & 180 ° horizontal rotation for angle of lighting
  5 LED battery status indicator & USB 5V 2A output
- IP54 dustproof and waterproof
- IK07 impact resistance

Switch mode	Lumen	Operating hours
Work light 25%	750 lm	12h
Work light 50%	1500 lm	6h
Work light 75%	3000 lm	3h
Work light 100%	4500 lm	2h

- •80 ° horizontal rotation

- 90 ° vertical rotation

- Replaceable battery

- Power bank in case of emergency

- Anti-slip handle



- Option to fixation

KT NO.	Applicable area	L x W x H mm	g	
9TA45A	Europe	288 x 176 x 131	2140	1 / 4

Contents

45W Twin Head SMD Site Light		x 1 PC.
AC charger		x 1 PC.
Battery pack		x 1 PC.

3000 Lumen Wired SMD LED Site Light (30W)

New

9TA421

- 30W SMD LED
- White light. Color temperature: 6500K
- Mode switch: 50%-100%-Off
- Material: ABS + Aluminum alloy casing
- Equipped with a 1.8-meter H07RN-F 3G 1.0mm electrical cable
- Slim shell with 360° adjustable design
- Option to wall mount or tripod stand at work sites
- (Adjustable Tripod for Site Light: 87162)
- IP54 dustproof and waterproof
- IK08 impact resistance
- Operating temperature: -20° C to +50° C

3000 Lumen | 30W | 50°C/-20 | 1.8M | IP54 IK08 | RoHS | CE

Switch mode	Lumen
Main light	1500 lm
High light	3000 lm

Contents

3000 Lumen Wired SMD LED Site Light (30W) x 1 PC.

(Does not include a light stand)

- Actual operating conditions

- Actual operating conditions

- Actual operating conditions



- 360° rotating stand
- for full-angle,
- shadow-free lighting

- Retractable design enhances protection and prevents cable bending

- Non-slip handle
- for improved grip and safety

- Compatible with tripod (recommended with model 87162)

- Thicker cable diameter enhances transmission efficiency, safety, and durability

- Aluminum alloy's quick heat dissipation ensures efficient operation

KT NO.	Applicable area	L x H x W mm	g	
9TA421A	Europe	240 x 270 x 55	1393	1/8

1600 Lumen Clamp Work Light

9TA471

- 16W COB
- White light, Color temperature: 6500K
- Top light - Main light (Eco - Low - Medium - High) - Off
- Battery capacity: 3.7V - 5200mAh lithium battery
- Charging time: 5 hours
- Material: Nylon + TPE
- Accessories: Type-C USB charging cable
- Features: 360° rotation + 270° vertical rotation lighting + magnetic non-slip base + clamping range up to 70mm
- IP65 dustproof and waterproof
- IK07 impact resistance
- Operating temperature: -10° C to +40° C

Switch mode	Lumen	Operationg hours
Eco light	100 lm	24h
Low light	300 lm	8h
Mid light	700 lm	5h
High light	1600 lm	3h

KT NO.	L x H x W mm	g	
9TA471A	176 x 105 x 95	625	1 / 8

Contents

1600 Lumen Clamp Work Light		x 1 PC.
Type-C USB cable		x 1 PC.

- Can be magnetically attached to metal objects

- Can be clipped anywhere

- Can be stably placed on a tabletop

- 300° rotation +270° vertical rotation

- Power indicator light & Type-C port

- Large-area magnetic design on the back



- Non-slip pads on the bottom ensure stability, reduce wobbling, and protect surfaces

- Enlarged button for easy pressing and improved convenience



- Special clamp design securely holds onto various objects and in different environments

60W Adjustable Colours tripod Stand Light New

9TA491

- High Quality SMD LEDs, Ra>80
- Color temperature switching: 2700K / 3500K / 4500K / 5500K / 6500K
- Mode / lumen switching: 600lm / 1200lm / 2400lm / 6000lm
- Battery: Rechargeable high-quality 14.8V 5200mAh lithium battery pack
- Charging time: 4.5 hours
- Material: ABS + Nylon + Aluminum
- Feature : Multi-color temperature/light output adjustment with memory function,one lamp for any demand scenario
- IP65 dustproof and waterproof
- IK07 impact resistance
- Operating temperature: -10° C to +40° C

Switch mode	Lumen	Operating hours
Light - I	600 lm	16h
Light - II	1200 lm	8h
Light - III	2400 lm	4h
Light - IV	6000 lm	2h

KT NO.	L x Ø mm	g	
9TA491A	142 x 142 x1200	4400	1/2

Contents		
60W Adjustable Colours tripod Stand Light		x 1 PC.
AC 100-240V to DC 20V 1.1A Charging cable		x 1 PC.



- Actual operating conditions

- Actual operating conditions

- Middle handle for easy carrying

- 90° adjustable multi-angle illumination area

- 330° adjustable lamp head angle

- Three-stage quick release structure, adjusts to use position in 5 seconds

- Handle located in the middle for lightweight and convenient carrying

- Aluminum tube with pneumatic cushioning retract function to prevent accidental injury

- Central control for multi-color temperature/light output adjustment, with 5-level battery indicator

40W COB Bluetooth Speaker Site Light

9TA46

- 40W COB LED
- White light color, kelvin : 6500K
- Rechargeable battery : 11.1V 5200 mAh Li-ion
- Quick charging time : 3.5 hours
- Material : TPE + PA + aluminum + PC
- Feature : 5 LED battery status indicator & USB 5V 2A out put
- 140° vertical rotation + hiding hook on the bottom
- 1 LED Bluetooth indicator
- 140° vertical rotation + hiding hook on the bottom
- High performance integrated 10W Bluetooth speaker
- IP65 dustproof and waterproof
- IK07 impact resistance

Switch mode	Lumen	Operating hours
Eco light	400 lm	20h
Full power light	4000 lm	2h
Music mode	-	5~8h

- AC Charger
- USB out put (Power bank)

- Bluetooth on & battery indicator

- Anti-slip handle

- Option to fixation

- Hiding Hook

- 140 ° vertical rotation

Contents

40W COB Bluetooth Speaker Site Light		x 1 PC.
AC charger		x 1 PC.

KT NO.	Applicable area	L x W x H mm		
9TA46A	Europe	210 x 210 x 100	1450	1 / 4

Ultra Compact Site Light

New

9TA48

- 30W COB LED
- White light color, kelvin : 6500K
- Rechargeable high quality 7.4V 5200mAh Li-ion
- Quick charging time : 4.5 hours
- Material : Aluminum Body, nylon stand and handle,rubber edge protecter
- IP65 dustproof and waterproof
- IK07 impact resistance

Switch mode	Lumen	Operating hours
Work light 20%	300 lm	25h
Work light 40%	750 lm	12h
Work light 60%	1500 lm	6h
Work light 80%	2250 lm	4h
Work light 100%	3000 lm	2h

- Input
- USB output (Power bank)


- 180 ° vertical rotation

- 5 LED battery level indicators,low power warning

- Option to fixation

- Tripod mountable(option tripod not included)

KT NO.	Applicable area	L x H x W mm		
9TA48A	Europe	205 x 153 x 75	960	1 / 8
9TA48B	America & Asia	205 x 153 x 75	960	1 / 8
9TA48D	Australia & New Zealand	205 x 153 x 75	960	1 / 8

Contents

30W floodlight with power bank		x 1 PC.
5V/2A Charger		x 1 PC.
Type-C USB		

ACCESSORIES

Adjustable Tripod for Site Light

87162

- Three section tube diameter : 25mm / 32mm / 38mm
- Durable heavy duty steel tripod body
- Can hold one light or 2 lights (with T-Bar)
- Adjustable tripod height from 700mm to 1500mm, Portable, easy to fold and great for transportation
- It is recommended to use with 9TA42 / 9TA45 / 9TA46 / 9TA48 (This product dose not contain lamps, please buy separately)

9TA42

9TA45

9TA46

9TA48

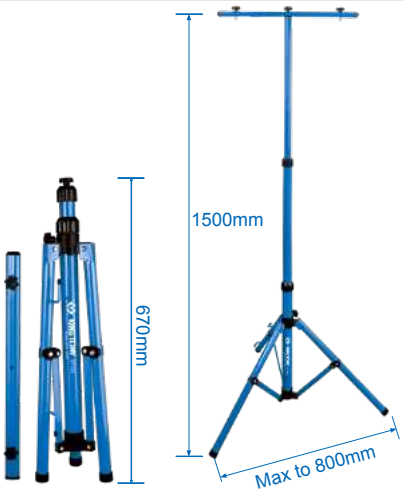

KT NO.	Tube Diameter (mm)	Loading Weight (kg)	Folded Length (mm)	Max height (mm)	g	
87162	38	3.0	700	1500	650	1 / 6

Detachable Underhood Light Shelf

87163

- Three section length adjustment fit variety of occasions
- Two movable base fit all kinds of magnetic lights
- 360° horizontal rotating base for different lighting angle
- Durable heavy duty aluminum body + Anti-sliding clasp handle
- It is recommended to use with 9TA44W (This product dose not contain lamps, please buy separately)

- Three section length adjustment fit variety of occasions
- 60 ° horizontal rotating base for different lighting angle

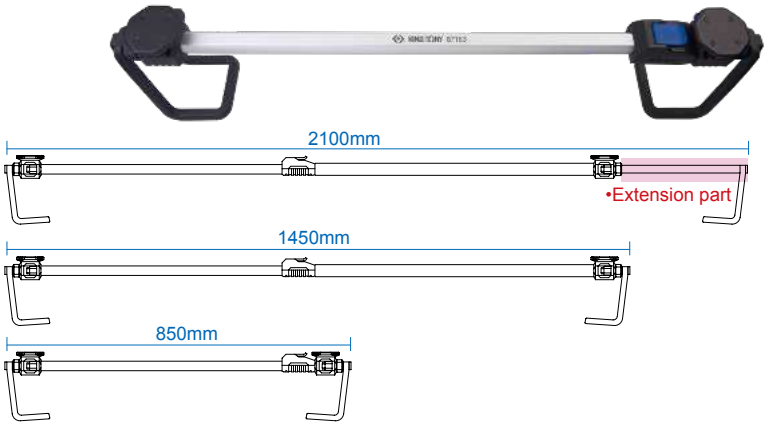

KT NO.	Width (mm)	Height (mm)	Folding length (mm)	Extendable length (mm)	g	
87163	110	180	850	2100	1300	1 / 6

AUTOMOTIVE TOOLS

KING TONY
9BC251A01
KING TONY
43240115Y
7-22
9BC41A22
10-15
9BC42A15
7-14
9BC41A14
10-11,5
9BC42A11

BMW

Petrol Engine Twin Camshaft Setting & Locking Set

9AT1018E

- The set includes camshaft / carrier bracket remover & installer tools
- Suitable for BMW petrol 1.8 and 2.0 N42 / N46 (chain) engine

P CHAIN 18 PC.

4400 1 / 3

MODEL:	118i. E87 (04-08) 120i. E87 (04-08) 316i. E46 (01-05) 316ti. Compact E46 (01-05) 318i. E46 (01-07) 318ti. Compact E46 (01-05) 318i. E90 (05-08) X3. 2.0i E83 (05-08) Z4. 2.0i E85 (04-08) 520i. E60 (04-08) 320i. E90 (05-08)
ENGINE CODE:	N42 / N4 6 B18, B18A, B20, B20A, B20B





CONTENTS :

- A&H&I - camshaft/carrier bracket
- Mounting fixture
- B - inlet camshaft securing tool (rear)
- C&F - torsion spring remover/installer
- D&E - inlet camshaft securing tool (front)
- G - intermediate lever clamp set (8 PC.)

BMW/ MINI

Petrol Engine Timing Set

9AT1108E

- Use for BMW & Mini 1.6 litre chain drive petrol engine
- Includes the cam & crankshaft locking tools and chain pre-tension setting tools for TDC position
- Suitable for BMW (N13) & Mini (N18) engines

P CHAIN 8 PC.

2527 1 / 10

MODEL:	BMW 1 Series 114i F20(2012-15), 116i F20 (2012-15), 118i F20 (2011-15) BMW 3 Series 316i F30 (2012-15) MINI Cooper S (R56/57) (2010-15) Coupe Cooper S (R58) (2012-15) Roadster (R59) (2012-15) Countryman (R60) (2012-16) Paceman (R61) (2013-16) Clubman (R55) (2011-14)
ENGINE CODE:	N13 B16A N18 B16/M0, B16A, B16A/M0, B16A/MO, B16C, B16C/TO, B16M0

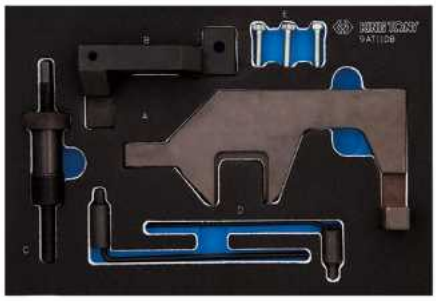

CONTENTS :

- A – camshaft locking tool
- B – camshaft locking tool
- C – chain tensioner tool
- D – crankshaft locking pin

BMW

Diesel Engine Timing Locking Set

9AT2107E

- The set includes camshaft alignment tool, flywheel locking tool, crankshaft pulley turning tool, and also high pressure pump sprocket removal tool
- Suitable for BMW N47 / N47S / N57 2.0 and 3.0 twin camshaft diesel chain drive engine
- Use to set & lock the camshaft and crankshaft when adjusting valve timing on engine correctly

D CHAIN 8 PC.

1730 1 / 10

MODEL:	1 Series 116d/118d/120d/123d E81/82/87/88 (07-12) 3 Series 316d/318d/320d/325d/330d/330xd E90/91/92/93 (07-12) 5 Series 520d E60/61 (07-10) 525d/530d/535d F10/11 (10-12) 530d GT/535d GT F07 (09-12) 7 Series 730d/730Ld/740d/740d xDrive F01/02/04 (08-12) X Series X1 sDrive 18d/20d E84 (09-12) X1 xDrive 18d/20d/23d E84 (09-12) X3 20d E83 (07-10) X3 xDrive 1.8d/30d E83 (08-12) X5 30d/xDrive 40d E70 (10-12) X6 xDrive 30d/40d E71/72 (10-12)
ENGINE CODE:	N47 / N47S D20A D20B D20T0 D20O0 D20UO N57 D30U0 D30O0 D30O1 D30T0

CONTENTS :

- A – camshaft Alignment Tool
- B – flywheel Locking Tool
- C – crankshaft Turning Tool
- D/F – high pressure pump sprocket removal tool
- E – tensioner Locking Pin

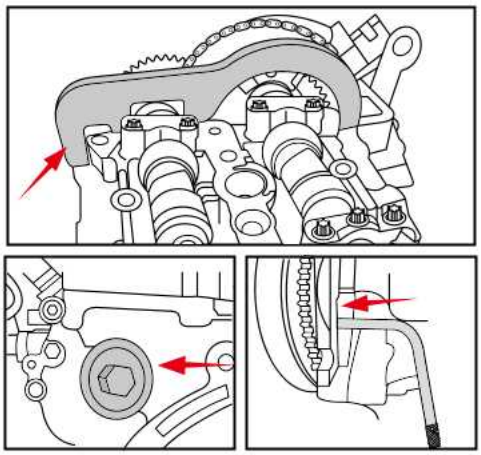

BMW

Petrol Engine VANOS Engagement Wrench

9AT1-A02

- For BMW twin camshaft engines with single VANOS unit mounted on inlet camshaft

298 12 / 48

MODEL:	318is. E36 (92-99), 318ti Compact E36 (94-01) 320i. E36 / E46 (92-07), 323i. E36 / E46 (95-01) 325i. E36 / E46 (92-07), 328i. E36 / E46 (95-01) 330i. E46 (00-07), 520i. E39 / E60 (96-05) 523i. E39 (96-00), 525i. E39 / E60 (00-05) 528i. E39 (96-00), 530i. E39 / E60 (00-05) 728i. E38 (94-02), 730i. E65 (02-05) Z3. (E36) 1.9-3.0 (96-03) Z4. (E85) 2.2-3.0 (03-06) X3. (E83) 3.0 (03-06), X5. (E53) 3.0 (99-07)
ENGINE CODE:	M50 / M52 Single VANOS (VVT) variants 20 6S 2(Later), 20 6S 3 , 25 6S 2(Later) 25 6S 3, 28 6S 1

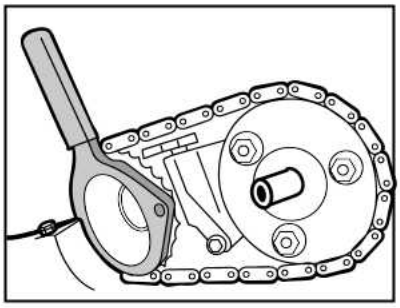

BMW

Diesel Engine Injection Pump Puller

9AT2-D01

- Specifically designed for holding the sprocket / chain in place when disassembling the VP44 injection pump and high pressure pump
- Common rail fits BMW engines

528 6 / 36

MODEL:	318d / Compact(E46) 320d / td Compact(E46) 330d(E46), 535d(E60 / E61), 730d(E38) X5 3.0d(E53), 530d(E39 / E60 / E61) 525d(E39 / E60 / E61)
ENGINE CODE:	M47 / M57 1 Series E87, 3 Series E46 / E90 5 Series E39 / E60, 6 Series E63 7 Series E38 / E65, X3 E83 and E53 / E70

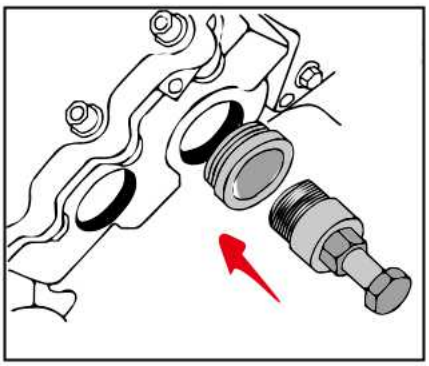

CHEVROLET

Petrol Engine Tension Adjustment Wrench Set (Via Water Pump)

9AT1202

- The set includes 41mm and 46mm tension adjust wrench
- Suitable for Vauxhall / Opel and Chevrolet engines

P BELT 2 PC.

695 6 / 24

MODEL:	9AT1202-B(41mm) Kalos (04-08), Aveo (06-08), Espero / Aranos (95-97), Nexia (95-97) Lanos (97-03), Nubira / Lacetti (97-09) Cruze (2009)
ENGINE CODE:	1.4 A13DM A14MS F14S3 1.4 16v. F14D3, 1.5 G15MF 1.5 16v. A15DM A15SMS A15MF 1.6 16v. A16DM A16DMS F16D3 LXT

CONTENTS :
- A - tension adjustment wrench (46mm)
- B - tension adjustment wrench (41mm)



BMW

Petrol Engine Timing Alignment Set

9AT1112E

- The set includes camshaft locking tool, VANOS alignment plate, flywheel locking pin
- Suitable for BMW 2.5/3.0 liters chain drive six cylinder, twin cams 16v petrol engines
- Use to lock camshaft in TDC position when setting or adjusting engines timing

P CHAIN 12 PC.

5900 1 / 3

MODEL:	128i. E82 (07-08) 130i. E81/87 (05-08) 135iS. E82 (07-08) 323i. E90/91/92/93 (04-08) 325i/xi. E90/91/92/93 (04-08) 328i/xi. E90/91/92/93 (04-08) 330i/xi. E90/91/92/93 (04-08) 335i/xi. E90/91/92/93 (05-08) 523i/Li. E60/61 (04-08) 525i/Li/xi. E60/61 (04-08) 528i/xi. E60/61 (06-08) 530i/Li/xi. E60/61 (05-08) 535i/xi. E60/61 (06-08) 630i. E63/64 (04-08) 730i/Li. E65/66 (04-08) X3 2.5/3.0 E83 (06-08) X5 3.0 E70 (06-08) Z4 2.5/3.0 E85/86 (05-08)
ENGINE CODE:	N51 / N52 /N52K (Valvetronic) N53 / N54 (Direct Injection)

CONTENTS :
- A - VANOS alignment plate (Red for N53/N54, Silver for N51/N52/N52K)
- B - camshaft locking tool
- C - flywheel locking pin





PSA PEUGEOT CITROËN

Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen / Peugeot, Vauxhall / Opel

CONTENTS :

- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool

A B C

112 g | 12 / 120

MODEL:	2.8D/Tdi/Hdi Relay / Jumper (01-06) Boxer (00-06)
ENGINE	8140.43 8140.43S 8140.63

Petrol & Diesel Engine Flywheel Holding & Locking Tool

9AT3-E02

- Used to remove the crankshaft pulley when replacing the timing belt
- The pulley retaining bolt is fitted with high torque and the flywheel must be securely locked during installation / removal
- Jamming tools into the teeth of the flywheel will cause serious damage to both teeth and housing



64 g | 25 / 100

MODEL:	Petrol 1.0 to 2.0 TU / XU (Belt) XU 1.6 to 2.0 Diesel 1.50 to 2 .50 TUD / XUD (Belt) XU1.6 to 2.0 XD1.8D to 1.9D

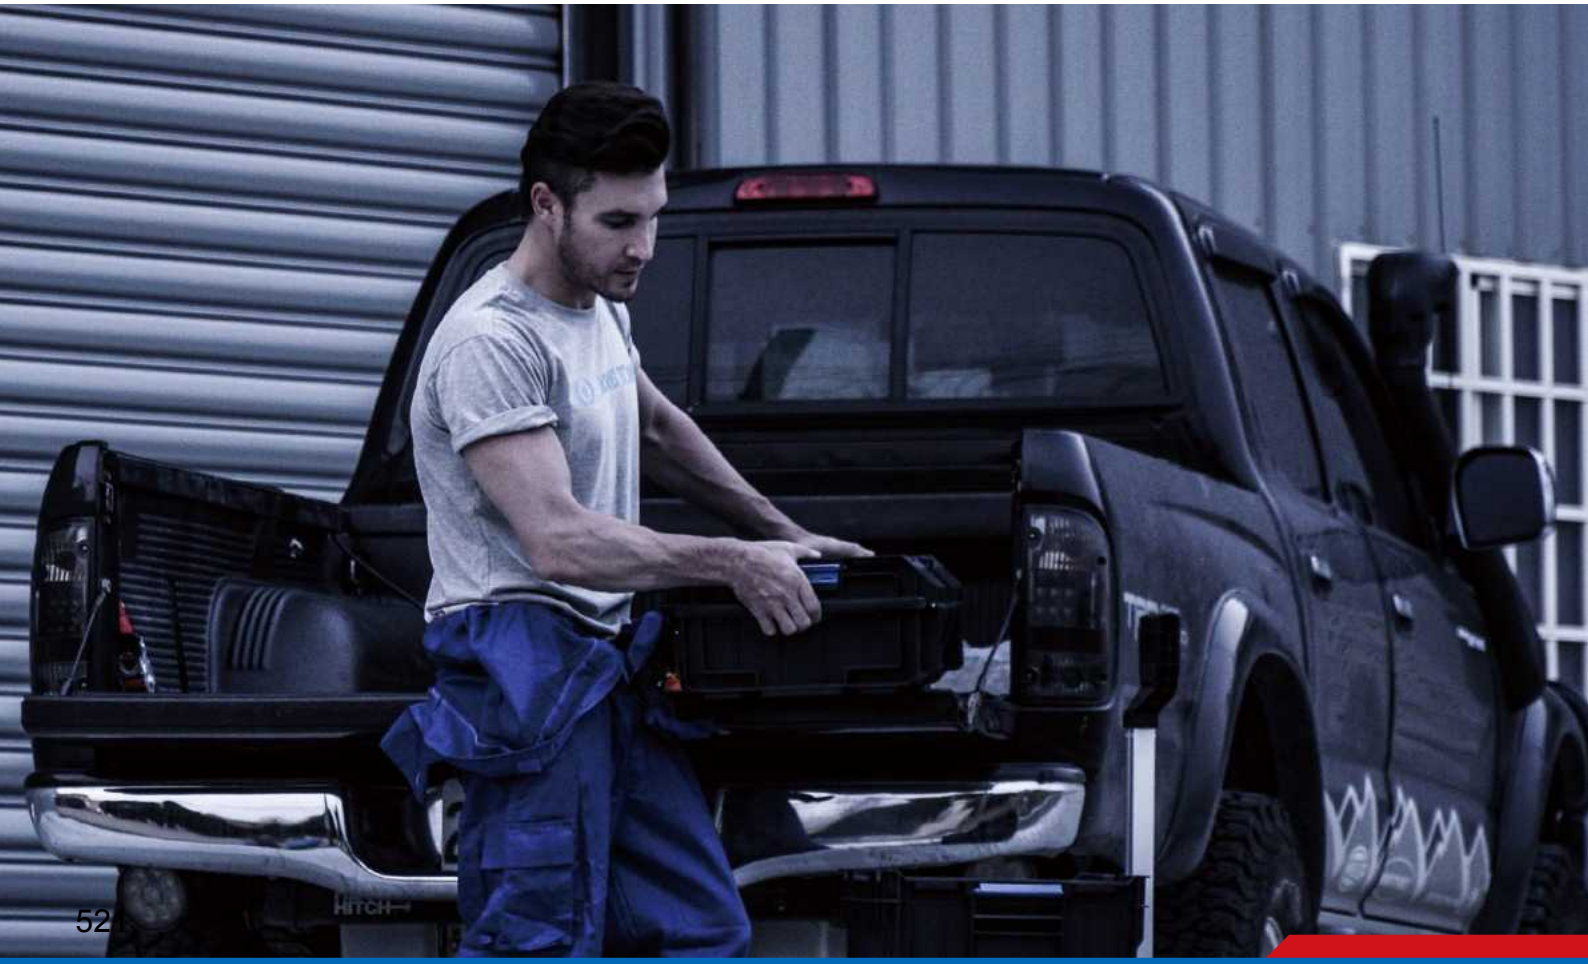

FIAT

Petrol Engine Flywheel Holding Tool

9AT1-E01

- Use to lock the flywheel while removing and replacing the timing belt
- Put it into the teeth of the flywheel to hold the crankshaft up, while releasing or tightening the bolt



51 | 20 / 100

MODEL:	Stilo (01-08), Brava / Bravo (95-02) Marea / Weekend (96-03), Multipla (99-09) Doblo / Cargo (02-06)
ENGINE CODE:	178B3.000, 182A4.000 182A6.000, 182B6.000

Petrol & Diesel Engine Flywheel Holding & Locking Tool

9AT3-E02

- Used to remove the crankshaft pulley when replacing the timing belt
- The pulley retaining bolt is fitted with high torque and the flywheel must be securely locked during installation / removal
- Jamming tools into the teeth of the flywheel will cause serious damage to both teeth and housing



64 | 25 / 100

MODEL:	Petrol 1.6 16v. Twin Cams (Belt) Stilo

Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen / Peugeot, Vauxhall / Opel

112 | 12 / 120

MODEL:	2.5D / 2.5DT / 2.8D / 2.8JTD Croma (93-97) Ducato (87-06) Talento (87-02)
ENGINE	8140.21, 8140.27, 8140.47R 8140.43, 8140.43S, 8140.63 8144.67

CONTENTS :

- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool

FORD

Diesel Engine Setting/Locking Tool (Belt Drive)

9AT2-C01

- The set includes crankshaft (oval / round), camshaft and tensioner locking pins
- Suitable for most of general VAG 1.4 / 1.9 / 2.0 TDi PD DOHC engines
- Also for Ford Galaxy models engine

408 | 10 / 40

MODEL:	Galaxy 1.9
ENGINE CODE:	ASZ / ANU







CONTENTS :

- A - Crankshaft Locking Tool (Silver / Oval)
- B - Crankshaft Locking Tool (Black / Round)
- C - Camshaft Locking Pins (2 pcs)
- D - Tensioner Pulley Locking Pin
- E - Auxiliary Belt Tensioner Locking Pin



FORD

EcoBoost 1.0 Timing Set

9AT1026E

- Engine Timing Tool Kit suitable for 1.0 petrol EcoBoost and 1.0 SCTi EcoBoost FORD engines.
- Contains tools vital for setting and locking the engine and for setting the position of the variable cam timing units.

16 PC. | P | CHAIN

4.4 | 1 / 4

MODEL:	Fiesta (2013-2016), EcoSport (2013-2015), B-Max (2013-2016), C-Max (2012-2016), Transit Courier (2012-2016), Transit Connect (2013-2016), Focus (2012-2016), Grand Tourneo Connect (2013-2015), Grand C-Max (2012-2016), Mondeo (2015-2016), Tourneo Connect (2013-2015)
ENGINE :	MICA, M1CB, M1DA, M1DD, M1JA, M1JC, M1JE, M1JH, M2DA, M2DB, M2DC, M2GA, P4JC, P4JD, SFCA, SFCB, SFDB, SFJA, SFJB, SFJC, SFJD, P4JA, P4JB, XMJA, XMJB, M1JA

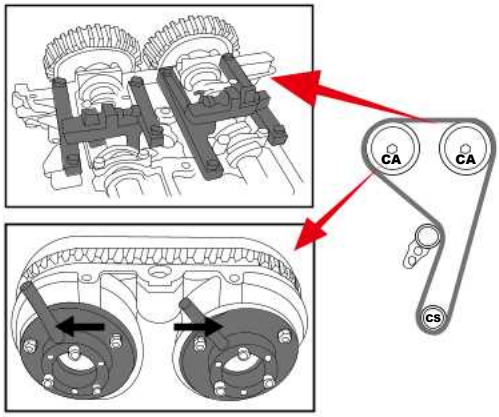

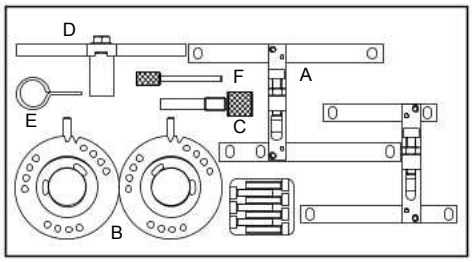

CONTENTS:
- A - Camshaft Locking Tool Set
- B - Camshaft VVT Adjustment Tool Set
- C - Crankshaft Setting Pin
- D - Flywheel Locking Tool
- E - Tensioner Locking Pin
- F - Crankshaft Pulley Positioning Pin

- Remove the starter motor and fit component D in the starter aperture so that its tooth locks the flywheel

FORD

Petrol Engine Twin Camshaft & Diesel Engine Timing Tool Set

9AT1406E

- The set includes VCT setting plate, camshaft setting plate, crankshaft TDC location pin, tensioner locking pin and flywheel locking tools
- Suitable for 16v. Duratec petrol engine of FORD 1.6 Ti-VCT twin camshaft
- Use to adjust VCT timing on inlet and exhaust camshaft during timing belt replacement

D | P | BELT | 7 PC.

1640 | 1 / 10

MODEL:	Focus C-Max (03-08) Focus (04-08) Mondeo (07-08)
ENGINE CODE:	HXDA





CONTENTS :
- A&E - flywheel locking tool
- B - camshaft setting plate
- C - crankshaft TDC location pin
- D - tensioner locking pin
- F - VCT setting plate
- G-crankshaft pulley alignment tool

FORD

Petrol & Diesel Engine Flywheel Holding Set

9AT3-E01

- Lock crankshaft in timed position by locating into flywheel
- Suitable for counter-holding crankshaft when releasing or tightening crankshaft pulley bolt



373 | 36 / 36

MODEL:	1.8 TDi / TDdi / TDCi Petrol Engines(Belt) Fiesta / Courier, Tourneo Connect, Focus C-Max, Mondeo, S-Max, Galaxy, Transit Connect 2.0TDCi Diesel Engines (Belt) Focus / C-Max, S-Max, Galaxy 1.6Ti-VCT Petrol Engines(Belt) Focus, Mondeo, Focus C-Max
ENGINE CODE:	1.8 TDi / TDdi / TDCi Petrol Engines(Belt) RTN, RTQ, RTP, BHDB, BHPA, C9DA, C9DB C9DC, F9DA, F9DB, FFBA, FFDA, FFWA HPCA, HPCB, P7PA, P9PA, QYBA, QYWA R2PA, R3PA, RWPA, KKDA 2.0TDCi Diesel Engines (Belt) AZWA, G6DA, G6DB, G6DC, QXWA 1.6Ti-VCT Petrol Engines(Belt) HXDA

LANCIA

Petrol Engine Flywheel Holding Tool

9AT1-E01

- Use to lock the flywheel while removing and replacing the timing belt
- Put it into the teeth of the flywheel to hold the crankshaft up, while releasing or tightening the bolt



51 | 20 / 100

MODEL:	Delta (96-99) Lybra (99-06)
ENGINE CODE:	182A4.000 182A6.000

IVECO

Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen/Peugeot, Vauxhall/Opel

112 | 12 / 120

MODEL:	2.5D/2.8D Daily (91-06) Turbo Daily (94-00)
ENGINE CODE:	8140.07, 8140.27S, 8140.47 8140.47R, 8140.67F, 8140.97 8140.23, 8140.43C, 8140.43S

CONTENTS :
- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool

A B C

LAND ROVER

Diesel Engine Injection Pump Puller

9AT2-D01

- Specifically designed for holding the sprocket / chain in place when disassembling the VP44 injection pump and high pressure pump
- Common rail fits BMW engines

528 | SET 6 / 36

MODEL:	Freelander (00-06) Td4 (2.0d) Range Rover (02-06) Td6 (3.0d)
ENGINE CODE:	204D3 / Td4 (2.0 M47:BMW) 306D1 / Td6 (3.0 M57 : BMW)



RENAULT

Diesel Engine Setting & Locking Set

9AT2008E

- The set includes auxiliary belt tensioner locking pin, camshaft setting tools, crankshaft pulley holding tool, chain tensioner locking pin and crankshaft locking pin
- Suitable for 2.0 dCi chain drive engines of Renault, Nissan and Vauxhall / Opel





2376 | 1 / 5

MODEL:	Megane II (07-09) Scenic / Grand Scenic (08-09) Laguna II (01-05) Vel Satis (05-09) Espace / Grand Espace (08-09) Koleos (08-09) Trafi c (07-09)
ENGINE CODE:	2,0 dCi M9R 700, 721, 722, 724, 740, 742, 746, 760 761, 780, 802, 803, 805, 830, 832, 833

CONTENTS :

- A&H - camshaft gear alignment tool
- B&C - camshaft setting plate
- D - crankshaft locking pin
- E - auxiliary belt tensioner locking pin
- F - crankshaft pulley holding tool
- G - chain tensioner locking pin

RENAULT

Petrol & Diesel Engine Flywheel Holding & Locking Tool

9AT3-E02

- Used to remove the crankshaft pulley when replacing the timing belt
- The pulley retaining bolt is fitted with high torque and the flywheel must be securely locked during installation / removal
- Jamming tools into the teeth of the flywheel will cause serious damage to both teeth and housing
- Suitable for petrol and diesel engine

64 | SET / 25 / 100

MODEL:	Petrol 1.2 to 2.2 (Belt) F3R, F7R, F7P, F3P, E7J F8M and F8Q (early) Diesel 1.50 to 2.50 TUD / XUD (Belt) F3R, F7R, F7P, F3P, E7J, F8M and F8Q (early)



Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen / Peugeot, Vauxhall / Opel

CONTENTS :
- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool

112 | 12 / 120

MODEL:	2.5D / 2.5D Turbo / 2.8dTi / 2.8dCi Trafic (98-00) Master (98-07)
ENGINE CODE:	S8U 720, 722, 730, 731, 742, 748 750, 752, 770, 772, 780, 782 S9U 700, 702, 704, 714, 740 S9W 206, 208, 212, 700, 702

Petrol & Diesel Engine Timing Set (dCi Engines)

9AT3-A03

- The set includes camshaft / crankshaft locking pin and TDC timing pin
- Used for timing belt replacement
- Suitable for Renault 1.5 and 1.9 dCi diesel and petrol engine



CONTENTS :
- A - crankshaft Locking Pin
- B - TDC Timing Pin
- C - camshaft/Crankshaft Locking Pin

RENAULT (Belt) | 220 | 10 / 100

MODEL:	Diesel Clio 1.5 dCi (01-08) Clio 1.9 DTi (99-03) Espace 1.9 TDi (97-02) Kangoo 1.5 dCi (04-08) Kangoo 1.9 DTi (99-03) Laguna 1.9 DTi (97-03) Megane II 1.5 dCi (02-05) Megane 1.9 D / TD / TDi (95-03) Scenic II 1.5 dCi (02-05) Scenic 1.9 TD (95-99) Petrol Clio 1.8 (92-01) Espace 2.0 (92-01) Laguna 1.8 (92-01) Megane, 2.0 (96-99) R19 1.8 (92-01) F3R Scenic 2.0 (96-99)	
ENGINE CODE:	Diesel K9K F8Q F9Q	Petrol F3P F3R

RENAULT

Petrol Engine Timing Locking Set-2.0 16V IDE - F5R

9AT1-A03

- The set includes crankshaft timing pin and camshaft setting plate, to aid timing belt replacement
- Suitable for Renault 2.0 IDE twin cam petrol engines found in Laguna and Megane vehicles





511 10 / 30

MODEL:	Megane (99-03) Laguna II (01-05)
ENGINE CODE:	F5R700, 701, 740

NISSAN

Diesel Engine Setting & Locking Tool Set

9AT2008E

- The set includes auxiliary belt tensioner locking pin, camshaft setting tools, crankshaft pulley holding tool, chain tensioner locking pin and crankshaft locking pin
- Suitable for 2.0 dCi chain drive engines of Renault, Nissan and Vauxhall / Opel





2376 1 / 5

MODEL:	Primastar (08-09) Qashqai (08-09) X-Trail (07-08)
ENGINE CODE:	M9R 780, 830, 832, 833

CONTENTS :
- A&H - camshaft gear alignment tool
- B&C - camshaft setting plate
- D - crankshaft locking pin
- E - auxiliary belt tensioner locking pin
- F - crankshaft pulley holding tool
- G - chain tensioner locking pin

VOLKSWAGEN GROUP AUDI/SKODA/VW/SEAT

Petrol Engine Twin Camshaft Setting & Locking Set - VAG 1.4 / 1.6 FSi (Chain)

9AT1103E

P CHAIN 3 PC.

- The set includes camshaft setting plate, TDC position tool (with DTI) and tensioner locking pin
- 9AT1103 ´B´ TDC positioning tool has to use with 9AT3-F01(not included in this set)

1456 g / 1 / 10

MODEL:	Audi A3 (03-07) Volkswagen Polo (02-08), Golf V (03-08), Golf Plus (05-08) Jetta (06-08), Passat (05-08), Touran (03-07) Skoda Octavia II (04-08)
ENGINE CODE:	1.4 FSI AXU, BKG, BLN 1.6 FSI BAG, BLF, BLP, BTS





CONTENTS :

- A - camshaft setting plate
- B - TDC position tool (with DTI)
- C - tensioner locking pin

VW/AUDI

VW Audi TIMING TOOL Set VAG 1.6/2.0 TDI CR

9AT2010E

- This set designs to fit the newest common rail diesel engine which is significantly different from the older PD engine.
- The CR engines combines belt and the gear drive by using a toothed belt to transfer the drive from the crankshaft to one of the cam shafts, then using gears to transfer the drive from one cam to the other.

Kg 2.7 / 1 / 4

D CHAIN 10 PC.

MODEL:	Audi A3, A4, A5, A6, Q5 Volkswagen Golf, Tiguan, Passat, Eos
ENGINE :	1.2 TDi ANY, AYZ 1.4 TDi AMF, ATL, BAY, BHC, BNM, BNV 1.9 TDi AJM, AMG, ANJ, ARL, ARX, ASZ, ATD, ATJ, AUY,AVB, AVF, AVQ, AWX, AXB, AXC, AXR, BEW, BJB, BKC, BKE, BLS, BLT, BMT, BPX, BRB, BRM, BRU, BSU, BSV, BSW, BTB, BVK, BXE, BXF 2.0 TDi AZV, BKD, BDJ, BDK, BGW, BHW, BKP, BLB, BMA, BMM, BMN, BMP, BMR, BNA, BPW, BRC, BRE, BRF, BRT, BSS, BUY, BUZ, BVE,BVF, BVG, BVH, BVW

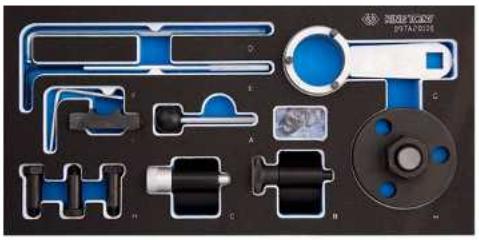

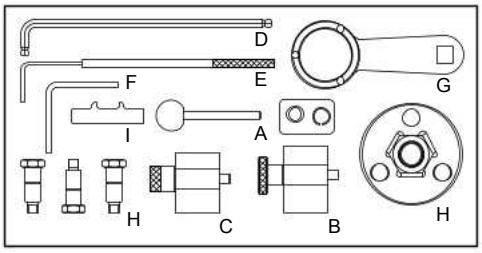

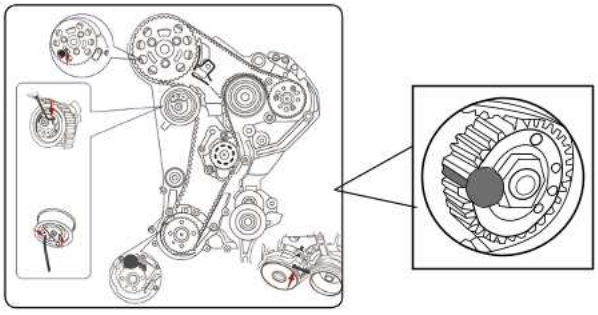

CONTENTS:

- A - Injection pump/ camshaft alignment pin
- B - Crankshaft pulley locking tool(Bored)
- C - Crankshaft pulley locking tool(Non-bored)
- D - Tensioner pulley adjustment tool(2.4mm Hex Key)
- E - Tensioner pulley locking tool
- F - auxiliary tensioner locking tool(3.9mm)
- G - Sprocket holding tool
- H - Cam sprocket hub puller
- I - Oil Pump /Balancer Shaft Alignment Tool

VOLKSWAGEN GROUP AUDI/SKODA/VW/SEAT

Diesel Engine Setting & Locking Set - Pumpe Düse

9AT2012E

- The set includes crankshaft & camshaft locking tool, tensioner setting & adjusting tools
- Suitable for belt drive Pumpe Düse diesel engines of VW group vehicles and Ford (Galaxy)
- Use to set & lock engine to make sure timing is in the correct position during timing belt replacement
- Suggestion :
  Check the engine is hydraulic or mechanical tensioner first. (Some of 1.2 1.4 1.9 engines were changed from hydraulic to mechanical.)

D BELT 12 PC.

1845 g 1 / 10

MODEL:	Audi A2 (01-06), A3 (01-09), A4 (99-09) A5 (08-09), A6 (98-08), TT (08-09) Q5 (08-09) Skoda Fabia (00-07), Fabia II (07-09) Octavia (00-09), Octavia II (04-09) Superb (02-08), Roomster (07-09) Volkswagen Lupo(99-05), Polo(99-07), Fox(05-08) Jetta (05-09), Passat (98-09), Beetle (00-09) Touran (03-09), Sharan (99-09) Caddy (03-09), Golf /Bora(98-08) Golf Plus (05-09), Transporter (03-09) Seat Arosa (99-05), Altea XL(04-09) Leon (00-09), Toledo (04-09) Alhambra (99-09), Ibiza / Cordoba)(02-09) Ford Galaxy (99-06)
ENGINE CODE:	1.2TDi PD ANZ, AYZ 1.4TDi PD AMF, ATL, BAY, BHC, BMS, BNM, BNV, BWB 1.9TDi PD AJM, AMG, ANU, ARL, ASZ, ATD, ATJ, AUY, AVB, AVF, AVQ, AWX, AXB, AXC, AXR, BEW, BJB, BKC, BKE, BLS, BLT, BMT, BPX, BRB, BRM, BRR,BRS, BRU, BSU, BSW, BTB, BUK, BVK, BXE, BXF 2.0TDi PD AZV, BDJ, BDK, BGW, BHW, BKD, BKP, BLB, BMA, BMM, BMN, BMP, BMR, BNA, BPW, BRC, BRE, BRF, BRT, BUZ, BVE, BVF, BVG, BVH, BWV 1.9TDi PD (Ford) ANZ, ASZ, AUY

CONTENTS :

- A - crankshaft locking tool (silver / oval)
- B - crankshaft locking tool (black / round)
- C - camshaft locking pins (2 pcs)
- D - tensioner adjuster (1.2, 1.4 & 1.9)
- E - tensioner adjuster (later 1.9 & 2.0)
- F - tensioner adjust tool (hexagon)
- G - tensioner locking tool
- H - tensioner locking pin (mechanical)
- I - tensioner locking tool (hydraulic)
- J - tensioner setting tool (hydraulic)
- K - auxiliary belt tensioner locking pin

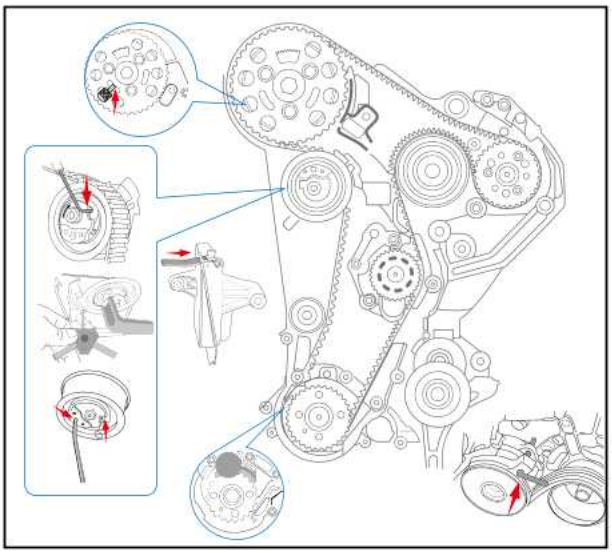

VOLKSWAGEN GROUP AUDI/SKODA/VW/SEAT

Petrol Engine Camshaft Sprocket Holding Tool

9AT1-A01

- For locking the camshaft pulleys when changing the toothed belt
- Engine repairs on 16-valve 1.4/1.6L FSi twin cams injection engine

340 | 6 / 36

MODEL:	Audi A2 (00-06) Seat Arosa (99-05), Ibiza / Cordoba (99-08) Leon (99-05), Toledo (99-05), Inca (00-04) Skoda Fabia (99-07), Octavia (00-08) Volkswagen Lupo (98-05), Polo (98-07), Golf / Bora (97-08), Beetle (01-08) Caddy (99-08)
ENGINE CODE:	AFK, AHW, AJV, AKQ, APE, AQQ, AUA, AUB, AXP, ARC, ATN, AUS, AVY, AZD , ARR, BBY, BBZ, BCA, BKY, BAD, BCB

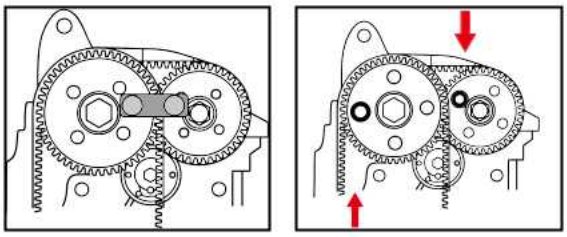

Diesel Engine Setting/Locking Tool (Belt Drive)

9AT2-C01

- The set includes crankshaft (oval/round), camshaft and tensioner locking pins
- Suitable for most of general VAG 1.4/1.9/2.0 TDi PD DOHC engines
- Also for Ford Galaxy models engine

408 | 10 / 40

MODEL:	Audi A2 1.4 (02-06), A3 1.9/2.0 (02-08), A4 1.2 (02-05), A4 1.9/2.0 (02-05), A6 1.9 (20-05) VW Beetle 1.9 (02-08), Bora 1.9 (02-08), Fox 1.4 (02-08), Golf 1.9 (02-08), Lupo 1.4 (02-08) Polo 1.4/1.9 (02-08), Sharan 1.9 (20-08), Jetta 2.0 (03-), Passat 2.0 (03-), Touran 2.0 (03-) Seat Altea 1.9 (05-08), Leon 1.9/2.0 (05-08), Toledo 1.9 (05-08) Skoda Octavia II 2.0 (03-06), Fabia 1.4 (03-06)
ENGINE CODE:	Audi AMF, ASZ, ATD, AVB, AVF, AWX, AXR, AZV, BHC, BKC, BKD, BKE, BLB, BMN, BNA, BPW, BRB, BRC, BRD, BRE, BRF, BUY, BVA, BVF, BVG VW AJM, AMF, ANU, ARL, ASZ, ATD, AUY, AVB, AVF, AWX, AXR, BAY, BMS, BNM, BNZ, BWB Seat BJB, BKC, BLS, BMM, BXE Skoda AMF, AZV, BKD

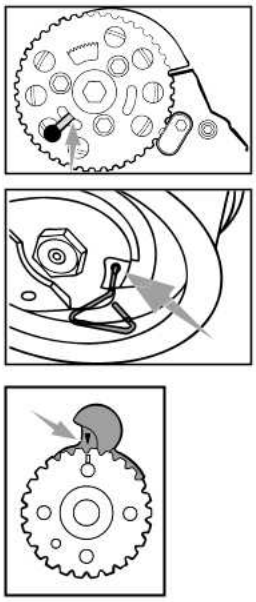

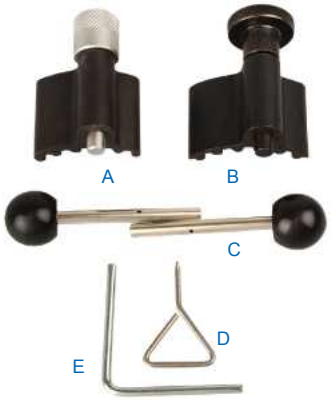

CONTENTS :

- A - crankshaft locking tool (silver / oval)
- B - crankshaft locking tool (black / round)
- C - camshaft locking pins (2 pcs)
- D - tensioner pulley locking pin
- E - auxiliary belt tensioner locking Pin

Petrol Engine Chain Tensioner Retainer

9AT1-A04

- Use to hold the chain tensioner in position when removing or installing timing chain
- Suitable for a variety of VAG chain drive engines

46 | 12 / 192

MODEL:	A3, A4, A6, A8, S3, S4, TT, etc
ENGINE CODE:	Audi AHA, AMB, AMU, APB, ART, ATC, ATQ, AWM, AWN, AWP, BBD, BCY, BEA, BEL, BFM VW AHA, APH, ATQ, AUG, AWM, AWP, AWV, BKF, BNU



VAUXHALL/OPEL

Petrol Turbo Engine Timing Set

9AT1007E

- The setting & locking set covers a wide range of Vauxhall/Opel and Chevrolet petrol engine.
- Include the necessary tool for setting and locking the camshaft and crankshaft for locking the timing chain tensioner.

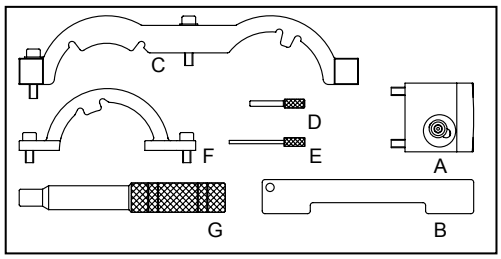

2.4 | 1 / 4

MODEL:	Cadillac : ELR (2014). Chevrolet : Aveo (2011-2015), Cruze (2011-2015), Volt (2012-2014),Trax (2013-2015), Orlando (2011-2015). Holden: Volt (2012-2014). Vauxhall / Opel: Agila (2000-2003), Agila-B (2008-2010), Adam (2012-2015),Ampera (2011-2015), Corsa-C (2000-2014), Corsa-D (2006-2014), Insignia (2011-2015), Meriva-B (2010-2015), Mokka (2012-2015),Zafira-C Tourer (2012-2015), Cascada (2013-2015),Astra-J (2009-2015).
ENGINE :	1.0 / 1.0 Ecoflex A10XEP 1.2 / 1.2 Ecoflex A12XEL, A12XER, LWD/A12XEL, L2Q/A12XEL, LWD/B12XEL 1.4 / 1.4 Ecoflex A14XER, LUJ/A14NET, LDD/A14XEL, LDD/A14XER, LDD/A14XEL, A14XEL, L2Z/A14XEL, LDD/B14XEJ, LDD/B14XEL, LDD/B14XER, LUJ/B14NEH, LUJ/B14NEL, LUJ/B14NET, LDD, LUU, LUH/A14NEL 1.4 Turbo LUJ/A14NEL, LUJ/A14NET, LUJ/B14NET 1.6 LDE/A16XER, LDE/B16XER

CONTENTS:
- A - Inlet Camshaft Adjusting Tool
- B - Camshaft Locking Plate
- C - Camshaft Sensor Locating Tool
- D - Chain Tensioner Locking Pin 4.0mm
- E - Chain Tensioner Locking Pin 2.5mm
- F - Camshaft Sensor Locating Tool
- G - Crankshaft Locking Pin

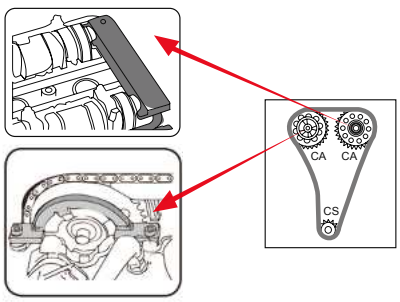

VAUXHALL/OPEL

Petrol Engine Tension Adjustment Wrench Set (Via Water Pump)

9AT1202

- The set includes 41mm and 46mm tension adjust wrench
- Suitable for Vauxhall / Opel and Chevrolet engine

695 | SET | 6 / 24

P | D | CHAIN | 2 PC.

MODEL:

9AT1202 - A(46MM)
Petrol / 1.8 and 2.0 S.O.H.C
Astra F, Calibra, Frontera C18NZ, C20NE
Diesel / 1.6D and 1.7D
Astra, Cavalier, Vectra 16DA, 17D

9AT1202 - B(41MM)
Petrol / 1.2 / 1.4 / 1.6 S.O.H.C
Corsa B / C , Combo, Astra-F, Vectra-B
C12NE, X12SZ, C14NZ, X14NZ, C14SE
X14SZ, X16SZ, X16SZR, Z16SE

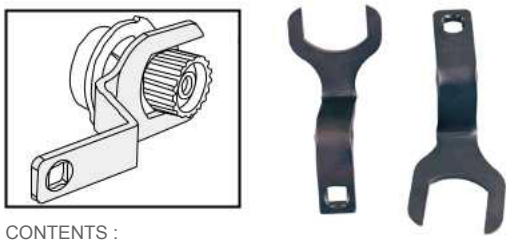

CONTENTS :

- A - tension adjustment wrench (46mm)
- B - tension adjustment wrench (41mm)

VAUXHALL/OPEL

Diesel Engine Setting & Locking Set

9AT2008E

- The set includes auxiliary belt tensioner locking pin, camshaft setting tools, crankshaft pulley holding tool, chain tensioner locking pin and crankshaft locking pin
- Suitable for 2.0 dCi chain drive engines of Renault, Nissan and Vauxhall / Opel

2376 | 1 / 5

D | CHAIN | 8 PC.

MODEL:	Vivaro (07-08)
ENGINE CODE:	M9R 780/782/784





CONTENTS :

- A&H – camshaft gear alignment tool
- B&C – camshaft setting plate
- D – crankshaft locking pin
- E – auxiliary belt tensioner locking pin
- F – crankshaft pulley holding tool
- G - chain tensioner locking pin

Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen / Peugeot, Vauxhall / Opel

D | BELT

112 | 12 / 120

MODEL:	2.5D / 2.8D Arena (97-01) Movano (98-03)
ENGINE CODE:	S8U 770, 772 S9W 700, 702

CONTENTS :

- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool

VAUXHALL/OPEL

Diesel Engine Setting & Locking Set

9AT2004E

- The set includes flywheel locking pin, camshaft setting tools, tensioner locking pin
- Use to retain timing position only. DO NOT use them to hold camshafts in position while releasing or tightening the sprocket bolt

1101 | 1 / 10

MODEL:	Diesel 1.3D CDTi (Chain) Agila (03-08), Agila-B (08-09) Corsa / Combo-C (03-09), Corsa-D (08-09) Tigra-B(04-09), Meriva (04-09) Astra-H (05-09)
ENGINE CODE:	Diesel 1.3D CDTi (Chain) Z13DT, Z13DTH, Z13DTJ

CONTENTS :

- A - camshaft setting tool set (pair)
- B - flywheel locking pin
- C - tensioner retaining pin





Diesel Engine Injection Pump Puller

9AT2-D01

- Specifically designed for holding the sprocket / chain in place when disassembling the VP44 injection pump and high pressure pump
- Common rail fits BMW engines

528 | SET | 6 /36

MODEL:	Omega - B (01-03)
ENGINE CODE:	Y25DT



VAUXHALL/OPEL

Petrol Engine Flywheel Holding & Locking Tool

9AT2-E01

- Use to remove the crankshaft pulley while replacing the timing belt
- Put into the teeth firstly, fix steadily on the housing according to manufacturer′ s guidelines

39 | SET | 20 / 100

MODEL:	Astra (86-91) Astra-F + G (91-98) Ascona-C / Cavalier (86-88) Vectra A (89-95)
ENGINE CODE:	16DA, 17D, 17DR, 17DTL



UNIVERSAL
Camshaft & Injection Pump Sprocket Holding Tool

9AT3-A01

- Use to counter hold camshaft or injection pump sprocket to release the retaining bolt
- For universal diesel and petrol engine

912 SET / 6 / 24





UNIVERSAL
TDC Indicator

9AT3-F02

- Use to measure if the cylinder piston is at TDC position
- This tool has to use with Dial Test Indicator 9AT3-F01

292 SET / 1 / 30

UNIVERSAL
Universal Camshaft Pulley Holding Wrench

9AT3-A02

- Use to hold camshaft pulley while loosening and tightening cam sprockets center bolt
- Designed with 4 pair groove pins 7, 10, 14, 16mm
- Adjustable swivel jaw both side application for most engine
- Capacity : 40 ~ 140mm (1-1/2" ~ 8-5/8")
- For universal engine, especially O.H.C. overhead cam engines cars

1000 / 1 / 6

9 PC.

UNIVERSAL
Camshaft Sprocket Puller

9AT3-A04

- Use to hold and remove the camshaft sprocket without damaging the sprocket
- Use with 3/8" square drive tool or 19mm wrench
- Suitable for most sprockets from Ø60 to Ø100 mm

KT NO.	Capacity mm		
9AT3-A04	60~100	1437	1 / 12

UNIVERSAL

Belt Tensioner Lock Pin Set

9AT3-B01

- Designed for retaining tensioner plunger in fixed position while replacing timing belt
- Suitable for common vehicle and engine

17 | SET / 20 / 100



CONTENTS :

- 0.79mm / .0310"
- 1.21mm / .0476"
- 1.41mm / .0560"
- 1.51mm / .0594"
- 1.71mm / .0670"
- 1.92mm / .0760"

UNIVERSAL

Dial Test Indicator

9AT3-F01

- Use to measure and accurately find the piston TDC position
- This tool has to use with TDC Indicator 9AT3-F02
- It can be used for mechanical circularity, flatness.....etc

63 | SET / 1 / 100



VOLKSWAGEN GROUP AUDI / SKODA / VW / SEAT

Petrol Engine Setting & Locking Set

CHAIN

6 PC.

9AT1506E

- The set includes dial & TDC indicator and camshaft setting tool
- Suitable for 1.2T / 1.4T FSi and 1.4 / 1.6 FSi engines
- Use to check and adjust engine timing

1856 | 1 / 10

MODEL:	Audi A1(10-12), A3(03-12) Seat Altea/Altea XL(08-12), Ibiza/Cordoba(08-12) Leon(07-12), Toledo(07-09) Skoda Fabia II(07-12), Octavia II(04-12) Roomster(06-12), Superb II(09-12) Yeti(09-12) VW Caddy/ Caddy Maxi(10-12), Eos(06-12) Golf(03-12), Golf Plus(03-12), Jetta(06-12) Passat(05-11), Polo(02-12), Scirocco(08-12) Tiguan(07-12), Touran(03-12)
ENGINE CODE:	1.2T FSi CBZA, CBZB, CBZC 1.4T FSi BLG, BMY, BWK, CAVA, CAVB, CAVC, CAVD CAVE, CAVF, CAXA, CAXC, CDGA, CSMA 1.4 FSi AXU, BKG, BLN 1.6 FSi BAG, BLF, BLP, BTS

- CONTENTS :
- A – camshaft setting plate
- B – TDC indicator
- C – camshaft setting tool
- D – crankshaft locking pin
- E – dial test indicator
- F – tensioner locking pin





Hose Clamp	KT Item	Suitable Car Brand
Hose Clamp	9AA11 9AA13 9AA16 9AA21 9AA31 9AA32	Universal VW(Intake), VW, Audi, Opel, Honda, Ford
Hose Clamp	9AA17	VW, Audi, Seat, Skoda, Lamborghini
CLIC Clamp CLIC-E Clamp CLIC-R Clamp CLIC-GR Clamp	9AA15 9AA25	VW, Audi, Citroen/Peugeot, Fiat, Mercedes-Benz, Opel, Renault, Ford, Volvo
Screw Clamp Worm Drive Clamp	1453-05 / 1453-06 / 1453-07 1453-08 / 1453-10	Universal

Straight Hose Clamp Pliers

9AA11

- Use to remove and install spring clamp
- Swivel V-shaped jaws
- Suitable for universal cars, especially VW, Audi, Opel, Honda, Ford

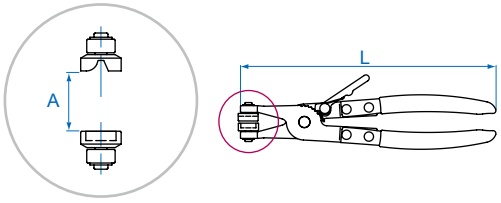

KT NO.	A mm	L inch	L mm	g	
9AA11	55	8-21/32	220	220	12 / 72

Flat Band Hose Clamp Pliers

9AA16

- Use to remove and install spring clamp
- Swivel concave jaws
- Suitable for universal cars, especially VW, Audi, Opel, Honda, Ford

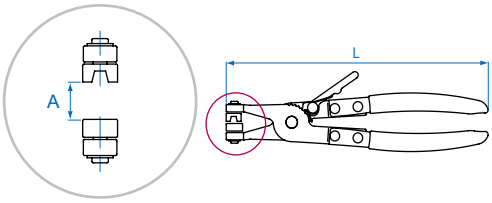

KT NO.	A mm	L inch	L mm	g	
9AA16	60	8-21/32	220	213	12 / 72

Wire Hose Clamp Pliers

9AA13

- Use to remove and install wire clamp
- Swivel jaws
- Suitable for universal cars, especially Corbin heater hose

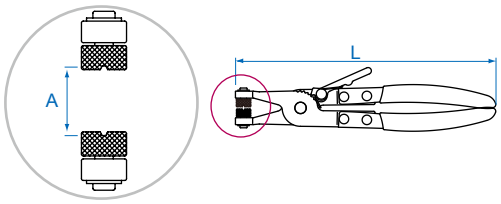

KT NO.	A mm	L inch	L mm	g	
9AA13	51	8-21/32	220	238	12 / 72

Curved Hose Clamp Pliers

9AA21

- Use to remove and install spring clamp
- 45° swivel concave jaw with greater access in confined spaces
- Suitable for universal cars, especially VW, Audi, Opel, Honda, Ford

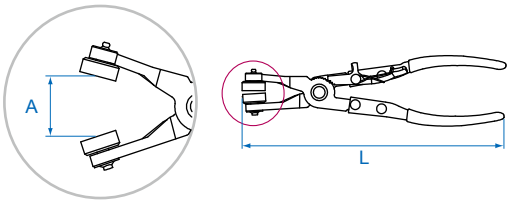

KT NO.	A mm	L inch	L mm	g	
9AA21	53	8-21/32	220	224	12 / 48

Flexible Hose Clamp Pliers

9AA31 | 9AA32

- Use to remove and install spring clamp
- Flexible flat jaw with greater access in confined spaces
- Suitable for universal cars

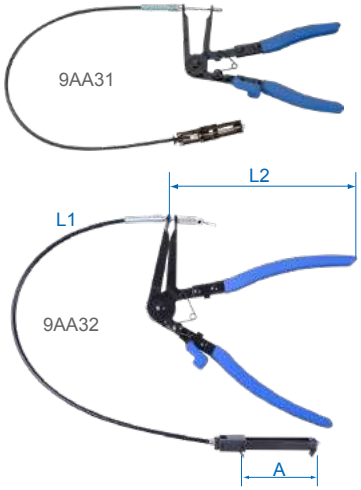

KT NO.	A mm	L 1 inch	L 1 mm	L 2 inch	L 2 mm	g	
9AA31	53	25	630	9	225	528	12 / 36
9AA32	77	27-1/4	700	12	310	756	6 / 24

CLIC Hose Clamp Pliers

9AA15

- Use to remove and install CLIC and CLIC-R clamp
- Special-designed jaws
- Suitable for VW, Audi, Opel, Citroen, Peugeot, Fiat, Renault, Mercedes-Benz

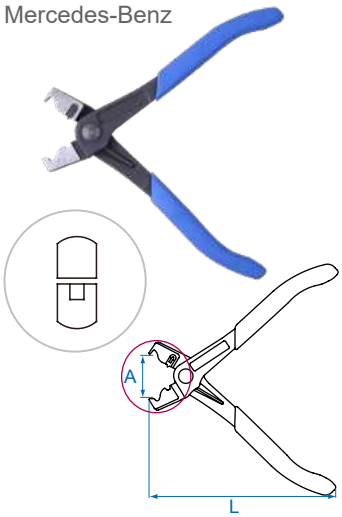

KT NO.	A mm	L inch	L mm	g	
9AA15	36	5-19/32	142	223	12 / 72

Fuel Line Hose Clamp Pliers

9AA17

- Use to remove and install fuel line clamp
- Special pick jaws
- Suitable for VW, Audi, SEAT, Skoda

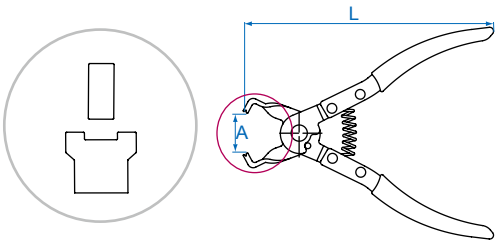

KT NO.	A mm	L inch	L mm	g	
9AA17	27	6-3/4	171	188	12 / 60

360° CLIC Hose Clamp Pliers

9AA25

- Use to remove and install CLIC and CLIC-R clamp
- 360° swivel angle
- Suitable for VW, Audi, Opel, Citroen, Peugeot, Fiat, Renault, Mercedes-Benz

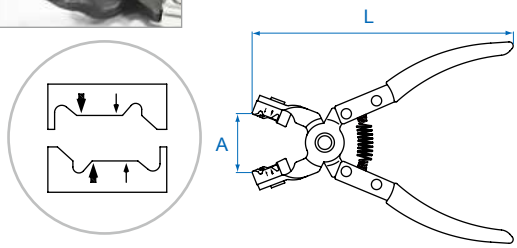

KT NO.	A mm	L inch	L mm	g	
9AA25	32	7	175	224	12 / 72

Fuel Line Pliers

9AB11

- Improved type can also use for fuel lines with plastic snap-together connectors
- Use for VW, Audi, Fiat, GM, Opel/ Vauxhall, Mercedes-Benz

KT NO.	L inch	L mm	g	
9AB11	9	228	270	6 / 36

9AB12

- For removal and replacement of the connections on the in-line fuel filter
- Use for VW, PSA , Fiat, Opel

KT NO.	L inch	L mm	g	
9AB12	6	150	87	12 / 144

Piston Ring Compressor

9AC

- The square adjustment key wrench forces the rings into the grooves and the clutch prevents it from expanding

KT NO.	H inch	H mm	Ø Capacity inch	Ø Capacity mm	g	
9AC125-32	3-1/4	80	2-1/4~5	57~125	260	20 / 60
9AC125-40	4	100	2-1/4~5	57~125	280	20 / 60
9AC175-32	3-1/4	80	3-1/2~7	90~175	300	20 / 60
9AC175-40	4	100	3-1/2~7	90~175	320	20 / 60
9AC175-66	6-3/4	165	3-1/2~7	90~175	530	20 / 40

Engine Cylinder Hone 50~175mm

9AC231-54

- For engine cylinders bores from 50mm to 175mm
- Adjustable spring tension and spread limiter easy to remove carbon
- The hone stones is 220 grit, coarse grade

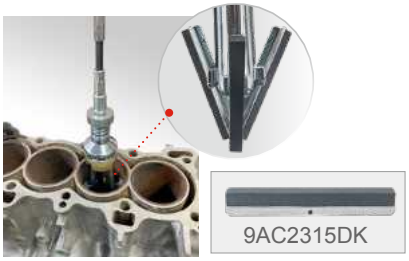

KT NO.	Ø Capacity mm	g	
9AC231-54	50~175	700	6 / 24

Valve Stem Seal Pliers

9AD11

- For removing valve stem seals in multi-valves engine
- Jaw longitudinal toothed - avoids slipping down
- For deeply leveled valve stem seals

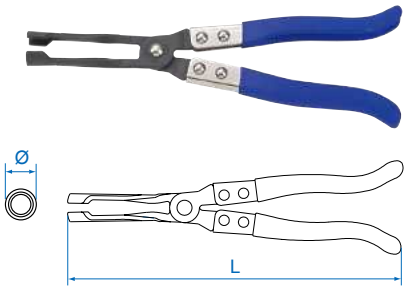

KT NO.	L inch	L mm	Ø mm	g	
9AD11	11	275	9.5	400	12 / 48

Swivel Oil Filter Wrench

9AE31

- Professional swivel PVC dipped handle
- Easy to bend in different positions for reaching into narrow spaces

KT NO.	Ø Capacity mm	g	
9AE31-73	60~73	275	6 / 36
9AE31-85	73~85	283	6 / 36
9AE31-95	85~95	300	6 / 36
9AE31-111	95~111	307	6 / 36
9AE31-121	110~121	309	6 / 36
9AE31-134	120~134	322	6 / 36

Oil Filter Wrench for HGV Truck New

9AE31X

- Oil filter wrench design for high torque requirements
- Use with a 1/2" square drive tool
- Universal tool for HGV truck, bus, tractor and marine engines

- Strong steel band can be moreStable on oil filter removal

KT NO.	Ø Capacity mm	g	
9AE31X-135	118~130	667	6 / 24
9AE31X-145	130~143	750	6 / 24

Quick Grip Oil Filter Wrench

9AE33

- Quick-adjustable tightening design
- Band type allows for narrow space
- Non-slip reaction teeth provides better grip

- The design offers a stronger clamping force

KT NO.	Ø Capacity mm	g	SET
9AE33-155	110~155	311	1 / 25

Band Type Oil Filter Wrench

9AE32

- Adjustable metal band
- Suitable for filters between Ø65mm to Ø155mm

KT NO.	Ø Capacity mm	g	
9AE32-110	65~110	246	25 / 50
9AE32-155	110~155	252	25 / 50

Oil Filter Chain Wrench New

3209

1/2"

- Suitable for removing all kings of oil filter on vehicles
- Chain design for easily removing stubborn oil filter

KT NO.	Ø Capacity mm	g	
3209-120	60~120	302	12 / 48
3209-135	60~135	333	12 / 48
3209-220	60~220	385	12 / 36

Strap Wrench

3203

- Strap wrench for oil filter

KT NO.	Ø Capacity mm	Overall length inch	Overall length mm	g	
3203	60~140	8-3/4	223	242	50
320300	strap			46	80
3203A0	60~260	8-3/4	223	300	45
320301	strap			73	80

32067A

- Aluminum alloy handle and strong polyester strap for tight grip
- Suitable for oil filter or any polished pipe

KT NO.	Overall Length inch	Overall Length mm	Capacity mm	g	
32067A	12	279	Ø 60~180	361	4 / 48
3206A00	Polyester strap			35	25 / 50

320760

- Strap wrench for oil filter
- Use with 1/2" square drive tool

KT NO.	Overall length inch	Overall length mm	Capacity mm	g	
320760	11	280	Ø 60~160	292	12 / 72

Chain Wrench

3204

- Chain wrench for oil filter

KT NO.	Ø Capacity mm	Overall length inch	Overall length mm	g	
3204	60~140	8-3/4	225	359	50

Chain Wrench

3205

- Heavy duty oil filter chain wrench, specially for auto, truck and agricultural equipment
- Flexible in confined space
- Suitable for all types of oil filters

- Adjust to appropriate size of the oil filter.

- Swiveling

- Release the chain to reinstate it.

KT NO.	Ø Capacity mm	Chain length mm	g	SET /
320540	60~105	350	742	6 / 24
320560	60~160	520	880	6 / 24

Cup Type Oil Filter Wrench

9AE1 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Cup-type design, reduce the possibility to damage oil filters
- Material: Aluminum

KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	g	SET /
9AE1-6414 (Aluminum)	3/8"	2-1/2	64	14	TOYOTA 4 Cylinder (1800CC.2000CC) ,ALLION, AURIS, COROLLA AXIO, ISIS, IST, COROLLA RUMION, COROLLA FIELDER, NOAH, PREMIO, PRIUS, VOXY, WISH, etc...	164	12 / 72

9AE2 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters

KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	g	SET /
9AE2-6514	3/8"	2-9/16	65	14	Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc...	222	12 / 48
9AE2-6567	3/8"	2-9/16 & 2-21/32	65 & 67	14	Fits same filters as made in Canada including, PH4386, PH4967, PH6017, PH6018, Daihatsu, Toyota, etc...	222	12 / 45
9AE2-6606	3/8"	2-19/32	66	6	Fiat(Punto, 1.2), Renault(Clio 1.2 Express, Kangoo. Rapid. Twingo), etc....	153	12 / 72
9AE2-7476	3/8"	2-29/32 & 3	74 & 76	15	Fits Fram, AC, Saturn, Opel, VW, Audi, Mercedes, etc....	167	12 / 72
9AE2-7608	3/8"	3	76	8	Fiat(z.B. Marea), Lancia(z.B. Delta), etc....	181	12 / 72
9AE2-7612	3/8"	3	76	12	Fiat(z.B. Ducato, Scudo, Ulysee),Renault, (Megane, Laguna, Espace III.), etc....	167	12 / 72
9AE2-7614	3/8"	3	76	14	Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche,Mercedes, BMW, Audi, Toyota, Opel, etc....	167	12 / 72
9AE2-8616	3/8"	3-3/8	86	16	Volvo(S40, S60, S70, S80) etc....	188	12 / 72
9AE2-8618	3/8"	3-3/8	86	18	VW. Golf.(MKIII. Tdi, Passat Tdi), Audi A6 Tdi, Renault(Clio, Rapid 1.9D, Laguna.Safrane. Espace 2.1D). Citroen, Peugeot, Renault, etc..	181	12 / 72
9AE2-9210	3/8"	3-40/64	92	10	Fiat, Cinquecento, Coupe, Croma, DAF, Fiat, Panda. Regata, Ritmo Fiat, Seicento. Tempra, Tipo, Lancia(Beta. Dedra. Kappa. Monte. Carlo. Prisma. Thema. Trevi), etc....	181	12 / 72
9AE2-9315	3/8"	3-21/32	93	15	Fits Casite, Champ, Champion, GM, Fram, Hastings,Purolator, Wix, Nissan, Volvo, Mazda, Audi, VW, Porsche, Renault, etc....	181	12 / 72
9AE2-9345	3/8"	3-21/32	93	45	VW-Audi.(TDi 2.4, 2.6, 2.8L), etc....	181	12 / 72
9AE2-9618	3/8"	3-3/4	96	18	Audi(A4 Tdi, VW Passat,97 Tdi), Renault (Laguna 2.2d. Safrane2.2D. Espace 2.2D. R19 2.2D. Rapid, Megane,1.9/2.1D. Tdi) etc..	208	12 / 72
9AE2-10615	3/8"	4-11/64	106	15	Fiat(Ducato 2.5D. Td), etc....	222	12 / 72
9AE2-10815	3/8"	4-8/32	108	15	Volvo(C70. S70. V70. Tdi. TD)(850 Tdi. TD) etc....	222	12 / 72
9AE2-10818	3/8"	4-8/32	108	18	Renault(Espace, Laguna, Master, Safrane, Traffic 2.4, 2.5, 2.8D. TD), etc....	222	12 / 72

Cup Type Oil Filter Wrench Set

9AE2002 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters

2 PC.

KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	282	1 / 40
9AE2-6514	3/8"	2-9/16	65	14	Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc...		
9AE2-6567	3/8"	2-9/16 & 2-21/32	65 & 67	14	Fits same filters as made in Canada including, PH4386, PH4967, PH6017, PH6018, Daihatsu, Toyota, etc...		

Cup Type Oil Filter Wrench Set

9AE2004 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters

4 PC.

KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	571	1 / 20
9AE2-6606	3/8"	2-19/32	66	6	Fiat (Punto, 1.2), Renault (Clio1.2 Express, Kangoo, Rapid, Twingo), etc...		
9AE2-7608	3/8"	3	76	8	Fiat (z.B. Marea), Lancia (z.B. Delta), etc...		
9AE2-7614	3/8"	3	76	14	Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche, Mercedes-Benz, BMW, Audi (I.B.A3TD) Opel, etc...		
9AE2-9315	3/8"	3-21/32	93	15	Fits Casite, Champ, Champion, GM, Fram, Hastings, Opel, Mazda, Volvo, Mitsubishi, Purolator, Wix, Nissan, VW, Porsche, Renault, Ford, Honda, Audi, etc...		

Cup Type Oil Filter Wrench Set

9AE2016 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- 1 PC. 1/2"(F)x3/8"(M) adapter
- 1 PC. 3 legs oil filter wrench(63-102mm)

16 PC.

KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	Kg 4.00 / 1 / 5
9AE2-6606	3/8"	2-19/32	66	6	Fiat(Punto, 1.2), Renault(Clio 1.2 Express, Kangoo. Rapid. Twingo), etc....	
9AE2-7476	3/8"	2-29/32 & 3	74 & 76	15	Fits Fram, AC, Saturn, Opel, VW, Audi, Mercedes, etc....	
9AE2-7608	3/8"	3	76	8	Fiat(z.B. Marea), Lancia(z.B. Delta), etc....	
9AE2-7612	3/8"	3	76	12	Fiat(z.B. Ducato, Scudo, Ulysee),Renault, (Megane, Laguna, Espace III.), etc....	
9AE2-7614	3/8"	3	76	14	Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche,Mercedes, BMW, Audi, Toyota, Opel, etc....	
9AE2-8616	3/8"	3-3/8	86	16	Volvo(S40, S60, S70, S80) etc....	
9AE2-8618	3/8"	3-3/8	86	18	VW. Golf.(MKIII. Tdi, Passat Tdi), Audi A6 Tdi, Renault(Clio, Rapid 1.9D, Laguna.Safrane. Espace 2.1D). Citroen, Peugeot, Renault, etc..	
9AE2-9210	3/8"	3-40/64	92	10	Fiat, Cinquecento, Coupe, Croma, DAF, Fiat, Panda. Regata, Ritmo Fiat, Seicento. Tempra, Tipo, Lancia(Beta. Dedra. Kappa. Monte. Carlo. Prisma. Thema. Trevi), etc....	
9AE2-9315	3/8"	3-21/32	93	15	Fits Casite, Champ, Champion, GM, Fram, Hastings,Purolator, Wix, Nissan, Volvo, Mazda, Audi, VW, Porsche, Renault, etc....	
9AE2-9345	3/8"	3-21/32	93	45	VW-Audi.(TDi 2.4, 2.6, 2.8L), etc....	
9AE2-9618	3/8"	3-3/4	96	18	Audi(A4 Tdi, VW Passat,97 Tdi), Renault (Laguna 2.2d. Safrane2.2D. Espace 2.2D. R19 2.2D. Rapid, Megane,1.9/2.1D. Tdi) etc..	
9AE2-10615	3/8"	4-11/64	106	15	Fiat(Ducato 2.5D. Td), etc....	
9AE2-10815	3/8"	4-8/32	108	15	Volvo(C70. S70. V70. Tdi. TD)(850 Tdi. TD) etc....	
9AE2-10818	3/8"	4-8/32	108	18	Renault(Espace, Laguna, Master, Safrane, Traffic 2.4, 2.5, 2.8D. TD), etc....	
9AE423	3/8"	2-1/2~4	63~102	-	3 legged oil Filter Tool	
9AE221	1/2"	-	-	-	Adaptor 1/2" F x 3/8" M	

Cup Type Oil Filter Wrench

9AE0 1/2"

- 1/2″ square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Cup-type design, reduce the possibility to damage oil filters
- Material: Aluminum

KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	g	SET
9AE0-6414 (Aluminum)	1/2"	-	64	14	TOYOTA.NISSAN	93	1 / 100
9AE0-7414 (Aluminum)	1/2"	-	74	14	AUDI. VW. OPEL. BMW. AUSTIN. 2003+FORD	118	1 / 100

9AE6 1/2"

- 1/2" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters

KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	g	SET
9AE6-6514	1/2"	2-8/16	65	14	Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc...	112	12 / 72
9AE6-6514A	1/2"	2-9/16	65	14	Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc...	112	12 / 72
9AE6-6567	1/2"	2-9/16 & 2-21/32	65 & 67	14	Fits same filters as made in Canada including, PH4386, PH4967, PH6017, PH6018, Daihatsu, Toyota, etc...	222	12 / 72
9AE6-6606	1/2"	2-19/32	66	6	Fiat (Punto, 1.2), Renault (Clio1.2 Express, Kangoo. Rapid. Twingo), etc...	222	12 / 72
9AE6-6814	1/2"	2-11/16	68	14	Fits Hastings, Mazda, Ford Escort, Capri, Subaru, Fran, PH6607 (Those Fram Filters Made in Korea), Motorcraft, FL816, etc...	222	12 / 72
9AE6-7314	1/2"	2-7/8	73	14	Fits Toyota/Lexus, etc...	222	12 / 72
9AE6-7414	1/2"	2-29/32	74	14	Audi, Volkswagen, BMW, Citroën, Peugeot, Ford, Fiat, Lancia, Mazda, Mercedes-Benz, Nissan, Vauxhall, Opel, Porsche, Renault, Suzuki, Toyota, etc...	153	12 / 72
9AE6-7415	1/2"	2-29/32	74	15	MF, Audi (#056-115-561g), GM. Rover, Chrysler, etc...	222	12 / 72
9AE6-7476	1/2"	2-29/32 & 3	74 & 76	15	Fits Fram, AC, Saturn, Opel, VW, Audi, Mercedes, etc...	243	12 / 72
9AE6-7577	1/2"	2-15/16 & 3-1/32	75 & 77	15	Fits VW, Audi, Casite, GM/AC, Hastings, Wix, NAPA, Ford, Isuzu, Mercedes, Opel, etc...	222	12 / 72
9AE6-7608	1/2"	3	76	8	Fiat (z.B. Marea), Lancia (z.B. Delta), etc...	222	12 / 72
9AE6-7612	1/2"	3	76	12	Fiat (z.B. Ducato, Scudo, Ulysee), Renault, (Megane, Laguna, Espace III), etc...	222	12 / 72
9AE6-7614	1/2"	3	76	14	Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche, Mercedes, Benz, BMW, Audi (I.B.A3TD) Opel, etc...	243	12 / 72
9AE6-7630	1/2"	3	76	30	Fits Motorcraft only-FL400A, Ford, etc...	243	12 / 72
9AE6-7815	1/2"	3-2/32	78	15	Nissan (#15028H8991), Ford, Toyota, Honda (Accord), etc...	243	12 / 72
9AE6-8015	1/2"	3-9/64	80	15	Fits Opel, Hastings, Fram, Purolator, Nissan, Honda, Motorcraft, Mazda, Isuzu, Subaru filters.	243	12 / 72
9AE6-8082	1/2"	3-9/64 & 3-7/32	80 & 82	15	Fits Wix Filters. Branded for:Mazda,Subaru,Toyota,Honda, Acura,Nissan,NAPA.Etc...	243	12 / 72
9AE6-8414	1/2"	3-3/10	84	14	Mercedes Benz V6/V8 CDi models, etc...	194	12 / 72
9AE6-8616	1/2"	3-3/8	86	16	Volvo (S40, S60, S70, S80), etc...	180	12 / 72

Cup Type Oil Filter Wrench

9AE6 1/2"

- 1/2" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters

KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	g	SET /
9AE6-8618	1/2"	3-3/8	86	18	VW. Golf. (MKIII. TDi, Passat TDi), Audi A6 TDi, Renault (Clio, Rapid1.9D, Laguna, Safrane, Espace 2.1D), Citroen, Peugeot, Renault, etc...	243	12 / 72
9AE6-9015	1/2"	3-17/32	90	15	Fits Honda (Accord). Mitsubishi. Mopar. Isuzu, etc...	180	12 / 72
9AE6-9210	1/2"	3-40/64	92	10	Fiat, Cinquecento, Coupe, Croma, DAF, Fiat, Panda, Regata, Ritmo Fiat, Seicento. Tempra, Tipo, Lancia (Beta. Dedra. Kappa. Monte. Carlo. Prisma. Thema. Trevi), etc...	260	12 / 72
9AE6-9315	1/2"	3-21/32	93	15	Fits Casite, Champ, Champion, GM, Fram, Hastings, Opel, Mazda, Volvo. Mitsubishi, Purolator, Wix, Nissan, VW, Porsche, Renault, Ford, Honda, Audi, etc...	260	12 / 72
9AE6-9336	1/2"	3-21/32	93	36	Fits Ford, Motorcraft only-FL1A, (FLA1B, FL300, FL820 Ford), etc...	260	12 / 72
9AE6-9345	1/2"	3-21/32	93	45	VW-Audi, (TDi 2.4, 2.6, 2.8L), etc...	260	12 / 72
9AE6-9515	1/2"	3-6/8	95	15	Toyota (#15600-41010) Alfa Romeo, GM, Ford, Chrysler.	260	12 / 72
9AE6-9618	1/2"	3-3/4	96	18	Audi (A4.A6, TDi), VW (Passat 97 TDi), Renault (Laguna 2.2D, Safrane2.2D. Espace2.2D.R19 2.2D. Rapid. Megane, 1.9/2.1D.TDi), etc...	260	12 / 72
9AE6-10015	1/2"	3-15/16	100	15	Fits Fram, Motorcraft, Wix, Isuzu, Mitsubishi, etc...	220	12 / 72
9AE6-10615	1/2"	4-11/64	106	15	Fiat (Ducato 2.5D.Td), etc...	190	12 / 72
9AE6-10815	1/2"	4-8/32	108	15	Volvo (C70.S70.V70.TDi.TD) (850 TDi. Turbo Diesel)	190	12 / 72
9AE6-10818	1/2"	4-8/32	108	18	Renault (Espace, Laguna, Master, Safrane, Traffic 2.4 , 2.5, 2.8D. TD), etc...	190	12 / 72

Cup Type Oil Filter Wrench Set

9AE6002 1/2"

- 1/2" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters

2 PC.

KT NO.	Diameter inch	Diameter mm	Flutes	Applicable models	g 282	SET / 1 / 40
9AE6-6514	2-9/16	65	14	Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc...		
9AE6-6567	2-9/16" & 2-21/32	65 & 67	14	Fits same filters as made in Canada including, PH4386, PH4967, PH6017, PH6018, Daihatsu, Toyota, etc...		

Cup Type Oil Filter Wrench Set

9AE6030 1/2"

- 1/2" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters
- Suitable for 3/8" or 1/2" drive tool

30 PC.

KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models
					Kg 6.67 / 1 / 3
9AE6-6514	1/2"	2-8/16	65	14	Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc...
9AE6-6567	1/2"	2-9/16 & 2-21/32	65 & 67	14	Fits same filters as made in Canada including, PH4386, PH4967, PH6017, PH6018, Daihatsu, Toyota, etc...
9AE6-6606	1/2"	2-19/32	66	6	Fiat (Punto, 1.2), Renault (Clio1.2 Express, Kangoo. Rapid. Twingo), etc...
9AE6-6814	1/2"	2-11/16	68	14	Fits Hastings, Mazda, Ford Escort, Capri, Subaru, Fran, PH6607 (Those Fram Filters Made in Korea), Motorcraft, FL816, etc...
9AE6-7314	1/2"	2-7/8	73	14	Fits Toyota/Lexus, etc...
9AE6-7415	1/2"	2-29/32	74	15	MF, Audi (#056-115-561g), GM. Rover, Chrysler, etc...
9AE6-7476	1/2"	2-29/32 & 3	74 & 76	15	Fits Fram, AC, Saturn, Opel, VW, Audi, Mercedes, etc...
9AE6-7577	1/2"	2-15/16 & 3-1/32	75 & 77	15	Fits VW, Audi, Casite, GM/AC, Hastings, Wix, NAPA, Ford, Isuzu, Mercedes, Opel, etc...
9AE6-7608	1/2"	3	76	8	Fiat (z.B. Marea), Lancia (z.B. Delta), etc...
9AE6-7612	1/2"	3	76	12	Fiat (z.B. Ducato, Scudo, Ulysee), Renault, (Megane, Laguna, Espace III), etc...
9AE6-7614	1/2"	3	76	14	Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche, Mercedes, Benz, BMW, Audi (I.B.A3TD) Opel, etc...
9AE6-7630	1/2"	3	76	30	Fits Motorcraft only-FL400A, Ford, etc...
9AE6-7815	1/2"	3-2/32	78	15	Nissan (#15028H8991), Ford, Toyota, Honda (Accord), etc...
9AE6-8015	1/2"	3-9/64	80	15	Fits Opel, Hastings, Fram, Purolator, Nissan, Honda, Motorcraft, Mazda, Isuzu, Subaru filters.
9AE6-8082	1/2"	3-9/64 & 3-7/32	80 & 82	15	Fits Wix Filters. Branded for:Mazda,Subaru,Toyota,Honda,Acura,Nissan,NAPA.Etc...
9AE6-8616	1/2"	3-3/8	86	16	Volvo (S40, S60, S70, S80), etc...
9AE6-8618	1/2"	3-3/8	86	18	VW. Golf. (MKIII. TDi, Passat TDi), Audi A6 TDi, Renault (Clio, Rapid1.9D, Laguna, Safrane, Espace 2.1D), Citroen, Peugeot, Renault, etc...
9AE6-9015	1/2"	3-17/32	90	15	Fits Honda (Accord). Mitsubishi. Mopar. Isuzu, etc...
9AE6-9210	1/2"	3-40/64	92	10	Fiat, Cinquecento, Coupe, Croma, DAF, Fiat, Panda, Regata, Ritmo Fiat, Seicento. Tempra, Tipo, Lancia (Beta. Dedra. Kappa. Monte. Carlo. Prisma. Thema. Trevi), etc...
9AE6-9315	1/2"	3-21/32	93	15	Fits Casite, Champ, Champion, GM, Fram, Hastings, Opel, Mazda, Volvo. Mitsubishi, Purolator, Wix, Nissan, VW, Porsche, Renault, Ford, Honda, Audi, etc...
9AE6-9336	1/2"	3-21/32	93	36	Fits Ford, Motorcraft only-FL1A, (FLA1B, FL300, FL820 Ford), etc...
9AE6-9345	1/2"	3-21/32	93	45	VW-Audi, (TDi 2.4, 2.6, 2.8L), etc...
9AE6-9515	1/2"	3-6/8	95	15	Toyota (#15600-41010) Alfa Romeo, GM, Ford, Chrysler.
9AE6-9618	1/2"	3-3/4	96	18	Audi (A4.A6, TDi), VW (Passat 97 TDi), Renault (Laguna 2.2D, Safrane2.2D. Espace2.2D.R19 2.2D. Rapid. Megane, 1.9/2.1D.TDi), etc...
9AE6-10015	1/2"	3-15/16	100	15	Fits Fram, Motorcraft, Wix, Isuzu, Mitsubishi, etc...
9AE6-10615	1/2"	4-11/64	106	15	Fiat (Ducato 2.5D.Td), etc...
9AE6-10815	1/2"	4-8/32	108	15	Volvo (C70.S70.V70.TDi.TD) (850 TDi. Turbo Diesel)
9AE6-10818	1/2"	4-8/32	108	18	Renault (Espace, Laguna, Master, Safrane, Traffic 2.4 , 2.5, 2.8D. TD), etc...
9AE433	1/2"	2-9/16~4-23/32	65~120		3 legged oil Filter Tool
9AE221	1/2"	-	-	-	Adaptor 1/2" F x 3/8" M

Three-Legs Oil Filter Wrench

9AE42

- The claw-type filter is available for removing all oil filters from 2-1/2" to 4" (63-102mm) in diameter
- Suitable for 3/8" or 1/2" square drive tool
- Coated with electro-black oxide finish for protection against rust
- CW & CCW direction

KT NO.	A inch	B inch	Ø Capacity inch	Ø Capacity mm	g	
9AE42	1/2	3/8	2-1/4~4	63~102	395	12 / 48
9AE221	1/2	3/8	-	-	39	-
9AE433	1/2	3/8	2-9/16~4-23/32	65~120	502	12 / 36



9AE43

- The claw-type filter is available for removing all oil filters from 3" to 4-3/4" (75-120mm) in diameter
- Suitable for 3/8" or 1/2" square drive tool
- Heavy duty design
- CW & CCW direction

KT NO.	A inch	B inch	Ø Capacity inch	Ø Capacity mm	g	
9AE43	1/2	3/8	3~4-3/4	75~120	604	1 / 36

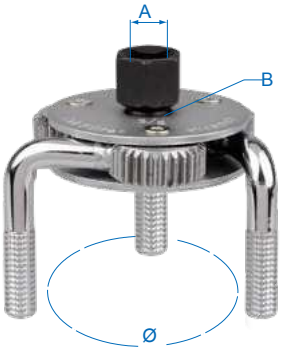

Two Jaws Oil Filter Wrench

9AE52

- The two jaws oil flter wrench is capable of remoring all kinds of oil flter
- Suitable for using with 1/2" square drive tool
- Lost wax coating with electro-black oxide finish for protection against rust
- Specially teeth designed steel jaws



KT NO.	A inch	Ø Capacity inch	Ø Capacity mm	g	
9AE52	1/2	2-3/8~3-1/8	60~80	470	1 / 16
9AE52-110	1/2	3-1/8~4-5/16	80~110	985	1 / 12

9AE53

- The claw-type filter is available for removing all oil filters from 3-1/8″ to 4-1/2″ (80-115mm) in diameter
- Suitable for using with 1/2″ square drive tool
- Coated with electro-black oxide finish for protection against rust

KT NO.	A inch	Ø Capacity inch	Ø Capacity mm	g	
9AE53-115	1/2	3-1/8~4-1/2	80~115	667	6 / 24



Adjustable Oil Filter Pliers

9AE71

- Adjustable sizes from 60 to 140mm
- Serrated jaws

KT NO.	L inch	L mm	Ø Capacity mm	g	
9AE71-90	9	230	60-90	357	12 / 72
9AE71-115	10	260	85-115	400	12 / 60
9AE71-140	14-1/2	365	100-140	897	1 / 20

Locking Grip Oil Filter Pliers

9AE72

- Lock and grip oil filters or any irregular shaped object for quick tightening or removal
- Use for adjusting and fastening at any angle

KT NO.	L inch	L mm	Ø Capacity mm	g	
9AE72	10	254	53-118	458	12 / 48

Hose Pinch & Set

9AF11

- Adjustable edges ensure no damage to hose
- Suitable for clamping radiator, heater, fuel, coolant and brake hoses

KT NO.	L inch	L mm	A Capacity mm	g	
9AF11-15	6-1/8	155	15	44	12 / 48
9AF11-30	7-9/32	185	30	76	12 / 48
9AF11-60	10	253	60	125	12 / 48

9AF113

- Adjustable edges ensure no damage to hose
- Suitable for clamping radiator, heater, fuel, coolant and brake hoses

245 g | SET 12 / 48 | 3 PC.

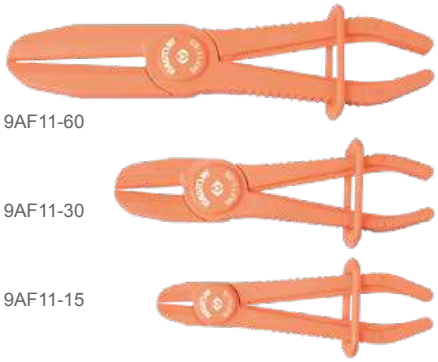

Fuel Gauge & Pump Sender Collar Wrench

9AG11

- Use for removing and fitting fuel gauge sender collars to avoid damage
- 3 jaws to ensure high torque and no risk to damage plastic collar
- Use with 19mm wrench or socket
- Suitable for most collars from 89 to 170mm

KT NO.	Ø mm	kg	
9AG11	89~170	1.05	1 / 12

Adjustable Fuel Tank Lid Remover

9AG13

- Use for removing and fitting fuel gauge sender collars to avoid damage
- Special jaws design, no risk to damage plastic collar
- Use with 3/8″ DR.
- Suitable for collars from 55 ~ 199mm
- Universal for application on most

g 560 1 / 24



BMW



BENZ



VW . AUDI
BENZ . BMW

Diesel Injector Extractor Tool

9AN021

- Use to remove injectors without dismantling the engine
- Suitable for Bosch injectors in Mercedes-Benz CDI engines 2.1 L and 2.2 L
- Application : Benz for Vito, Sprinter, Viano, C class, E class, CLC, CLK

kg 2 1 / 6

6 in 1 Flywheel Puller

9XAH1

- This tool is designed to offer 6 different sizes for the Flywheel wheel rings on motorcycles
- Sizes include: M20 x 1.5R / M14 x 1.5R / M16 x 1.5R / M18 x1.5R /| M24 x 1.0R / M27 x 1.0L

kg 730 1 / 24



Valve Spring Compressor Set

9AH31

- Use for compress of motorcycle or small engines valve spring
- Adapter size: 16, 19, 23, 25, 30mm
- Capacity: 130mm
- Throat depth: 100mm

1.31 1 / 12

9AH12

- Complete service tool set for OHV & OHC petrol or diesel engines on Audi, Nissan, Toyota, Chrysler, Honda, Mazda, Mitsubishi, Saturn, Lexus, Hyundai, Infiniti, Porsche, Volvo, VW

3.75 1 / 5

10 PC.

Valve Spring Compressor Set

9AH025

- Suitable for large engines & diesel engines
- Capacity: 35~140mm
- Designed to quickly and easily compress valve springs
- Dual size in 25 and 30mm adapter

5 PC.

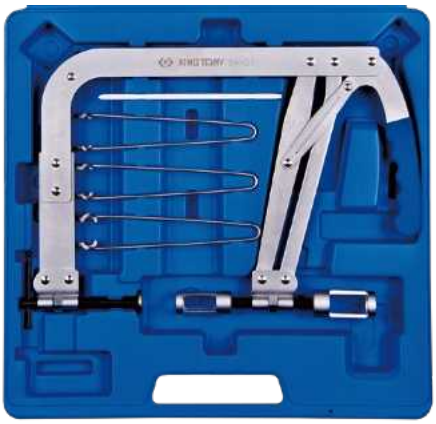



KT NO.	A mm	B mm	L mm	Kg	
9AH025	35~140	280	390	5	1 / 5

Valve Lappers

9AH0311

- For hand lapping valves

100 12 / 108

2 PC.

KT NO.	Diameter Cups Size	
9AH0311	1-1/8" (29mm) 5/8" (16mm)	1-3/8" (35mm) 13/16"(21mm)

Heavy Duty Air Valve Lapper Set

9AH0321

- Design for operating in tough environments
- Adjustable speed regulator for precise control during operation
- Complete with rubber caps of 20, 30, 35, 45mm



5 PC.

KT NO.	Free Speed R.P.M	Pistone Stroke inch	Pistone Stroke mm	Overall Length inch	Overall Length mm	Air Inlet inch	Air Hose ID	Average Air Consumption CFM	Average Air Consumption L/min	kg	
9AH0321	5600	1.1	29	9.0	228	1/4	3/8	2.5	71	1.82	1 / 10

Oscillating Valve Lapping Tool

9AH0331

- Facilitates the easy insertion of valves
- Automatic change in direction
- Use with fine grinding paste
- Two different suction cups: 22mm / 28mm
- Working speed(Max):1000rpm



287 g

10 / 40

Cylinder Head Surface Rectifier

9AH41

- Precise test for engine block and cylinder head when reassembling or overhauling an engine
- Work with a feeler gauge
- Suitable for 4 and 6 cylinder engine
- Refer to automotive manufacturer' s service manual for the minimum clearance
- Size : 600(L) x 36(W) x 16(H) mm

4.08 kg

1 / 5

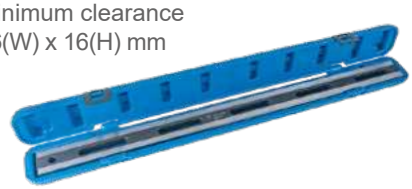

Universal Clutch Aligner Set

9AK11-1

- Designed to make alignment and assembly of clutch
- Specially designed for those vehicles equipped with late-model front wheel drives without pilot bearing in flywheel

3 PC.



CONTENTS :



9AK11P03
Ø15-18mm

9AK11P02
Ø18-21mm

9AK11P01
Ø22-28mm

KT NO.	Ø mm	kg	
9AK11-1	15~28	0.60	12 / 48

Oxygen Sensor Socket

9AJ3122

3/8"

- For installing and removing oxygen sensors
- Offset design for confined areas



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9AJ3122	22	34	38	8	34	178	1 / 100

9AJ4322

1/2"

- For oxygen sensors
- Featuring a slot for the connecting lead



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9AJ4322	22	32	30	30	85	294	5 / 60

Oxygen Sensor Socket Set

9AJ017

3/8"+1/2"

- 7 PC. special sockets for removing oxygen sensors
- Suitable for most vehicles : Volkswagen, BMW, PSA, Mercedes-Benz, Ford, etc...

2.33 kg 1 / 10

KT NO.	Part.	Size	mm
9AJ4229		1/2"	29
9AJ3322		3/8"	22
9AJ4227		1/2"	27
9AJ3222		3/8"	22
9AJ3127		3/8"	27
9AJ4122		1/2"	22
9AJ3122A		3/8"	22

7 PC.

Diesel injection Socket

9AN4128

- Suitable for Alfa Romeo, Chrysler, Land Rover, Rover, etc...



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9AN4128	28	38.1	35.2	15	83	339	5/60

9AN4227

- Suitable for BMW, Fiat, Ford, etc...



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9AN4227	27	36.5	32.2	12.7	78	209	5/60

Man & Benz Truck Diesel Injection Valve Socket

9AN43

- The tool is designed to remove and install diesel injection valve
- Application: MAN 422/403, BENZ Truck, SCANIA

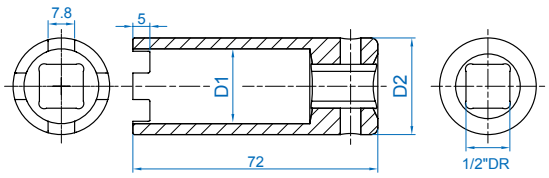

KT NO.	D1 mm	D2 mm	Tooth	g	
9AN43	22	28.4	4	181	10 /80



Self Adjusting Clutch Alignment Setting Tool Set

9AK21

- Prevent damage to system and to keep adapter ring in right position
- Necessary for pre-tensioning self adjusting clutches before removal or installation, avoiding clutch deformation
- Prevents plate distortion
- Suitable for most SAC(Self Adjusting Clutches 3 and 4 holes) equipped on vehicles of FIAT GROUP, VW, AUDI, BMW, Mercedes-Benz, VOLVO, OPEL, RENAULT etc

Kg 10.75

1 / 2

38 PC.

Pulley Removing Wrench

9AL

- To lock the pulley during removing or assembling any type of pulley retaining bolt

KT NO.	L inch	L mm	Ø mm	g	
9AL11	14-3/8	365	40~140	540	12 / 36
9AL12	14-3/8	365	40~140	540	12 / 36

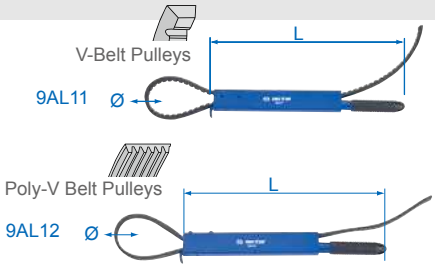



- Compressors

- Water pump pulley

- Alternator pump pulley

- Oil filter removal & assembly

Universal Cooling Pump and Refiller Tool Set

CAUTION

DO NOT open the radiator cap on a hot engine

9AM01

- For testing leakage in radiator system
- Vacuum leakage testing and bubble-free refilling
- Special pick hooks to speed up replacement of pipes
- Quick-release coupling on each connections
- Rubber cones with functional diameter 17~40mm

7 PC.

KT NO.	Type		Kg	
9AM010	Japan		3.40	1 / 5
9AM011	USA		3.40	1 / 5
9AM012	Europe		3.40	1 / 5

Piston Ring Pliers

9AP

- For removing and mounting piston rings
- Nickel plated

KT NO.	L inch	L mm	Ø Capacity mm	g	
9AP100	8-11/32	212	50~100	323	12 / 48
9AP120	8-15/16	227	80~120	354	12 / 48
9AP160	9-61/64	253	110~160	458	12 / 48

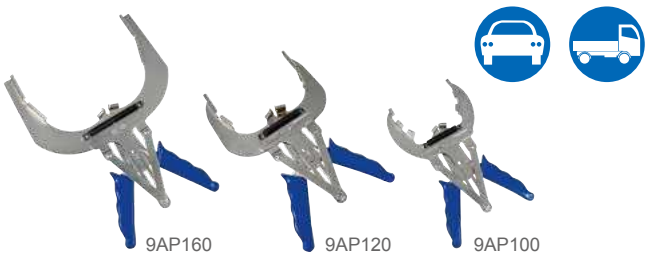

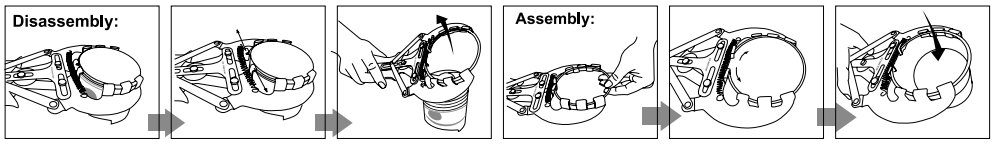

Drain Plug Removal Tool

9AR21 3/8"

- Use for removing and installing of the plastic oil drain plug on the latest VAG vehicle
- 3/8" DR and HEX 17 mm
- For VW, Audi, Skoda, Seat 1.2 / 1.4 / 1.8 / 2.0 TFSI oil drain plug and 1.6 / 2.0 TDI diesel engines cam cover plug

g 20

12 / 288

Plastic Drain Plug

9AR29-S

- Suitable for VW, Audi, Skoda, Seat 1.2 / 1.4 / 1.8 / 2.0 TFSI oil drain plug and 1.6 / 2.0 TDI diesel engines cam cover plug
- Use with removal tool 9AR21
- OEM numbers 06L 103801

g 13

1 / 144

Oil Drain Plug Key Set

9AR11

- Suitable for sump plugs on engine, gearbox and back axle
- Contents :
  Hex key socket : H8, H9, H10, H12, H13, H14, H17 mm
  Square socket : 5/16", 3/8", 7, 8, 10, 11, 12, 13, 14 mm
  Torx socket : T45
  Triangular socket : 10mm
  Spline (TAMPER) socket : M16
  Square drive socket : 10mm
  3/8" drive sliding T-handle

21 PC.

Kg 1.70

1 / 10

Diesel Injector Puller Set

9AS11

- The set contains M8, M12, M14, M17 adaptor
- Suitable for various vehicles with Bosch and Lucas type diesel injectors
- Remove stubborn diesel injectors easily and quickly
- New M17 adaptor for GM Vauxhall / Opel injectors X20DTH / Y20DTH series engines

Kg 1.11

1 /20

Why spark plugs need torque tightening ?

- 1. Modern engines cylinder heads are made of aluminium alloy
- 2. A correct factory-set gaps can provide best performance



Cylinder head material	Thread diameter (mm)				
	M8	M10	M12	M14	M18
Cast iron	-	10~15 N·m	15~25 N·m	25~35 N·m	35~45 N·m
Aluminium	8~10 N·m	10~12 N·m	15~20 N·m	25~30 N·m	35~40 N·m

Suggested torque for spark plugs with gasket, always follow factory owner's manual

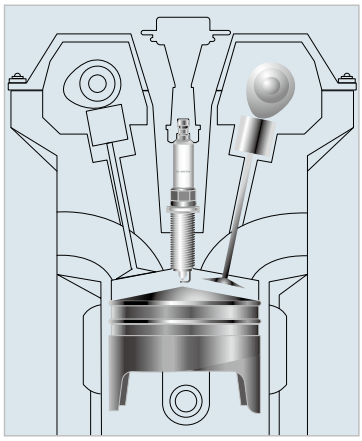

3/8" Spark Plug Sockets

3/8"	Size (inch)	Size (mm)	Type		Socket L(mm)			
					63	70	90	250
	9 / 16	14	6 pt	Rubber	36B514			
			12 pt	Rubber	36B014		36C014	36D014
			12 pt	Metal clip	367014			
	5 / 8	16	6 pt	Rubber		363516		
			12 pt	Rubber		363016		
			6 pt	Magnet		366516		
			12 pt	Magnet		366016		
	23 / 32	18	12 pt	Rubber	36B018			
			6 pt	Metal clip	367518			
			12 pt	Metal clip	367018			
	13 / 16	20.8	6 pt	Rubber		363521		
			12 pt	Rubber		363021		
			6 pt	Magnet		366521		
			12 pt	Magnet		366021		

1/2" Spark Plug Sockets

1/2"	Size (inch)	Size (mm)	Type		Socket L(mm)
					70
	9 / 16	14	6 pt	Rubber	463514RC
			12 pt	Rubber	463014RC
	5 / 8	16	6 pt	Rubber	463516RC
			12 pt	Rubber	463016RC
			6 pt	Magnet	466516C
			12 pt	Magnet	466016
	23 / 32	18	6 pt	Magnet	
	13 / 16	20.8	6 pt	Rubber	463521RC
			12 pt	Rubber	463021RC
			6 pt	Magnet	466521C

Torque Wrench & Accessory

KT NO.	Gear Teeth	Square Drive	Torque Range in·lb / ft·lb	Incr.	Torque Range N·m	Incr.
34362-1CG	24	3/8"	40~200 in·lb	1 in·lb	5.1~22.0 N·m	0.12 N·m
34362-2CG	32	3/8"	15~80 ft·lb	0.5 ft·lb	23.7~105.1 N·m	0.7 N·m

KT NO.	Gear Teeth	Square Drive	Torque Range N·m	Incr.
34362-2DG	32	3/8"	20~100 N·m	0.5 N·m
34362-3DG	32	3/8"	10~60 N·m	0.5 N·m

KT NO.	Square Drive	Torque Range N·m	Torque Range ft·lb	Total Length kgf·m
34307-1A	3/8"	27~135 N·m	19.9~99.6 ft·lb	2.75~13.76 kgf·m

1/2" drive (M) 3/8" drive (F)

KT NO.	Spec.
3814	3/8"F x 1/2"M

Spark Plug Rethreader Set

11305SQ

- Spark plug rethreader set is used for rethreading damaged spark plug threads in aluminum cylinder heads

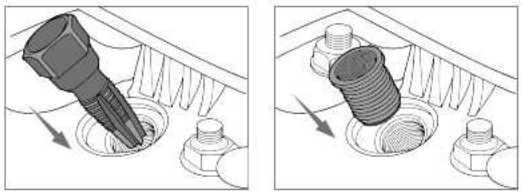

KT NO.	Size mm	Type inch	g	
11305SQ	14	3/8, 7/16, 1/2, 3/4	13	12 / 72

Double Size "L" Handle

1586

- Material : Chrome vanadium alloy steel
- For oil plug

KT NO.	Overall length inch	Overall length mm	Size inch	Size mm	g	
1586-09	9	230	5/16 x 3/8	8 x 10	320	6 / 48

Ribe Socket M10S

9AW4911 — 1/2"

- 6 points
- Use for replacing and removing idler pulley center screw on TOYOTA ALTIS
- 1/2" DR. socket ribe M10S for TOYOTA

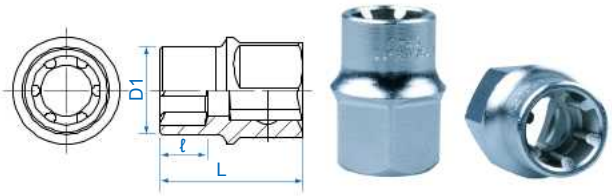

KT NO.	Size	D1 mm	ℓ mm	L mm	g	
9AW4911	M10S	19	10	33.8	16	10 / 200

Ribe Socket M12S

9AW4901 — 1/2"

- 6 points
- Use for replacing and removing engine head screw and flywheel center screw on NISSAN models
- 1/2" DR. socket ribe M12S for NISSAN

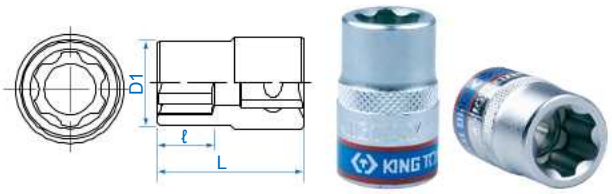

KT NO.	Size	D1 mm	ℓ mm	L mm	g	
9AW4901	M12S	22	14	38	15	10 / 200

Bearing Race and Seal Driver Set

9BA11

- Quick and easy to insert bearing race
- Collars fit most standard wheel bearing sizes
- Helps reduce damage to both race and axle housing
- 9 collar sizes:
  (1) 1.574"/40mm (2) 1.732"/44mm
  (3) 1.968"/50mm (4) 2.322"/59mm
  (5) 2.480"/63mm (6) 2.559"/65mm
  (7) 2.834"/72mm (8) 2.992"/76mm
  (9) 3.189"/81mm

Kg 1.8

1 / 10

10 PC.

Universal Bearing Ring Puller

9BA41

- Three jaws with the thin edge provide an equal grip tension to avoid any slide or tilt
- Suitable for all kind of bearing and sleeves diameter 10 to 125mm
- Applicable : For universal vehicles

- Adjustable slide knob for quick control locking

KT NO.	Ø Capacity mm	Kg	
9BA41	10~125mm	3.6	1 / 4

Hose Clamp	KT Item	Suitable Car Brand
CV Boot Clamp Ear Clamp	9BB11 9BB12 9BB13	VW, Audi, BMW, Ford, GM, Opel, Nissan, Mercedes- Benz, Mazda, Honda, Chrysler, Citroen, Seat
CV Boot Clamp	9BB31	Universal

Ear Hose Clamp Pliers

9BB11

- Use to remove and install ear clamp
- Special hook jaw easy to hold clamp in position
- Suitable for CV joint boot, vacuum lines, and cooling system



KT NO.	L inch	L mm	A max mm	g	
9BB11	10	260	22.5	364	12 / 48

CV Boot Clamp Pliers

9BB12

- Use to remove and install stainless CV boot clamp
- Can be used with 1/2" flexible handle bar or torque wrench
- Suitable for Audi, Opel, Citroen, SEAT, BMW, Mercedes-Benz, Honda, Nissan, Mazda, Ford, GM, Chrysler





KT NO.	L inch	L mm	A max mm	g	
9BB12	9-1/2	235	12	512.4	6 / 36

CV Boot Clamp Pliers with Socket

9BB13

- Used to remove and install stainless CV boot clamp
- Can be used with 3/8" flexible handle bar or torque wrench
- Suitable for Audi, Opel, Citroen, SEAT, BMW, Mercedes-Benz, Honda, Nissan, Mazda, Ford, GM, Chrysler

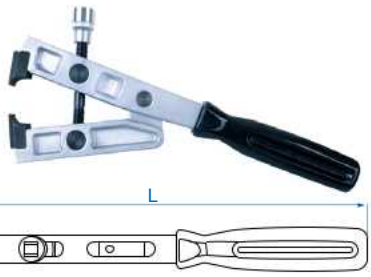



KT NO.	L inch	L mm	A max mm	g	
9BB13	11	278	45	888	5 / 20

CV Boot Clamp Installer

9BB31

- Used to cut and install clamp with built-in cutting arm
- Includes locking device and ratchet function
- Suitable for general vehicle types

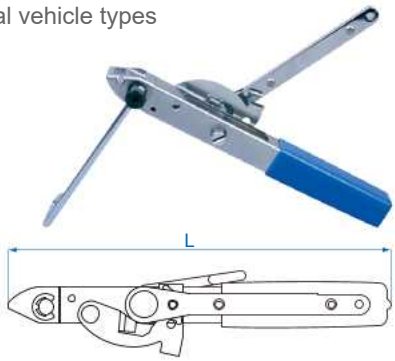

Lock

Cut

KT NO.	L inch	L mm	g	
9BB31	6-1/2	124	347	12 / 36

CV Joint Assembly Removal Tool

9BB42

- Separates the CV Joint from the axle without removing the drive shaft
- Reduces the risk of damaging the transmission, or the CV joint
- Multiple hole pattern allows adjustment to different depths
- Suitable for most vehicles equipped with Constant Velocity U-joints

Kg 1.77 1 / 10



Exhaust Pipe Hanger

9BP11

- Used to remove rubber holders from exhaust brackets
- Suitable for general vehicle types

KT NO.	L inch	L mm	A max mm	g	
9BP11	10	250	60	339	12 / 36

Exhaust Clamp Pliers

9BP21

- Used to remove and install exhaust clamps
- Include spring and locking mechanism
- Suitable for Citroen/Peugeot, Renault and prizing open types of exhaust clamps

KT NO.	L inch	L mm	A max mm	g	
9BP21	12	300	60	496	12 / 36

Handbrake Cable Pliers

9BC11

- For hand brake cable removal and replacing
- Suitable for Audi, BMW, Citroen, Nissan, Peugeot, Seat, Renault, Rover, etc

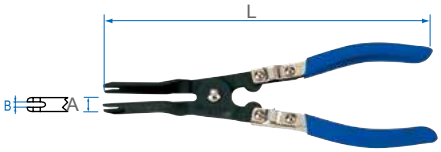

KT NO.	L inch	L mm	A max mm	B mm	g	
9BC11	9	230	60	5	198	12 / 48

Disc Brake Piston Separator

9BC21

- Heavy duty drop forged construction
- Fits in brake caliper to push back pistons for new brake pads installation

KT NO.	Max capacity inch	Max capacity mm	g	
9BC21	2-7/8	75	1130	1 / 20

Drum Brake Spring Pliers

9BC121

- Designed to remove and replace brake retaining spring on drum brakes

KT NO.	L inch	L mm	g	
9BC121	8-1/2	215	305	6 / 72

Universal Disc Brake Wind-Back Tool Set

9BC22

- Magnetic socket adapter
- Including 9 adapters for brake assemblage
- For rotating pistons back into caliper to provide clearance for new pads
- Prevents damage to the piston and boot
- Suitable for VW, Audi, Ford, Nissan, Alfa romeo, Rover, Saab, Subaru, Toyota, Jaguar, and most of the general motors

Kg 2.87 1 / 6

11 PC.

HGV Drum Brake Spring Pliers

9BC124

- Designed to remove and replace brake retaining spring on drum brakes
- Extra strong version for HGV air or hydraulic drum brakes



KT NO.	L inch	L mm	g	
9BC124	20-5/8	525	1250	3 / 6

Universal Disc Brake Wind-Back Tool Set

9BC23

- For rotating pistons back into caliper to provide clearance for new pads
- Prevents damage to the piston and boot
- Suitable for BMW, Ford, VW, Audi, Porsche, Saab, Opel, Volvo, Jaguar, Citroen, Peugeot, Renault, Lauxhall, Lancia, Alfa romeo, Fiat, Nissan, Honda, Subaru, Toyota, Mitsubishi
- Contents:
  21 PC. Adapters for brake assemblage
  3 PC. Backing pads
  2 PC. Rotating caliper with 3/8" DR. (right/left side threaded)
  2 PC. Hex key: 7, 8mm
  2 PC. Pin punch : Ø 5.5, 6mm
  1 PC. 3/8" DR. x 12mm hex key socket

Kg 4.87 / 1 / 4

31 PC.

Brake Caliper Piston Tool

9BC24A

- Designed for rewinding brake piston with right-handed thread
- Complete with reaction plate and double sided adapter
- Fast and easy to use, prevents damage to the piston and boot
- Fits most European and Japanese vehicles

KT NO.	Capacity A(mm)	Capacity B(mm)	g	
9BC24A	22	33	700	5 / 30



3 PC.

Universal Disc Brake Wind-Back Tool Set

9BC26

- Prevents damage to the piston and boot
- For rotating pistons back into caliper to provide clearance for new pads
- Suitable for FORD, ROVER, HONDA, Mercedes-Benz, TOYOTA, VW, AUDI, NISSAN, BMW, MAZDA, MITSUBISHI

Kg 1.38 / 1 / 12

7 PC.

Pneumatic Disc Brake Wind-back Tool Set

9BC251

- Air operated ram applies pressure to caliper piston, while the handle is rotated by hand
- Easy to use- works on standard workshop air supply
- Reversible- works on both RH and LH applications
- Can be used on wind back and push back piston
- Supplied with adaptor, which covers a wide range of popular vehicles
- Full range of additional specialist adaptors available
- Suitable for Mercedes-Benz, BMW, Audi, VW, Opel, Volvo, Jaguar, Citroen, Fiat, Peugeot, Alfa romeo, Saab, Lancia, Toyota, Honda, Nissan, Mitsubishi, Isuzu, Mazda, Subaru, GM, Ford, Rover

18 PC.

3.20 1 / 5

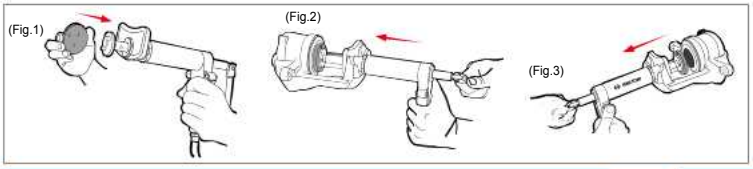



Increase the use of space

Magnetic

Pneumatic Disc Brake Wind-Back Tool

9BC251A01

- Designed to make disc brake services faster and energy saving
- Tool can be turned left and right ward - suitable for regular and reverse-threaded pistons
- Pneumatic powered tool is able to wind pistons back simply pressing a button

1.35 1 / 10



Increase the use of space

Magnetic

Brake Bleeder Valve Collection Bottle

9BC32

- Complete with a metal hanging hook
- It contains a brake oil check valve, a silicone hose, and a universal rubber adapter that is compatible with most vechicles
- Capacity : 1000 ml

420 1 / 12

CAUTION

Always keep the tool clean after using

Brake Caliper Slogging Wrench

10B0B

- Use for the assembly and removal of the brake caliper screw connections on commercial vehicles
- Designed with a 3/4" DR., can be used with torque wrenches for tightening operations
- The torque adjustment formula laser etched onto the wrench for calculating the correct setting torque when tightening the fixings



KT NO.	Size mm	Application	L mm	g	
10B0B-24	M24	SAF	215	580	1 / 24
10B0B-26	M26	DAF XF, XF95, XF105, XF106	220	580	1 / 24
10B0B-E18	E18	MAN TGL, TGM	215	580	1 / 24
10B0B-E20	E20	MAN TGL, TGM	215	580	1 / 24
10B0B-E24	E24	MAN TGA, TGS, TGX	220	580	1 / 24

Brake Bleeder Wrench Set

9BC5001MR

- Wrench size : 7, 8, 9, 10, 11mm
- Use on any vehicle, SUV, light truck or motorcycle brake caliper
- Combine wrench & socket to make loosening and tightening easily
- Ideal for bleeding brake system and hydraulic clutch system without removing the wheels
- High quality material internal seal to upgrade durability
- Silicone tube has the characteristics of acid and alkali proof, corrosion resistance, wear resistance, high and low temperature resistance
- Brake bleeder socket wrench prevents air backflow into brake system

6 PC.

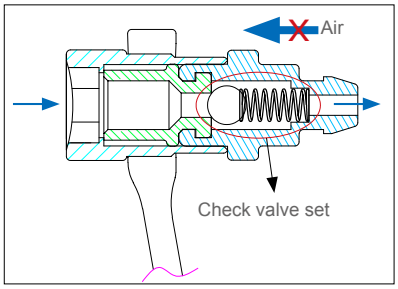

Blow case size (mm) :
260 x 160 x 60 (0.08 cuft)

Contents 0.73 1 / 10

	9BC5107M	7mm
	9BC5108M	8mm
	9BC5109M	9mm
	9BC5110M	10mm
	9BC5111M	11mm
	9BC32P021	

Universal Sleeve Removal and Installation Set

9BD101

- Can easily extract and draw in bearings, bushes, seals with this comprehensive tools
- Reduces the possibility of damaging the bearing/suspension housings
- Tool doesn't designed to be used with the impact wrench

26 PC.

18.0 1 / 1

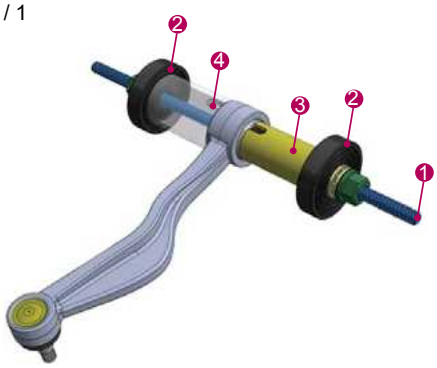

No.	
1	M10 × P1.5 spindle and two fixing nuts with bearing
1	M12 × P2.0 spindle and two fixing nuts with bearing
1	M14 × P2.0 spindle and two fixing nuts with bearing
1	M16 × P2.5 spindle and two fixing nuts with bearing
2	Step discs with A and B sides (2 pcs)
3	Golden sockets (11 pcs) marked with A
4	Silver socket (9 pcs) marked with B

	Socket sizes OD × ID mm
A	44 × 34 mm, 46 × 36 mm, 54 × 44 mm, 56 × 46 mm, 58 × 48 mm, 66 × 56 mm, 68 × 58 mm, 70 × 60 mm, 78 × 68 mm, 80 × 70 mm, 82 × 72 mm
B	48 × 38 mm, 50 × 40 mm, 52 × 42 mm, 60 × 50 mm, 62 × 52 mm, 64 × 54 mm, 72 × 62 mm, 74 × 64 mm, 76 × 66 mm

Ball Joint Extractor

9BE11

- Drop forged steel body



KT NO.	A mm	B(mm) Max	B(mm) Min	C mm	D mm	E mm	g	
9BE11	160	50	12	19	19	25	1080	1 / 12

9BE21

- Special design 2 stage operation, suits most cars and light trucks ball joints in steering & suspension
- Suitable for most European and Japanese vehicles



KT NO.	A mm	B(mm) Max	B(mm) Min	C mm	D mm	E mm	g	
9BE21	160	50	12	20	22	32	1270	1 / 12

9BE4

- For quick and easy separation of ball joint pivots of pitman arms, steering tie rods, ball joints, etc
- Suitable for general trucks and vehicles
- For better safety operation & avoid damage



KT NO.	A mm	B mm	C mm	D mm	g	
9BE41	36	40	18	17	364	1 / 36
9BE42	46	48	23	17	558	1 / 36
9BE43	62	62	29	19	925	1 / 12
9BE44	64	76	40	24	1658	1 / 12
9BE45	77	100	46	24	1858	1 / 12

Impact Ball Joint Separator

9HBE4 3/4"

- Use for quick separation of ball joint for heavy goods vehicle
- Extra deep design for tight space
- Use with impact tools

Heavy Goods Vehicle Ball Joint Separator

Size(mm)	Application
30	BMW (E39), Benz(W203/W210/W211/W220/W221), Mitsubishi Delica, Canter, Toyota Dyna etc...
39	"4 tons and European truck: Scania, Benz, MAN 414 drag link and Hino etc..."
47	"8.8 tons~10.5 tons truck: Hino, Isuzu, Nissan, UD,Fuso etc..."
58	Scania etc...
62	"15 tons~35 tons: Hino, Isuzu, Nissan, Fuso truck and bus etc..."
67	MAN(FE410A) etc...

KT NO.	A mm	B mm	g	
9HBE4-30	30	95	2320	6 / 6
9HBE4-39	39	95	2320	6 / 6
9HBE4-47	47	95	2320	6 / 6

3/4" DR.

KT NO.	A mm	B mm	g	
9HBE4-58	58	120	4200	6 / 6
9HBE4-62	62	120	4366	6 / 6
9HBE4-67	67	120	4200	6 / 6

Hydraulic HGV Ball Joint Separator & Set

9HBE81

- Use for separating ball joint for heavy goods vehicles
- Design for operating manually or by 12 tons hydraulic ram
- Strengthen fork and lever for greater force to be applied

3 PC.

7.00 / 1 / 2

capacity	
Jaw opening	70mm
Jaw width	36mm

9HBE083

- Use for separating ball joint for heavy goods vehicles
- Design for operating manually or by 12 tons hydraulic ram
- Interchangeable jaws width : 30 / 34 / 40mm

5 PC.

8.50 / 1 / 2

Jaw Opening size : 30, 34, 40 mm

Track Rod End Remover & Installer

9BE51 | 9BE52

- Removes and replaces the axial joint
- Hex part on the end of tool : works with 27 mm wrench or 1/2" DR. ratchet

KT NO.	L inch	L mm	Ø Capacity mm	g	
9BE51	15-3/4	400	28~35	1635	1 / 10
9BE52	15-3/4	400	35~45	2140	1 / 10

Multi-Purpose Inner Tie Rod Tool

9BE62 | 9BE63 1/2"

- Use for replace inner tie rod ends without removing the rack and pinion
- Internal serrated design to make grip tight
- Use with ratchets and extensions by 1/2" DR.
- Suitable for most vehicles & trucks

KT NO.	L inch	L mm	Ø Capacity mm	g	
9BE62	3-1/4	81.50	33~42	370	24
9BE63	3-7/16	87.56	42~50	422	24

Universal Adjustable Wheel Bearing Lock Nut Wrench

9HBN01 3/4"

- For disassemble and assemble vario nut and cap
- Extra slim design suitable to reach narrow space for special nut
- Use with 3/4" DR. tools and suggest to lock by torque wrench
- Application for 6PT, 8PT and round nut
- Adjustable open jaw 50~150mm
- Contents:
- 3 pairs round adapter for round nut : 6mm, 8mm ,10mm
- 3 pairs square adapter for round nut : 1/4", 5/16", 3/8"

3.68 1 / 5

13 PC.

3/4" DR.

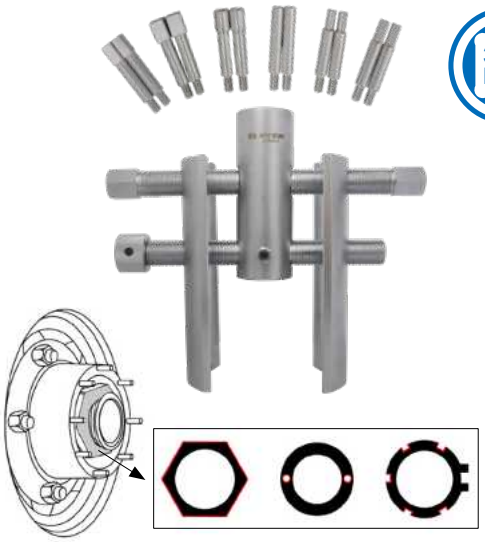

Coil Spring Compressor Set

9BF31

- Developed for "Macpherson" suspensions, using a range of 3 sets interchangeable monobloc forks
- Spring specification / use :
  A : Ø80~115mm
  B : Ø110~150mm
  C : Ø140~195mm
- Suitable for BMW, Ford, VW, Audi, Porsche, Saab, Opel, Volvo, Nissan, Honda, Mitsubishi, Subaru, Toyota

8 PC.

KT NO.	L mm	Capacity mm	Kg	
9BF31	460	40~300	15.00	1 / 1

Drop Forged Coil Spring Compressor Set

9BF11 9BF21

- Drop forged SCM435 jaws & leaded screws
- Both 21mm 6-point sockets and 1/2" wrench are available
- Suitable for limited space under wheel arch

6 PC.

9BF11

9BF21

KT NO.	L mm		mm	Kg	
9BF11	85 / 370	1/2"	21	2.40	1 / 6
9BF21	85 / 270	1/2"	21	3.36	1 / 6

Steering Wheel Puller Set

9BG11

- Easy to remove and install steering wheel for cars and trucks
- 2 sets 17mm hex head puller with pointed and flat cups
- 4 sets side bolts
- Small plate Dia. :
  1"~3-11/16" 25~95mm
- Large plate Dia. :
  1-1/8"~5" 28~125mm
- Side bolts size :
  3 PC. 5/16" UNC x 3-1/2" lon g puller bolts
  3 PC. 5/16" UNF x 3" long puller bolts
  3 PC. 3/8" UNC x 3" long puller bolts
  3 PC. 3/8" UNF x 3" long puller bolts

4.10 1 / 6

18 PC.

Coil Spring Compressor Set

9BF33

- Suitable for BMW, Audi, Chevrolet, Citroen, Fiat, Ford, Honda, Hyundai, Kia, Lancia, Mazda, Benz, Mitsubishi, Nissan, Opel, Peugeot, Renault, Seat, Tesla, Toyota, Volvo
- Can be operated with impact wrench
- Spring specification/use:75~155 mm
- Stroke: 106~293 mm
- Max load: 6,400 kgf·m (62,765 N·m)

3 PC.

5.5 kg 1 / 4

- Place upper and lower discs on spring

- Insert the main tool body into the spring

- Insert through the disc and make a half turn to connect the tool and disc

- Turn the hex nut on the main tool body lower end to fix all parts

- Use an air/impact wrench to compress the spring

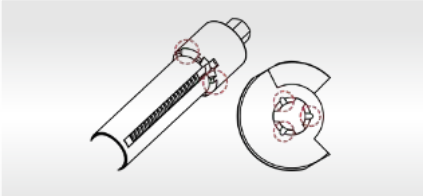

- Special pins on tool body to mesh with grooves on discs to create a secure connection

Wheel Balancing Weight Tool

9BK11

- Ideal for fitting and removing wheel balance weights

KT NO.	L inch	L mm	A mm	B mm	g	
9BK11	10	250	22	86	420	10 / 50

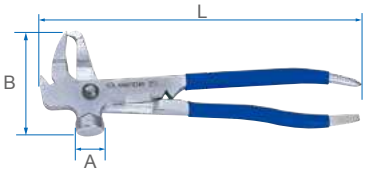

Tire Lever

9BK41

9BK43

- Straight pattern with profiled shank

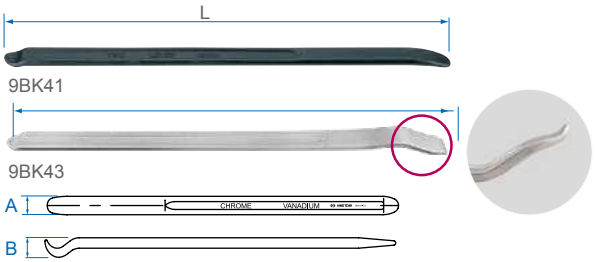

KT NO.	L inch	L mm	A mm	B mm	g	
9BK41-20	8	200	21.6	11	104	10 / 50
9BK41-28	11	280	22.7	13.5	239	10 / 50
9BK41-38	15	380	24.5	13.5	358	10 / 50
9BK41-53	21	530	28	12	930	10 / 20
9BK41-65	25	650	30	15	1075	10 / 20
9BK43-65	25	650	30	15	1100	10 / 20

Tire Valve Installer

9BK31

9BK32

- Use for replacement and fitting tire valves
- Composite body prevents damage onto alloy wheel
- 180 degree pivoting head
- 310mm plastic handle

9BK31

118 g 12 / 144

9BK32

353 g 6 / 48

- For removal & installing valve cores

Tire Lever

9BK41-73

- To install and remove the tire from wheel rim
- Precision forged with greater leverage design
- Special design for 17" to 22.5" tire

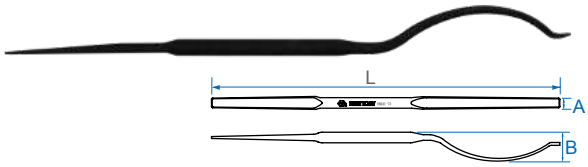

KT NO.	L inch	L mm	A (mm)	B (mm)	g	
9BK41-73	28-3/4	730	22	64.4	1618	1 / 10

Tire Valve Core Torque Tool / Installer Torque Screwdriver

34102-040M

- Preset torque setting in order to remove & install valve cores correctly
- Prevent overloaded torque to cause damage on valves sensor cores
- Preset torque is 0.45 N·m (4.0 lbf·in)
- Ergonomics design with PP handle

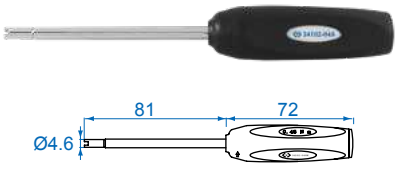

62 20 / 100

Digital Tire Gauge

9BM120

- Tyre pressure gauge specification :
  Unit range :
  0-100 psi / 0~7.0 bar / 0~7.0 Kgf-cm² / 0~700 kpa
  Display resolution :
  0.1 psi / 0.01 bar / 0.01 Kgf-cm² / 0.01 kpa
- Tread depth gauge specification :
  Unit range : 0-22mm / .8"(Gauge : mm / inch)
  Display resolution : 0.01mm / .001"



KT NO.	A mm	B mm	L mm	g	
9BM120	53	38	101	53	12 / 96

Digital Tire Tread Depth Gauge

9BM811

- Digital large LCD screen display
- Material : ABS Plastic, stainless steel needle
- One-touch switch between Metric / Inch system interchange
- Zero setting at any position
- Mini size, hand-held and portable
- Unit range : 0-25.4mm / 0-1"
- Display resolution : 0.01mm / .0005"

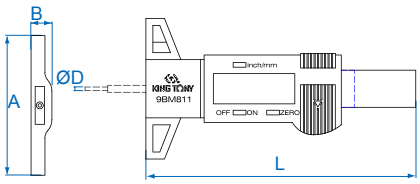

KT NO.	ØD mm	A mm	B mm	L mm	g	
9BM811	1.5	60	9	116	39.6	25 / 100

Tire Air Bead Seater

9HBL

- Capacity : 5 Gallon
- Used for seating tires for cars, trucks, ATVs, tractors
- Air gauge for easy and accurate air volume readings
- Can be used for tire sizes up to 24.5"

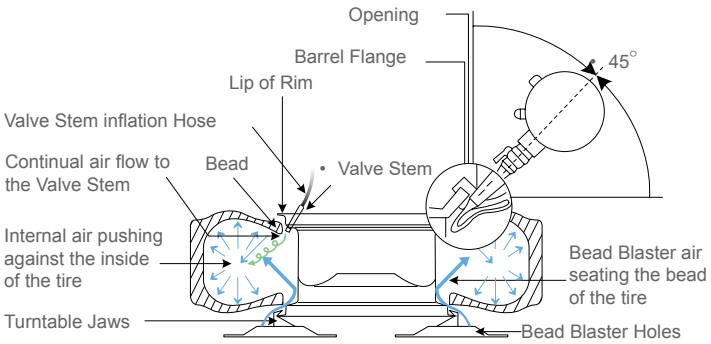

KT NO.	Type	Capacity	Max. pressure	kg	
9HBL11-05	America	5 gallon (20 L)	145 PSI (10 bar)	11.0	1
9HBL12-05	Europe				

3-In-1 Inflator

9BM

- Diaphragm pressure gauge
- Accuracy : ANSI B40.100 ± 3% ~ ± 2% ~ ± 3%
- Special rubber housing protects manometer against light impacts
- 3 functions(check, release, inflator) all together on the press handle
- Variable trigger, two control position inflate / deflate leve
- Flexible 400MM high pressure rubber hose with clip-on air tire chuck
- Pressure range : 0-160 PSI (9BM21) / 0-220 PSI (9BM22)
- Built in hang-up hook allows easy storage

- 9BM2110
- 9BM2111
- 9BM2210
- 9BM2211

- 9BM2210A
- 9BM2211A

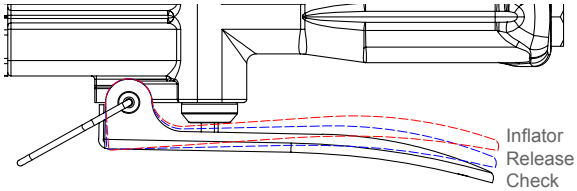

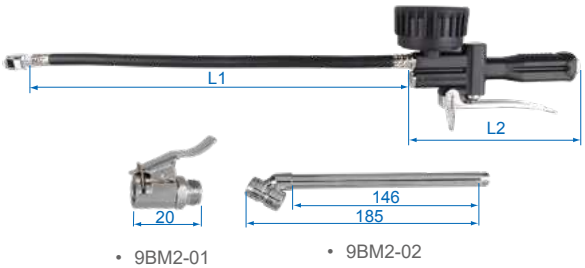

- 9BM2-01
- 9BM2-02

KT NO.	Pressure range (Psi)	Air Inlet (BSPT/NPT)	L (mm) L1	L2	Air hose (ID)	g	
9BM2110	160	1/4"-19 BSPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2111	160	1/4"-18 NPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2210	220	1/4" BSPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2211	220	1/4" NPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2210A	220	1/4" BSPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2211A	220	1/4" NPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2-01	(included in all 9BM series)		20		-	25	-
9BM2-02	(included in 9BM2210A & 11A only)		185		-	105	-

Wheel Lock Screw Socket Set

9BW0120 VW

- Used to permit servicing of customer vehicles, even lose the key
- Applicable for installing and removing locks of most VW models
- Chrome molybdenum, alloy steel chrome plated
- Work with 17mm hex tool
- Contents :
  #521, #522, #523, #524, #525, #526, #527, #528, #529, #530, #531, #532, #533, #534, #535, #536, #537, #538, #539, #540

2.9 Kg 1 / 5

20 PC.



9BW0220 BMW

- Used to permit servicing of customer vehicles, even lose the key
- Applicable for installing and removing locks of most BMW models
- Chrome molybdenum, alloy steel chrome plated
- Work with 17mm hex tool
- Contents :
  #041, #042, #043, #044, #045, #046, #047, #048, #049, #050, #051, #052, #053, #054, #055, #056, #057, #058, #059, #060

1.94 Kg 1 / 5

20 PC.



10 Point Socket 20MM

9BW4801

- 1/2" DR.
- 10 points
- Use for replacing and removing retaining screw on rear trailing arm on HONDA CR-V

KT NO.	○ mm	D1 mm	ℓ mm	L mm	g	
9BW4801	20	25	15	38	88.0	10 / 160



1/2"

Locking Nuts & Bolt

WSB01

- Long Bolt

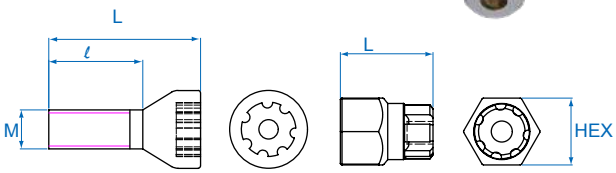

KT NO.		HEX	Thread M	ℓ mm	L mm
WSB012802-5		-	M12 x 1.5	28	47
		13/16	-	-	29
WSB013006-5		-	M14 x 1.5	30	49
		13/16	-	-	29

WSN04

- Long Lock Nut

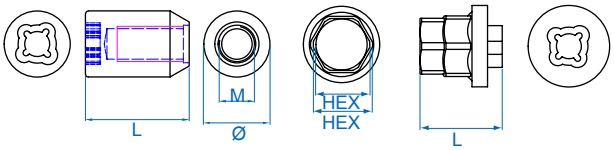

KT NO.		HEX	Ø	Thread M	L mm
WSN043601-5		-	23	M12 x 1.25	36
		19 x 13/16	-	-	28
WSN043602-5		-	23	M12 x 1.5	36
		19 x 13/16	-	-	28

WSN14

- Lock Nut

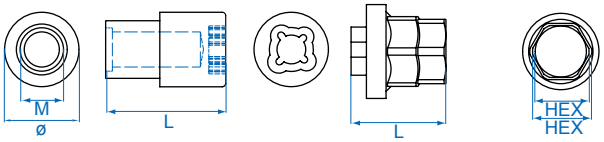

KT NO.		HEX	Ø	Thread M	L mm
WSN143601-5		-	23	M12 x 1.25	36
		19 x 13/16	-	-	28
WSN143602-5		-	23	M12 x 1.5	36
		19 x 13/16	-	-	28

WSB02

- Cone Seat Bolt Lock

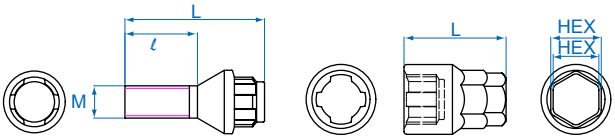

KT NO.		HEX	Thread M	ℓ mm	L mm
WSB022701-5		-	M12 x 1.25	27.5	52.5
		17 x 3/4	-	-	38

- Material - chrome molybdenum alloy steel
- Finishing - phosphate sunk

Impact Socket for Hybrid Wheel Bolts Mercedes-Benz

9BW4501 — 1/2"

- Durable outer sleeve protects polished wheels and lug nut
- Suitable for Hybrid wheel bolts on e.g. MERCEDES-BENZ C-Class type 204, 204X E-Class type 211, 212, 207 SLK type 172 M-Class type 164, 166 S-Class type 221, 222 CL-Class type 216

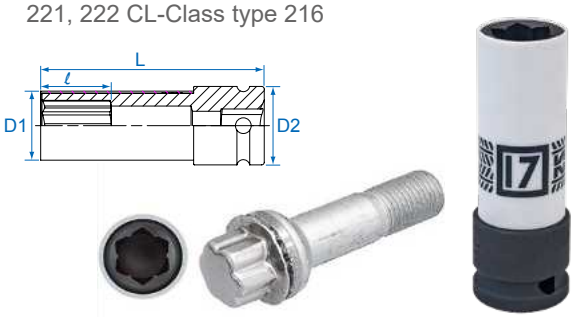

KT NO.	Size mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9BW4501	17	26.4	30	26	85.5	229	5 / 60

Impact Socket for Special Profile Wheel Bolts

9BW4502 — 1/2"

- Durable outer sleeve protects polished wheels and lug nut
- Suitable for Wheel nuts with special profile 21 mm on HYUNDAI i30, Tucson and KIA

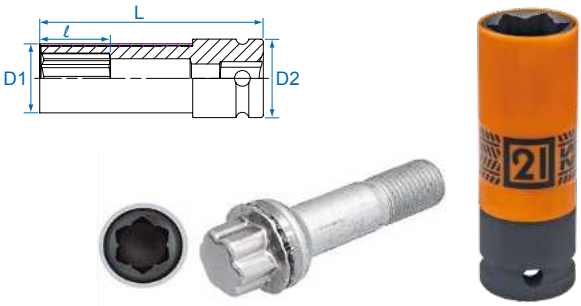

KT NO.	Size mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9BW4502	21	28.5	30	26	85.5	252	5 / 60

Wheel Nut Impact Socket & Set

- Thin wall impact socket set with plastic sleeve
- Color coded, sizes are easy to recognize
- Material: Chrome molybdenum alloy steel
- The design of protective sleeve is able to reduce the wear of sheath and avoid damaging the aluminum alloy rims

4 PC.



Kg 1.12 1/20

- Blow case size (mm) :
- 160 x 135 x 50 (0.038 cuft)

- 44904MP01

- 44904MP02

44904MP01 — 1/2"

Contents		DR.	Applicable vehicle	Size(mm)	L(mm)
	494515M	1/2"	Smart	15	85.0
	494517M	1/2"	-	17	85.0
	494519M	1/2"	-	19	85.5
	494521M	1/2"	-	21	85.5

44904MP02 — 1/2"

Contents		DR.	Applicable vehicle	Size(mm)	L(mm)
	494517M	1/2"	-	17	85.0
	494519M	1/2"	-	19	85.5
	494521M	1/2"	-	21	85.5
	494522M	1/2"	Opel	22	85.0

44907MP — 1/2"

Kg 2.13 1/12

Contents		DR.	Applicable vehicle	Size(mm)	L(mm)
	494515M	1/2"	Smart	15	85
	494517M	1/2"	-	17	85
	494519M	1/2"	-	19	85
	494521M	1/2"	-	21	85
	494522M		Opel	22	85
	9BW4501		Mercedes Benz	17	85
	9BW4502		Hyundai/Kia	21	85

7 PC.

Stud/Hub Cleaning Tool & Set

9BK72

KT NO.	L inch	L mm	g	
9BK72-12	7/16	12	25.2	100
9BK72-13	1/2	13	25.4	100
9BK72-14	9/16	14	25	100
9BK72-16	5/8	16	25.6	100
9BK72-22	7/8	22	33.6	100
9BK72-28	1-1/18	28	38	100

9BK73

KT NO.	mm	g	
9BK73-14	14	13.2	100
9BK73-22	22	13.8	100
9BK711	150	101.8	100

9BK7008

- For cleaning corrosion from studs, especially useful for cleaning around the base of studs
- Includes one quick change handle and adaptor

8 PC.

KT NO.	Contents	g 545	10
9BK72	12, 13, 14, 16, 22, 28		
7704-50	1/2"		
9BK711	1/2"		

9BK7009

- For cleaning corrosion from hubs and studs, especially useful for cleaning around the base of studs
- Includes one quick change handle and adaptor

8 PC.

KT NO.	Contents	g 480	10
9BK72	14, 22		
9BK73	14 x 2, 22 x 2		
7704-50	1/2"		
9BK711	1/2"		

Lubrication-Grease Gun

9BU11

- Ideal for machine, automobile, farm and garden equipments, other vehicles etc.

9BU11T

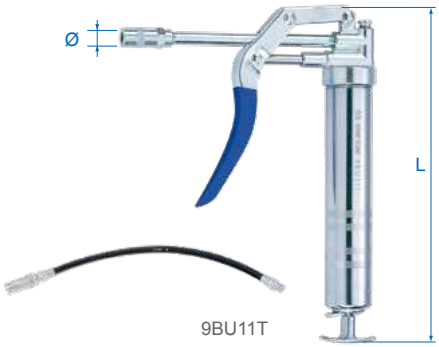

KT NO.	L inch	L mm	Ø Screw thread	High pressure PSI	High pressure bar	Capacity c.c.	Capacity oz	Kg	
9BU111	10-5/8	267	1/8 x 28 PT	4000	275	120	3	0.61	1 / 30
9BU112	10-5/8	267	M10 x 1.0P	4000	275	120	3	0.61	1 / 30
9BU111T	10-5/8	267	1/8 x 28 PT	4000	275	120	3	0.68	1 / 30
9BU112T	10-5/8	267	M10 x 1.0P	4000	275	120	3	0.68	1 / 30

9BU111/ 9BU111T For general market except North America, Germany, South Africa, Egypt
9BU112/ 9BU112T For Germany, South Africa, Egypt, etc.

Lubrication-Grease Gun with 12" Tube

9BU143T

- Ideal for machine, automobile, farm and garden equipments, other vehicles etc.

KT NO.	L inch	L mm	Ø Screw thread	High pressure PSI	High pressure bar	Capacity c.c.	Capacity oz	Kg	
9BU1432T	14-1/2	368	M10 x 1.0P	7000	483	400	14	1.36	1 / 12

9BU1432T For Germany, South Africa, Egypt, etc.

Lubrication-Grease Gun

9BU2

- Ideal for machine, automobile, farm and garden equipments, other vehicles etc.

KT NO.	L inch	L mm	Ø Screw thread	High pressure PSI	High pressure bar	Capacity c.c.	Capacity oz	Kg	
9BU241	14	360	1/8 x 28 PT	10000	700	400	14	1.18	1 / 16
9BU242	14	360	M10 x 1.0P	10000	700	400	14	1.18	1 / 16
9BU251	14.2	365	1/8 x 28 PT	10000	700	500	16	1.52	1 / 16
9BU252	14.2	365	M10 x 1.0P	10000	700	500	16	1.52	1 / 16
	9BU241 / 9BU251	For general market except North America, Germany, South Africa, Egypt							
	9BU242 / 9BU252	For Germany, South Africa, Egyp t, etc.							

Lubrication-Grease Gun with 12" Tube

9BU2T

- Ideal for machine, automobile, farm and garden equipments, other vehicles etc.

9BU8109
9BU8209
9BU8112
9BU8212

KT NO.	L inch	L mm	Ø Screw thread	High pressure PSI	High pressure bar	Capacity c.c.	Capacity oz	Kg	
9BU241T	14	360	1/8 x 28 PT	10000	700	400	14	1.24	1 / 16
9BU242T	14	360	M10 x 1.0P	10000	700	400	14	1.24	1 / 16
9BU251T	14.2	365	1/8 x 28 PT	10000	700	500	16	1.63	1 / 16
9BU252T	14.2	365	M10 x 1.0P	10000	700	500	16	1.63	1 / 16
9BU8109	9	229	1/8 x 28 PT						
9BU8209	9	229	M10 x 1.0P						
9BU8112	12	305	1/8 x 28 PT						
9BU8212	12	305	M10 x 1.0P						
	9BU241T / 9BU251T	For general market except North America, Germany, South Africa, Egypt							
	9BU242T / 9BU252T	For Germany, South Africa, Egypt, etc.							

Portable Bearing Packer

9BU41

- Quick and easy way to pack bearings with less mess
- Suitable for bearing diameter up to 90 mm
- Press the cap until old grease forced out and replaced by fresh grease

505.2 g 1 / 36

Oil Suction Gun

9BT2

- Designed for all purpose, quickly draining and filling oil and other fluids for clutches, agricultural, and industrial chemical, additives, transmission on differentials, brake master cylinders, oil filters or other type of sumps or sampling engine oil
- Features 11" flexible plastic hose

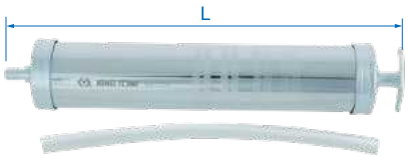

KT NO.	L inch	L mm	Capacity c.c.	Capacity oz	g	
9BT250	13.4	340	500	16	770	1 / 20
9BT2100	17.3	440	1000	32	1238	1 / 20

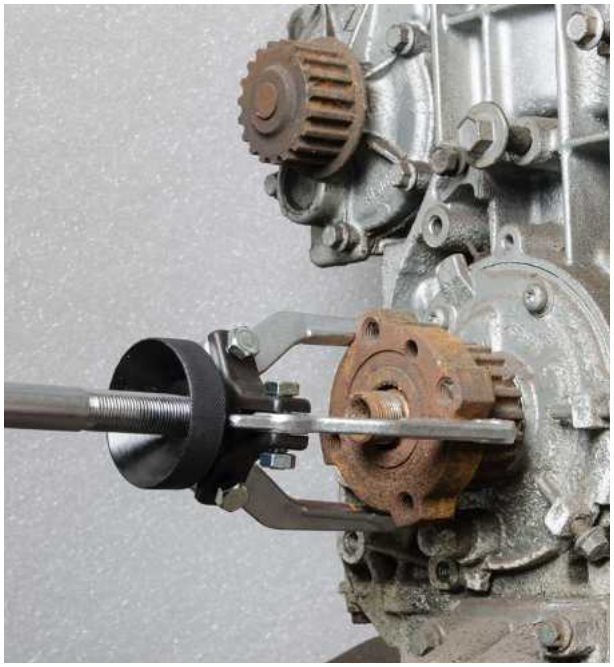

Slide Hammer Puller Set

9BQ01

- 5 lbs / 2.2 kgs slide hammer with 500 mm shaft make more powerful
- Three types to use : internal/external puller, plate puller, dent puller
- Use for remove vehicle Hub, rear axle, bearing or repair dent, etc.

7.5 kg 1/2

17 PC.

CONTENTS:

- 1 PC. 500 mm T handle shaft
- 1 PC. 5 lbs / 2.2 kgs hammer
- 1 PC. Axle puller
- 1 PC. Hub puller
- 1 PC. Hook
- 1 PC. Locking pliers puller
- 1 PC. Dent puller
- 1 PC. Central bolt
- - Hex 19mm x 5/8″ x 18UNF x L140mm
- 1 PC. Twin head
- 1 PC. Tripe head
- 1 PC. Adjustable nut
- 3 PC. 3.5″ leg
- 3 set nut & bolt

Axle Puller With Slide Hammer

9BQ11

- 5 lbs / 2.2 kgs slide hammer
- 500 mm T handle shaft

3 PC.

4 kg 1 / 4

CONTENTS:

- 1 PC. 500 mm T handle shaft
- 1 PC. 5 lbs / 2.2 kgs hammer
- 1 PC. Axle puller

Auto Body Repair Tool

CAUTION Please wear proper safety gear while working.

9CF110

- Bumping hammer
- Flat face

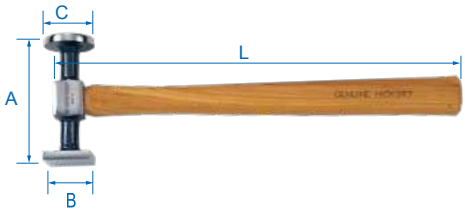

KT NO.	A mm	B mm	C mm	L mm	g	
9CF110	98.5	38	40	325	440	6 / 36

9CF131

- Curved pein & finishing hammer

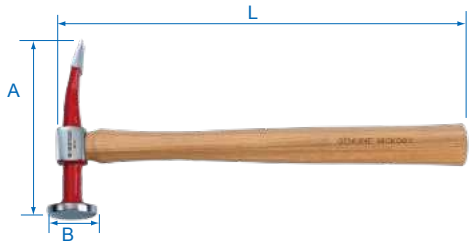

KT NO.	A mm	B mm	L mm	g	
9CF131	140	40	325	467	6 / 36

9CF120

- Light shrinking hammer - smooth
- Flat face + milled square face

KT NO.	A mm	B mm	C mm	L mm	g	
9CF120	98	40	38	325	467	6 / 36

9CF132

- Stright pein & finishing hammer

KT NO.	A mm	B mm	L mm	g	
9CF132	141	40	325	460	6 / 36

9CF130

- Straight pick & finishing hammer

KT NO.	A mm	B mm	L mm	g	
9CF130	138	40	325	467	6 / 36

9CF210

- Utility dolly



KT NO.	A mm	B mm	L mm	g	
9CF210	69	64	42.3	1380	6 / 12

Auto Body Repair Tool & Set

CAUTION Please wear proper safety gear while working.

9CF220

- Curved dolly



KT NO.	A mm	B mm	L mm	Kg	
9CF220	58.6	45	133	1630	6 / 12

9CF230

- Heel dolly



KT NO.	A mm	B mm	L mm	g	
9CF230	60	30	79.3	1130	6 / 12

9CF240

- Toe dolly

KT NO.	A mm	B mm	L mm	g	
9CF240	58.5	29.1	121	1400	6 / 12

9CF241

- Thin toe dolly

KT NO.	A mm	B mm	L mm	g	
9CF241	55	24	118	960	6 / 12

9CF-107 | 9CF-207 | 9CF-307

- All drop forged medium(SAE/AISI 1045,1055) carbon steel
- Hammers are hardened and tempered, including 3 hardwood handled hammers and 4 dollies

7 PC.

9CF-107

9CF-207

9CF-307

KT NO.	Contents			Kg	
9CF-107	**9CF130**	**9CF240**	**9CF110** **9CF120** **9CF220** **9CF230** **9CF210**	7.50	1 / 2
9CF-207	**9CF131**	**9CF241**		7.10	
9CF-307	**9CF132**			7.10	

Pneumatic Dent Puller

9CH212

- With 3 LB (1.36 kgs) sliding hammer
- With brass valve and 1/4" air plug
- With 13" length inlet hose
- With 2 PC. pads (120mm , 150mm)
- Air exhaust from the handle
- Working pressure 90 PSI
- 1/4" european

3.5 / 1/4

Bodywork File & Set

9CM01

- Used for sheet-metal working
- Suitable for flat and curved surfaces
- Double-sides file with radial shape
- Lightweight aluminium body
- 1 PC. file included

9CM11

9CM209

KT NO.	Version	Teeth inch	Length mm	g	
9CM01	rough	8	355	1580	1 / 20

9CM2

- Used for sheet-metal working
- Suitable for flat and curved surfaces
- Double-sides file with radial shape
- For 9CM11

KT NO.	Version	Teeth inch	Length mm	g	
9CM209	rough	8	355	330	1 / 50
9CM212	fine	12	355	330	1 / 50

Slide Hammer Bodywork Puller Set

9CH01

- 6 lbs / 2.7 kgs slide hammer with 540 mm shaft make more powerful
- Variety attachment adaptor suitable for different situation
- Use for vehicle body panel and chassis or other metal distortion etc.

8.50 / 1/2

CONTENTS:

- 1 PC. 540 mm handle shaft
- 1 PC. 6 lbs / 2.7 kgs hammer
- 1 PC. Large curve hook
- 1 PC. Small curve hook
- 1 PC. Large 90° hook
- 1 PC. Small 90° hook
- 1 PC. Flat squashed attachment
- 1 PC. Straight attachment
- 1 PC. Double attachment
- 1 PC. Tapping screw
- 1 PC. Hook attachment with chain

Putty Knife

9CJ1112 1-1/4"

KT NO.	A inch	A mm	L inch	L mm	g	
9CJ1112	1-1/4	32	8-1/2	218	60.0	24 / 144

9CJ1120 2"

KT NO.	A inch	A mm	L inch	L mm	g	
9CJ1120	2	50	8-1/2	218	70.0	24 / 144

Putty Knife

9CJ1130 3"

KT NO.	A inch	A mm	L inch	L mm	g	
9CJ1130	3	76	8-1/2	218	82	24 / 144

Bolstered Scraper

9CJ2112 1-1/4"

KT NO.	A inch	A mm	L inch	L mm	g	
9CJ2112	1-1/4	32	8-1/2	218	120	24 / 144

9CJ2212 1-1/4"

KT NO.	A inch	A mm	L inch	L mm	g	
9CJ2212	1-1/4	32	8-1/2	218	120	24 / 144

Carbide Scraper Set

9CJ072

- The blade tip is made of tungsten carbide material, which offers high hardness and a long lifespan. Available in 16mm and 32mm width.
- It can be used to scrape off residual carbon deposits, rust marks, or silicone residue from surfaces of objects, such as old silicone on oil sumps, exhaust manifolds, or brake calipers.
- The blade tip is equipped with a protective cover, and the rear end has a hanging hole.

301 10 / 40

2 PC.

KT NO.	A mm	L inch	L mm
9CJ7416	16	8	210
9CJ7432	32	8	210

Bolstered Scraper

9CJ2120 2"

KT NO.	A inch	A mm	L inch	L mm	g	
9CJ2120	2	50	8-1/2	218	140	24 / 144

Pinch Weld Scraper

9CJ3104 1/2"

KT NO.	A inch	A mm	L inch	L mm	g	
9CJ3104	1/2	12	6-1/2	168	75	24 / 144

9CJ3105 5/8"

KT NO.	A inch	A mm	L inch	L mm	g	
9CJ3105	5/8	15	8-1/2	218	108	24 / 144

9CJ3106 3/4"

KT NO.	A inch	A mm	L inch	L mm	g	
9CJ3106	3/4	19	6-1/2	168	75	24 / 144

Multi Purpose Single Edge Razor Scraper

9CJ61-40

- Ideal for scraping labels and decals
- Comfortable TPR handle for maximum grip
- Accepts all standard single edge razor blades

KT NO.	A inch	A mm	L inch	L mm	g	
9CJ61-40	1-1/2	40	9	235	145	6 / 72

Putty Knife Set

9CJ013

3 PC.

Contents

0.20 / 1 / 24

9CJ1112

9CJ1120

9CJ1130

Bolstered Scraper Set

9CJ023

3 PC.

Contents

0.40 / 1 / 24

9CJ2112

9CJ2212

9CJ2120

Pinch Weld Scraper Set

9CJ033

3 PC.

Contents

0.26 / 1 / 24

9CJ3104

9CJ3105

9CJ3106

Mini Panel Removal Set

9CI016

- Easy to remove small trim items and panels with slim profile
- Made from impact resistant high quality nylon
- Applicable: Air vents, door panels, door locks, dash trim, internal fittings, etc.

6 PC.

0.30

12 / 48

Long Nose Clamp

9CD14

- Drop forged chrome molybdenum alloy steel for maximum strength
- Jaw width : 32mm
- 3 Ton straight pulling capacity

1.83

1 / 10

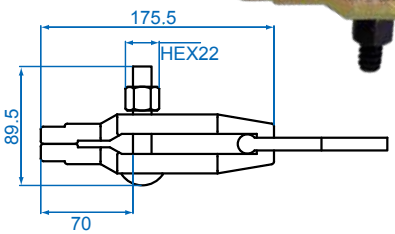

Large Pull Clamp With Top Pull

9CD21

- Drop forged chrome molybdenum alloy steel for maximum strength
- Jaw width : 37mm
- Two-way pull operation
- Dual self-tightening serrated jaws for a positive grip
- Capacity : 3 ton (straight way), 2 ton (cross way)

2.45 / 1 / 6



Small Pull Clamp With Top Pull

9CD31

- Drop forged chrome molybdenum alloy steel for maximum strength
- Jaw width : 44mm
- 44mm wide mouth with teeth
- With top pull and 360 degree self tightening pull ring
- Dual self-tightening serrated jaws for a positive grip
- Ideal for work in tight areas
- Capacity : 5 ton (straight way), 2 ton (cross way)

2.38 / 1 / 6



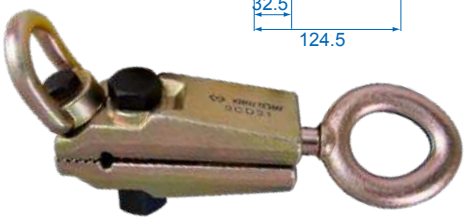

Double Suction Pad Holder

9CW21

- Lifting up to 65 kg in horizontal position
- Adjustable handle designed for curved surface
- Ø120mm rubber vacuum cup can prevent from the damage of surface and grip tightly
- Use for holding glass, tiles, sheet metal, etc.

KT NO.	Ø mm	Load capacity kg	g	
9CW21	120	65	805	4 / 8

Windscreen Remove Tool Set

9CW01

- Use for removing glued of vehicle windows
- Use A with C to pierce the wire through the adhesive beads
- Use the cutting wire with B to remove adhesive beads

CONTENTS :

- A - Wire feeder tool
- B - Wire pull handle - pair
- C - Triangle cutting wire - 22 meters

KT NO.	Wire L m	T Handle L mm	g	
9CW01	22	330	456	8 / 32

Single Suction Pad Holder

9CW22

- Lifting up to 40 kg in horizontal position
- Ø120mm rubber vacuum cup can prevent from the damage of surface and grip tightly
- Use for holding glass, tiles, sheet metal...

KT NO.	Ø mm	Load capacity kg	g	
9CW22	120	40	351	6 / 48

Alternator Tool & Set

- Specialized in removing & installing freewheel pulleys on alternator
- Ideal for dismantling and assembling the free wheel pulley while changing the alternator or pulley
- The pulley shaft is held in place with the bit on 1/2" DR. socket whilst the nut is undone using the 33 teeth union nut with 19mm spanner
- Suitable generator brand: Bosch, Valeo, Magetic Marelli, Denso, etc.
- It′ s also interchangeable and comprehensive components to work on VW, Audi, Citroen/ Peugeot, Mercedes, Renault, BMW, Flat, Ford, Toyota, etc.

9DA103

1/2"

- M10 spline

KT NO.	Size	Overall length mm	g	
9DA103	M10	113	151	10 / 120

9DA104

1/2"

- T50 Star

KT NO.	Size	Overall length mm	g	
9DA104	T50	113	151	10 / 120

Alternator Tool & Set

9DA022

- Specialized in removing & installing freewheel pulleys on alternator
- Suitable generator brand : Bosch, Valeo, Magetic Marelli, Denso, etc.
- It's also interchangeable and comprehensive components to work on VW, Audi, Citroen/Peugeot, Mercedes, Renault, BMW, Fiat, Ford, Toyota, etc.

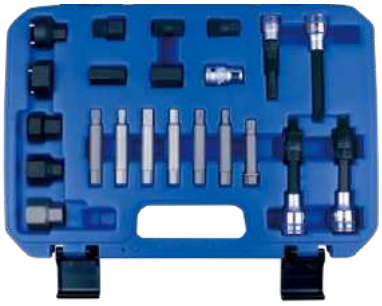

22 PC.

CONTENTS:

- 3 PC. Combined bit socket –
- 3/8" DR. x M10 x 90mmL / 1/2" DR. x T50 x 113mmL / 1/2" DR. x M10 x 113mmL
- 1 PC. Spline bit socket 1/2" DR. x M10 x 110mmL
- 3 PC. 33 teeth socket –15mm HEX x19mm / 15mm Hex x17.5mm / 22mm Hex
- 2 PC. Hex nut –22mm x 30mmL (Ø12.0mm) / 17mm x 35mmL (Ø14.7mm)
- 1 PC. - 35mm Round x 17mm hex (four pin)
- 1 PC. - 38mm Hex adaptor (three pin)
- 1 PC. - 28.6mm Round x H28 x H22 x 32mmL
- 2 PC. - Hexagon head nut –28H x H19 x 35mmL / 28H x H21 x 36mmL
- 1 PC. - M10 x H12 bit 64mmL
- 6 PC. - 10mm shank head bits 75mmL –T40 / T50 / M8 / M10 / H8 / H10
- 1 PC. - 1/2" DR. Bit holder

Kg 2.57 / 1 / 5

Spark Plug Boot Pliers

9DB201

- Remove spark plug cables safely and prevent cable damage
- Pliers' handles and jaws are coated with a heavy-duty plastic for sure grip

KT NO.	L mm	Ø mm	L1 mm	g	
9DB201	260	12~20	20	289	6 / 36

Automotive Voltage Tester

9DC23

- Insulated alligator clip with 150 cm cable
- 2 LEDs indicate positive(+)/negative(-) polarity
- Test voltage 3~48V
- For application of D.C. circuits only
- Two testing methods as illustration

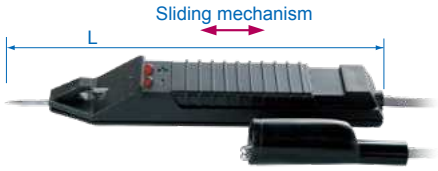





KT NO.	L mm	Test range	g	
9DC23	150	3~48V	52	10 / 100

Circuit Tester

9DC22

- Bronze body housing
- Cover cap for contact needle
- Bulb of 24V/3W interchangeable
- For 6/12/24V DC systems
- For application of D.C. circuits only



KT NO.	L mm	Test range	g	
9DC22	107	6~24V	50	20 / 200

Digital Display Circuit Tester

9DC242

- For 6/12/24V DC systems
- For application of DC circuits only
- Check if the circuit is electrified or not by stainless steel stylus
- Bigger heavy duty insulated alligator ground clip
- 3M long retractable cable
- LCD display easy to read digital voltage display
- Powered from the power source being measured, no batteries required
- CE approval EN 61000-6-3(2007) , EN 61000-6-1(2007)
- Do not use on air bags
- Ultra-V will burn circuit board

Specification	
Measured valtage	5~28V
Testing current	<10mA
Operating temp	-10~50° C
Operating humidity	<80%

KT NO.	Test range	g	
9DC242	6, 12, 24	225	10 / 60

Positive (+) polarity

Negative (-) polarity

Circuit Tester with Nixie Display

9DC243

- For 12/24/48V DC systems
- For application of DC circuits only
- Check if the circuit is electrified or not by stainless steel stylus
- Test by car battery or negative ground conversion
- 3M long retractable cable
- 1M extension cable
- Powered from the power source being measured, no batteries required
- Nixie display easy to read digital voltage display
- CE approval EN 61000-6-3(2007) , EN 61000-6-1(2007)
- Do not use on air bags
- Ultra-V will burn circuit board

Specification	
Measured valtage	0.3~60V
Testing current	<10mA
Operating temp	0~50° C
Operating humidity	≦ 80%

KT NO.	Test range	g	
9DC243	12, 24, 48	277	10 / 60

Positive (+) polarity

Negative (-) polarity

Battery Tester

9DD21

- Test battery hydrometer quickly
- Use to check battery condition and charge state
- Detects hot or cold overcharge accurately
- For 6 / 12 / 24 volt system

85 / 10 / 100

Anti-freeze & Coolant Tester

9DD22

- Use to check condition of antifreeze and coolant (Ethylene Glycol)
- Ideal for avoiding winter freeze-ups and summer overheating

85 / 10 / 100

Mechanic's Stethoscope

9DH11

- Ears covered with plastic, effective to separate from outside noise
- 210mm extension probe can expand the space while operating or using in narrow space
- Quickly to find and detect the abnormal noise with the probe
- Use for detecting various vehicles parts or machine equipment

147 / 12 / 72

Vehicle Battery Tester

9DC51

- Test a 12V lead-acid battery of any vehicle
- CCA testing(SAE/DIN/EN/IEC/CA standard)-Working voltage: DC 9~15V
- Engine starting voltage test - Measures the minimum voltage when the engine starts
- Charging voltage test - About 14 volts
- CCA Level bar indication - LOW / MID / HIGH
- LCD with background light

KT NO.	Test range(V)	Size(mm) L x W x H	g	/
9DC51	9 ~ 15	135 x 78 x 33	374	1 / 30

Digital Glow Plug Tester

9DM1A1

- Suitable for steel and ceramic glow plugs
- LCD Display
- Short circuit protection & reverse charging protection
- Auto power off : 110 seconds
- 9V batteryx1 (Battery not included)
- CE approval

KT NO.	Glow plug(V)	Size(mm) L x W x H	g	/
9DM1A1	3.5-4.4-5-7-8.5 10-11-24	135 x 78 x 33	356	1 / 40

Gasoline Engine Injection Pressure Tester Kit

9DP1101

- Used to identify and diagnose low fuel pressure
- Shockproof gauge with dual reading of 0~120 PSI and 0~8 bar
- Various kit of adapters for most injection systems of European, Japanese and American vehicles, includes Bosch CIS, GM TBI and MFI system

5.0 kg 1 / 4

No.	Dedcription
1	1 PC. (0-120 psi/0-8bar)
2	1 PC. Connector Hose
3	1 PC. Connector Hose
4	1 PC. Connector Hose
5	1 PC. Connector Hose
6	1 PC. Connector Hose
7	1 PC. Connector Hose
8	1 PC. Connector Hose
9	2 PC. Connector Tube (5/8"-18 male nut)
10	2 PC. Connector Tube (5/8"-18 invert flare nut)
11	2 PC. Adapter (M16 female~5/8")
12	2 PC. Adapter (M14 female~3/8")
13	2 PC. Adapter (M16 female~3/8")
14	2 PC. Adapter (M14 female~3/8")
15	2 PC. Adapter (M16 ar-10mm)
16	1 PC. Adapter
17	1 PC. Manifold Adapter
18	1 PC. Manifold Adapter
19	1 PC. Adapter (90 degrees)

No.	Dedcription
20	1 PC. Adapter (M14 male-female)
21	1 PC. Adapter (M10 male-M12 male)
22	1 PC. Adapter (M10 female-M12 male)
23	1 PC. Adapter (M8 female-M12 male)
24	2 PC. Adapter (M8 male-M12 male)
25	1 PC. Adapter (M14 male-M12 male)
26	1 PC. Adapter (M16 male-M12 male)
27	1 PC. Adapter (Banjo bolt M12)
28	1 PC. Adapter (Banjo bolt M12)
29	1 PC. Adapter (Banjo bolt M10)
30	1 PC. Adapter (Banjo bolt M8)
31	1 PC. Adapter (Banjo bolt M6)
32	1 PC. Adapter
33	1 PC. Adapter (M8 male-M12 male)
34	1 PC. Adapter (M16 female-M12 male)
35	1 PC. Adapter (M14 female-M12 male)
36	1 PC. Gauge Hook
37	1 PC. Repair Pack

Gasoline Compression Tester Kit

9DP130

- Suitable for petrol engines on lawn mowers, motorbikes, cars, trucks and so on.
- Quickly diagnose problems with pistons, rings, and valves
- Gauge has dual color scale with 0-300 PSI, 0-20 Kg/cm^2
- Easy pressure release button on side of tester
- Brass corrosion resistant fittings

KT NO.	Max Pressure	g	
9DP1301	300PSI / 20Kg/cm^2	1206	1 / 10
9DP1302	300PSI / 20Kg/cm^2	1100	1 / 10

8 PC.

9DP1301

3 PC.

9DP1302

Diesel Engine Compression Tester Kit

9DP2301

- Suitable for testing cars and light commercial vehicles with direct or indirect injection on diesel engine
- Gauge reading range from 0-1000 PSI (0-70 bar)
- Includes a pressure gauge, various connect adapter and replacement seal & washer

2.58 kg 1 / 6

No.	Dedcription
A	1 PC. 2-1/2″ gauge with 420mm hose
B	1 PC. Glow plug adapter (73.5mm*M10*1.25)
C	1 PC. Glow plug adapter (54mm*M12*1.25)
D	1 PC. Glow plug adapter (72mm*M14*1.25)
E	1 PC. Dummy injector (114mm)
F	1 PC. Dummy injector (64mm*M24*2.0)
G	1 PC. Stanadyne dummy (112mm)

No.	Dedcription
H	1 PC. Glow plug adapter (114mm*M10*1.25)
I	1 PC. Glow plug adapter (119mm*M10*1.0)
J	1 PC. Dummy injector (75mm*M20*1.5)
K	1 Set Seal & washer
L	1 PC. 90° Elbow
M	1 PC. Clamp plate

Oil Pressure Tester Kit

9DP3201

- Suitable for testing engine oil pressure and transmission pressure
- Applicable to both gasoline and diesel engines, also suitable for passenger cars and light trucks
- Gauge reading range from 0-150 PSI (0-10 bar)
- Provided with an oil filter clamp for piercing through oil filter canister when oil pressure switch is hard to access

13 PC.

2.10 kg 1 / 5

Adapter

Black (Imperial threads)	Silver (Metric threads)
1/2″ x 20 UNF	M10 x P1.0
3/8″ x 20 UNF	M12 x P1.5
1/4″ x 18 NPTF	M14 x P1.5
1/8″ x 27 UPT	M16 x P1.5
R 1/8″ DIN	M18 x P1.5

Universal Terminal Release Tool Set

9DT11

- Suitable for most of the vehicles, VW Group, BMW, Opel, Renault, Ford, Daimlerchrysler, Fiat, Toyota and Saab
- Use to loose contacts easily or carry out other applications in the field of car electricity

850 g 1 / 10

12 PC.

A	**9DT11-1**	ABS 4.0mm round terminal
B	**9DT11-2**	3.5mm round terminal
C	**9DT11-3**	1.5mm round terminal
D	**9DT11-4**	Maxi power timer
E	**9DT11-5**	Pit pod / Faston 6.3mm
F	**9DT11-6**	JPT / SPT
G	**9DT11-7**	Micro timer ii
H	**9DT11-8**	Standard tool
I	**9DT11-9**	Standard 2.72mm
J	**9DT11-10**	Standard 1.48mm
K	**9DT11-11**	Standard 1.89mm
L	**9DT11-12**	Micro standard





Safety Goggles

9CK-101

- Soft PVC frame & lens high impact clear polycarbonate
- Anti-dust and anti-impact vents

KT NO.	L1 inch	L1 mm	L2 inch	L2 mm	g	
9CK-101	2-7/8	74	6	153	70	20 / 200

Steel Wire Brush

9CZ101

- Material : wood handle / steel wire
- Wire brush with three rows

KT NO.	H mm	L1 mm	L2 mm	g	
9CZ101	22	258	105	65	24 / 144

Pressure Oil Can

9TB225

9TB500

- Material: Plastic body (9TB225)
- Material: Metal body (9TB500)

9TB225 9TB500

KT NO.	Capacity c.c.	g	
9TB225	225	103	1 / 160
9TB500	500	302	10 / 60

Clip Removal Pliers

9TC101

- For removal of door inner-linings and other trim items held in place by plastic rivets

KT NO.	L inch	L mm	g	
9TC101	9	230	241	12 / 48

Refillable Pressure Sprayer

CAUTION

Always wear eye protection while using this tool

9TBA600

- Suitable for lubrication, cleaning brake systems, removing dust and applying anti-rust
- Two-position folding nozzle for a standard or long stream spray pattern for narrow and difficult to reach areas
- Do not use with strong chemical or corrosive fluid tool
- The aluminum alloy material uses a one-piece seamless structure to withstand high pressure
- Increase in thickness makes the product less prone to deformation and stronger
- The trigger is not affected by recoil force and is easy to operate
- Max pressure 350 Psi (25Kg /cm²)
- Safety valve pressure : 140Psi (9.84 Kg /cm²)

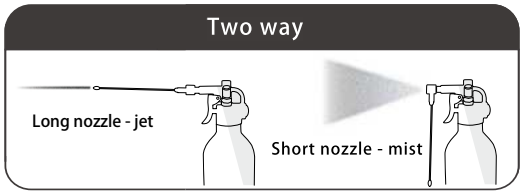



KT NO.	L inch	L mm	capacity	g	
9TBA600	11	280	600 c.c.	330	1 / 12

9TBA650

- Suitable for lubrication, cleaning brake systems, removing dust and being anti-rust
- Two-position folding nozzle for a standard or long stream spray pattern for narrow and areas which are difficult to reach
- Aluminum canister
- Do not use with strong chemical or corrosive fluid

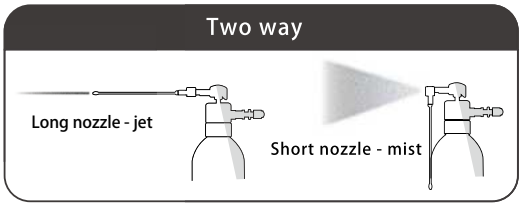

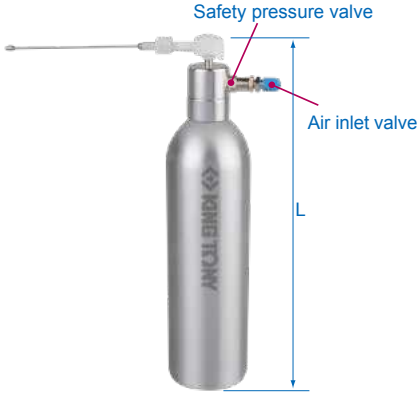

KT NO.	L inch	L mm	capacity	g	
9TBA650	11	287	650 cc	290	1 / 12

spare nozzle #9TBA650BTK

Pry Bar & Set

- Grip material - PP+TPR
- Chrome vanadium alloy steel

9TK1

- Packaged in plastic tray
- Pry bars are for prying and levering
- Sturdy blade minimizing lever spring effect
- It's hardened and tempered for maximum durability

KT NO.	L mm	g	
9TK108	204	110	6 / 72
9TK112	312	286	6 / 48
9TK118	458	514	6 / 48
9TK124	608	655	6 /36

9TK014

4 PC.

Contents 1.87 Kg 5 / 10

9TK108, 9TK112, 9TK118, 9TK124

Jumbo Pry Bar & Set

9TK2

- For heavy-duty application
- Includes straight, 90, 75, 30 degree tip for variety situation to use
- Extra long pry bar makes more powerful for prying and levering

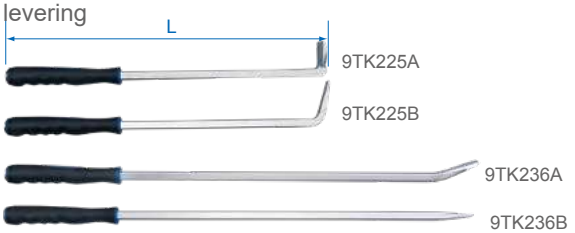

KT NO.	L inch	L mm	Type	Kg	
9TK225A	25	625	90°	1.42	1 / 8
9TK225B	25	625	75°	1.36	1 / 8
9TK236A	36	930	30°	1.92	1 / 6
9TK236B	36	930	Straight	1.92	1 / 6

9TK024

4 PC.

Contents 9.34 Kg 1 / 2

9TK225A
9TK225B
9TK236A
9TK236B

Rolling Head Pry Bar & Set

- Material - chrome vanadium alloy steel
- Finishing - Black phosphate with polished head

CAUTION Please wear proper safety gear while working.

9TK3

- With a long tapered end for alignments and a rolling head for prying

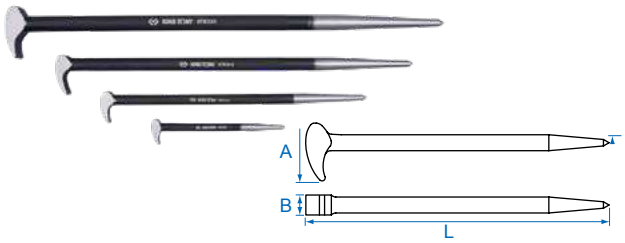

KT NO.	L inch	L mm	A mm	B mm	g	
9TK306	6	151	29.0	10.0	75	10 / 200
9TK312	12	305	36.5	12.3	252	2 / 40
9TK316	16	405	45.6	14.5	501	2 / 20
9TK320	20	504	60.2	18.0	952	2 / 20

9TK034

4 PC.

Contents 1.73 Kg 1 / 8

9TK306
9TK312
9TK316
9TK320

Door Upholstery Remover

- Grip material - PP+TPR
- Chrome vanadium alloy steel

48280180 | 43280212

- Special tool to remove the lining and clip of the car

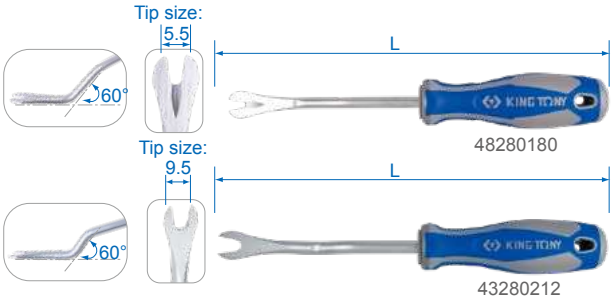

KT NO.	Tip mm	L mm	Type	g	
48280180	5.5	210	60°	90	12 / 144
43280212	9.5	240	60°	134	12 / 144

Hook & Pick Set

43250115Y

- 10" Bent-pick

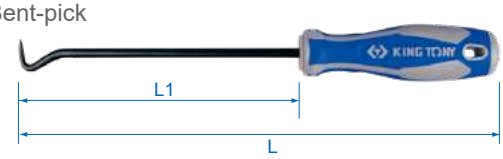

KT NO.	L mm	L1 mm	g	
43250115Y	260	150	94	12 / 144

43260115Y

- 10" Hook-pick

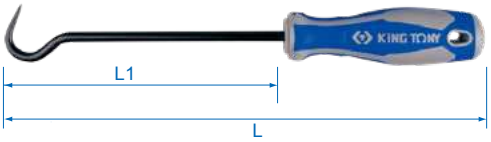

KT NO.	L mm	L1 mm	g	
43260115Y	260	150	96	12 / 144

43270115Y

- 10" 90° -pick



KT NO.	L mm	L1 mm	g	
43270115Y	260	150	94	12 / 144

43290115Y

- 10" Straight-pick

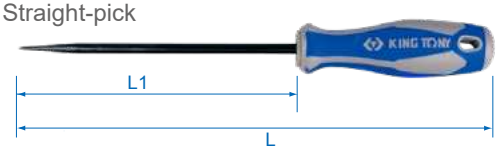

KT NO.	L mm	L1 mm	g	
43290115Y	260	150	91	12 / 144

9-30904AY

- Use for scribing, alignment, installing and removing O rings, seals, cotter pins and washers

4 PC.

Contents	kg 0.43	1 / 10
43250115Y	**43270115Y**	
43260115Y	**43290115Y**	

43240115Y

- Wide scraper
- Use for removing old gaskets more easily and quickly

KT NO.	L mm	L1 mm	g	
43240115Y	260	150	149	12 / 144

30914AY

- Use for scribing, alignment, installing and removing O rings, seals, cotter pins and washers

Contents	g 62.8	6 / 72
43350175Y	**43360175Y**	
43370175Y	**43390175Y**	

4 PC.

Hook & Pick Set

9-30909AY

Tray category #8 (375 x 187mm)

9 PC.

- Use for scribing, alignment, installing and removing O rings, seals, cotter pins and washers
- Use for removing old gaskets more easily and quickly

Contents — 0.69 kg — 1 / 12

43250115Y	43350175Y
43260115Y	43360175Y
43270115Y	43370175Y
43290115Y	43390175Y
43240115Y	

Radiator Hose Removal Tools

- Grip material - PP+TPR
- Chrome vanadium alloy steel

432A0113

- 9-1/2" Lightening type removal tools
- 9-1/2" U type removal tools

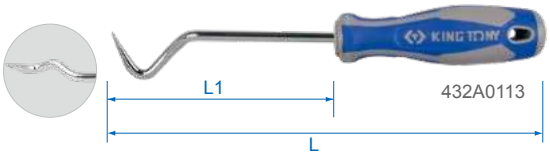

KT NO.	L mm	L1 mm	g	
432A0113	240	130	93	12 / 96

432A0213

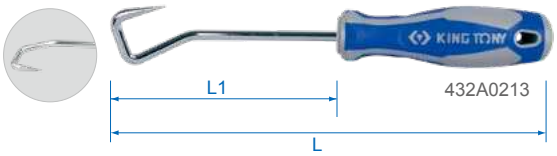

KT NO.	L mm	L1 mm	g	
432A0213	240	130	101	12 / 96

Magnetic Flexible Handle

- Grip material - PP+TPR

2121

- Enhanced flexible conduit for perfect shaping
- More powerful magnetic force

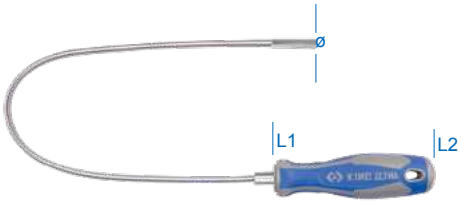

KT NO.	Size	Dia x length(mm) L1	L2	Magnetic power(kg)	g	
2121-12	12"	Ø 7 x 305	415	0.5	100	1 / 100
2121-18	18"	Ø 7 x 457	567	0.5	120	1 / 80

2121A

- Powerful magnet retrieves metal objects up to 3kg
- Slide cap prevents retrieving foreign objects
- Enhanced flexible conduit for perfect shaping
- Grip Material-PP+TPR
- Chrome vanadium alloy steel

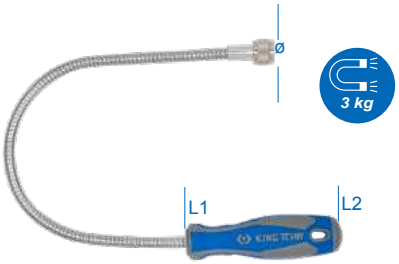





KT NO.	Size	Dia x length(mm) L1	L2	Magnetic power(kg)	g	
2121A-15	15"	Ø18 x 381	491	3	250	1 / 25
2121A-18	18"	Ø18 x 457	567	3	270	1 / 25

Magnetic Pick-Up Tool

2124

- Compact and ergonomic design for comfortable holding
- Enhanced flexible conduit for perfect shaping
- Solid crimping for holding tube and flexible conduit
- More powerful magnetic force
- Comfortable pushing strength

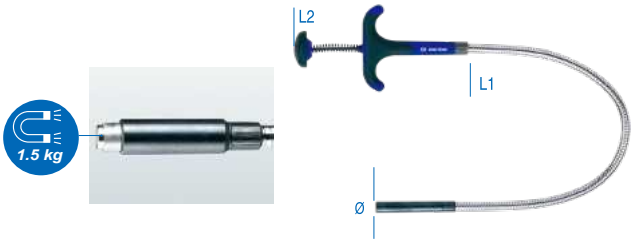

KT NO.	Size	Dia x length(mm) L1	L2	Magnetic power(kg)	g	
2124-18	18"	Ø13.5 x 450	610	1.5	181	1 / 36

Magnetic Claw Pick-Up Tool

2126A-18

- Enhanced flexible conduit for perfect shaping
- Solid crimping for holding tube and flexible conduit
- Maximum claw width 1-1/4"
- Comfortable pushing strength

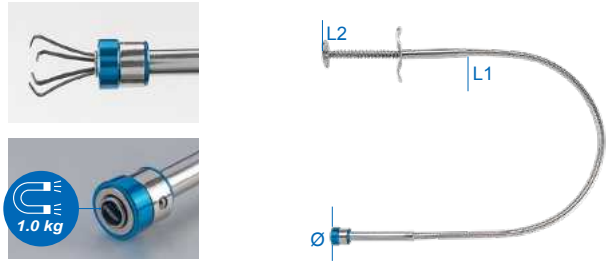

KT NO.	Size	Dia x length(mm) L1	L2		g	
2126A-18	18"	Ø15 x 440	600	1-1/4"	258	1 / 36

3 in 1 Pick-Up Tool

2129-24

- Compact and ergonomic design for comfortable holding
- Enhanced flexible conduit for perfect shaping
- Solid crimping for holding tube and flexible conduit
- More powerful magnetic force
- Hook type claw
- Clamp light
- Comfortable pushing strength
- Lithium cell : LR521 x 3

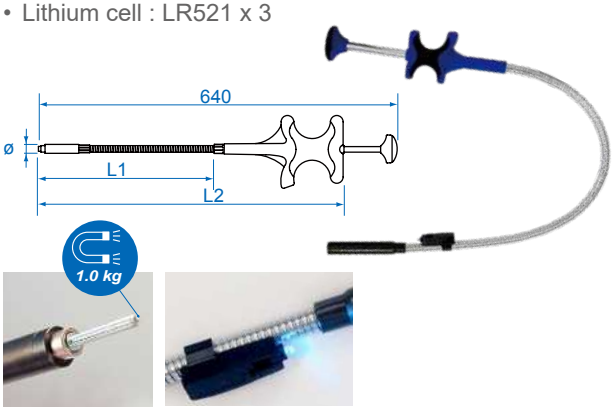

KT NO.	Size	Dia x length(mm) L1	L2	Magnetic power(kg)		g	
2129-24	24"	Ø13 x 470	570	0.4	1-1/4"	280	12 / 48

Telescoping Magnetic Pick-Up Bar

2128-26

- Pen style for carring conveniently

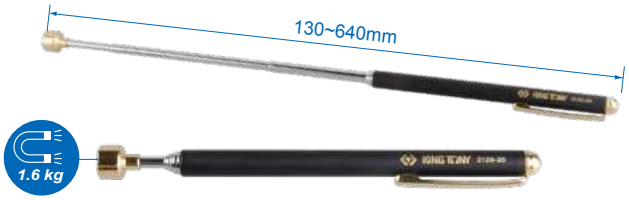

KT NO.	Extendable Length mm	Magnetic Power	g	
2128-26	130~640	3.5LBS/1.6KGS	45.6	50 / 200

Multi-Function Telescoping Bar

9TQ21

87 g 50 / 100

Magnetic Pick-Up Bar

- Magnetic power : 1.3 lbs / 0.6 kg
- Extendable length : 635 mm

38 mm Diameter Inspection Mirror



- To inspect hidden or narrow areas
- Double ball joint links swivel mirror for viewing to 360°

Scriber

- To mark lines on workpieces
- To clean the water-spurting hole of the windscreen wiper

3 in 1 Flexible Inspection Bar

9TQ02

203 12 / 72

Magnetic Pick-Up Bar

- Magnetic power : 3.5 lbs / 1.6 kg
- Length : 450 mm

Blub

- Size:2.2 V , 0.25 A
- Operates On 2 AA Batteries
- (Not Included)

Inspection Mirror

- 50 x 25 mm playground shape
- To inspect hidden or narrow areas
- Double ball joint links swivel mirror

Videoscope

- 5.5mm lens with 6 LED, can be used for shooting video or taking photo (1080P HD Camera 1920 x 1080 resolution)
- The videoscope is suitable for visually inspecting areas that are difficult to access over a great distance
- CE / ROSH / FCC certification
- IP67 waterproof rating

9TQ11

- Handheld version
- 4.3 inch LCD display with 1080P resolution
- Equipped with 2600mAh Li-ion battery, can be continuous use for 3 hours
- UN38.8 certification

740 1 / 8

Contents

	Protective cap
	Hook
	Magnet
	Side mirror
	Charging cable

9TQ12

- Wifi version
- Before use, download the inskam APP, both IOS & Android are applicable
- Equipped with 1800mAh Li-ion battery, can be continuous use for 2-3 hours

331 1 / 45

Contents

	Protective cap
	Hook
	Magnet
	Side mirror
	Charging cable

10-1/2" Internal-External Heavy Duty Circlip Pliers Set

- 1.Internal & External circlip pliers 10-1/2" 267 mmL,
- 2.Internal ring 65~140 mm, External ring 65~120 mm

KT NO.	L inch	L mm	Spread inch	Spread mm	Ø mm	Ø mm	kg	
68GS-11	10-1/2	267	2	50	65~140	3	0.31	25 / 50
68RS-11	10-1/2	267	2	50	65~120	2.75	0.32	25 / 50

68GS-11

68RS-11

10-1/2" Internal-External Heavy Duty Circlip Pliers Set

45115PP

- Internal & External circlip pliers 10-1/2" 265 mmL, maximum spread 45 mm
- Interchangeable tips 0° , 15° , 45° , 90°
- Internal ring 65~140 mm, External ring 65~120 mm
- Interchangeable tips 2.75 mm and 3.00 mm
- Heavy duty pliers with ratcheting locking device large rings are easily controlled

	Contents
68GS-11	1 PC. Internal straight circlip pliers 0° Internal interchangeable
68RS-11	1 PC. External straight circlip pliers 0° External interchangeable
68GR-01	1 Set. 15° Internal interchangeable (Ø3mm, Black)
68GQ-01	1 Set. 45° Internal interchangeable (Ø3mm, Black)
68GB-01	1 Set. 90° Internal interchangeable (Ø3mm, Black)
68RR-01	1 Set. 15° External interchangeable (Ø2.75mm, Silver)
68RQ-01	1 Set. 45° External interchangeable (Ø2.75mm, Silver)
68RB-01	1 Set. 90° External interchangeable (Ø2.75mm, Silver)
68ZZ-01	1 Set - Screws (6 PC. M5x0.8)

External Use



Internal Use



15 PC.

KT NO.	L inch	L mm	Spread inch	Spread mm	Ø mm	Ø mm	kg	
45115PP	10-1/2	267	2	50	-	-	1.30	1 / 10
68GS-11	10-1/2	267	2	50	65~140	3	0.31	25 / 50
68RS-11	10-1/2	267	2	50	65~120	2.75	0.32	25 / 50

16" Internal-External Heavy Duty Circlip Pliers Set

45211PP

- Internal & External circlip pliers 16″ 400 mmL, maximum spread 85 mm
- Interchangeable tips 0° , 45° , 90°
- Internal ring 78-155 mm, External ring 88~165 mm
- Interchangeable tips 3.00 mm
- Heavy duty pliers with ratcheting locking device large rings are easily controlled

11 PC.

	Contents
	68GS-16 1 PC. internal straight circlip pliers **68GZ-02** (0° internal interchangeable)
	68GS-16 1 PC. external straight circlip pliers **68GZ-02** (0° internal interchangeable)
	68GQ-02 2 Set(4 PC.) 45° internal interchangeable
	68GB-02 2 Set(4 PC.) 90° internal interchangeable
	68ZZ-02 1 Set screws (4 pc. m6x1.0)

External Use



Internal Use



KT NO.	L inch	L mm	Spread inch	Spread mm	Ø mm	Ø mm	kg	
45211PP	16	406	3-1/4	85	-	-	3.32	1 / 6
68GS-16	16	406	3-1/4	85	78~155	3	0.93	1 / 25
68RS-16	16	406	3-1/4	85	88~165	3	0.97	1 / 25

Kneeling Mat

9TG11

- Kneeling mat makes working more comfortable during repairing wheels, brakes and exhausts
- Make the chemicals and oil resistant
- Easily clean surface
- Light and small, easy to carry and available to hang it

KT NO.	L mm	A mm	B mm	g	
9TG11	455	214	30	126	1 / 18

LED Folding Mat

9TG21

- Folding mechanics mat for mechanics sit / kneel and lie on it
- 24 SMD LED lights
- Brightness : 600 Lumen(lm)
- 3 x AA batteries not included
- Folds for easy storage
- Make the chemicals and oil resistant

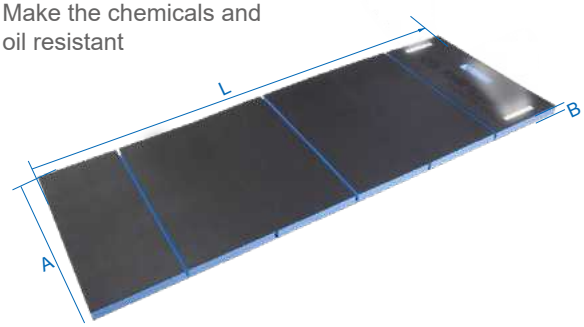

KT NO.	L mm	A mm	B mm	g	
9TG21	1150	420	24	992	1 / 10

LED Kneeling Mat

9TG12

- Kneeling mat with work lights for under car repair or useful as a head protector
- 24 SMD LED lights
- Brightness : 600 Lumen(lm)
- 3 x AA batteries not included
- Make the chemicals and oil resistant

KT NO.	L mm	A mm	B mm	g	
9TG12	460	270	30	320	1 / 25

Plastic Car Creeper

87C23-B

- Designed for 2 side storage trays, for easily picking up for small parts or tools
- Vinyl-covered foam pad brings more comfortable while working
- 280 lb. weight capacity
- 1-1/4" ground clearance

KT NO.	Size mm	g	
87C23-B	1010 x 475 x 130 (40")	5000	1

Steel Creeper

87C25-B

- Designed with comfortable sponge cushion
- 300 lbs capacity
- 6 PC. durable swivel casters
- Long size Vinyl-covered foam pad brings more comfortable while working
- All steel construction frame makes it more strong and durable

87C25-B

KT NO.	Size mm	g	
87C25-B	1020 x 425 x 110 (40")	7400	1

Creeper and Seat

New

87C26-B

- Designed with comfortable sponge cushion
- 6 swivel castors for full mobility
- Long size Vinyl-covered foam pad brings more comfortable while working
- All steel construction frame makes it more strong and durable

KT NO.	Capacity(T) Width x Depth x Height		CUFT
87C26-B	430 x 425 x 410	1 / 1	2.10



- The wheel can rotate 360 degrees, allowing for rotation without any dead angles

- The seat cushion is made of thickened foam, soft and comfortable, preventing fatigue even after long periods of sitting

Wing Protector

9TP11

- Protection from unwanted scratches, dents and dirt
- Magnetic attachment keeps paintwork safe from damage
- Rugged, padded imitation leather and reinforced edges provide a perfect, cushioned working area

KT NO.	Size mm	g	
9TP11	1050 x 650	649	1 / 8

Wing Protector

9TP12

- Protection from unwanted scratches, dents and dirt
- Magnetic attachment keeps paintwork safe from damage
- Rugged, padded imitation leather and reinforced edges provide a perfect, cushioned working area

KT NO.	Size mm	g	
9TP12	1050 x 650	649	1 / 8

9TP22

- Protection from unwanted scratches, dents and dirt
- Magnetic attachment keeps paintwork safe from damage
- Suction cup attachment keeps paintwork safe from damage
- Rugged, padded imitation leather and reinforced edges provide a perfect, cushioned working area
- 3 suction cups attached

- Suction cup can be strongly adsorbed on the aluminum alloy material

KT NO.	Size mm	g	
9TP22	1050 x 650	650	1 / 8

Oil Drain Pan

9TT11-18

- This 18 litre Oil Drain Pan includes easy grip, large carrying handles and integral spout for pouring waste oil or fluids into a recycling container. The anti-splash lip prevents spillage. Ideal for draining antifreeze or oil. (Not suitable for spray gun cleaner)

18L

CONTENTS :

- 18 litre capacity
- Anti-splash lip
- Integral spout
- Ideal for draining antifreeze or oil
- Meets PAHS regulations

KT NO.	L mm	W mm	H mm	g	
9TT11-18	681	570	130	920	15

Wheel Axle Oil Drain

9TT21-03

- When the professional technician reaches for an oil drainer pan it has to be light yet strong, a convenient size for the task in hand and easily cleaned
- The wheel Axle Oil Drain is designed for HGVs, features a 3 litre capacity and is fits snugly into the dish of the wheel to catch the waste oil as it is drained from the axle. It is also stable on the workshop floor and easy to handle

3L

CONTENTS :

- Wheel axle oil drain pan with pouring lip
- Manufactured from PE plastic
- 3 litre capacity

KT NO.	L mm	W mm	H mm	g	
9TT21-03	316	246	156	390	20

Drum Drain Basin

9TT31-20

- Plastic basin installed on drum for receiving waste oil
- Intended to be installed at a standard barrel, the drain lid marries with the barrel inlet allowing simple and efficient draining of waste oil from filters etc
- Features ribbed drainage channels and a filter gate to catch foreign objects

20L

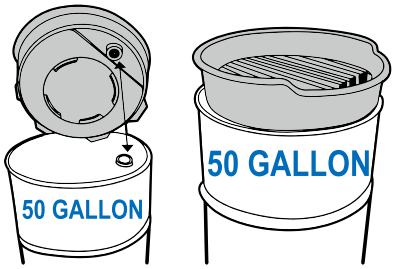

KT NO.	Ø mm	H mm	g	
9TT31-20	600	155	1700	5

10L Pneumatic Oil(ATF) & Liquid Dispenser

9TV13

- Use to extract, transfer and dispense fluid quickly, safety and cleanly
- Non-spark, one man in same step can operate
- Provide with the safety valve, pre-setting 43 PSI (3 Bar), the exceed pressure will be relief automatically
- Provide with the pressure gauge, can be read & control the pressure in the tank more easily
- Provide 2 way control valve for dispensing more safety
- 8 PC. one touch transportation adapter

KT NO.	Max. Capacity	Working pressure (PSI)	Temperature range	Air inlet	g	
9TV13-100	10 L	90	-19°C~140°C	1/4"	4750	1

Manual Fluid Extractor

9TV21-09

- Capacity : 9 litre
- Use for extracting all types of engines oil, transmission fluid and lubricants of cars, marine, stationary, motorbikes engines etc.

- Silicon hose x 1.2 m
- Nylon hose x 1.1 m
- Nylon hose x 1.0 m

KT NO.	Max. Capacity	Temperature range	g	/
9TV21-09	9 L	-19°C~90°C	4750	1 / 2

Pneumatic Grease Pump 20L

9TU11

- The barrel body is made of high-grade steel plate. It can contain 5 gallons(20L) of barrel packed grease from all nations around the world
- Suitable for all sorts of machinery, vehicles, airplanes, ships, etc. The efficient instrument for infusing grease powerfully for lubrication & maintenance purpose
- Pump of separate type: utilize the principle of liquid getting pumped & driven by air compressor to draw in liquid. There are two independent & separate cycle systems of pump out there, which prevents air- compressor-exhaust moisture from getting to the grease inside the barrel and deteriorating its quality

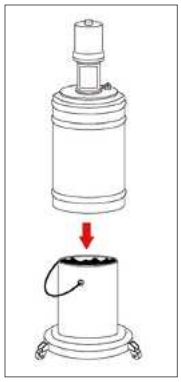

KT NO.	Air Input Pressure (bar)	(PSI)	Pressure Ratio	Grease (bar)	Output Pressure (PSI)	Deliver Rate (cc/sec)	N.W.	G.W.	kg	CUFT
9TU11-20	4-9	60-130	45 :1	180-405	2700-5850	30	17	20.5	21.0	6.4

Hand Grease Pump 20L

9TU21

- 20L tank for 5 gallons grease oil
- Suitable for #00,#0,#1,#2 grease oil
- Included 1.8m length hose & pistol sprayer
- 1/4″ High pressure 10,000 psi W.P oilfield hose
- Portable equipment with single pull handle
- Suitable for all sorts of machineries, vehicles, airplanes, ships, etc.

KT NO.	Transmission rate	Hose Length	N.W.	G.W.	CUFT
9TU21-20	4 cc/stroke	1.8 m	8.2 Kg	9.4 Kg	2.2

Oil Transfer Bucket Pump 20L

9TW21

- Lever pump 20 L tank for oil
- Suitable for diesel fuel, lubricating oils up to SAE 90 and Non-corrosive fluids
- Included 1.8m length hose & sprayer
- Portable equipment with single pull handle

KT NO.	Deliver Rate	Hose Length	Outlet tube	N.W.	G.W.	CUFT
9TW21-20	65 cc/stroke	1.8m	3/8"	7.8 Kg	8.5Kg	2.2

ST
STARTER

Socket Set

ST2346MR 1/4"

- Blow case size (mm) :
- 254 x 147 x 46 (0.16 cuft)

46 PC.



2766DK

Contents		1.06 / 1 / 12
2335M		4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2033		T8, T10, T15, T20, T25, T30, T40
2035		H3, H4, H5, H6, H7, H8
2031		PH1, PH2, PH3
2032		4, 5.5, 7
2038		PZ1, PZ2, PZ3
1115-14		H1.27, H1.5, H2, H2.5
2766-55G	2791	2222-02 2222-04
2571-45H	2312-06	2179DF

Socket Set

ST4028MR

ST4528MR

ST4028SR 1/2"

ST4528SR 1/2"

- Blow case size (mm) :
- 387 x 223 x 58 (0.18 cuft)

24 PC.

ST4028MR/ST4528MR

ST4028SR/ST4528SR



4766DK

KT NO.		Contents		4.10 / 1 / 4
ST4028MR	4330MRC	8, 9, 10, 11, 12, 13, 14, 15, 16 17, 18, 19, 21, 22, 24, 27, 30, 32	463021HC	4766-10G 4251-05RH 4251-10RH 4572-12H 4791RH
ST4028SR	4330SRC	5/16", 3/8", 7/16", 15/32" 1/2",9/16", 19/32", 5/8", 11/16" 3/4", 25/32", 13/16", 7/8" 15/16",1", 1-1/16", 1-3/16", 1-1/4"		
ST4528MR	4335MRC	8, 9, 10, 11, 12, 13, 14, 15, 16 17, 18, 19, 21, 22, 24, 27, 30, 32	463521HC	
ST4528SR	4335SRC	5/16", 3/8", 7/16", 15/32" 1/2",9/16", 19/32", 5/8", 11/16" 3/4", 25/32", 13/16", 7/8" 15/16",1", 1-1/16", 1-3/16", 1-1/4"		

Socket & Wrench Set

SC7083MR

- Blow case size (mm) :
- 422 x 275 x 85 (0.35 cuft)

SC7583MR 1/4"+1/2"

83 PC.

KT NO.	Contents
SC7083MR	2330M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
	4330MRC: 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32
	463016RC
	463021HC
SC7583MR	2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
	4335MRC: 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32
	463516HC
	463521HC

5.65 1 / 4

1060	8, 10, 11, 12, 13, 14, 17, 19
2031	PH1, PH2
2032	4, 5.5, 6.5
2033	T8, T10, T15, T20, T25, T27, T30
2035	H3, H4, H5, H6
2038	PZ1, PZ2
1836P	PH3, PH4
1836S	8 x 1.2, 10 x 1.6, 12 x 2.0
1836T	T40, T45, T50, T55
1836H	H8, H10, H12, H14
1836Z	PZ3, PZ4
2766-55G	
4766-10G	
4251-05RH	
2222-02	
2222-04	
79831	
4222-10	
2312-06	
7702-25	
3824	
2571-45H	
2179DF	
414810S	
2791	
4791RH	

Socket & Wrench Set

SC7396MR 1/4"+1/2"

- Metal case size (mm) :
- 422 x 275 x 85 (0.35cuft)

Contents

5.5 1 / 4

2335M	4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2235M	6, 8, 10, 12, 13, 14
4335MRC	10, 12, 13, 14, 15, 16, 17, 18, 19, 22, 23, 27, 32
4535M	15, 16, 17, 19, 24
1060	8, 10, 12, 13, 14, 15, 16, 17, 18, 19
1836H	H8, H10, H12, H14
1836T	T50, T55, T60
1025S	3.0, 4.0, 5.0, 6.0
1025P	PH1, PH2 x 2, PH3
1025Z	PZ1, PZ2 x 2, PZ3
1025T	T10, T15, T20, T25, T27, T30, T40
1025H	H3, H4, H5, H6
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1025R	RB2
753-63	
7702-25	
2766-55G	4766-10G
2571-45H	2179DF
4222-10	2222-02 2141
2791	4791RH 3824 414810S

96 PC.

Socket & Wrench Set

SC7096MR

- Blow case size (mm) :
- 422 x 275 x 85 (0.35 cuft)

SC7596MR 1/4"+1/2"

96 PC.

KT NO.	Contents			
SC7096MR	2330M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 2230M: 6, 7, 8, 9, 10, 11, 12, 13 4230MC: 14, 15, 17, 19, 22 4330MRC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 463016RC 463021HC	2031: PH1, PH2 2032: 4, 5.5, 6.5 2033: T8, T10, T15, T20, T25, T27, T30 2035: H3, H4, H5, H6 2038: PZ1, PZ2 1836P: PH3, PH4 1836S: 8x1.2, 10x1.6, 12x2.0 1836T: T40, T45, T50, T55 1836H: H7, H8, H10, H12, H14 1836Z: PZ3, PZ4 1115-03: 1.5, 2, 2.5	2766-55G 4766-10G 2179DF 4222-10 2222-02 2222-04 4251-05RH 2571-45H 2791 4791RH 414810S 3824 7702-25 2745	Kg 6.22 / 1 / 4
SC7596MR	2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 2235M: 6, 7, 8, 9, 10, 11, 12, 13 4235MC: 14, 15, 17, 19, 22 4335MRC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 463516HC 463521HC			

Socket & Wrench Set

SC7010MR

- Blow case size (mm) :
- 422 x 275 x 85 (0.35 cuft)

SC7510MR 1/4"+1/2"

110 PC.

SC7510MR

SC7010MR

KT NO. | Contents | 6.9 | 1 / 4

SC7010MR

- 2330M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2230M — 6, 7, 8, 9, 10, 11, 12, 13
- 4230MC — 14, 15, 17, 19, 22
- 4330MRC — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463016RC
- 463021HC

SC7510MR

- 2335M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2235M — 6, 7, 8, 9, 10, 11, 12, 13
- 4235MC — 14, 15, 17, 19, 22
- 4335MRC — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463516HC
- 463521HC

Common

- 2375M — E4, E5, E6, E7, E8
- 4375M — E10, E11, E12, E14, E16, E18, E20, E24
- 2031 — PH1, PH2
- 2032 — 4, 5.5, 6.5
- 2033 — T8, T10, T15, T20, T25, T27, T30
- 2035 — H3, H4, H5, H6
- 2038 — PZ1, PZ2
- 1836P — PH3, PH4
- 1836S — 8x1.2, 10x1.6, 12x2.0
- 1836T — T40, T45, T50, T55, T60
- 1836H — H7, H8, H10, H12, H14
- 1836Z — PZ3, PZ4
- 1115-03 — 1.5, 2, 2.5
- 2766-55G
- 4766-10G
- 2179DF
- 4222-10
- 2571-45H
- 2222-02, 2222-04
- 4251-05RH
- 2791, 4791RH
- 3824
- 414810S
- 7702-25
- 2745

Socket & Wrench Set

SC9043MR

- Blow case size (mm) :
- 560 x 400 x 110 (0.87 cuft)

SC9543MR 1/4"+3/8"+1/2"

143 PC.

KT NO. | Contents | 13.7 | 1 / 2

KT NO.		Contents	
SC9043MR	2330M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10 4330MRC: 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32 463016RC, 463021HC	2375M: E4, E5, E6, E7, E8 3330M: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22 4375MC: E10, E12, E14, E16, E20 1025P: PH0, PH1, PH2, PH3 1025S: 4, 5.5, 7 1025U: T10H, T15H, T20H, T25H, T27H, T30H, T40H 1025H: H2, H3, H4, H5, H6, H7, H8, H10 1025Z: PZ0, PZ1, PZ2, PZ3 1421: PH2 x 38, PH1 x 80 1461: PH2 x 100 1422: 6.5 x 38, 5.5 x 75 1462: 6.5 x 150	1060: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 1930: 8 x 10, 10 x 12, 11 x 13, 12 x 14, 17 x 19 1145MR: H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10 2222-02, 2222-04, 2222-06 3221-03, 3221-06 4251-03R 4222-10 2312-06 2179DF 3781-11F 4452-18FR 2141 4581-10 79831 6111-07 2766-55G 4766-10G 6011-10R 79093-03M 3824 3812 2791, 3792, 4791RH 7821-30
SC9543MR	2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10 4335MRC: 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32 463516HC, 463521HC		

Ball Hex Key

ST1120MR

- Extra long arm with ball point type
- DIN ISO 2936

KT NO.	mm	mm	mm	g	
ST112012MR	H12	57	262	283	8 / 48
ST112014MR	H14	70	294	441	8 / 48
ST112017MR	H17	80	337	740	4 / 32
ST112019MR	H19	89	379	1044	4 / 16

ST1145MR

- Standard arm type
- Hex head
- DIN ISO 2936

KT NO.	mm	mm	mm	g	
ST114512MR	H12	57	137	166	10 / 120
ST114514MR	H14	70	154	261	6 / 72
ST114517MR	H17	80	177	439	4 / 48
ST114519MR	H19	89	199	619	4 / 32

Hex Key Set

ST20219MR

9 PC.

Spec.	Contents	g	
		300	6 / 48
Standard arm	ST1145MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	

ST20209MR

9 PC.

Spec.	Contents	g	
		480	8 / 48
Extra long arm	ST1125MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	

ST20213MR

13 PC.

Spec.	Contents	g	
		1880	2 / 8
Standard arm hex-head key	ST1145MR	H2, H2.5, H3, H4, H5, H6, H7, H8, H10, H12, H14, H17, H19	

ST20208MY

8 PC.

Spec.	Contents	g	
		480	8 / 48
Extra long arm	ST1125MY	H2, H2.5, H3, H4, H5, H6, H8, H10	

ST20109MR

9 PC.

Spec.	Contents	g	
		480	8 / 48
Extra long arm / ball	ST1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	

ST20419PR

9 PC.

Spec.	Contents	g	
		480	8 / 48
Extra long arm / Tamper resistant	ST1127R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H	

ST20203MR

13 PC.

Spec.	Contents	g	
		330	1 / 4
Extra long arm / ball	ST1120MR	H2, H2.5, H3, H4, H5, H6, H7, H8, H10, H12, H14, H17, H19	

ST20203SR

13 PC.

Spec.	Contents	g	
		330	1 / 4
Extra long arm / ball	ST1120SR	5/64, 3/32, 1/8, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8, 1/2, 9/16, 5/8, 3/4	

KING TONY
KING TONY
KING TONY
KING TONY
KING TONY
KING TONY
KING TONY

Tool Diamond Blocks

TS00108 SET A

01 Hand Socket

02 Ratchet

03 Combination Wrench

04 Phillips Screwdriver

05 Portable Tool Box

06 Shelf Trolley

07 Workbench

08 Measuring Tape

TS00208 SET B

01 Impact Socket

02 Impact Wrench

03 Combination Pliers

04 Slotted Screwdriver

05 Ratchet Tubing Cutter

06 Tool Trolley

07 LED Lamp

08 LED Box

Business & Office

Leather Male Wallet

ZS104

Size : 115 x 90 mm

Leather Belt (Male)

ZS108

Mat

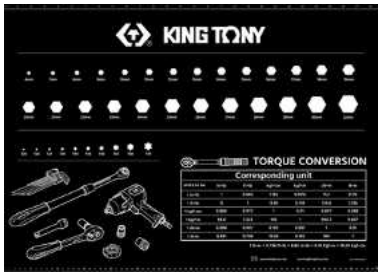

ZS418K

Size : 700 x 500 x 2 mm

Ball-Bearing Pen

ZS402

Ruler 30cm

ZS408

Notepaper

ZS517

Size : 75 x 75 mm

Mouse Pad

ZS306

Size : 180 x 180 x 3 mm

A4 Shape Clear File

ZS409

Size : 310 x 220 mm

Clothes

Work Clothing

ZS109

Overall	Waist.(inch)	Hip(inch)
ZS109 - L	34"	48"
ZS109 - XL	36"	50"
ZS109 - 2L	38"	52"
ZS109 - 3L	41"	54"

Work Clothing

ZS112

Overall	Waist.(inch)	Hip(inch)
ZS112 - L	36"	44"
ZS112 - XL	40"	48"
ZS112 - 2L	44"	52"
ZS112 - 3L	48"	56"

Windbreaker Jacket

ZS141

Overall	Chest girth(inch)
ZS141 - S	44"
ZS141 - M	46"
ZS141 - L	48"
ZS141 - XL	50"
ZS141 - 2L	52"
ZS141 - 3L	54"

Work Hat

ZS110

T-shirt

ZS142W

ZS142B

Overall	Shoulder width (inch)	Chest girth (inch)
S	16"	38"
M	17"	40"
L	18"	42"
XL	18-1/2"	44"
2L	19"	46"
3L	19.5"	48"

Leisure Products

Golf Umbrella

ZS116
Size : 68 x 8K

Personal Cooler Bag

ZS120-S
Size : 290 x 150 x 210 mm
Weight : 352g

Handbag

ZS119
Size : 360 x 380 x 100 mm

Paper Cup

ZS511

Coaster



ZS514
Size : 99 x 99 mm

Mug

ZS606
Size : 900 x 240 mm
Capacity : 550ml

Door mat

ZS417
Size :
600 x 900 x 08mm
PVC

Beach Towel

ZS155

ZS155A
Size : 740 x 1400mm
80% Polyester
20% Nylon

ZS156
Car Window Sun Shade
Size: 1500 x 700mm

Merchandise

Mini Pocket Tools

ZS522

Mini Pocket Tools

ZS524

Key Ring

ZS533

Mini Pocket Tools

ZS540

Sales Support

Small Flag

ADFLAG

Size : 254 x 160 mm

Big Flag

ADFLAG1

Size : 930 x 1430 mm

Outdoor Flag

ADFLAG2

Size : 2100 x 600 mm

Canvas Strip

ADCV-01

ADCV-02

Size : 3000 x 800 mm

Stickers

ADSTK21KT	909 x 450 mm
ADSTK22KT	506 x 226 mm
ADSTK23KT	264 x 42 mm

Stickers

ADSTK31KT

Size : 660 x 160 mm

Stickers

ADSTK-C1

Size : ø - 250 mm

ADSTK-H2

Size : ø - 250 mm

Folding Tent



- Quick and easy to set up
- Tent roof made of high quality 600D fabric
- Waterproof and UV resistant
- Full structure made of robust steel
- Adjustable height, max to 3400 mm
- Includes practical carrier bag

KT NO.	Spec.	Height (mm)	kg	
ZS115	3000 x 3000 mm (not included ZS115-1)	3400	22	1 / 1
ZS115-1	2100 x 3000 mm Side curtain	-	0.9	1 / 15

ZS115-1 x 3

Full truss structure

Hanging capacity up to 70 kgs

Foot pad comes with stake hole



3 section of height adjustment

Display Stand Series

Display Stand

New

87306A

Overall Size -
W 1000 x D 500 x H 2200 mm
Attachment-
1 PC. lamp case
2 PC. shelve
7 PC. steel plate with hole
40 PC. Black hooks
Weight - 52 Kg
Lightbox height adjustment range: 2200-2500mm

Corner Display Stand

New

87306CA

Overall Size -
W 965 x D 304 x H 2200 mm
Attachment-
1 PC. lamp case
2 PC. shelve
7 PC. steel plate with hole
Weight - 31 Kg
Requires pairing with 87306 for extended use
Lightbox height adjustment range: 2200-2500mm

Display Stand Cabinet

New

87306-04

Overall Size -
W 400 x D 400 x H 1000 mm
Weight - 12 Kg
Can be used in 87306/87307 series

Double-sided Display Stand

New

87307A

Overall Size -
W 1000 x D 960 x 2200 mm
Attachment-
2 PC. Lamp case
4 PC. Shelve
14 PC. Steel plate with hole
40 PC. Hooks
Weight - 75 Kg
Lightbox height adjustment range: 2200-2500mm

Main Double-sided Island Display Stand

New

87308A

Overall Size -
W 1000 x D 840 x H 1300 mm
Weight - 37 Kg

Sub Double-sided Island Display Stand

New

87308B

Overall Size -
W 980 x D 840 x H 1300 mm
Weight - 33 Kg
Sub island display stand must be attached with main island display stand, it can't be used individually

Side Display Stand

New

87308C

Overall Size -
W 840 x D 450 x H 1300 mm
Weight - 19 Kg

Mesh Display Panel

New

87308-7

Overall Size -
W 840 x D 300 x H 1280 mm
Weight - 10 Kg

Movable Display Stand

New

87309W

Overall Size -
W 500 x D 450 x H 1732 mm
Weight - 21 Kg

Display Stand Series

Display Board

87203

Wall hanging type 30 PC. hook included
Overall Size -
W 725 x D 14 x H 900 mm
Weight - 11.50 Kg / Cuft - 0.328

Display Hook

87301-49

87301- 494A	4" x Ø 4 mm
87301- 496A	6" x Ø 5.2 mm
87301- 498A	8" x Ø 5.2 mm
87301- 499A	9" x Ø 8 mm

Display Stand

87301-36(White)

Overall Size -
W 902 x D 268 x H 143 mm
Weight - 6.5 Kg / Cuft - 0.62

Hammer Hook

91431

Overall Size -
W 40 x D 210 x H 240 mm
Weight - 411.6 g / Cuft - 0.072

Steel Rack Hook

91432

Idea for hanging display & presenting tool set
230mm maximum depth
5kg maximum tool weight (heavier & longer items, you can put 2 PC. to hold)

Wrench Display

87157-06



Capacity : 6 PC.
For all measuring tape
(1900 27x30~41x46 Series)
Size:100x100x46mm
Weight - 0.22 Kg
Cuft - 0.72

Wrench Display

87157-09



Capacity : 9 PC.
For all measuring tape
(1900 5.5x7~27x29 Series)
Size : 100 x 100 x 46 mm
Weight - 0.22 Kg
Cuft - 0.72

Display Shelf Magnets

ADVT-03X

Size : 960 x 55 mm
Magent

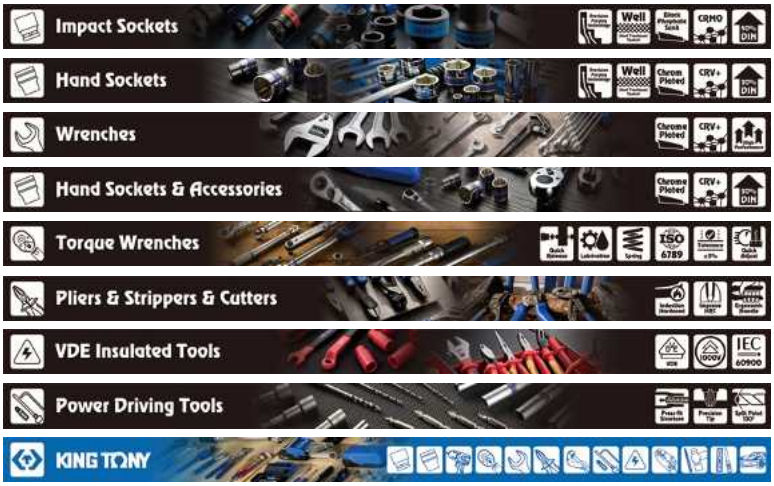

Impact Sockets	ADVT-031
Hand Sockets	ADVT-032
Wrenches	ADVT-033
Hand Sockets & Accessories	ADVT-034
Torque Wrenches	ADVT-035
Pliers & Strippers & Cutters	ADVT-036
VDE Insulated Tools	ADVT-037
Power Driving Tools	ADVT-038
KING TONY	ADVT-039

Display Stand Series

Side Panel for Display Stand

ADVT-04

Size : 240 x 900 mm

Side Panel for Display Stand

ADVT-05

Size : 240 x 900 mm

Magnetic Base

91422

Tool Display

Display Shelf for L-wrench

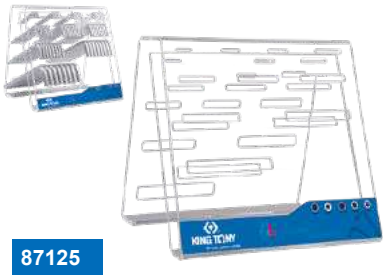

87125

Overall Size - W 220 x D 260 x H 5 mm
Weight 135g / Cuft 1.10
Reference : 2020H0MR

Display Stand

87152

Overall Size -W400 x D230 x H470 mm
Weight - 1.20 Kg / Cuft - 1.53

Display Rack for Torque Wrench



87153

Overall Size -W 330 x D 255 x H 475 mm
Weight - 1.23 Kg / Cuft - 1.41

Tools Display Stand

A4 size paper :
297 x 210mm

87154-01

6 kgs max. loading capacity

87154

Overall Size -
W 280 x D 170 x H 45 mm
Weight - 1.2 Kg / Cuft 1.35

Impact Wrench Display Stand

A4 size paper :
297 x 210mm

87154-01

87156

87156A

Overall Size -
W 280 x D 170 x H 45 mm
Weight - 1.9Kg / Cuft 0.31

Contents

	87156
	87154-01
	SY-210M x3
	SY-20A x6
	SY-10A x3

Socket Shelf

87102

87103

Width can be adjustable to display multiple socket series
Single serial socket size tab attached

Overall Size -
W 415 x D 336 x H 320 mm
Weight - 6.85 Kg(87102)
6.37 kg(87103)
Cuft - 0.67

Reference:
3568MR
4072MR / 4572MR
4072SR / 4572SR
4066MR / 4566MR
4066SR
4472MP/4472SP
4466MP/4466SP

Screwdriver Shelf

87105 **87107** **87111**

87105-W 595 x D 240 x H 210 mm
Weight - 3.40 Kg Cuft - 1.97
87107-W 383 x D 136 x H 130 mm
Weight - 0.86 Kg

Reference:
87105 (31416MR)
(31516MR)

Tool Display

Impact Wrench Display Stand

871061A(1/4″ -19 BSPT)
871061B(1/4″ -18 NPT)
871061F(1/4″ -19 BSPT)
Reference :
Applied for 3/8″ & 1/2″ DR. air tools

Screwdriver Shelf

87104

Overall Size -
W 325 x D 205 x H 270 mm
Weight - 1.20 Kg Cuft - 0.3

Metal Holder for Flat Chisel

87108

Metal Holder

8711B

Overall Size -
W 600 x D 240 x H 60 mm
Weight - 6.20 Kg
Cuft - 0.9
Reference :
1090PR1

Display Stand for Combination Wrenches

87124

New

Applicable to 1060/1062 series combination wrenches
Wrench Size from 8mm ~ 24mm
Overall Size- W 900 x D 350 x H430 mm
Weight - 5.4kg / Cuft 4.8

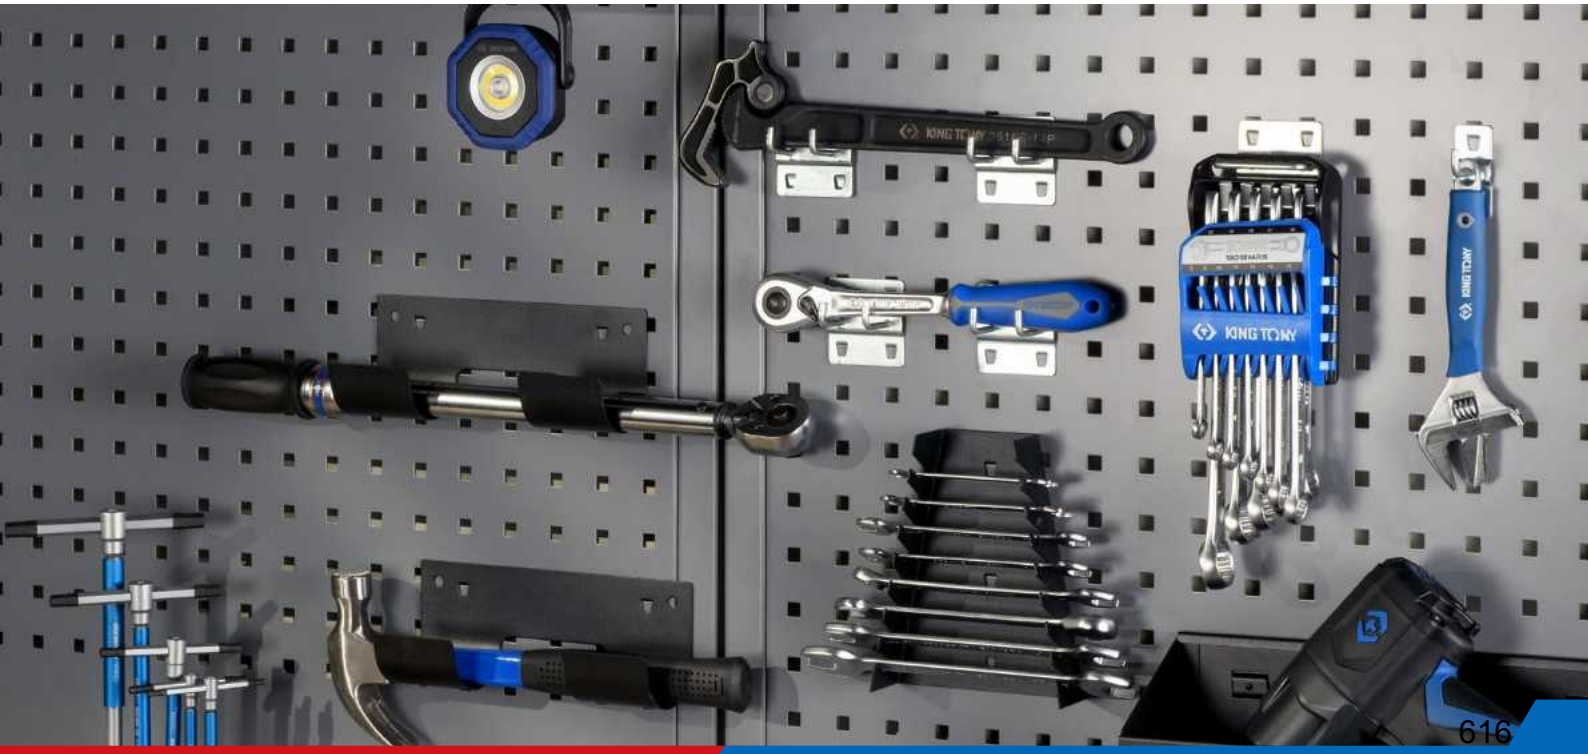

Sign List

Internal hexagon	External hexagon	Bi - hexagon	Spline head	Spline head - tamper resistant	Internal torx	External torx	External torx - tamper resistant	Double square
torx plus-tamper resistant	torx plus	Ribe bit socket	Phillips head	Slotted head	Pozidriv	PlusMinus	Internal square	External square
External square	Ribe socket 12 mm	Ribe socket 10 mm	Axial lock nut	Square	Crowfoot	Hook wrench	External KM locknut	Internal KM locknut
Speical profile for wheel nut	Claw Pickup	Internal square	Hexagon	Pentagon	Ball hex	Flat face - roung	Flat face - square	Milled square face
Internal circlip	External circlip	Thin serrated	Coarse serrated	Smooth	With opening spring	Round jaws	Half-round jaws	Flat & point jaws
Soft wire	Medium hard wire	Hard wire	Piano wire	Europe	America & Asia	Australia & New Zealand	English	Australia
Changeable blade	Guide rollers	Cutter wheel	Outside diameter (O.D.)	Wall thickness	Inside diameter (I.D.)	(mm) Capacity of open jaw	Diameter	
Center cut	With bevel	With small bevel	With very small bevel	Without bevel	Diesel engine	Petrol engine	Timing belt	Timing chain
Max. torque	Air inlet	Free speed	Air pressure	Std. bolt size	Air hose	Anvil type	Avg. air consumption	Sound
Vibration level	Litre capacity	Q'ty / Carton	Q'ty / Box	Q'ty / Bag	Q'ty / Blister card	(g)(kg) Weight		
Light weight		ESD	ISO	CE certificate	VDE certificate	G.S. approval	TUV certificate	
HGV	Commercial Vehicles	Small commercial vehicles	Passenger cars	Buses	Construction vehicles	Agricultural machinery	Motorcycles	Engine series
Agricultural machinery-tiller	Chassis	Steel construction	Assembly line	Factory	Strobe	IP Protection	Adjustable lighting	Lumen
Lighting for hours	Watt	Adjustment button	Thickness	Magnetic	USB cable	USB charger	Cable length	Charging time
DC charger	AC charger	Li-ion battery	Battery	IK07/ IP20	10 cm range			

Information-General Safety Recommendations

It all fits together



■ DIN screwdrivers

Slotted screws											
Size			2x0.4	2.5x0.4	3x0.5	3.5x0.6	4x0.8	5.5x1	6.5x1.2	8x1.2	10x1.6
Metric screws											
Flat head M	ISO 2009			1.6	2	2.5	3	3.5	4 5		
M		DIN 963		1.6	2	2.5	3 3.5	4	5		
Oval head M	ISO 2010			1.6	2	2.5	3	3.5	4 5		
M		DIN 964		1.6	2	2.5	3 3.5	4	5		
Cheese head M	ISO 1207							3.5	4	5	6
M		DIN 84		1.6 1.8	2	2.5		4	4	5	6
Pan head M	ISO 1580			1.6	2	2.5	3	3.5	4	5	6
M		DIN 85					3	3.5	4 5		6
M		DIN 920		2.5	3/3.5	4	5	6	8		10
M		DIN 921		1.6	2	2.5	3 3.5	4		5	6
Set M	ISO 4766 7435	DIN 551 417	2.5 3	3.5	4		5 6		8		
M	ISO 4735	DIN 427	2.5 3	3.5	4		5 6		8		14
Self tapping screws											
Flat head B	ISO 1482				2.2		2.9	3.5	4.2 4.8		
B		DIN 7972			2.2		2.9	3.5 3.9	4.2 4.8		
Oval head B	ISO 1483				2.2		2.9	3.5	4.2 4.8		
B		DIN 7973			2.2		2.9	3.5 3.9	4.2	4.8	6.3
Pan head B	ISO 1481				2.2		2.9	3.5		4.2 4.8	5.5 6.3
B		DIN 7971				2.9	2.9	3.5		4.2 4.8	5.5 6.3

Phillips + Pozidriv								
Size			00	0	1	2	3	4
Metric screws								
Flat head M	ISO 7046	DIN 965		1.6 2	2.5 3	3.5 5	6	8 10
Oval head M	ISO 7047	DIN 966		1.6 2	2.5 3	3.5 5	6	8 10
Pan head M	ISO 7045	DIN 7985		1.6 1.8	2.5 3	3.5 5	6	8 10
Self tapping screws								
Flat head B	ISO 7049	DIN 7981			2.2 2.9	3.5 4.8	5.5 6.3	
Oval head B	ISO 7050	DIN 7982			2.2 2.9	3.5 4.8	5.5 6.3	
Pan head B	ISO 7051	DIN 7983			2.2 2.9	3.5 4.8	5.5 6.3	
ANSI screws				0-1	2-4	5-10	12-16	18-...

■ How to find the correct screwdriver

	Slotted	Phillips	Pozidriv	Torx	Torx	Square	Hex	Nut
Classic Screwdriver	1412	1411						
SoftFinish Screwdriver	1422	1421	1428	1423	1427	1424		
Classic Screwdriver (Heavy Duty)	1482	1481						
SoftFinish Screwdriver (heavy Duty)	1462	1461						
Nutspinner								1450 5450 1453
SoftFinish Electric	1472	1471	1478					
Precision Screwdriver	1432	1431		1433				
Exchangeable ratchet Screwdriver	32809	32809		32809				
Two-way screwdriver	2411 1317 2431	2411 1317 2431	1317	1317 2433			1317	32810
Torque Screwdriver							3411	

Internal Torx														
			For torx head screw											
			T5	T6	T7	T8	T9	T10	T15	T20	T25	T27	T30	T40
		mm	1.42	1.70	1.99	2.31	2.50	2.74	3.27	3.86	4.43	4.99	5.52	6.65
Metric screws														
Cheese head M	ISO 4762	DIN 912	*	2	*	2.5		3		4	5	**	6	
Flat head M	ISO 4760	DIN 963 965	*	*	*	2.5		3	3.5	4	5	**	6	8
Oval head M	ISO 7047 2010	DIN 964 966	*	2	*	2.5		3	3.5	4	5	**	6	
Cheese head M		DIN 7984 6912	*	*	*	2.5		3		4	5	**	6	
Oval head M	ISO 7045	DIN 7985	*	2	*	2.5		3	3.5	4	5	**	6	
Flat head M	ISO 10642	DIN 7991	*	*	*	2.5		3		4	5	6	**	8
Self tapping screws														
Pan head B	ISO 7049	DIN 7981 7982	*	2.2	*	2.9		3.5	3.9	4.2 5.5	4.8	**	6.3	
Flat head B	ISO 7050	DIN 7972 7983	*	2.2	*	2.9		3.5	3.9	4.2	4.8 5.5	**	6.3	
Oval head B	ISO 7051	DIN 7973	*	2.2	*			3.5	3.9	4.2	4.8 5.5	**	6.3	8

* Screws for tungsten carbide inserts ** Special screws

Index	
ISO International standard	
DIN German standard	
M Metric screws	Thread diameter
M Set screw metric	Thread diameter
M Metric nut	Thread diameter
B Self tapping screw	Thread diameter
	Symbols
Tool drive = screwdriver socket	
for screws with internal drive	
Took drive = Nutdriver socket	
for screws with head drive	

Bits / Sockets for S size

TORX internal screw											
		T5	T6	T7	T8	T9	T10	T15	T20	T25	T27
	S(ref.mm)	1.42	1.7	2	2.32	2.5	2.74	3.28	3.86	4.43	4.99
	Screws(ref)	M1.5	M2	M2.5	M2.5	M3	M3/M3.5	M3.5/M4	M4/M5	M4.5/M5	M4.5/M5/M6
		T30	T40	T45	T50	T55	T60	T70	T80	T90	T100
	S(ref.mm)	5.52	6.65	7.82	8.84	11.23	13.26	15.54	17.58	19.95	22.16
	Screws(ref)	M6/M7	M7/M8	M8/M10	M10	M12	M14	M16	M18	M20	M22

SPLINE											
		M4	M5	M6	M8	M10	M12	M14	M16	M18	M20
	S(ref.mm)	3.6	4.8	6	7.2	9.6	11.41	13.22	15.63	16.85	19.25
	Screws(ref)	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20

RIBLE											
		M5	M6	M7	M8	M9	M10	M12	M13	M14	M16
	S(ref.mm)	5	6	7	8	9	10	12	13	14	16
	W(ref.mm)	1.1	1.3	1.4	1.7	1.9	2.2	2.6	3	3.1	3.5
	Screws(ref)	M6	M8		M10	M10	M12				

IPR														
		IPR8	IPR9	IPR10	IPR15	IPR20	IPR25	IPR27	IPR30	IPR40	IPR45	IPR50	IPR55	IPR60
	S(ref.mm)	2.14	2.33	2.58	3.07	3.63	4.16	4.70	5.22	6.27	7.32	8.32	10.54	12.45

TORXplus (EP/EPL)														
	EP/EPL	8EP	10EP	12EP	14EP	16EP	18EP	20EP	22EP	24EP	26EP	28EP	30EP	32EP
	S_1 (ref.mm)	7.4	9.3	11.0	12.8	14.6	16.5	18.3	20.1	22.0	23.7	25.5	27.3	29.0
	S_2 (ref.mm)	5.3	6.8	7.9	9.2	10.5	11.9	13.2	14.8	15.7	17.5	18.3	20.0	21.3

TORX external screw													
		E4	E5	E6	E7	E8	E10	E11	E12	E14	E16	E18	E20
	S(ref.mm)	3.83	4.72	5.69	6.17	7.47	9.37	10.03	11.12	12.85	14.71	16.64	18.41
	Screws(ref)	M3	M4	M5	M6	M6/M7	M8	M8/M10	M10	M12	M12	M14	M16
		E22	E24	E26	E28	E30	E32	E34	E36	E38	E40	E42	E44
	S(ref.mm)	20.24	22.1	23.85	25.65	27.38	29.16	30.96	32.82	34.67	36.37	38.2	39.98
	Screws(ref)	M18	M18/M20										

SQUARE							
		RB00	RB0	RB1	RB2	RB3	RB4
	S(ref.mm)	1.30	1.80	2.30	2.86	3.38	4.85

Torque Data

mm	mm	mm	Bolts and nuts classes (SAE threads, triangular shape, high pitch 0.15 coefficient)					
			4.8 Torque N・m	5.8 Torque N・m	6.8 Torque N・m	8.8 Torque N・m	10.9 Torque N・m	12.9 Torque N・m
M3	5.5	2.5	0.64	0.8	0.91	1.21	1.79	2.09
M4	7	3	1.48	1.83	2.09	2.78	4.09	4.79
M5	8	4	2.93	3.62	4.14	5.5	8.1	9.5
M6	10	5	5	6.2	7.1	9.5	14	16.4
M8	13	6	12.3	15.2	17.4	23	34	40
M10	16	8	24	30	34	46	67	79
M12	18	10	42	52	59	79	116	136
M14	21	12	67	83	94	127	187	219
M16	24	14	105	130	148	198	291	341
M18	27	14	145	179	205	283	402	471
M20	30	17	206	254	291	402	570	667
M22	34	17	283	350	400	552	783	917
M24	36	19	354	438	500	691	981	1148
M27	41	19	525	649	741	1022	1452	1700
M30	46	22	712	880	1005	1387	1969	2305
M33	50	24	968	1195	1366	1884	2676	3132
M36	55	27	1242	1534	1754	2418	3435	4020
M39	60		1614	1994	2279	3139	4463	5223
M42	65	32	1995	2464	2816	3872	5515	6453
M45	70		2497	3085	3525	4847	6903	8079
M48	75	36	3013	3722	4254	5849	8330	9748
M52	80		3882	4795	5480	7535	10731	12558
M56	85	41	4839	5978	6832	9394	13379	15656
M60	90		6013	7428	8490	11673	16625	19455
M64	95	46	7233	8935	10212	14041	19998	23402

* In order not over-tighten the fastener, please refer manufacturer's service manual, or TORQUE DATA for tightening torque information
* Torque tightening is refer to "thread dimension" of screw, which is M3~M64 size mention above table

Torque Conversion

Units to be	Corresponding unit					
	in・lb	ft・lb	kgf・cm	kgf・m	cN・m	N・m
1 in・lb	1	0.083	1.152	0.0115	11.3	0.113
1 ft・lb	12	1	13.83	0.138	135.6	1.356
1 kgf・cm	0.868	0.072	1	0.01	9.807	0.098
1 kgf・m	86.8	7.233	100	1	980.7	9.807
1 cN・m	0.088	0.007	0.102	0.001	1	0.01
1 N・m	8.851	0.738	10.20	0.102	100	1

1 N·m = 0.738 ft·lb = 8.85 in·lb = 0.10 Kgf·m = 10.20 Kgf·cm

Torque Data

IMPERIAL

inch	threads per inch	Bolts and nuts classes (SAE threads, triangular shape, high pitch 0.15 coefficient)			
		A Torque ft · lb	5 Torque ft · lb	8 Torque ft · lb	9 Torque ft · lb
Coarse Thread Series					
1/4	20	32 in · lb	76 in · lb	107 in · lb	126 in · lb
5/16	18	66 in · lb	157 in · lb	221 in · lb	259 in · lb
3/8	16	10	23	33	38
7/16	14	16	37	52	61
1/2	13	24	57	80	94
9/16	12	35	82	115	135
5/8	11	48	113	159	186
3/4	10	85	200	282	331
7/8	9	136	322	455	533
1	8	204	483	681	799
1-1/4	7	409	840	1363	1597
1-1/2	6	711	1462	2371	2779
Fine Thread Series					
1/4	28	37 in · lb	87 in · lb	123 in · lb	144 in · lb
5/16	24	73 in · lb	174 in · lb	245 in · lb	287 in · lb
3/8	24	11	26	37	43
7/16	20	18	41	58	68
1/2	20	27	64	90	105
9/16	18	39	91	128	151
5/8	18	54	127	180	211
3/4	16	94	223	315	369
7/8	14	150	355	502	588
1	14	229	542	765	896
1-1/4	12	453	930	1509	1768
1-1/2	12	800	1645	2668	3127

*** note : Torque-Tension relationship for ASTM A307 Grade A(SAE J2), SAE J429 Grade 5, SAE J429 Grade 8 & FNL Grade 9 Bolts**

*** note : Torque values for 1/4" and 5/16" are in in·lb. All other torque values are in ft·lb**

Hanger No. List

	Hanger No.	Suitable Size	Hanger No. (with product)
Socket Hanger for 1/4" DR. Socket	08782100	1/4"DR. Socket	KT No. & D1
Socket Hanger for 3/8" DR. Socket	08783100	3/8"DR. Socket	KT No. & D1
Socket Hanger for 1/2" DR. Socket	08784100	1/2"DR. Socket	KT No. & D1
Socket Hanger for 3/4" DR. Socket	08786100	3/4"DR. Socket	KT No. & D1
Hanger for 1/4" DR. Accessories	08782102	1/4"DR. Ratchet, sliding T-handle, flexible handle	KT No. & D1
Hanger for 3/8" DR. Accessories	08783102	3/8"DR. Ratchet, sliding T-handle, flexible handle	KT No. & D1
Hanger for 1/2" DR. Accessories	08784102	1/2"DR. Ratchet, sliding T-handle, flexible handle	KT No. & D1
Hanger for Wrench	8781103 choose suitable hangers according to different sizes	For example,1060 6~9mm	KT No. & D1
Hanger for Wrench & Nut Spinner	8781100 choose suitable hangers according to different sizes	For example,1060 10~19mm & nut spinner	KT No. & D1
Hanger for Wrench	8781101 choose suitable hangers according to different sizes	For example,1060 20~23mm	KT No. & D1
Hanger for Wrench	8781102 choose suitable hangers according to different sizes	For example,1060 24~32mm	KT No. & D1
Hanger for Speed Wrench	087837(size)KT	Speed wrench, open-side speed wrench size, 8~24mm	KT No. & D1
Hanger for Screwdriver	8785100 choose suitable rubber rings according to different sizes	Screwdriver, hex key, spline L-wrench, star L-wrench, L-type wrench, T-type wrench	KT No. & D1
Hanger for Power Driving	8785001	Power driving 9.5mm groove	KT No. & D1

10 XXXX

1004A6HQ N26
1004A6TQ N26
1004A6UQ N26
1004B6HQ N26
1004B6TQ N26
1004B6UQ N26
1004C6HQ N26
1004C6TQ N26
1004C6UQ N26
1004D6HQ N26
1004D6TQ N26
1004D6TQ N26
1005APR 465
1005GQ 490
1006APR 465
1006GPN 467
1006PR 466
1006PRN 466
1009GPN 467
1009PR 466
1009PRN 466
1010CMR 396
1010PR 466
1011MQ 381
1014GPN 467
1015GQ 490
1015MQ 381
1015PQ 381
1016PR 466
1020-08 323
1020-09 323
1020-10 323
1020-11 323
1020-12 323
1020-13 323
1020-14 323
1020-15 323
1020-16 323
1020-17 323
1020-18 323
1020-19 323
1023EQ 381
102500P 377
102500R 378
102501P 377
102501R 378
102501Z 378
102502H 377
102502P 377
102502P-S1 387
102502R 378
102502Z 378
102502Z-S1 387
102503H 377
102503P 377
102503R 378
102503S1 377
102503Z 378
102504H 377
102504M 377
102504P 377
102504S1 377
102504S2 377
102505H 377
102505M 377
102505S1 377
102506H 377
102506M 377
102506S1 377
102506T 377
102507H 377
102507S1 377
102507T 377
102507U 377
102508H 377
102508M 377
102508S1 377
102508S2 377
102508T 377
102508U 377
102508V 377
102509T 377
102509U 377
102509V 377
102510H 377
102510M 377
102510T 377
102510T-S1 387
102510U 377
102510V 377
102512P 377
102515H 377
102515T 377
102515T-S1 387
102515U 377
102515V 377
102520T 377
102520T-S1 387
102520U 377
102520V 377
102525H 377
102525T 377
102525T-S1 387
102525U 377
102525V 377
102527T 377
102527U 377
102527V 377
102530T 377
102530T-S1 387
102530U 377
102530V 377
102535S1 377
102535T 377
102540T 377
102540U 377
102540V 377
102545S1 377
102545T 377
102550T 377
102555S1 377
102555S2 377
102565S1 377
1025PRN 466
1026CQ-AM 386
1031-10R 321
1031-11R 321
1031-12R 321
1031-13R 321
1031-14R 321
1031-15R 321
1031-16R 321
1031-17R 321
1031-18R 321
1031-19R 321
1031-22R 321
1031-24R 321
1031-26R 321
1031-27R 321
1031-30R 321
1031-32R 321
1031-34R 321
1031-35R 321
1031-36R 321
1031-38R 321
1031-41R 321
1031-46R 321
1031-48R 321
1031-50R 321
1032CQ 387
1032CQ01 387
1035MR 398
1036MR 398
1036ZQ 490
1041CQ-EB 401
1042CQ 381
1043CQ 381
1044716 180
1044CQ 382
1044MR 398
1045MR 399
1045MR01-EB 400
1048MR 383
1049CQ 399
1060-06 313
1060-07 313
1060-08 313
1060-09 313
1060-10 313
1060-11 313
1060-12 313
1060-13 313
1060-14 313
1060-15 313
1060-16 313
1060-17 313
1060-18 313
1060-19 313
1060-20 313
1060-21 313
1060-22 313
1060-23 313
1060-24 313
1060-25 313
1060-26 313
1060-27 313
1060-28 313
1060-29 313
1060-30 313
1060-32 313
1060-55 313
1061-06 310
1061-07 310
1061-08 310
1061-09 310
1061-10 310
1061-11 310
1061-12 310
1061-13 310
1061-14 310
1061-15 310
1061-16 310
1061-17 310
1061-18 310
1061-19 310
1061-20 310
1061-21 310
1061-22 310
1061-23 310
1061-24 310
1061-25 310
1061-26 310
1061-27 310
1061-28 310
1061-29 310
1061-30 310
1061-32 310
1062-06 311
1062-07 311
1062-08 311
1062-09 311
1062-10 311
1062-11 311
1062-12 311
1062-13 311
1062-14 311
1062-15 311
1062-16 311
1062-17 311
1062-18 311
1062-19 311
1062-20 311
1062-21 311
1062-22 311
1062-23 311
1062-24 311
1062-25 311
1062-26 311
1062-27 311
1062-28 311
1062-29 311
1062-30 311
1062-32 311
1067-06 315
1067-07 315
1067-08 315
1067-09 315
1067-10 315
1067-11 315
1067-12 315
1067-13 315
1067-14 315
1067-15 315
1067-16 315
1067-17 315
1067-18 315
1067-19 315
1067-20 315
1067-21 315
1067-22 315
1067-23 315
1067-24 315
1067-25 315
1067-26 315
1067-27 315
1067-28 315
1067-29 315
1067-30 315
1067-32 315
1071-33 313
1071-34 313
1071-35 313
1071-36 313
1071-38 313
1071-41 313
1071-42 313
1071-44 313
1071-46 313
1071-48 313
1071-50 313
1071-55 313
1071-60 313
1071-65 313
1071-70 313
1071-75 313
1071-80 313
1071-85 313
1080-06 331
1080-07 331
1080-08 331
1080-09 331
1080-10 331
1080-11 331
1080-12 331
1080-13 331
1080-14 331
1080-15 331
1080-16 331
1080-17 331
1080-18 331
1080-19 331
1080-20 331
1080-21 331
1080-22 331
1080-23 331
1080-24 331
1080-25 331
1080-26 331
1080-27 331
1080-28 331
1080-29 331
1080-30 331
1080-32 331
1081-06 331
1081-07 331
1081-08 331
1081-09 331
1081-10 331
1081-11 331
1081-12 331
1081-13 331
1081-14 331
1081-15 331
1081-16 331
1081-17 331
1081-18 331
1081-19 331
1081-20 331
1081-21 331
1081-22 331
1081-23 331
1081-24 331
1081-25 331
1081-26 331
1081-27 331
1081-28 331
1081-29 331
1081-30 331
1081-32 331
1084-08 330
1084-09 330
1084-10 330
1084-11 330
1084-12 330
1084-13 330
1084-14 330
1084-15 330
1084-16 330
1084-17 330
1084-18 330
1084-19 330
1090PR1 465
10A0-24 324
10A0-27 324
10A0-30 324
10A0-32 324
10A0-36 324
10A0-41 324
10A0-46 324
10A0-50 324
10A0-55 324
10A0-60 324
10A0-65 324
10A0-70 324
10A0-75 324
10A0-80 324
10A0-85 324
10A0-90 324
10A0-95 324
10A0-A0 324
10A0-A5 324
10A0-B0 324
10A0-B5 324
10A0-C0 324
10A0-C5 324
10B0-17 324
10B0-19 324
10B0-21D1 324
10B0-22D1 324
10B0-24 324
10B0-26 324
10B0-27 324
10B0-30 324
10B0-32 324
10B0-34 324
10B0-36 324
10B0-41 324
10B0-46 324
10B0-50 324
10B0-55 324
10B0-60 324
10B0-65 324
10B0-70 324
10B0-75 324
10B0-80 324
10B0-85 324
10B0-90 324
10B0-95 324
10B0-A0 324
10B0-A5 324
10B0-B0 324
10B0B-24 324
10B0B-24 563
10B0B-26 324
10B0B-26 563
10B0-B5 324
10B0B-E18 324
10B0B-E18 563
10B0B-E20 324
10B0B-E20 563
10B0B-E24 324
10B0B-E24 563
10B0-C0 324
10C0-24 325
10C0-27 325
10C0-30 325
10C0-32 325
10C0-36 325
10C0-41 325
10C0-46 325
10C0-50 325
10C0-55 325
10C0-60 325
10C0-65 325
10D0-08 315
10D0-09 315
10D0-10 315
10D0-11 315
10D0-12 315
10D0-13 315
10D0-14 315
10D0-15 315
10D0-16 315
10D0-17 315
10D0-18 315
10D0-19 315
10F0-17P 316
10F0-19P 316
10F0-21P 316
10F0-22P 316
10F0-23P 316
10F0-24P 316
10F0-26P 316
10F0-27P 316
10F0-29P 316
10F0-30P 316
10F0-32P 316
10F0-36P 316
10F0-38P 316
10F0-41P 316
10F0-46P 316
10F0-50P 316
10F0-55P 316
10F0-60P 316
10F0-65P 316
10F0-70P 316
10F0-75P 316
10F0VE-07 420
10F0VE-08 420
10F0VE-09 420
10F0VE-10 420
10F0VE-11 420
10F0VE-12 420
10F0VE-13 420
10F0VE-14 420
10F0VE-16 420
10F0VE-17 420
10F0VE-18 420
10F0VE-19 420
10F0VE-20 420
10F0VE-21 420
10F0VE-22 420
10F0VE-23 420
10F0VE-24 420
10G0VE-07 420
10G0VE-08 420
10G0VE-09 420
10G0VE-10 420
10G0VE-11 420
10G0VE-12 420
10G0VE-13 420
10G0VE-14 420
10G0VE-15 420
10G0VE-16 420
10G0VE-17 420
10G0VE-18 420
10G0VE-19 420
10G0VE-21 420
10G0VE-22 420
10G0VE-24 420

11 XXXX

11015SQ 484
1106MR 317
1106MR01 317
1108MR 317
1108SR 317
11101SQ 397
11104PR 467
11104PR10 467
1110MR 317
1112MR 317
1112MRN 317
1112SR 317
111946 325
112002MR 404
112003MR 404
112004MR 404
112005MR 404
112006MR 404
112007MR 404
112008MR 404
112010MR 404
112015MR 404
112025MR 404
11205SQ 404
11208SQ 404
11225SQ 485
112261 325
112310R 406

112315R 406
112320R 406
112325R 406
112327R 406
112330R 406
112340R 406
112345R 406
112350R 406
112502MR 402
112502SR 402
112503MR 402
112503SR 402
112504MR 402
112504SR 402
112505MR 402
112505SR 402
112506MR 402
112506SR 402
112507MR 402
112508MR 402
112508SR 402
112510MR 402
112510SR 402
112512MR 402
112512SR 402
112514MR 402
112515MR 402
112516SR 402
112517MR 402
112518SR 402
112519MR 402
112522MR 402
112525MR 402
112525SR 402
112576 325
112605MR 403
112606MR 403
112608MR 403
112610MR 403
112612MR 403
112710R 406
112715R 406
112720R 406
112725R 406
112727R 406
112730R 406
112740R 406
112745R 406
112750R 406
113002MR 404
113002SR 404
113003MR 404
113003SR 404
113004MR 404
113004SR 404
113005MR 404
113005SR 404
113006MR 404
113006SR 404
113007SR 404
113008MR 404
113008SR 404
113010MR 404
113010SR 404
113012SR 404
113015MR 404
113025MR 404
113025SR 404
11305SQ 558
113086 325
11310SQ 484
11311MQ02 490
11325SQ 491
11328SQ 491
11406SQ 484
11409SQ02 468
11409SQ03 468
11409SQ04 468
11409SQ05 468
11409SQ06 468
11409SQ08 468
11427SQ02 468
11427SQ03 468
11427SQ04 468
11427SQ05 468
11427SQ06 468
11427SQ08 468
114310R 406
114315R 406
114320R 406
114325R 406
114327R 406
114330R 406
114340R 406
114345R 406
114350R 406
114502MR 402
114502SR 402
114503MR 402
114503SR 402
114504MR 402
114504SR 402
114505MR 402
114505SR 402
114506MR 402
114506SR 402
114507MR 402
114508MR 402
114508SR 402
114510MR 402
114510SR 402
114512SR 402
114515MR 402
114516SR 402
114518SR 402
114520SR 402
114524SR 402
114525MR 402
114525SR 402
114555MR 402
114605MR 403
114606MR 403
114608MR 403
114610MR 403
114612MR 403
114710R 406
114715R 406
114720R 406
114725R 406
114727R 406
114730R 406
114740R 406
114745R 406
114750R 406
115002MR 411
115003MR 411
115004MR 411
115005MR 411
115006MR 411
115008MR 411
115010MR 411
115025MR 411
11509SQ05 468
11527SQ05 468
115310R 412
115315R 412
115320R 412
115325R 412
115327R 412
115330R 412
115340R 412
115345R 412
115350R 412
1153A05R 413
1153A06R 413
1153A07R 413
1153A08R 413
1153A09R 413
1153A10R 413
1153A15R 413
1153A20R 413
115502MR 411
115503MR 411
115503SR 411
115504MR 411
115504SR 411
115505MR 411
115505SR 411
115506MR 411
115506SR 411
115508MR 411
115508SR 411
115510MR 411
115510SR 411
115512SR 411
115525MR 411
115525SR 411
115H05M-10 336
115H06M-10 336
115H07M-10 336
115H08M-10 336
115H08M-14 336
115H09M-10 336
115H10M-10 336
115H10M-14 336
115H11M-10 336
115H12M-10 336
115H13M-10 336
115H13M-14 336
116002MR 410
116003MR 410
116004MR 410
116005MR 410
116006MR 410
116007MR 410
116008MR 410
116010MR 410
116025MR 410
116310R 410
116310TR 410
116315TR 410
116320TR 410
116325TR 410
116327TR 410
116330TR 410
116340TR 410
116345TR 410
116350R 410
116350TR 410
1163A05R 413
1163A06R 413
1163A07R 413
1163A08R 413
1163A09R 413
1163A10R 413
1163A15R 413
1163A20R 413
116502MR 410
116503MR 410
116504MR 410
116505MR 410
116506MR 410
116507MR 410
116508MR 410
116510MR 410
116525MR 410
118406M 336
118407M 336
118408M 336
118409M 336
118410M 336
118411M 336
118412M 336
118413M 336
118414M 336
118417M 336
118508M 336
118509M 336
118510M 336
118511M 336
118512M 336
118513M 336
118514M 336
118517M 336
118519M 336
119502M 413
119503M 413
119504M 413
119505M 413
119506M 413
119508M 413
119510M 413
119525M 413
1195A02M 412
1195A25M 412
1195A03M 412
1195A04M 412
1195A05M 412
1195A06M 412
1195A08M 412
1195A10M 412
11A310R 412
11A315R 412
11A320R 412
11A325R 412
11A327R 412
11A330R 412
11A340R 412

12 XXXX

1207MR 314
1207SR 314
1208MR 314
12107MRN 326
12107MRN01 326
12109MRS01 312
1210MR 314
12112MRN 326
12112MRS02 312
12114MRN 326
1211MR 314
1211MRN 314
1211SR 314
1211SR01 314
1211SR02 314
1212MR 314
1212MR01 314
1213SRN 314
1214MR 314
1214MR01 314
1214MRN 314
1214MRN05 314
1214SR 314
1214SRN01 314
1215MR 314
1215MR01 314
1215MR02 314
1215MRN01 314
1215MRN02 314
1216SR 314
1216SRN 314
1218MR01 314
1218MRN 314
12207SRN 327
12208SRS 312
1224CRN 314
1226MR 314
1226MRN 314
122A06MR 312
122A06MR01 312
122A07MRN01 ...327
122A07MRN02 ...327
122A09MRS01 312
122A12MRN 327
122A12MRS02 312
122A14MRN 327
1266MR 315
1272MR 315
1275MR 315
1275MRN 315
1282MR 316
12916MQ1 492
12939MQ1 492
12939MQ-A 492
12939MQ-A 492
12939MQ-A03 492
12939SQ1 492
12939SQ1 492
12939SQ-A 492
12939SQ-A 492
12939SQ-A03 492
1296MRN 314
12A09MRS01 312
12A0MRN 310
12A1MRN 310
12A2MRS02 312
12A3MRN 310
12A4MRN 310
12B4MRN 310
12C7MRN01 310
12C8MRN 310
12D06MRS 311
12D06MRS 312
12D06MRS 312
12D06MRS01 312
12D09MRN 311
12D09MRS01 312
12D10MRN 311
12D12MRS 312
12D12MRS01 312
12D13MRN 311
12D14MRN05 311
12D15MRN 311
12D15MRN01 311
12D18MRN 311
12D21MRN 311
12D26MRN 311
12FVE08MRN 420
12FVE10MRN 420

13 XXXX

13012MR 326
13013MR 326
1305SR 322
1306MR 322
1306MRN 322
131101P 392
131102P 392
131103P 392
13113MR 327
131501P 392
131502P 392
131503P 392
1317012PN 375
1317012ZN 375
1317046SN 375
1317057SN 375
1317115TN 375
1317225TN 375
1317340TN 375
1317401PN 375
131744BHN 375
1317501ZN 375
131755BHN 375
1317602PN 375
131766BHN 375
1317702ZN 375
132A13MR 328
132A13MR01 328
134501P 392
134502P 392
134503P 392
1360012P 378
1360022P 378
1360023P 378
1360552P 378
1360552Z 378
1360703P 378
136501P 392
136502P 392
136503P 392
13A6502P 392
13B6502P 392

14 XXXX

1406PR 322
14103GP 278
14110003 369
14110104 369
14110204 369
14110204-E* 369
14110205-E* 369
14110206 369
14110206-E* 369
14110208-E* 369
14110214 369
14110306 369
14110308 369
14120303 369
14120404 369
14120806 369
14120808 369
14125504 369
14126504 369
14126504-E* 369
14126506 369
14126506-E* 369
14126514 369
14210023 365
14210104 365
14210112 365
14210116 365
14210132 365
14210204 365
14210206 365
14210212 365
14210214 365
14210216 365
14210306 365
14220303 365
14220404 365
14220503 365
14220504 365
14220512 365
14220516 365
14220806 365
14220807 365
14220808 365
14221008 365
14225503 365
14225504 365
14225505 365
14225506 365
14226504 365
14226506 365
14226512 365
14226514 365
14226516 365
14230602 366
14230702 366
14230803 366
14230903 366
14231003 366
14231503 366
14231510 366
14232004 366
14232010 366
14232504 366
14232510 366
14232704 366
14233005 366
14233010 366
14234006 366
14240206 366
14270803 366
14270903 366
14271003 366
14271503 366
14272004 366
14272504 366
14272704 366
14273005 366
14274006 366
14280023 366
14280104 366
14280132 366
14280204 366
14280306 366
14311003 432
14311015 432
14311103 432
14311115 432
14312003 432
14312015 432
14313003 432
14313015 432
14320615 432
14320815 432
14321003 432
14321015 432
14321503 432
14321515 432
14321803 432
14321815 432
14322003 432
14322015 432
14322503 432
14322515 432
14323003 432
14323015 432
14323503 432
14323515 432
14324003 432
14324015 432
14330403 432
14330415 432
14330503 432
14330515 432
14330603 432
14330615 432
14330703 432
14330715 432

14330803 432
14330815 432
14330902 432
14330903 432
14331002 432
14331003 432
14331502 432
14331503 432
14332002 432
14332003 432
143574 141
143602 141
143633 141
143694 141
1450-04 376
1450-05 376
1450-06 376
1450-07 376
1450-08 376
1450-09 376
1450-10 376
1450-11 376
1450-12 376
1450-13 376
1450-45 376
1450-55 376
1453-05 376
1453-06 376
1453-07 376
1453-08 376
1453-10 376
14610103 370
14610204 370
14610206 370
14610306 370
14620806 370
14620807 370
14621008 370
14621012 370
14621210 370
14625504 370
14626504 370
14626506 370
14710003 423
14710104 423
14710204 423
14710306 423
14720303 423
14720404 423
14720807 423
14722503 423
14723504 423
14725505 423
14726506 423
14740105 423
14740206 423
14780104 423
14780204 423
14780306 423
147E0104 423
147E0204 423
14810103 371
14810204 371
14810204-E*.....371
14810205 371
14810205-E* 371
14810306 371
14810412 371
14820806 372
14821012 372
14825503 372
14826504 372
14826504-E* 372
14826505-E* 372
14826506 372
14902MR01 329
14903MR01 329
14A10132 368
14A10204 368
14A10214 368
14A10306 368
14A20303 368
14A20404 368
14A20808 368
14A25504 368
14A25505 368
14A26506 368
14A26514 368
14A80132 368
14A80204 368
14B10103 371
14B10204 371
14B10206 371
14B10306 371
14B20807 371
14B25504 371
14B26506 371

15 XXXX

15001012P 330
15001113P 330
15001214P 330
15001317P 330
15001415P 330
15001417P 330
15001719P 330
15001721P 330
15001921P 330
15001922P 330
15001924P 330
15002123P 330
15002224P 330
15002326P 330
15002427P 330
15002430P 330
15002632P 330
15002730P 330
15002732P 330
15003032P 330
15003236P 330
15003638P 330
15003641P 330
15003841P 330
150267 141
150450 141
150633 141
151001P 392
151002P 392
151003P 392
151501P 392
151502P 392
151503P 392
155001P 392
155002P 392
155003P 392
15631612 336
15631615 336
15631618 336
15631818 336
15632112 336
15632115 336
15632118 336
157501P 392
157502P 392
157503P 392
1586-09 558
1589262 200
1589384 200
1592550 247
1592641 247
1592733 247

16 XXXX

1606MR 318
1611MR 318
163604H 379
163605H 379
163605M 380
163606H 379
163606M 380
163607H 379
163608H 379
163608M 380
163609H 379
163609M 380
163610E 380
163610H 379
163610M 380
163610T 379
163610U 380
163612H 379
163612M 380
163614M 380
163615E 380
163615T 379
163615U 380
163620E 380
163620T 379
163620U 380
163625E 380
163625T 379
163625U 380
163627E 380
163627T 379
163627U 380
163630E 380
163630T 379
163630U 380
163640E 380
163640T 379
163640U 380
163645E 380
163645T 379
163645U 380
163650E 380
163650T 379
163650U 380
163655E 380
163655T 379
163655U 380
163660E 380
163660T 379
163660U 380
168004H 379
168005H 379
168005M 380
168006H 379
168006M 380
168007H 379
168008H 379
168008M 380
168009H 379
168009M 380
168010E 380
168010H 379
168010M 380
168010T 379
168010U 380
168012H 379
168012M 380
168014M 380
168015E 380
168015T 379
168015U 380
168020E 380
168020T 379
168020U 380
168025E 380
168025T 379
168025U 380
168027E 380
168027T 379
168027U 380
168030E 380
168030T 379
168030U 380
168040E 380
168040T 379
168040U 380
168045E 380
168045T 379
168045U 380
168050E 380
168050T 379
168050U 380
168055E 380
168055T 379
168055U 380
168060E 380
168060T 379
168060U 380

17 XXXX

1706MR 319
1707SR 319
1708MR 319
1708MR01 319
1710037 201
1710MR 319
1712MR 319
1712MRN 319
1712MRN01 319
174010H 236
174010H 246
174012H 236
174012H 246
174014H 236
174014H 246
174017H 236
174017H 246
174019H 236
174019H 246
174022H 236
174022H 246

18 XXXX

1805MR 331
1808MR 331
181202P 378
181203P 378
1812MR 331
1826MR 331
183203H 378
183204H 378
183205H 378
183206H 378
183207H 378
183208H 378
183210H 378
183212H 378
183215T 379
183220T 379
183225T 379
183227T 379
183230T 379
183240T 379
183245T 379
183250T 379
183601P 378
183602P 378
183602Z 379
183603P 378
183603Z 379
183604H 378
183604P 378
183604Z 379
183605H 378
183606H 378
183607H 378
183608H 378
183608S 378
183609S 378
183610H 378
183610S 378
183611S 378
183612H 378
183612S 378
183614H 378
183614S 378
183620T 379
183625T 379
183627T 379
183630T 379
183635T 379
183640T 379
183645T 379
183650T 379
183655T 379
183660T 379
1842MR 330
187015T 379
187020T 379
187025T 379
187027T 379
187030T 379
187040T 379
187045T 379
187050T 379
188002P 378
188003P 378
188004P 378
188008S 378
188010S 378
188012S 378

19 XXXX

19000607 317
19000708 317
19000809 317
19000810 317
19000911 317
19001011 317
19001012 317
19001013 317
19001113 317
19001213 317
19001214 317
19001314 317
19001317 317
19001415 317
19001417 317
19001617 317
19001618 317
19001719 317
19001819 317
19001921 317
19001922 317
19002022 317
19002123 317
19002224 317
19002326 317
19002426 317
19002427 317
19002430 317
19002528 317
19002632 317
19002729 317
19002730 317
19002732 317
19003032 317
19003036 317
19003236 317
19003436 317
19003641 317
19004146 317
19005507 317
19100607 323
19100809 323
19100810 323
19101011 323
19101012 323
19101213 323
19101214 323
19101415 323
19101417 323
19101617 323
19101719 323
19101819 323
19102022 323
19102123 323
19102427 323
1912MR 331
1912MRN 331
19200608 322
19200711 322
19201012 322
19201418 322
19201622 322
19202024 322
1926MR 331
19300810 322
19300911 322
19301011 322
19301012 322
19301113 322
19301213 322
19301214 322
19301315 322
19301417 322
19301719 322
19301922 322
19312224 323
19312427 323
19313032 323
19500810 321
19501012 321
19501113 321
19501214 321
19501315 321
19501417 321
19501618 321
19501719 321
19501922 321
195404R 246
195419H 246
195419H 251
195422H 246
195422H 251
195424H 246
195424H 251
195427H 246
195427H 251
195430H 246
195430H 251
195432H 246
195432H 251
19600607 318
19600809 318
19600810 318
19601011 318
19601012 318
19601113 318
19601213 318
19601214 318
19601415 318
19601417 318
19601617 318
19601719 318
19601819 318
19601921 318
19602022 318
19602123 318
19602224 318
19602326 318
19602426 318
19602427 318
19602732 318
19603032 318
19611415 318
19611617 318
19611819 318
19700607 319
19700809 319
19700810 319
19701011 319
19701012 319
19701113 319
19701213 319
19701214 319
19701314 319
19701415 319
19701417 319
19701617 319
19701719 319
19701819 319
19701921 319
19701922 319
19702022 319
19702123 319
19702224 319
19702326 319
19702426 319
19702427 319
19702528 319
19703032 319
199104R 334
19911722 334
199306R 334
19932427 334
19932433 334
19961721 334
19980016 335
19991921 335
19991921A 335
199920R 335
19992224 335
19992224A 335
19992427 335
19992427A 335
19992432 335
19992432A 335
199925R 335
19992730 335
19992730A 335
19992732 335
19992732A 335
19992733 335
19992733A 335
19992833 335
19992833A 335
19993032 335
19993032A 335

19993233 335
19993233A 335
19993238 335
19993238A 335
19993821 335
19993821A 335
19993822 335
19993822A 335
19994121L 335
19994121LA 335
19A00607 325
19A00809 325
19A0-09 325
19A01011 325
19A01213 325
19A01415 325
19A0-15 325
19A0-15 325
19A01617 325
19A01819 325
19A02022 325
19A02123 325
19A02426 325
19A02528 325
19A02729 325
19A03032 325
19B00810 320
19B01011 320
19B01012 320
19B01113 320
19B01214 320
19B01315 320
19B01417 320
19B01618 320
19B01719 320
19B01921 320
19B02224 320
19C00607 320
19C00809 320
19C01011 320
19C01213 320
19C01415 320
19C01617 320
19C01819 320
19C02022 320
19C02123 320
19C02426 320
19C02528 320
19C03032 320

1A XXXX

1A06MR 323

1C XXXX

1C08MR 320
1C12MR 320

1E XXXX

1E10MR 321
1E11MR 321

1F XXXX

1F06MRN 320

20 XXXX

20002UB 407
20107MR01 404
20107SR 404
20108MR 404
20109MR 404
20109MRU 407
20109MW 405
20109MW 405
20109MW-S 405
201101X 133
201102X 133
201103X 133
201104X 133
20110MR 404
20119MR01 404
201208X 133
201235X 133
201255X 133
20129SR 404
201308X 134
201309X 134
201310X 134
201315X 134
201320X 134
201325X 134
201327X 134
201330X 134
201340X 134
201503MX 133
201504MX 133
201505MX 133
201506MX 133
201506SX 133
201508MX 133
201508SX 133
201510MX 133
201801X 134
201802X 134
201803X 134
201804X 134
2019MR 145
2019MR 145
2019SR 145
2019SR 145
201A09MR 408
201B09MR 408
20208MR 402
20208MR01 403
20208SR01 403
20209MR 402
20209SR02 402
2020H0MR 403
20210MR 403
20218MR 402
20219MR 402
20219SR 402
2021MR 146
2021MR 146
2027MRE 149
2027MRE 149
20307PR 407
20308PR 407
20309PR 407
2030CR 146
2030CR 146
203101 134
203102 134
203103 134
203104 134
20317MR 409
20318PR 407
20319PR 407
20319PRU 407
2031MR 146
2031MR 146
203204 134
203207 134
203208 134
203210 134
203235 134
203255 134
203265 134
203308 135
203309 135
203310 135
203315 135
203320 135
203325 135
203327 135
203330 135
203340 135
203503 134
203504 134
203504S 134
203505 134
203505S 134
203506 134
203506S 134
203507 134
203507S 134
203508 134
203508S 134
203510 134
203510S 134
203512S 134
2035S 134
2035VE03 417
2035VE04 417
2035VE05 417
2035VE06 417
203708 135
203709 135
203710 135
203715 135
203720 135
203725 135
203727 135
203730 135
203740 135
203801 135
203802 135
203803 135
203A19PR 408
20407PR 407
20409PR 407
20419PR 407
2044SRV 151
2044SRV 151
2048MRV 151
204B29PR 408
20505PR01 403
20515PR01 403
20A16MR 409
20A17MR 409

21 XXXX

2104PR 144
2107PR 144
2109PR 144
21108MR 412
2114TR 144
2119PR 144
21-20-07MR 474
21-20-101 474
21-20-101 474
21-20-102 475
21-20-102 475
21208MR 412
21208SR 412
2121-12 592
2121-18 592
2121A-15 592
2121A-18 592
2124 593
2126A-18 593
2127-06M 483
2127-08M 483
2127-11M 483
2127-14M 483
2127-18M 483
2127A-06M 483
2127A-08M 483
2127A-11M 483
2127A-14M 483
2127A-18M 483
2127A-24M 483
2127A-33M 483
2127A-50M 483
2127PR 143
2127SR 143
2128-26 593
2128PR 389
2129-24 593
21-30-09MR 475
21-30-09MR 475
21309PR 412
213312DF 142
213312DF 142
2138PR 389
2141 143
2141 143
2142 143
2142 143
2166DF 382
2176DF 142
2177DF 142
2178DF 142
2178TG 142
2178VE 417
2178VE-05 417
2179DF 142

22 XXXX

22106MR 411
22108MR 411
22118MR 411
22208MR 411
22218MR 411
2221VE-04 417
2221VE-06 417
223004M 133
223005M 133
223006M 133
223007M 133
223008M 133
223009M 133
223010M 133
223011M 133
223012M 133
223013M 133
223014M 133
223045M 133
223055M 133
22306TR 411
22309TR 411
22319TR 411
223504M 132
223505M 132
223505S 132
223506M 132
223506S 132
223507M 132
223507S 132
223508M 132
223508S 132
223509M 132
223509S 132
223510M 132
223510S 132
223511M 132
223511S 132
223512M 132
223512S 132
223513M 132
223514M 132
223514S 132
223515M 132
223516S 132
223518S 132
223545M 132
223555M 132
227504M 133
227505M 133
227506M 133
227507M 133
227508M 133

23 XXXX

231008M 133
231010M 133
231010S 133
231012S 133
2311-18 141
2311MR 143
2313MR 144
2319869 204
23208MR 412
23208MR 412
2323126 252
2323218 252
233004M 132
233005M 132
233005S 132
233006M 132
233006S 132
233007M 132
233007S 132
233008M 132
233008S 132
233009M 132
233009S 132
233010M 132
233010S 132
233011M 132
233011S 132
233012M 132
233012S 132
233013M 132
233014M 132
233014S 132
233015S 132
233016S 132
233045M 132
233055M 132
23308PR 413
2331SRV 150
233504M 132
233505M 132
233505S 132
233506M 132
233506S 132
233507M 132
233507S 132
233508M 132
233508S 132
233509M 132
233509S 132
233510M 132
233510S 132
233511M 132
233511S 132
233512M 132
233512S 132
233513M 132
233514M 132
233514S 132
233515M 132
233515S 132
233516S 132
233518S 132
233532M 132
233545M 132
233555M 132
2335VE05M 417
2335VE06M 417
2335VE07M 417
2335VE08M 417
2335VE09M 417
2335VE10M 417
2335VE11M 417
2335VE12M 417
2335VE13M 417
2335VE14M 417
237504M 133
237505M 133
237506M 133
237507M 133
237508M 133
237510M 133
2375M 133

24 XXXX

24110204 369
24110214 369
24308PR 413
24311030 433
24311140 433
24312020 433
24330610 433
24330715 433
24330820 433
24330915 433
2452-05F 142
2452DK 142
2452DK 143
2453 143
2453-05F 143

25 XXXX

2501MR 140
2509MR 143
2509SR 143
2510SR 144
2511MR 144
2513MR 143
2513MRD1 143
2515MR 140
2516MR 145
2516MR 145
2516MRV03 149
2516SR 145
2518MR 145
2518MR01 145
2518SR 145
2519MR 145
2519SR 145
2521MR 146
2524MRV 149
2525MRE 148
2526MR 146
2526SR 146
2526SR 146
2527MRE 149
2528MRV 149
2530CR 146
2531MR 146
2534MRV 150
253504M 227
253505M 227
253506M 227
253507M 227
253510M 227
253513M 227
253514M 227
253545M 227
253555M 227
2539MR 147
2539MR-AM 148
2539MRV04 385
2541MR 147
2544SRV 151
2547MR-EB 400
2548MRV 151
2549MR-EB 152
2550MRV 152
2551MR 147
2551MR01 147
2553MRV 151
2553MRV01 152
2555MR 382
2565MRV 150
2571-45 143
2575MR 147
25VE01MRV 417

27 XXXX

2725-55F 137
2725-55G 137
2725DK 137
2745 140
2746 383
2747 140
2747DR 140
2752-06G 137
2752-45G 137
2752DK 137
2759-55G 137
2759DK 137
2760DK01 139
2761-55F 137
2761-55P 137
2761DK 137
2769-55F 138
2769-55P 138
2769DK 138
276A-04G 139
276ADK 139
276B-0225 136
2771-55F 138
2771-55G 138
2771DK 138
2771VE 417
2771VE-55 417
2773-55GS 136
2773-55GS 138
2773DK 138
2773DK 136
2774-55F 138
2774-55G 138
2774DK 138
2779-55F 138
2779-55G 138
2779DK 138
2781-06P 139
2781DK 139
2792 141
2793 142

28 XXXX

2813 142
2863P 227

30 XXXX

30106AMRB 368
30107AMRB 368
30115MR 367
30116AMRB 368

30117MR 367
30118MR 367
30127MR 367
3013MR 164
3013SR 164
30206AMRB 371
30206MR 370
3020MR 167
3020MR 167
3020MR02 167
3020MR02 167
3020SR 167
3020SR02 167
302102 160
302103 160
302104 160
302205 160
302208 160
302210 160
302308 160
302309 160
302310 160
302315 160
302320 160
302325 160
302327 160
302330 160
302340 160
302345 160
302350 160
3023MR 167
3023MRV11 169
3024MR 167
3024SR 167
302503 160
302504 160
302505 160
302506 160
302507 160
302508 160
302509 160
302510 160
302512 160
3025VE04 418
3025VE05 418
3025VE06 418
3025VE08 418
3025VE10 418
302708 160
302709 160
302710 160
302715 160
302720 160
302725 160
302727 160
302730 160
302740 160
302745 160
302750 160
3027MR 168
3027MR 168
3027SR 168
302D08 160
302D09 160
302D10 160
302D15 160
302D20 160
302D25 160
302D27 160
302D30 160
302D40 160
302D45 160
302D50 160
302D55 160
302D60 160
30307PR 367
30309PR 367
30315PR 367
30316PR 367
30317PR 367
30319PR 367
3032SRV 169
3033MRV 170
3034MR 168
3036CR 168
303906 160
303907 160
303908 160
303909 160
303910 160
305310 228
305315 228
305320 228
305325 228
305327 228
305330 228
305340 228
305345 228
305350 228
305355 228
305360 228
3054MR 170
305504M 228
305504S 228
305505M 228
305505S 228
305506M 228
305506S 228
305507M 228
305507S 228
305508M 228
305508S 228
305510M 228
305510S 228
305512M 228
305512S 228
305514M 228
305516M 228
305516S 228
305517M 228
305545S 228
3055CR 169
30605MR 424
30606MR 424
30607MR 424
30607MR02 424
30615MR 424
30617MR 424
30618MR 424
30618MR N18
306320 228
306325 228
306327 228
306330 228
306340 228
306345 228
306350 228
306355 228
306504M 228
306505M 228
306506M 228
306508M 228
306510M 228
30914AY 591
30VE31MRV 418

31 XXXX

3103PR 166
3105PR 165
3106PR 164
3108PR8 165
3109PR8 165
31107MR 367
31116MR 367
3113PR 166
3116PR 164
3119PR8 165
31216MR 367
3121PR 165
3129PR 165
3131PR8 165
31416MR 373
31416MR-D 373
31419MR 434
31419MR 434
31419MR-A 433
31419MR-D 434
314201 139
31427MR 373
31427MR-D 373
3146PR 165
314708S 229
314710M 229
314710S 229
314808S 164
314810M 164
314810S 164
3149PR8 165
31516MR 373
31516MR-D 373
3178VE-08 418

32 XXXX

3203 333
3203 542
3203 542
320300 333
320300 542
320301 333
320301 542
3203A0 333
3203A0 542
3204 333
3204 542
3204 542
3205 542
320541 542
320560 542
32067A 334
32067A 542
3206A00 334
3206A00 542
320760 542
3209-120 541
3209-135 541
3209-220 541
32108MR 433
32118MR 433
3213MR 166
3214-35 479
3214-60 479
321510M 153
321512M 153
32209MR 433
3221-16 163
3221-18 163
3221-24 163
32218MR 433
3221VE-06 418
3221VE-10 418
3223 163
3223-14 163
323007M 154
323008M 154
323008S 154
323009M 154
323010M 154
323010S 154
323011M 154
323012M 154
323012S 154
323013M 154
323014M 154
323014S 154
323015M 154
323016M 154
323016S 154
323017M 154
323018M 154
323018S 154
323019M 154
323020S 154
323021M 154
323022M 154
323022S 154
323024M 154
323024S 154
323026S 154
323028S 154
323030S 154
323032S 154
32309PR 433
323506M 154
323507M 154
323508M 154
323508S 154
323509M 154
323510M 154
323510S 154
323511M 154
323512M 154
323512S 154
323513M 154
323514M 154
323514S 154
323515M 154
323516M 154
323516S 154
323517M 154
323518M 154
323518S 154
323519M 154
323520S 154
323521M 154
323522M 154
323522S 154
323524M 154
323524S 154
323526S 154
323528S 154
323530S 154
323532S 154
3235VE08M 418
3235VE10M 418
3235VE12M 418
3235VE14M 418
32503MR 369
32503MR N18
32518MR 375
32518MR01 376
32518MR02 376
32526MRN 384
3254MR 385
3260-03P 229
3260-04P 229
3260-05P 229
3260-06P 229
3260-08P 229
3260-10P 229
32607MR 433
327504M 155
327505M 155
327506M 155
327507M 155
327508M 155
327510M 155
327511M 155
327512M 155
327514M 155
327516M 155
327518M 155
32808MR 384
32809MR 382
3293 163

33 XXXX

33011 278
33012 278
33013 278
33108MR 367
3311 163
33121 272
33122 272
333006M 153
333007M 153
333008M 153
333008S 153
333009M 153
333010M 153
333010S 153
333011M 153
333011S 153
333012M 153
333012S 153
333013M 153
333014M 153
333014S 153
333015M 153
333015S 153
333016M 153
333016S 153
333017M 153
333018M 153
333018S 153
333019M 153
333019S 153
333020M 153
333020S 153
333021M 153
333022M 153
333022S 153
333023M 153
333024M 153
333024S 153
333026S 153
333028S 153
333030S 153
333032S 153
333506M 153
333507M 153
333508M 153
333508S 153
333509M 153
333510M 153
333510S 153
333511M 153
333511S 153
333512M 153
333512S 153
333513M 153
333514M 153
333514S 153
333515M 153
333515S 153
333516M 153
333516S 153
333517M 153
333518M 153
333518S 153
333519M 153
333519S 153
333520M 153
333520S 153
333521M 153
333522M 153
333522S 153
333523M 153
333524M 153
333524S 153
333526S 153
333528S 153
333530S 153
333532S 153
3335VE06M 417
3335VE07M 417
3335VE08M 417
3335VE09M 417
3335VE10M 417
3335VE11M 417
3335VE12M 417
3335VE13M 417
3335VE14M 417
3335VE15M 417
3335VE16M 417
3335VE17M 417
3335VE18M 417
3335VE19M 417
3335VE20M 417
3335VE21M 417
3335VE22M 417
3335VE24M 417
333E10M 155
333E11M 155
333E12M 155
333E14M 155
333E16M 155
333E18M 155
333E20M 155
33411-040 264
33411-041 264
33411-050 264
33411-051 264
33411-71 278
33412-050 264
33412-051 264
33421-040 262
33421-041 262
33431-050 262
33431-051 262
33431-065 263
33461-100 261
33461-101 261
33481-095 263
33481-096 263
33491-030 261
33491-031 261
335108M 159
335109M 159
335110M 159
335111M 159
335112M 159
335113M 159
335114M 159
335115M 159
335116M 159
335117M 159
335118M 159
335119M 159
33611-055 264
33611-056 264
33621-075 264
33621-076 264
33622-075 264
33622-076 264
33631-110 264
33631-111 264
33632-110 264
33632-111 264
33671-160 266
33672-160 266
33681-100 263
33681-101 263
337504M 155
337505M 155
337506M 155
337507M 155
337508M 155
337510M 155
337511M 155
337512M 155
337514M 155
337516M 155
337518M 155
33811 267
33811-150 267
33812 267
33812-150 267
33831 267
33831-180 267
33832 267
33832-180 267
33841 265
33841-180 265
33842 265
33842-180 265
33851 265
33851 267
33851-120 265
33851-121 265
33851-250 267
33852 265
33852 267
33852-120 265
33852-121 265
33852-250 267
33861-200 266
33862-200 266
33871-160 266
33872-160 266
33911 267
33911-250 267
33912 267
33912-250 267
33921 267
33921-300 267
33922 267
33922-300 267

34 XXXX

34011-1DG 302
34011-1EG 302
34011-2DG 302
34011-2EG 302
34011-3DG 302
34011-3DG 302
3406MP 229
34102-040M 569
3419PP 229
34207-1A 301
34211-3DG 302
34223-1A 297
34223-1B 297

34223-1C 297
34262-1CG 284
34262-1DG 285
34262-1DK 284
34262-1DK 285
34262-2DG 285
34262-3DG 285
34266-1FG 295
3426A-1DG 288
3426A-2DG 288
3426C-1DF 286
3426C-1DF 286
3426C-1DK 286
3426C-1DK 286
3426C-2DF 286
3426C-2DF 286
3426E-1HG 294
34307-1A 301
34323-1A 297
34323-1B 297
34323-1C 297
34323-2A 297
34323-2B 297
34323-2C 297
3432F-1KF 296
3432F-3KF 296
343506M 227
343507M 227
343508M 227
343508S 227
343509M 227
343510M 227
343510S 227
343511M 227
343512M 227
343512S 227
343513M 227
343514M 227
343514S 227
343515M 227
343516M 227
343516S 227
343517M 227
343518M 227
343518S 227
343519M 227
343520M 227
343520S 227
343521M 227
343522M 227
343522S 227
343523M 227
343524M 227
343524S 227
343526S 227
343528S 227
34362-1CG 284
34362-1DG 285
34362-1DK 284
34362-1DK 285
34362-1DK 286
34362-1GG 286
34362-2CG 284
34362-2DG 285
34362-2DK 161
34362-2xx/3xx 284
34362-2xx/3xx 285
34362-3DG 285
34366-1FG 295
34367-2AG 300
3436A-2DG 288
3436C-1DK 286
3436C-1DK 286
3436E-1HG 294
3436E-2HG 294
3436E-3HG 294
34407-1A 301
34407T-1A 301
34417-1A 299
34423-1A 297
34423-1B 297
34423-1C 297
34423-2A 297
34423-2B 297
34423-2C 297
344251A12MR 298
3442F-1KF 296
3442F-3KF 296
34440 303
34440A 303
3445G-1FB 298
34462-1CG 284
34462-1DG 285
34462-1DK 285
34462-1DK 286
34462-1GG 286
34462-2CG 284
34462-2DG 285
34462-3DG 285
34462-3DG/3GG .285
34462-3DG/3GG .286
34462-3DK 285
34462-3DK 286
34462-3GG 286
34462-4DG 285
34464-1FG 296
34464-2FG 296
34466-1FG 295
34466-2FG 295
34466-3FG 295
34467-1AG 300
3446A-1DG 288
3446A-2DG 288
3446E-1HG 294
3446E-2HG 294
3446E-3HG 294
34486 303
34488 303
34488-26 304
34501107M 290
34501108M 290
34501108S 290
34501109M 290
34501110M 290
34501110S 290
34501111M 290
34501112M 290
34501112S 290
34501113M 290
34501114M 290
34501114S 290
34501115M 290
34501116M 290
34501116S 290
34501117M 290
34501118M 290
34501118S 290
34501119M 290
34501120S 290
34501121M 290
34501122M 290
34501122S 290
34501124M 290
34501124S 290
34501127M 290
34501130M 290
34501132M 290
34501136M 290
34501213M 291
34501214M 291
34501215M 291
34501216M 291
34501216S 291
34501217M 291
34501218M 291
34501218S 291
34501219M 291
34501220S 291
34501221M 291
34501222M 291
34501222S 291
34501223M 291
34501224M 291
34501224S 291
34501225M 291
34501226M 291
34501226S 291
34501227M 291
34501228S 291
34501230M 291
34501230S 291
34501232M 291
34501232S 291
34501234M 291
34501236M 291
34501236S 291
34501238M 291
34501240M 291
34501240S 291
34501241M 291
34501248S 291
34501410M 291
34501411M 291
34501412M 291
34501413M 291
34501414M 291
34501416M 291
34501417M 291
34501418M 291
34501419M 291
34501421M 291
34501422M 291
34502107M 291
34502108M 291
34502108S 291
34502110M 291
34502110S 291
34502111M 291
34502112M 291
34502112S 291
34502113M 291
34502114M 291
34502114S 291
34502115M 291
34502116M 291
34502116S 291
34502117M 291
34502118M 291
34502118S 291
34502119M 291
34502120S 291
34502121M 291
34502122M 291
34502122S 291
34502124S 291
34502126S 291
34502128S 291
34502213M 292
34502214M 292
34502215M 292
34502216M 292
34502216S 292
34502217M 292
34502218M 292
34502218S 292
34502219M 292
34502220S 292
34502221M 292
34502222M 292
34502224M 292
34502224S 292
34502227M 292
34502230M 292
34502232M 292
34502234M 292
34502236M 292
34502241M 292
34503102R 290
34503103R 290
34503104R 290
34503203R 290
34503204R 290
34503206R 290
34503206R1 290
34504236M 292
34504245M 292
34504255M 292
34504262M 292
34504275M 292
34504290M 292
34505102R 292
34505201R 292
34505201R 292
345101E08MR 293
345102D08MR 293
345102E08MR 293
345104D08MR 293
34512-1CG 289
34512-1DG 289
34512-2CG 289
34512-2DG 289
34512-3CG 289
34512-3DG 289
34512-4DG 289
3452 163
345201D11MR 293
345201E11MR 293
345202C11MR 293
345202D11MR 293
345202E11MR 293
345203D11MR 293
345203E11MR 293
3452-08F 163
3452-10F 163
34522-1CG 289
34522-1DG 289
34522-2CG 289
34522-2DG 289
34522-3CG 289
34522-3DG 289
34522-4DG 289
34522-5DG 289
34522-6DG 289
34522-7DG 289
34522-8DG 289
34522-9DG 289
3452DK 163
3453 163
34607-1A 302
3465G-1FB 298
3465G-2FB 298
3465G-3FB 298
34660 303
34660A 303
34662-1CG 284
34662-1DG 285
34662-1DK 284
34662-1DK 284
34662-1DK 285
34662-1DK 285
34662-2CG 284
34662-2DG 285
34662-3CG 284
34662-3DG 285
34662-3DK 284
34662-3DK1 285
34662-3xx series .285
34666-1FG 295
34666-2FG 295
34666-3FG 295
3466E-1HG 294
3466E-2HG 294
34688 303
3485G-1DB 298
3485G-2DB 298
34862-1CG 284
34862-1DG 285
34862-2CG 284
34862-2DG 285
34862-2DK 284
34862-2DK 284
34862-2DK:series .285
34862-3CF 287
34862-3FF 287
3488B03MP 305
3488B03MP N25

35 XXXX

3508MR 166
3508MR10 164
3508SR 166
35105MR 369
35107MR 369
3511-06.....337
3511-10..... 337
35114MR 372
35114MR01 372
35116MR01 369
3513MR 164
3513MR 164
35208MR 370
3520MR 167
3520MR02 167
3523MR 167
3523MRV10 169
3523MRV11 169
3524MR 167
3527MR 168
3533MRV 170
3534MR 168
353506M 227
353507M 227
353508M 227
353508S 227
353509M 227
353510M 227
353510S 227
353511M 227
353512M 227
353512S 227
353513M 227
353514M 227
353514S 227
353515M 227
353516M 227
353516S 227
353517M 227
353518M 227
353518S 227
353519M 227
353520S 227
353522S 227
353524S 227
3537MR 168
3545MRV 170
3568MR 171
3571 163
357505M 228
357506M 228
357507M 228
357508M 228
357510M 228
357512M 228
357514M 228
35VE01MRV 418

36 XXXX

3611-06P 332
3611-06R 332
3611-08P 332
3611-08R 332
3611-10P 332
3611-10R 332
3611-12P 332
3611-12R 332
3611-15HP 332
3611-15HR 332
3611-18HP 332
3611-18HR 332
3611-24HP 332
3611-24HR 332
3611VE-06 420
3611VE-08 420
3611VE-10 420
3611VE-12 420
3612MR 159
3614-08R 332
3616-10.....333
3616S-08P 333
3616S-14P 333
3619MR10 159
36206MR 372
363016 158
363021 158
3631-10R 332
363516 158
363521 158
3641-35 333
3641-50 333
3641-80 333
3641-C0 333
3641-I0 333
365014B 157
365016A 157
365016B 157
366516 158
366521 158
367018 158
367021 158
367516 158
367518 158
367521 158
36A014 157
36B014 157
36B018 157
36B514 157
36C014 157
36D014 157

37 XXXX

3709MR10 159
3716MR 158
372111M 329
372112M 329
372115M 329
372116M 329
372118M 329
37221-030 272
37235-030 273
37235-031 273
3725-08F 161
3725-08G 161
3725DK 161
373008M 326
373009M 326
373010M 326
373011M 326
373012M 326
373013M 326
373014M 326
373015M 326
373016M 326
373017M 326
373018M 326
373019M 326
373021M 326
373022M 326
373024M 326
373108M 326
373109M 326
373110M 326
373111M 326
373112M 326
373113M 326
373114M 326
373115M 326
373116M 326
373117M 326
373118M 326
373119M 326
373121M 326
373122M 326
373124M 326
373127M 326
373130M 326
373132M 326
37321-050 272
373210S 327
373212S 327
373214S 327
373216S 327
373218S 327
373220S 327
373222S 327
373224S 327
373228S 327
37323 273
37323-080 273
37323-081 273
373230S 327
37334-080 272
37334-081 272
37335-030 273
37360809M 328
37361011M 328
37361013M 328
37361213M 328
37361415M 328
37361618M 328
37361719M 328
37370607M 328
37370809M 328
37371011M 328
37371213M 328
37371415M 328
37371618M 328
37371623M 328
373811M 329
373812M 329
373814M 329
373815M 329
3739N0813M 329

3739N0811M 329
3739N1215M 329
3739N1619M 329
373A07M 327
373A08M 327
373A09M 327
373A10M 327
373A11M 327
373A12M 327
373A13M 327
373A14M 327
373A15M 327
373A16M 327
373A17M 327
373A18M 327
373A19M 327
373A21M 327
373A22M 327
373A24M 327
37423 273
37423-080 273
37423-081 273
37434-080 272
37434-081 272
37435-075 273
37435-076 273
375010M 159
375011M 159
375012M 159
375012S 159
375013M 159
375014M 159
375014S 159
375015M 159
375016M 159
375016S 159
375017M 159
375018M 159
375018S 159
375019M 159
375020S 159
375022S 159
375024S 159
3750M 159
3752-09G 161
3752DK 161
3759-08G 161
3759DK 161
3760-45 161
3760DK01 161
3761-08F 161
3761-08P 161
3769-08F 162
3769-08P 162
3769DK 162
3771-08G 162
3771DK 162
3771VE 418
3771VE-08 418
3774-08G 162
3774DK 162
3779-08F 162
3779-08G 162
3779DK 162
3781-11F 162
3781DK 162
378508M 158
378509M 158
378510M 158
378512M 158
378514M 158
378516M 158
3792 164
3793 164
3794 164
3796P 229

38 XXXX

3862P 228
3864P 229
3864P 229
3893EW 141
3893EW 163
3893EW-01 141
3893EW-01 163
3893EW-02 141
3893EW-02 163

39 XXXX

39122008M 491
39122008M N15
39123008M 491
39123010M 491
39123010M 491
39123010M N15
39123012M 491
39124012M 491
39124012M 491
39124012M N15
39124016M 491
39124016M 491
39124016M N15

3E XXXX

3E07PR 165

40 XXXX

4010MR 186
4010SR 186
4012MR 190
4012SR 190
401408M 174
401409M 174
401410M 174
401411M 174
401412M 174
401413M 174
401414M 174
401419M 174
401505M 234
401506M 234
401507M 234
401508M 234
401508S 234
401509M 234
401510M 234
401510S 234
401512M 234
401512S 234
401513M 234
401514M 234
401516S 234
401517M 234
401519M 234
4016SR 190
402102 177
402103 177
402104 177
402208 177
402210 177
402212 177
402214 177
402216 177
402320 178
402325 178
402327 178
402330 178
402340 178
402345 178
402350 178
402355 178
402360 178
402370 178
4024MR 191
4024SR 191
402503 177
402504 177
402505 177
402506 177
402506S 177
402507 177
402507S 177
402508 177
402508S 177
402509 177
402509S 177
402510 177
402510S 177
402511 177
402512 177
402512S 177
402514 177
402514S 177
402516S 177
402517 177
402518S 177
402519 177
402520S 177
402524S 177
4025VE 419
4025VE04 419
4025VE05 419
4025VE06 419
4025VE08 419
4025VE10 419
402605 177
402606 177
402608 177
402610 177
402612 177
402614 177
402616 177
402618 177
4026MR 193
4026MR03 193
4026MR04 193
4026SR 193
4026SR03 193
402720 178
402725 178
402727 178
402730 178
402740 178
402745 178
402750 178
402755 178
402760 178
4028MR 192
4028SR 192
402A10 178
402B16 178
402B18 178
4030CR 194
4030CR01 194
4031MR 191
4031SR 191
4032MR 192
4032SR 192
403320 178
403325 178
403327 178
403330 178
403340 178
403345 178
403350 178
403355 178
403360 178
403370 178
4033MR 191
4033MR03 194
4033SR 191
4034MR 194
4034MR06 194
403504 177
403505 177
403506 177
403507 177
403508 177
403509 177
403510 177
403511 177
403512 177
403514 177
403517 177
403519 177
4035VE04 419
4035VE05 419
4035VE06 419
4035VE08 419
4035VE10 419
403605 177
403606 177
403608 177
403610 177
403612 177
403614 177
403720 178
403725 178
403727 178
403730 178
403740 178
403745 178
403750 178
403755 178
403760 178
404108 178
404108 178
4042CR 195
4042CR02 195
4044CR 195
404605 177
404607 177
404608 177
404610 177
404612 177
404614 177
4047MR 196
404904 178
404905 178
404906 178
404907 178
404908 178
404909 178
404910 178
404912 178
404913 178
404914 178
404916 178
404925 178
405320 235
405325 235
405327 235
405330 235
405340 235
405345 235
405350 235
405355 235
405360 235
405370 235
405504M 235
405505M 235
405506M 235
405506S 235
405507M 235
405508M 235
405508S 235
405510M 235
405510S 235
405512M 235
405512S 235
405513M 235
405514M 235
405514S 235
405516M 235
405516S 235
405517M 235
405518M 235
405519M 235
405608M 235
405610M 235
405612M 235
40603GP 422
406325 235
406327 235
406330 235
406340 235
406345 235
406350 235
406355 235
406360 235
406504M 235
406505M 235
406506M 235
406508M 235
406510M 235
406512M 235
406514M 235
406608 177
406609 177
406610 177
406612 177
406614 177
406616 177
4066MR 175
4066SR 175
4072MR 173
4072SR 173
407505M 235
407506M 235
407508M 235
407510M 235
407512M 235
407514M 235
409616M 236
40D006 177
40D008 177
40D010 177
40D506 177
40D508 177
40D510 177

41 XXXX

41026MR 103
41026MRD 103
4104PR 183
4105PR 187
4106PR 186
4108FR 197
4108PR10 187
4109PR 189
4109PR10 187
4110PR 189
4110PR10 186
4110SR10 186
4111FR 197
4112FR 197
4116FR01 197
4116PR 187
4117PR 189
4118MR 186
4119PR 189
4119PR10 187
4120PR 189
4120PR10 187
4121-11GR 183
4126PR 187
4128PR 189
4136PR 187
414708S 236
414710M 236
414710S 236
414808S 184
414810M 184
414810S 184
4148PR10 186
414A08S 236
41517MRV 104
41517MRVD 104
41526MR 103
41526MRD 103
41542MRV 104
41542MRVD 104
4178VE-08 419

42 XXXX

4208MR 188
4208MR10 186
4208SR 188
42104GP 346
42104GP01 346
42107GX 456
42114GP 347
42116GP 347
42124GP 346
42124GP01 346
42124GP04 346
4213MR 188
42154GP 347
4215MR 188
4216MR 188
4220MR 190
4221-18 183
4221-24 183
4221-30 183
4221-36 183
42213GP01 346
4223-02R 183
4223-05R 183
4223-10R 183
4223MR 190
4224MR 192
423008M 173
423009M 173
423010M 173
423010S 173
423011M 173
423012M 173
423012S 173
423013M 173
423014M 173
423014S 173
423015M 173
423016M 173
423016S 173
423017M 173
423018M 173
423018S 173
423019M 173
423020M 173
423020S 173
423021M 173
423022M 173
423022S 173
423023M 173
423024M 173
423024S 173
423025M 173
423026M 173
423026S 173
423027M 173
423028M 173
423028S 173
423029M 173
423030M 173
423030S 173
423032M 173
423032S 173
423033M 173
423034M 173
423034S 173
423036M 173
423036S 173
423038S 173
423040S 173
423508M 174
423509M 174
423510M 174
423510S 174
423511M 174
423512M 174
423512S 174
423513M 174
423514M 174
423514S 174
423515M 174
423516M 174
423516S 174
423517M 174
423518M 174
423518S 174
423519M 174
423520M 174
423520S 174
423521M 174
423522M 174
423522S 174
423523M 174
423524M 174
423524S 174
423525M 174
423526M 174
423526S 174
423527M 174
423528M 174
423528S 174
423529M 174
423530M 174
423530S 174
423532M 174
423532S 174
423533M 174
423534M 174
423534S 174
423536M 174
423536S 174
423538M 174
423538S 174
423541M 174
423541S 174
423542S 174
423544S 174
423546S 174

423548S 174
424508M 174
424509M 174
424510M 174
424512M 174
424513M 174
424514M 174
42503PR 350
42504PR 350
4251-02R 183
4251-03R 183
4251-04R 183
4251-05R 183
4251-06R 183
4251-08R 183
4251-10R 183
4251VE-05 419
4251VE-10 419
425508M 174
425509M 174
425510M 174
425512M 174
425513M 174
425514M 174
4260-03P 236
4260-04P 236
4260-05P 236
4260-06P 236
4260-08P 236
4260-10P 236
4260-12P 236
4260-16P 236
4269-08-90 236
4269-08-A0 236
4269-08-B0 236
4269-08-C0 236
4269-08-D5 236
4269-08-F0 236
4269-08-G0 236
4269-08-H5 236
4269-08-J0 236
4269-08-K0 236
427508M 175
427510M 175
427512M 175
427514M 175
427516M 175
427518M 175
427520M 175
427522M 175
427524M 175
4275M 175

43 XXXX

4306MRN 197
4308MR 188
4308MR10 186
4311-16F 183
4311-16G 183
4311MR 186
4313MR01 188
4315MR 188
4316MR 188
4320MR 190
43240115Y 591
43240115Y 592
4324MR 192
43250115Y 591
43250115Y 592
4325MR 193
43260115Y 591
43260115Y 592
43270115Y 591
43270115Y 592
43280212 590
43290115Y 591
43290115Y 592
432A0113 592
432A0213 592
433008MR 172
433009MR 172
433010MR 172
433010SR 172
433011MR 172
433012MR 172
433012SR 172
433013MR 172
433013SR 172
433014MR 172
433014SR 172
433015MR 172
433015SR 172
433016MR 172
433016SR 172
433017MR 172
433018MR 172
433018SR 172
433019MR 172
433019SR 172
433020MR 172
433020SR 172
433021MR 172
433022MR 172
433022SR 172
433023MR 172
433024MR 172
433024SR 172
433025MR 172
433025SR 172
433026MR 172
433026SR 172
433027MR 172
433028MR 172
433028SR 172
433029MR 172
433030MR 172
433030SR 172
433032MR 172
433032SR 172
433033MR 172
433034MR 172
433034SR 172
433036MR 172
433036SR 172
433038SR 172
433040SR 172
433044SR 172
43350175Y 591
43350175Y 592
433506MR 172
433507MR 172
433508MR 172
433509MR 172
433510MR 172
433510SR 172
433511MR 172
433512MR 172
433512SR 172
433513MR 172
433514MR 172
433514SR 172
433515MR 172
433515SR 172
433516MR 172
433516SR 172
433517MR 172
433518MR 172
433518SR 172
433519MR 172
433519SR 172
433520MR 172
433520SR 172
433521MR 172
433522MR 172
433522SR 172
433523MR 172
433524MR 172
433524SR 172
433525MR 172
433525SR 172
433526MR 172
433526SR 172
433527MR 172
433528MR 172
433528SR 172
433529MR 172
433530MR 172
433530SR 172
433532MR 172
433532SR 172
433533MR 172
433534MR 172
433534SR 172
433536MR 172
433536SR 172
433538MR 172
433538SR 172
433539MR 172
433541MR 172
433541SR 172
433546MR 172
4335VE08M 419
4335VE10M 419
4335VE11M 419
4335VE12M 419
4335VE13M 419
4335VE14M 419
4335VE15M 419
4335VE16M 419
4335VE17M 419
4335VE18M 419
4335VE19M 419
4335VE20M 419
4335VE21M 419
4335VE22M 419
4335VE24M 419
4335VE27M 419
4335VE30M 419
4335VE32M 419
43360175Y 591
43360175Y 592
43370175Y 591
43370175Y 592
43390175Y 591
43390175Y 592
433E18M 175
433E20M 175
433E22M 175
433E24M 175
433E26M 175
433E28M 175
433E30M 175
433E32M 175
437508M 175
437510M 175
437511M 175
437512M 175
437514M 175
437516M 175
437518M 175
437520M 175
437522M 175
437524M 175

44 XXXX

4405MXL 240
4407MP 242
4408MP 238
4408SP 238
44106AMP01 269
44108AMP01 269
4410MP 239
4410MP01 239
4410SP 239
44116MP 268
44116MP04 268
44116MP10 268
44118MP 268
44118MP04 268
44118MP10 268
4412MP 239
4413MP 239
4414MP 239
4414SP 239
441517M 233
441519M 233
441521M 233
441522M 233
4415M 233
4415MP 240
4415MP03 240
4416SP 239
4417PP 242
4418MP 242
4419MP 239
4421MP1 238
4423MP 238
443008M 231
443009M 231
443010M 231
443011M 231
443012M 231
443013M 231
443014M 231
443015M 231
443016M 231
443017M 231
443018M 231
443019M 231
443020M 231
443020S 231
443021M 231
443022M 231
443023M 231
443024M 231
443024S 231
443027M 231
443028S 231
443030M 231
443030S 231
443032M 231
443032S 231
443034S 231
443036M 231
443036S 231
443040S 231
443042S 231
443048S 231
443508M 232
443509M 232
443510M 232
443510S 232
443511M 232
443512M 232
443512S 232
443513M 232
443514M 232
443514S 232
443515M 232
443516M 232
443516S 232
443517M 232
443518M 232
443518S 232
443519M 232
443520M 232
443520S 232
443521M 232
443522M 232
443522S 232
443523M 232
443524M 232
443524S 232
443525M 232
443526M 232
443526S 232
443527M 232
443528M 232
443528S 232
443529M 232
443530M 232
443530S 232
443532M 232
443532S 232
443533M 232
443534M 232
443534S 232
443536M 232
443536S 232
443538M 232
443538S 232
443540S 232
443541M 232
443542S 232
443546M 232
4452-15FR 183
4452-18FR 183
4452-24FR 183
4452DK 183
4452DK1 183
4453-15F 183
4453-18F 183
4457MP 242
4461-24G 184
4461DK 184
4462-18F 184
4462-24F 184
4462DK 184
4466MP 232
4466MP-A 232
4466MP-DA 232
4466MP-DB 232
4466SP 232
4466SP-A 232
4466SP-D 232
4467PP 242
4472MP 231
4472MP-A 231
4472MP-D 231
4472SP 231
4472SP-A 231
4472SP-D 231
4476MP 242
44801AMP 270
44801AMP01 270
44801BMP 270
44801FMP 270
44801FMP01 270
44802AMP 270
44802BMP 270
44802FMP 270
44803AMP 271
44803BMP 271
44803FMP 271
4481PP1 237
44904MP 241
44904MP01 241
44904MP01 573
44904MP02 241
44904MP02 573
44905MP 241
44906MP 240
44907MP 241
44907MP 573
44K732M 223
44K738M 223
44K745M 223
44K752M 223
44K758M 223
44K832M 223
44K838M 223
44K845M 223
44K852M 223
44K858M 223
44K928M 222
44K932M 222
44K938M 222

45 XXXX

4501MR 189
4503MR01 335
4505MR 197
4505SR 197
4506MR 335
4510MR 186
4510SR 186
4511-06 338
4511-10.....338
45115PP 348
45115PP 595
4511MR 189
4511SR 189
4512MR 190
4512SR 190
4516MR 190
4516SR 190
45211PP 349
45211PP 595
4523MRV01 196
4524MR 191
4524MRV04 196
4524SR 191
452513M 230
452514M 230
452517M 230
452519M 230
452521M 230
452522M 230
452524M 230
4525M 230
4526MR 193
4526MR03 193
4526MR15 196
4526SR 193
4526SR03 193
4528MR 192
4528SR 192
453008M 229
453009M 229
453010M 229
453011M 229
453012M 229
453013M 229
453014M 229
453015M 229
453016M 229
453016S 230
453017M 229
453018M 229
453018S 230
453019M 229
453020M 229
453020S 230
453021M 229
453022M 229
453022S 230
453023M 229
453024M 229
453024S 230
453025M 229
453026M 229
453026S 230
453027M 229
453028M 229
453028S 230
453029M 229
453030M 229
453030S 230
453032M 229
453032S 230
453033M 229
453034M 229
453034S 230
453036M 229
453036S 230
453038M 229
453038S 230
453041M 229
4531MR 191
4531SR 191
4532MR 192
4532SR 192
4533MR 191
4533MR03 194
4533SR 191
4534MR 194
4534MR06 194
453508M 230
453509M 230
453510M 230
453510S 231
453511M 230
453512M 230
453512S 231
453513M 230
453514M 230
453514S 231
453515M 230
453516M 230
453516S 231
453517M 230
453518M 230
453518S 231
453519M 230
453520M 230
453520S 231
453521M 230
453522M 230
453522S 231
453523M 230
453524M 230
453524S 231
453525M 230
453526M 230
453526S 231
453527M 230
453528M 230
453528S 231
453529M 230
453530M 230
453530S 231
453532M 230

453532S 231
453533M 230
453534M 230
453534S 231
453535M 230
453536M 230
453536S 231
453537M 230
453538M 230
453538S 231
453539M 230
453540S 231
453541M 230
453546M 230
4535MR 195
4542CR 195
4542CR02 195
4544CR 195
4547MR 196
4566MR 175
4572DK 184
4572MR 173
4572SR 173
4573-10R 184
4573DK 184
457510M 234
457512M 234
457514M 234
457516M 234
457518M 234
457520M 234
4583-12R 184
4584-12R 184
45VE01MRV 419

46 XXXX

463014RC 176
463016RC 176
463021RC 176
463514RC 176
463516RC 176
463521RC 176
466016 176
466516C 176
466521C 176
467014C 176
467016 176
467021 176
467514C 176
467516 176
467521 176

47 XXXX

4725-10FR 179
4725-10GR 179
4725-12BR 179
4725-12FR 179
4725-12GR 179
4725DKR01 179
4752-12G 180
4752DK 180
4756-10G 179
4756DK 179
4759-10G 179
4759DK 179
4760-05G 180
4760DK01 180
4762-10F 180
4762-10G 180
4762-10P 180
4762-15G 180
4762DK 180
4768-10F 180
4768-10G 180
4768-10P 180
4768DK 180
4771-10BR 180
4771-10FR 180
4771-10GR 180
4771DK 180
4771VE-10 419
4773-10GS 182
4773-10GS 182
4773-22GS 182
4773-22GS 182
4773DK 182
4773DK 182
4774-10G 181
4774DK 181
4779-10BR 181
4779-10FR 181
4779-10GR 181
4779DK01 181
4781-12F 181
4781DK 181
4791R 185
4791R 185
4793 185
4794 185
4794 185
4795-18 338
4796P 237
4797P 237
4798P 237
4799P 237

48 XXXX

4813 184
4815MP04 240
4815MP05 240
4816 184
482547 163
482639 163
482761 163
48280180 590
483249 163
483277 163
483369 163
483491 163
483510M 232
483511M 232
483512M 232
483513M 232
483514M 232
483516M 232
483517M 232
483519M 232
483521M 232
483522M 232
483523M 232
483524M 232
483526M 232
483527M 232
483530M 232
483535M 232
4844R 185
4863P 238
4866P 238
4873P 237

49 XXXX

49151719M 234
49151921M 234
49152122M 234
49152123M 234
49152426S 234
493008M 233
493009M 233
493010M 233
493011M 233
493012M 233
493013M 233
493014M 233
493015M 233
493016M 233
493017M 233
493018M 233
493019M 233
493020M 233
493021M 233
493022M 233
493023M 233
493024M 233
493027M 233
493030M 233
493032M 233
493036M 233
493510M 233
493510S 233
493511M 233
493512M 233
493512S 233
493513M 233
493514M 233
493514S 233
493516M 233
493516S 233
493517M 233
493518S 233
493519M 233
493520S 233
493521M 233
493522M 233
493522S 233
493523M 233
493524M 233
493524S 233
493526M 233
493526S 233
493527M 233
493528S 233
493530M 233
493530S 233
493532S 233
493534S 233
493536S 233
493538S 233
493541S 233
494515M 234
494517M 234
494519M 234
494521M 234
494522M 234
495517MX 234
495519MX 234
495521MX 234
4955MX 234

50 XXXX

5022MR 206
5022SR 206
502503H 377
502504H 377
502505H 377
502506H 377
502507H 377
502508H 377
502509H 377
502510H 377
5025H 377
5039CR 206
5060-08 313
5060-10 313
5060-12 313
5060-14 313
5060-16 313
5060-18 313
5060-20 313
5060-22 313
5060-24 313
5060-26 313
5060-28 313
5060-30 313
5060-32 313
5060-34 313
5060-36 313
5060-38 313
5060-40 313
5071-42 313
5071-44 313
5071-46 313
5071-48 313
5071-50 313
5071-52 313
5071-54 313
5071-56 313
5071-58 313
5071-60 313
5071-62 313
5071-64 313
5071-72 313
5071-80 313
5071-88 313
5071-96 313
5084-16 330
5084-18 330
508845 163
508937 163
509059 163

51 XXXX

5169PR 382

54 XXXX

5450-08 376
5450-10 376

55 XXXX

5522MR 206

57 XXXX

577302 413
577302 .....N15
577407M 337
577408M 337
577410M 337
577412M 337
577413M 337
577414M 337
577415M 337
577417M 337
577418M 337
577419M 337

58 XXXX

588558 337
588680 337

59 XXXX

59000810 317
59001012 317
59001214 317
59001416 317
59001618 317
59001820 317
59002022 317
59002224 317
59002628 317
59003032 317
59003034 317
59003236 317
59003640 317
59301012 322
59301214 322
59301416 322
59301618 322
59301820 322
59302224 322
59302428 322
59601214 318
59601618 318
59602022 318
59602428 318
59603032 318
59700810 319
59701012 319
59701214 319
59701416 319
59701618 319
59701820 319
59702022 319
59702224 319
59702428 319
59702628 319
59703032 319
59703436 319
59703640 319
59703842 319

60 XXXX

6011-05 349
6011-07 349
6011-07R 349
6011-10 349
6011-10R 349
6012-07 349
6012-10 349
6013-10 350
6014MR 202
6014MR12 203
601514M 246
601517M 246
601519M 246
601521M 246
601522M 246
601524M 246
601527M 246
601530M 246
601532M 246
6016MR 202
6016SR 202
602360 200
602370 200
602380 200
602390 200
6023A0 200
6023MR 202
6023SR 202
602514 200
602517 200
602519 200
602522 200
6031-07 350
6031-10 350
609616M 246
609616M10H 246
609616M12H 246
609616M14H 246
609616M17H 246
609616M19H 246
609616M22H 246
609622M19H 246
609622M22H 246
609622M24H 246
609622M27H 246
609622M30H 246
609622M32H 246
610534 163

61 XXXX

6111-06 342
6111-07 342
6111-08 342
6112-09 342
6114-05 342
6116-07A 422
6116-08A 422
6121-06X 351
6121-09X 351
6131-12 345
6131-12P01 345
6131-14 345
6131-14P01 345
6131-18 345
6131-18P01 345
6131-24 345
6131-24P01 345
6131-30 345
6131-30P01 345
6131-36 345
6131-36P01 345
6131-42 345
6131-42P01 345
6133-08 345
6141-06C 449
6141-08C 449
6146-08A 422

62 XXXX

6207-05 429
6211-06 342
6213-06 342
6214-05 342
6214-45 342
6216-06A 422
6217-05 429
6224CR 202
6226CR 203
623030M 199
623032M 199
623033M 199
623036M 199
623039M 199
623041M 199
623046M 199
623050M 199
6231-07 342
6232-08 342
623517M 199
623518M 199
623519M 199
623520M 199
623521M 199
623522M 199
623523M 199
623524M 199
623525M 199
623526M 199
623527M 199
623528M 199
623529M 199
623530M 199
623531M 199
623532M 199
623533M 199
623534M 199
623535M 199
623536M 199
623537M 199
623538M 199
623539M 199
623541M 199
623541M 199
623542M 199
623543M 199
623544M 199
623545M 199
623546M 199
623547M 199
623548M 199
623549M 199
623550M 199
623551M 199
623552M 199
623553M 199
623554M 199
623555M 199
623556M 199
623557M 199
623558M 199
623559M 199
623560M 199
623563M 199
623565M 199
623570M 199
6236-07A 422
6247-05 429
6251-16 200
6260-04 247
6260-04P 247
6260-07 247
6260-07P 247
6260-10 247
6260-10P 247
6260-13 247
6260-13P 247
627032 333
6271-05C 430
6271-65C 430

63 XXXX

6311-06 343
6311-08 343
6313-06 343
6314-05 343
6314MR 202
6314MR12 203
6315-06 350
6315-09 350
6316MR 202
6317-06 430
6318-08A 422
6319-11C 343
6323MR 202
6329-13C 343
633017M 198
633019M 198
633021M 198
633022M 198
633022S 198
633023M 198
633024M 198
633024S 198
633026M 198
633026S 198
633027M 198
633028M 198
633028S 198
633029M 198
633030M 198
633030S 198
633032M 198

633032S 198
633033M 198
633034M 198
633034S 198
633035M 198
633036M 198
633036S 198
633038M 198
633038S 198
633040S 198
633041M 198
633042M 198
633042S 198
633044S 198
633046M 198
633046S 198
633048M 198
633048S 198
633050M 198
633050S 198
633052S 198
633054M 198
633054S 198
633055M 198
633056S 198
633058M 198
633058S 198
633060M 198
633060S 198
633062S 198
633063M 198
633064S 198
633065M 198
633066S 198
633068S 198
633070M 198
633070S 198
633072S 198
633074S 198
633076S 198
633078S 198
633080S 198
633082S 198
633084S 198
633086S 198
633088S 198
6331-06 344
6331-08 344
6334-05 343
633517M 199
633518M 199
633519M 199
633520M 199
633521M 199
633522M 199
633523M 199
633524M 199
633525M 199
633526M 199
633527M 199
633528M 199
633529M 199
633530M 199
633531M 199
633532M 199
633533M 199
633534M 199
633535M 199
633536M 199
633537M 199
633538M 199
633539M 199
633541M 199
633541M 199
633542M 199
633543M 199
633544M 199
633545M 199
633546M 199
633547M 199
633548M 199
633549M 199
633550M 199
633551M 199
633552M 199
633553M 199
633554M 199
633555M 199
633556M 199
633557M 199
633558M 199
633559M 199
633560M 199
633562M 199
633563M 199
633564M 199
633565M 199
633570M 199
6336-08A 422
6337-06 430
6339-13C 343
6347-05 431
6347-05 431
6377-55 430
63A7-05 431
63B7-05 431

64 XXXX

6408MP 248
6408MP10 248
6408SP10 248
6409MP 248
6409MP03 248
6409SP10 248
6410MP 248
6410SP 248
6411-06 344
64114AMP 271
64114FMP 271
6411MP 248
6424MP 248
6431-10C 344
6431-11C 344
643519M 244
643521M 244
643522M 244
643523M 244
643524M 244
643524S 244
643525M 244
643526M 244
643526S 244
643527M 244
643528M 244
643528S 244
643529M 244
643530M 244
643530S 244
643532M 244
643532S 244
643533M 244
643534M 244
643534S 244
643535M 244
643536M 244
643536S 244
643538M 244
643538S 244
643540M 244
643540S 244
643541M 244
643542M 244
643542S 244
643543M 244
643544M 244
643544S 244
643546M 244
643546S 244
643548M 244
643548S 244
643550M 244
643550S 244
643552S 244
643554S 244
643555M 244
643556S 244
643558S 244
643560M 244
643560S 244
643562S 244
643564S 244
643565M 244
6452-18F 200
6452-30F 200
6452DK 200
6462-40P 200
6462DK 200
6463-08C 344
647518M 245
647520M 245
647522M 245
647524M 245
64801AMP 271
64801BMP 271
64801FMP 271
6482-24G 201
6482DK 201
64K765M 223
64K770M 223
64K775M 223
64K780M 223
64K8 223
64K865M 223
64K870M 223
64K875M 223
64K880M 223
64K975M 222
64K9M 222

65 XXXX

651017M 242
651018M 242
651019M 242
651021M 242
651022M 242
651023M 242
651024M 242
651026M 242
651027M 242
651028M 242
651029M 242
651030M 242
6511-10 345
6511-10C 345
6511-13C 345
6511-17C 345
651417M 245
651419M 245
651420M 245
651421M 245
651514M 243
651515M 243
651516M 243
651517M 243
651518M 243
651519M 243
651521M 243
651522M 243
651523M 243
651524M 243
651525M 243
651526M 243
651527M 243
651528M 243
651529M 243
651530M 243
6516-10 344
6516-10A 422
6516-10C 344
6517-08C 344
6517-10C 344
6517-12C 344
6518-10C 345
6521-13 358
6521-16 358
6521-21 358
6521-26 358
6522-12 358
6522-16 358
6522-22 358
6522-25 358
6522-29 358
653017M 243
653019M 243
653021M 243
653022M 243
653023M 243
653024M 243
653026M 243
653027M 243
653028M 243
653029M 243
653030M 243
653032M 243
653033M 243
653034M 243
653035M 243
653036M 243
653038M 243
653040M 243
653041M 243
653042M 243
653046M 243
653063M 243
653065M 243
653070M 243
6531-10 358
6531-12 358
6531-14 358
6531-18 358
6531-24 358
6531-36 358
6531-48 358
6532-08 358
6532-10 358
6532-12 358
6532-14 358
6532-18 358
6532-24 358
6532-36 358
6532-48 358
6533-10L 359
6533-12L 359
6533-14L 359
6533-18L 359
6533-24L 359
6533-36L 359
6533-48L 359
653513M 243
653517M 243
653518M 243
653519M 243
653521M 243
653522M 243
653522S 244
653523M 243
653524M 243
653524S 244
653526M 243
653526S 244
653527M 243
653528M 243
653528S 244
653529M 243
653530M 243
653530S 244
653531M 243
653532M 243
653532S 244
653533M 243
653534M 243
653534S 244
653535M 243
653536M 243
653536S 244
653538M 243
653538S 244
653540M 243
653540S 244
653541M 243
653542M 243
653542S 244
653543M 243
653544M 243
653544S 244
653545M 243
653546M 243
653546S 244
653548M 243
653548S 244
653550M 243
653550S 244
653552M 243
653552S 244
653554M 243
653554S 244
653555M 243
653556S 244
653557M 243
653558M 243
653558S 244
653560M 243
653560S 244
653562S 244
653563M 243
653564S 244
653565M 243
653566S 244
653568S 244
653570M 243
653570S 244
653572S 244
653574S 244
653576S 244
6572-20 201
6572DK 201
657524M 245
657526M 245
657528M 245
657530M 245
657532M 245
6581-18 201
6585-19 201
65SS-07 347

66 XXXX

6605-08 350
6615-06 351
6615-11 351
6615-18 351
6625-06 351
6625-11 351
6625-18 351
6665-09 350
66HB-05 346
66HB-07 346
66HB-10 346
66HS-05 346
66HS-07 346
66HS-10 346
66SB-05 346
66SB-07 346
66SB-10 346
66SS-05 346
66SS-07 346
66SS-10 346

67 XXXX

6711-06 344
6716-06A 422
6720-10 458
6721-10 458
6724-20F 200
6724DK 200
6732-09 458
6732-09 458
6742-06 458
6751-44 452
6755-05 453
6756-05 453
6761-07 452
6762-08 452
6778-20FS 200
6778DK 200
6779-20F 200
6779DK 200
6781-85 456
6781P0A 456
6781P0B 456
6781P0C 456
6781P0D 456
6781P0F 456
6781P0H 456
6791 201
6797P 246
6798P 246
67A1-07 452
67B1-06 453
67B2-05 454
67B3-55 454
67F1-08 456
67G 457
67G0005 456
67GG-09 457
67GH-09 457
67GHP01 456
67GHP01 457
67GJ-09 457
67GJP01 456
67GK-09 457
67GKP01 456
67GL-09 457
67GLP01 455
67GN-09 456
67GNP01 456
67HB-07 347
67HS-07 347
67SS-07 347
67SB-07 347

68 XXXX

68 482
6814 201
6818 201
683517M 245
683519M 245
683521M 245
683522M 245
683523M 245
683524M 245
683526M 245
683527M 245
683529M 245
683530M 245
683532M 245
6864 247
6864P 247
6868 247
6868P 247
6874 247
6874P 247
68GB-01 348
68GB-01 595
68GB-02 349
68GB-02 595
68GQ-01 595
68GQ-01 348
68GQ-02 349
68GQ-02 595
68GR-01 348
68GR-01 595
68GS-11 348
68GS-11 595
68GS-16 349
68GS-16 349
68GS-16 349
68GS-16 349
68GS-16 595
68GS-16 595
68GS-16 595
68GZ-02 349
68GZ-02 349
68GZ-02 595
68GZ-02 595
68HB-05 347
68HB-07 347
68HB-07L 348
68HB-07L 348
68HB-10 347
68HS-05 347
68HS-07 347
68HS-10 347
68RB-01 348
68RB-01 595
68RQ-01 348
68RQ-01 595
68RR-01 348
68RR-01 595
68RS-11 348
68RS-11 595
68RS-16 349
68RS-16 595
68SB-05 347
68SB-07 347
68SB-10 347
68SS-05 347
68SS-07 347
68SS-10 347
68ZZ-01 348
68ZZ-01 595
68ZZ-02 349
68ZZ-02 595

69 XXXX

6921-05 342
6921-06 342
6921-07 342
6927-05 429
693519M 245
693521M 245
693522M 245
693523M 245
693524M 245
693524S 245
693526M 245
693526S 245
693527M 245
693528S 245
693529M 245
693530M 245
693530S 245
693532M 245
693532S 245
693534S 245
693536S 245
693538S 245
693540S 245

6A XXXX

6AB12-55 446
6AB13-06 446
6AB13VE-06 421
6AB13VE-06 .....N17
6AB14-06 447
6AB14-65 447
6AB21-65 446
6AB31-75 446
6AB33-95 448
6AC51-26 459
6AC52-12 459
6AD10-325 449
6AD10-3P01 449
6AD16-500 449
6AD17-150 449
6AD23-400 449
6AF11-125 436
6AF21-165 436
6AG11-20 437
6AH01-1 436
6AH01-2 436
6AH01-4 436
6AH11 436
6AH12 436
6AH13 436

6B XXXX

6BB11 482
6BC100 436
6BC141-1 434
6BC141A 434
6BC200 436
6BC210A 434
6BC210B 434
6BC210D 434
6BC210F 434
6BC23-1 435
6BC23A 434
6BC24A 434
6BC26-1 435
6BC26-3 435
6BC26A 434
6BC26B 434
6BC26C 434
6BC26F 434
6BC3007 435
6BC372 435
6BC372-1 435
6BC372-2 435
6BC372-3 435
6BC372-4 435
6BC372-5 435
6BD11 435
6BD22 435
6BE11-07 436
6BE12-07 436
6BE16-07 436
6BF11-17 435
6BF21-17 435
6BJ21 482
6BJ901 482

6C XXXX

6CB02 443
6CB21 443
6CB31 441
6CB41 442

70 XXXX

7003MR 215
7010MR 216
7011MR 209
7028MR 217
7053MR01 218
7077MR 211
7081MR 212
7082MR 210
7087MR 213
7096MR 208
7098MR 214

71 XXXX

711002P 388
711002P-S1 390
711102H 388
711102H-S1 390
711103H 388
711103H-S1 390
711104H 388
711104H-S1 390
711105H 388
711105H-S1 390
711106H 388
711106H-S1 390
711107H 388
711107H-S1 390
711108H 388
711110H 388
711110T 388
711110T-S1 390
711110U 389
711110U-S1 391
711115T 388
711115T-S1 390
711115U 389
711115U-S1 391
711120T 388
711120T-S1 390
711120U 389
711120U-S1 391
711125H 388
711125H-S1 390
711125T 388
711125T-S1 390
711125U 389
711125U-S1 391
711127T 388
711127T-S1 390
711127U 389
711127U-S1 391
711130T 388
711130T-S1 390
711130U 389
711130U-S1 391
711140T 388
711140T-S1 390
711140U 389
711140U-S1 391
7112PR 205
7113PR 205
711501P 388
711501P-S1 390
711502H 388
711502P 388
711502P-S1 390
711503H 388
711503P 388
711503P-S1 390
711504H 388
711505H 388
711505H-S1 390
711506H 388
711506T 388
711506T-S1 390
711507T 388
711507T-S1 390
711508H 388
711508T 388
711508T-S1 390
711509T 388
711509T-S1 390
711510T 388
711510T-S1 390
711512SH-S1 390
711515T 388
711515T-S1 390
711515U 389
711520T 388
711520T-S1 390
711520U 389
711525T 388
711525T-S1 390
711525U 389
711527T 388
711527T-S1 390
711527U 389
711530T 388
711530T-S1 390
711530U 389
711540T 388
711540T-S1 390
7120PR 205
7120PR01 205
715000P 388
715000P-S1 390
715000R 389
715000R-S1 391
715001P 388
715001P-S1 390
715001R 389
715001R-S1 391
715001Z 389
715001Z-S1 391
715002H 388
715002H-S1 390
715002P 388
715002P-S1 390
715002R 389
715002R-S1 391
715002Z 389
715002Z-S1 391
715003H 388
715003H-S1 390
715003P 388
715003P-S1 390
715003R 389
715003R-S1 391
715003S1 388
715003S1-S1 390
715003Z 389
715003Z-S1 391
715004H 388
715004H-S1 390
715004P 388
715004P-S1 390
715004S1 388
715004S1-S1 390
715004S2 388
715004S2-S1 390
715005H 388
715005H-S1 390
715005S1 388
715005S1-S1 390
715006H 388
715006H-S1 390
715006S1 388
715006S1-S1 390
715006T 388
715006T-S1 390
715007H 388
715007H-S1 390
715007T 388
715007T-S1 390
715008H 388
715008H-S1 390
715008T 388
715008T-S1 390
715009T 388
715009T-S1 390
715009U 389
715009U-S1 391
715010T 388
715010T-S1 390
715010U 389
715010U-S1 391
715012SH 388
715012SH-S1 390
715014SH 388
715014SH-S1 390
715015T 388
715015T-S1 390
715015U 389
715015U-S1 391
715020T 388
715020T-S1 390
715020U 389
715020U-S1 391
715025H 388
715025H-S1 390
715025T 388
715025T-S1 390
715025U 389
715025U-S1 391
715027T 388
715027T-S1 390
715027U 389
715027U-S1 391
715030T 388
715030T-S1 390
715030U 389
715030U-S1 391
715035S1 388
715035S1-S1 390
715040T 388
715040T-S1 390
715040U 389
715040U-S1 391
715045S1 388
715045S1-S1 390
715050T 388
715050T-S1 390
715055S1 388
715055S1-S1 390
715065S1 388
715065S1-S1 390
716502P 388
716502P-S1 390
717000R 389
717000R-S1 391
717001P 388
717001P-S1 390
717001R 389
717001R-S1 391
717001Z 389
717001Z-S1 391
717002H 388
717002P 388
717002P-S1 390
717002R 389
717002R-S1 391
717002Z 389
717002Z-S1 391
717003H 388
717003P 388
717003P-S1 390
717003R 389
717003R-S1 391
717003Z 389
717003Z-S1 391
717004H 388
717005H 388
717005H-S1 390
717006H 388
717006H-S1 390
717006T 388
717006T-S1 390
717007T 388
717007T-S1 390
717008H 388
717008T 388
717008T-S1 390
717009T 388
717009T-S1 390
717010T 388
717010T-S1 390
717010U 389
717010U-S1 391
717015T 388
717015T-S1 390
717015U 389
717015U-S1 391
717020T 388
717020T-S1 390
717020U 389
717020U-S1 391
717025H 388
717025T 388
717025T-S1 390
717025U 389
717025U-S1 391
717027T 388
717027T-S1 390
717027U 389
717027U-S1 391
717030T 388
717030T-S1 390
717030U 389
717030U-S1 391
717040T 388
717040T-S1 390
717040U 389
717040U-S1 391
719001P 388
719001P-S1 390
719001Z 389
719001Z-S1 391
719002P 388
719002P-S1 390
719002Z 389
719002Z-S1 391
719003P 388
719003P-S1 390
719003Z 389
719003Z-S1 391

72 XXXX

721102P 389
721102P-S1 391
726502P 389
726502P-S1 391
727502P 389
727502P-S1 391

73 XXXX

731101P 389
731101P-S1 391
731102P 389
731102P-S1 391
731103P 389
731103P-S1 391
731152P 392
731502P 389
731502P-S1 391
731503P 389
731503P-S1 391
731552P 392
734501P 389
734501P-S1 391
734502P 389
734502P-S1 391
734503P 389
734503P-S1 391
734551P 392
734552P 392
736501P 389
736501P-S1 391
736502P 389
736502P-S1 391
736552P 392

74 XXXX

74010 487
74020 487
74030 487
74040 487
74060 487
741002P 389
741002P-S1 391
7411PP 238
741502P 389
741502P-S1 391
742002P 389
74250 488
74260 488
74270 488
743002P 389
743003P 389
74410 488
74412 488
74414 488
74416 488
745002P 389
745002P-S1 391
74512 488
74514 488
74613 489
747501P 389
747501P-S1 391
747502P 389
747502P-S1 391
747503P 389
747503P-S1 391
74A00 479

75 XXXX

750-100 392
750-150 392
7503MR 215
750-50A 392
750-60 392
750-75 392
75101-08G 489
75101-10G 489
75102-08G 489
75102-10G 489
7510G 489
7510MR 216
7511MR 209
751-60 392
751-75 392
75201-08G 489
75201-10G 489
75202-08G 489
75202-10G 489
752-100 393
752-150 393
752-300 393
752-60 393
752-75 393
7528MR 217
7528MR01 217
75302-08G 489
75302-10G 489
753-63 393
753B-280D1 394
753B-280D1-S 394
75402-08G 489
75402-10G 489
7541G 489
754-90 393
75501-08G 489
75501-10G 489
75502-08G 489
75502-10G 489
755-300 393
7553MR01 218
755-400 393
7558MR 206
7577MR 211
7581MR 212
7581MR01 212
7582MR 210
7587MR 213
7587MR01 213
759-140 393
7596MR 208
7598MR 214
75A105M 395
75A106M 395
75A108M 395
75A110M 395
75A112M 395
75A114M 395
75A116M 395
75RF09M 483

76 XXXX

7606508S 395
7606510S 395
7606512M 395
7606512S 395
7607510M 395
76103-04 464
76104-05 464
76104-74G 466

76105-06 464
76106-74G 466
76108-74G 466
7611006M 395
7611008M 395
7611010M 395
7611012M 395
7611013M 395
7611014M 395
76110-74G 466
7611506M 395
7611507M 395
7611508M 395
7611510M 395
7611512M 395
7611513M 395
7611514M 395
7612006M 395
7612008M 395
7612010M 395
7612012M 395
7612014M 395
76125-74G 466
7614208S 395
7614210S 395
7614512S 395
7616505M 395
7616506M 395
7616507M 395
7616508M 395
7616508S 395
7616510M 395
7616510S 395
7616512M 395
7616512S 395
7616513M 395
7616514M 395
7616514S 395
76210-10 465
76213-04 465
76213-06 465
76215-05 465
76217-06 465
76218-75G 466
76219-75G 466
76220-07 465
76220-84G 466
76222-84G 466
76223-08 465
76224-10 465
76226-12 465
76301-05 464
76302-05 464
76302-74G 466
76303-05 464
76303-74G 466
76304-05 464
76304-74G 466
76305-05 464
76305-74G 466
76306-05 464
76306-74G 466
76307-05 464
76308-05 464
76308-74G 466
76309-06 464
76310-06 464
76402-45 465
76402-55G 466
76403-05 465
76403-06 465
76403-06G 466
76404-06 465
76404-07G 466
76405-08G 466
76405-65 465
76406-07 465
76406-84G 466
76407-84G 466
76408-08 465
76408-88G 466
76409-88G 466
76410-09G 466
76410-14G 466
76410-85 465
7641206P 487
7641206P 487
76412-09 465
76412-10G 466
76412-14G 466
76414-10 465
76414-11G 466
76414-14G 466
76416-12G 466
76416-14G 466
76505-05 465
76717-05 467
76721-06 467
76724-08 467
76729-10 467
76804-05 467
76807-06 467
76B808M 396
76B809M 396
76B812M 396
76B813M 396
76B814M 396
76B815M 396
76B816M 396
76B819M 396
76B821M 396
76C1108M 396
76C1109M 396
76C1110M 396
76C1111M 396
76C1112M 396
76C1113M 396
76C1114M 396
76C1117M 396
76C1119M 396
76C1121M 396
76C1123M 396
76C1124M 396
76MBH.....374
76MBH.....N16
76MBH-S2.....374
76MBH-S2.....N16

77 XXXX

7702-25 396
7702-50 396
7702-75 396
7703-50 396
7704-50 396
7704-50 574
7704-50 574
77133-06 478
77133-08 478
77142-061.....478
77142-081.....478
77328-26 479
77335-25 478
77340-20 478
7743-56 396
7744-60 396
7773GS 181

78 XXXX

78106 201
7811-08 463
7811-12 463
7811-16 463
7811-24 463
7811-32 463
7811-40 463
7821-30 463
7821-50 463
7821-80 463
7822-40 463
7822-45 463
7822-50 463
7823-10 463
7823-15 463
7823-20 463
7833-10 463
7833-12 463
7833-15 463
7833-20 463
7834-50 463
7842-22 464
7842-28 464
7842-35 464
7842-45 464
7842-60 464
7848-60 464
7848-80 464
7851-08 464
7851-16 464
7851-24 464
7851-32 464
7851-40 464
7851-48 464
7851-64 464
7852-23 463
7852-55 463
7861-08 463
7861-16 463
7861-20 463
7861-24 463
786P06 247

79 XXXX

79062 477
79062-12 477
79063-06 478
79063-12 478
79063-20 478
79063-40 478
79093-02M 476
79093-03C 476
79093-03M 476
79093-05C 476
79093-05M 476
79093-05M1 476
79093-08C 476
79093-08M 476
79094-02M 476
79094-03C 476
79094-03M 476
79094-05C 476
79094-05C1 476
79094-05M 476
79094-08C 476
79094-08M 476
79095-05M 476
79095-05M-S 476
7911-12 489
7912-0111 355
7912-21 355
7912-22 355
7912-23 355
7912-2311 355
7913 357
7913-42 357
7913-4211 357
7913A-63 357
7913A-6311 357
7913B-35 357
7913B-3511 357
7914A-0111 356
7914A-0111 357
7914A-35 356
7914C-70 356
7914C-7021 356
7915-30 356
7915-3011 356
7915A-19 357
7915A-28 357
7916-0111 356
7916-12M 356
7916-15M 356
7916-21M 356
7916M 356
7918-A0 355
7918-A011 355
7921-12 489
7932-04 450
7933-45 450
7935-08 450
7939VE-01 421
7939VE-01 .....N17
7939VE-07 421
7939VE-07 .....N17
7941-08 450
7946-07 448
7946-07-S 448
7962-03 471
7962-04 471
7962-06 471
7962-08 471
7962-12 471
7962B-05 471
7962B-06 471
7962B-08 471
7962B-10 471
7962B1PR 471
7962B-35 471
7963-03 471
7963-04 471
7963-06 471
7963-08 471
7963-12 471
7963C-03 473
7963C-03 .....N18
7963C-05 473
7963C-05 .....N18
7963C-08.....473
7963C-08.....N18
796401MR 474
7965-02 471
7971-07 451
7971-07P02 451
79711 475
79721 475
79731 475
7977-07 451
7977-07P02 451
7977-07-S 451
7978-07 451
7978-07P02 451
7978-07-S 451
79815 507
79831 507
79833 508
79834 508
79834 .....N24
79900-04 274
79900-10 274
79900-13 274
79900-20 274
79901-04 274
79901-10 274
79901-13 274
79901-20 274
7990A 275
7990A-P02 275
7990A-P03 275
7990A-P04 275
7990A-P05 275
7990A-P06 275
7990A-P07 275
7990A-P08 277
79910-10 277
79910-15 277
79911-10 277
79911-15 277
79912-10 277
79912-15 277
79953-10 276
79953-15 276
79960-10 276
79960-15 276
79960-20 276
79962-10 276
79962-15 276
79962-20 276
79982-06 274
79982-10 274
799A0-23C 277
799A0-33C 277
799A0-43C 277
799A1-23C 277
799A1-33C 277
79A21-30 479
79A22-30 479
79B1-01 374

7A XXXX

7AA105 481

7C XXXX

7CA0107M 359
7CA0110S 359
7CA0606S 360
7CA0606S1 360
7CA11-12S 360
7CA11-15M 360
7CA11-16M 360
7CA11-16S 360
7CA11-20S 360
7CA11-24S 360
7CA15-10M 361
7CA81-30H 481
7CA81-30H 481
7CA82-30 481

7D XXXX

7DM1160 477

7E XXXX

7E51180-60 397
7E51180-80 397
7E61001 490

7H XXXX

7HA03 361
7HA21 361

7K XXXX

7K09MP 223
7K09MP01 223

80 XXXX

801521M 251
801522M 251
801524M 251
801527M 251
801530M 251
801532M 251
801536M 251
8015MR 205
8015SR 205
809622M 251
809622M19H 251
809622M22H 251
809622M24H 251
809622M27H 251
809622M30H 251
809622M32H 251

82 XXXX

820001 52
820002 52
820003 52
820005 52
820011 52
8251-16 204
8260-07P 252
8260-10P 252
8260-13 252
8260-13P 252
827011 52

83 XXXX

833036M 204
833038M 204
833041M 204
833046M 204
833046S 204
833048S 204
833050M 204
833054M 204
833054S 204
833055M 204
833058M 204
833060M 204
833060S 204
833063M 204
833064S 204
833065M 204
833067M 204
833070M 204
833071M 204
833072S 204
833075M 204
833076S 204
833077M 204
833080M 204
833084S 204
833094S 204
8330A0S 204

84 XXXX

8404MP 253
8408MP 253
8408MP02 253
8409MP 253
8410MP 253
8410SP 253
843524M 250
843527M 250
843528M 250
843530M 250
843530S 250
843532M 250
843532S 250
843533M 250
843534M 250
843534S 250
843535M 250
843536M 250
843536S 250
843538M 250
843538S 250
843540M 250
843540S 250
843541M 250
843542M 250
843542S 250
843544S 250
843546M 250
843546S 250
843548M 250
843548S 250
843550M 250
843550S 250
843552M 250
843552S 250
843554M 250
843554S 250
843555M 250
843556S 250
843558M 250
843558S 250
843560M 250
843560S 250
843562S 250
843564S 250
843565M 250
843566S 250
843568S 250
843570M 250
843570S 250
843572S 250
8462-40P 204
8462DK 204
847000 52
84700002B 52
84700003B 52
84700011B 52

85 XXXX

851417M 250
851419M 250
851420M 250
851421M 250
851422M 250
851426S 250
852421M 250
853417M 251
853419M 251
853421M 251
853519M 249
853521M 249
853522M 249
853523M 249
853524M 249
853524S 249
853525M 249
853526M 249
853526S 249
853527M 249
853528M 249
853528S 249
853529M 249
853530M 249
853530S 249
853532M 249
853532S 249
853533M 249
853534M 249
853534S 249

853535M 249
853536M 249
853536S 249
853537M 249
853538M 249
853538S 249
853540M 249
853540S 249
853541M 249
853542M 249
853542S 249
853544M 249
853544S 249
853545M 249
853546M 249
853546S 249
853548M 249
853548S 249
853550M 249
853550S 249
853552M 249
853552S 249
853553M 249
853554M 249
853554S 249
853555M 249
853556S 249
853558M 249
853558S 249
853560M 249
853560S 249
853562S 249
853563M 249
853564S 249
853565M 249
853566M 249
853566S 249
853568M 249
853568S 249
853570M 249
853570S 249
853571M 249
853572S 249
853574S 249
853575M 249
853576S 249
853578S 249
853580M 249
853580S 249
853582S 249
853584S 249
853585M 249
853586S 249
853588S 249
853590M 249
853590S 249
853592S 249
853594S 249
853595M 249
853596S 249
8535A0M 249
8535A0S 249
8535A4S 249
8535A8S 249
8535B2S 249
85451735M 251
85451941M 251
85452038M 251
85452041M 251
85452141M 251
8572-25 204
8572DK 204
8581-26 204

87 XXXX

870208 144
870311 166
870406 144
870406 166
870406 187
870410 187
870422 144
870422 166
870422 187
87102 615
87103 615
87104 373
87104 615
87105 373
87105 614
871061A 279
871061B 279
871061F 279
87107 615
87108 467
87108 616
87111 615
87118 476
8711B 465
8711B 616
8711B-1 465
87124 616
87125 615
87137 45
8714101B 45
87152 615
87153 615
87154 615
87154-01 279
87154-01 615
87155 471
87156 279
87156A 279
87156A 615
87157-06 614
87157-09 614
87162 514
87163 514
8720 144
87201 42
87201 42
87203 614
8720813D1 144
8730 166
87301-36 614
87301-49 614
87306-04 613
87306-04 .....N27
87306A 613
87306C N27
87306CA 613
87307A 613
8730811D1 166
87308-7 613
87308-7 .....N28
87308A 613
87308A N28
87308B 613
87308B N28
87308C 613
87308C N28
8730907 159
87309W 613
87309W N27
8740 187
87401-2 43
87401-3 43
87401-3H 43
87402 44
87404 44
87405 48
87405-1 48
87405-2 48
87405-3 48
874059 183
87405-9 48
87407 44
87408 44
8740809D1 187
87411-6B 39
87411-9B 39
874148 183
87417-10B 39
87419-5B 39
87421-3B 40
87422-3B 40
874301 183
87431-5BE 41
87432-15 33
87432-17 33
87432-23 33
87432-24 33
87432-31 33
87432-32 33
87432-33 33
87432-34 33
87432-41 33
87432-52 33
87432-5G 31
87432-5U 30
87432-5U N12
87434-7G 31
87434-7U 30
87434-7U N12
87437-8U 30
87437-8U N12
87434U 30
87435-13B 32
87438-3B 37
87441-1B 37
87441-3B 37
87446-3B-KB 36
87452C-B 38
87502 42
87502-01 43
87502-02 43
87502-050 43
87502-051 43
87502-054 43
87502-058 43
87502-061 43
87502-064 43
87502-068 43
87502-11 43
87502-12 43
87502P01 42
87502P011 42
87502P012 42
87502P02 41
87502P03 41
87512 42
8760 201
8760807D1 201
8760807D1 201
87634-7B 32
87711C 45
87721B 45
87722B 46
87723B 46
8779-32F 204
8779DK 204
8797 252
8797P 252
87A05 44
87A051 44
87A051-KB 44
87A05-KB 44
87A08 44
87C23-B 596
87C25-B 597
87C26-B 597
87C26-B N14
87D11-01A-KB 11
87D11-01A-KG 11
87D11-02A-KB 9
87D11-02A-KG 9
87D11-03A-KB 12
87D11-03A-KG 12
87D11-04A-KB 12
87D11-04A-KG 12
87D11-05A-KB 12
87D11-05A-KG 12
87D11-06A-B 16
87D11-06A-G 16
87D11-071A-B 17
87D11-071A-G 17
87D11-08A 16
87D11-08SA 16
87D11-09A 16
87D11-09SA 16
87D11-10A 16
87D11-10SA 16
87D11-11A-KB 13
87D11-11A-KG 13
87D11-12A-KB 13
87D11-12A-KG 13
87D11-13A-KB 17
87D11-13A-KG 17
87D11-14A 18
87D11-14SA 18
87D11-15A-KB 17
87D11-15A-KG 17
87D11-16A-G 18
87D11-17A-KB 11
87D11-17A-KG 11
87D11-18A-KB 10
87D11-18A-KG 10
87D11-19A-KG 13
87D11-19A-KG 13
87D11-20A-K 15
87D11-20LA-K 15
87D11-21A-KB 11
87D11-21A-KG 11
87D11-22A-KB 11
87D11-22A-KG 11
87D11-23A-KB 15
87D11-23A-KG 15
87D11-24A-K 14
87D11-25A-KB 14
87D11-25A-KG 14
87D11-26A-K 16
87D11A-KB 8
87D11A-KG 8
87D11X01SA-KB 4
87D11X01SA-KG 4
87D11X02SA-KB 5
87D11X02SA-KB 6
87D11X02SA-KG 5
87D11X03A-KG 6
87D11X04A-KB 7
87D11X04A-KG 7
87D11X05A-KB 7
87D11X05A-KG 7
87D11X06A-KB 17
87D11X06A-KG 17
87D11X06SA-KB ...17
87D11X06SA-KG .. 17
87G38-7B-K 35
87H32-B 38
87H32-B N14
87SQ11 22
87SQ11-4B-BK 22
87SQ11-4B-BK N5
87SQ31 23
87SQ3-11 27
87SQ3-11 ..... N10
87SQ3-12 27
87SQ3-12 .....N10
87SQ3-13 27
87SQ3-13 ..... N10
87SQ31-6B-BK 23
87SQ31-6B-BK N6
87SQ31-7B-BK 23
87SQ31-7B-BK N6
87SQ31-8B-BK 23
87SQ31-8B-BK N6
87SQ32 23
87SQ32 ..... N10
87SQ32-10B-BK ... 23
87SQ32-10B-BK ...N6
87SQ3-22 27
87SQ3-23 28
87SQ3-23 ..... N11
87SQ32-6B-BK 23
87SQ32-6B-BK N6
87SQ32-7B-BK 23
87SQ32-7B-BK N6
87SQ32-8B-BK 23
87SQ32-8B-BK N6
87SQ32-9B-BK 23
87SQ32-9B-BK N6
87SQ33 24
87SQ3-31 27
87SQ3-31 .....N10
87SQ3-32 27
87SQ3-32 .....N10
87SQ3-33 28
87SQ3-33 .....N11
87SQ33-6B-BK 24
87SQ33-6B-BK N7
87SQ33-7B-BK 24
87SQ33-7B-BK N7
87SQ33-8B-BK 24
87SQ33-8B-BK N7
87SQ3-41 28
87SQ3-41 .....N11
87SQ34-10B-BK ... 24
87SQ34-10B-BK ... 24
87SQ34-10B-BK ...N8
87SQ3-42 28
87SQ3-51 28
87SQ41 25
87SQ41 .....N9
87SQ41-11 25
87SQ41-11 .....N9
87SQ41-12 25
87SQ41-12 .....N9
87SQ41-B 25
87SQ41-B N9

88 XXXX

8816 204
883524M 250
883527M 250
883529M 250
883530M 250
883532M 250
883533M 250
883534M 250
883535M 250
883536M 250
883538M 250
883541M 250
8866 252
8866P 252
8869 252
8869P 252

90 XXXX

901-068MR 94
901-073MR 94
902-062MR 97
902-062MRD 97
902-065MR 98
902-065MRD 98
902-068MR 98
902-068MRD 98
902-084MR01 99
902-084MRD01 99
902-084SR 99
902-084SRD 99
902-089MR01 100
902-089MRD01 ...100
902-103MR 100
902-103MRD 100
902-109MR 101
902-109MRD 101
902-132CR 101
902-132CRD 101
902-164MR 97
902-164MRD 97
9033CR 207
90401 238
90402 238
90403 247
90404 247
90405 247
90405 252
90406 252
9043MR 219
9052-001MRV 49
9052-001MRV 425
9052-002MRV 50
9052-002MRV 221
90601 238
90602 238
90603 247
90604 247
90605 252
90606 252
90607 247
90608 229
90609 229
9063MR 207
9063MR01 207
908-077CR 102
908-077CRD 102

91 XXXX

91000M 185
91038MY01 438
9113PR 142
9113PR 164
9113PR 185
9113PR 185
911-000CR 95
911-000CR02 95
911-000CRV 61
911-002CR 95
911-003CR 96
911-003CR01 96
911-004CRV 61
91230 433
91232 375
91333MQ 437
91422 615
91431 464
91431 614
91432 614
91528H/S 464
91535H/S 464
91545H/S 464
91560H/S 464
919-001CRV 62

9-1 XXXX

9-10112MR 119
9-10112MRV 71
9-10115MR 114
9-1011GP 123
9-102A12MR 119
9-102A12MR 119
9-102A15MR 114
9-1044CQV 83
9-1112MRV 76
9-1205MR 111
9-12110MR 123
9-12120MR 114
9-1215MR03 128
9-1216MR 111
9-1216MR01 111
9-1216MR03 111
9-1217MR 127
9-1218MR 111
9-1219MR01 111
9-1220MRV 75
9-1272MR 112
9-1282MR 112
9-12A1MR 124
9-12A1MRV 76
9-12C7MR 122
9-12D20MRV 75
9-12FVE15MRV 78
9-12FVG15MRV ... 78
9-1303MR 118
9-1606MR 127
9-1606MR01 127
9-1608MR 112
9-1609MR 112
9-1709MR 112
9-1711MR 113
9-1716MR 127
9-1812MR 113
9-1812MR 113
9-1838MR 113
9-1905MR 118
9-1905MR 321
9-1912MR 113
9-1912MR 113
9-1C08MR 114

9-2 XXXX

9-20110MR 119
9-2044SRV 80
9-2048MRV 80
9-21-20-07MRV 83
9-22108MR 116
9-22108MRV 77
9-22124MRV50 68
9-22308TR 116
9-22308TRV 77
9-2331SRV 70
9-2516MRV03 84
9-2524MRV 84
9-2526MR 118
9-2528MRV 84
9-2534MRV 70
9-2544SRV 80
9-2548CR 106
9-2548CR01 106
9-2548CRV 64
9-2548MRV 80

9-2550MRV 72
9-2553MRV 81
9-2553MRV01 81
9-2565MRV 70
9-25VE01MRV 71

92 XXXX

9260 253
9260P 253
92543MR 222
92543MR01 222

9-3 XXXX

9-30106MR 127
9-30110CR 117
9-30206MR 127
9-30208MRV 77
9-30216MRV 83
9-3023MR01 109
9-3023MR01 109
9-3023MRV11 81
9-30612MRV 79
9-30904AY 122
9-30904AY 591
9-30904AYV 72
9-30909AY 122
9-30909AY 592
9-30909AYV 73
9-31006MR 126
9-31106MR 119
9-31110MR 117
9-31110MRV 78
9-31124MRV 69
9-31909PR 117
9-31919MR 120
9-31920MRV 68
9-3523MR 109
9-3523MRV10 81
9-3523MRV11 81
9-3544MRV 73
9-35VE01MRV 72
9-35VE02MRV 79
9-3612MR 122
9-34128FR 117

93 XXXX

932-000MR 91
932-000MRD 91
932-008MR 92
932-008MRD 92
932-009MR0 288
932-009MRD02 88
932-010MR02 89
932-010MRD02 89
934-001MR04 93
934-001MRD04 93
934-010MRV 56
934-010MRVD 56
934-010MRV-G 56
934-011MRV 57
934-011MRVD 57
934-011MRV-G 57
934-019MRV 58
934-019MRVD 58
934-019MRV-G 58
934-086MRVD 59
934-235MRV 55
934-235MRVD 55
934-235MRV-G 55
935-525CRV 60
935-525CRVD 60

9-4 XXXX

9-40102GP 106
9-40102GPV 64
9-40103GP 119
9-40104GPV 82
9-40112GPV 64
9-40113GPV 82
9-40122GPV 64
9-40203GP 127
9-40207GP 115
9-40207GP01 115
9-4026MR02 105
9-4029CR 128
9-4057MR 121
9-40604GP 115
9-40606GPV 79
9-40618GP 123
9-4116FR 127
9-4116FR03 127
9-4119PR 118
9-4120PR 118
9-4128FR 119
9-4129PRV 70
9-4138PR 121
9-4138PRV 70
9-4143FRV 71
9-4147PRV 82
9-4156PR 128
9-42102GPV 64
9-42114GP 106
9-42114GPV 64
9-42116GPV 76
9-42144GP 115
9-4219MR 126
9-4219MR07 126
9-4219SR08 126
9-4221MRV 73
9-4235MR 124
9-4319MR 126
9-4319MR01 126
9-4319MR02 126
9-4319MR05 126
9-4328MR 109
9-4333MR 109
9-4333MR03 109
9-4335MR 124
9-4335MR 124
9-4338MR 125
9-4338MR01 125
9-4338MR03 125
9-4401MPV 82
9-4419MPV 75
9-44214GPV 82
9-4427MP 121
9-4429MPV 71
9-4435MP 124
9-44803AMPV 67
9-44803AMPV01 ...67
9-44805AMPV 67
9-4516MR 108
9-4522MR 108
9-4526MR 105
9-4526MRV05 73
9-4527MRV02 74
9-4537MRV 74
9-4557MR 121
9-45VE01MRV 72
9-45VE02MRV 85
9-4827MP 121

94 XXXX

9403PP.....N15
941-101MR 90
941-101MRD 90

95 XXXX

9519MR50 220
953532M 254
953533M 254
953534M 254
953536M 254
953538M 254
953541M 254
953542M 254
953546M 254
953550M 254
953555M 254
953560M 254
953564S 254
953565M 254
953566S 254
953568S 254
953570M 254
953570S 254
953572S 254
953574S 254
953575M 254
953576S 254
953578S 254
953580M 254
953580S 254
953582S 254
953584S 254
953585M 254
953586S 254
953588S 254
953590M 254
953590S 254
953592S 254
953594S 254
953595M 254
953596S 254
953598S 254
9535A0M 254
9535A0S 254
9535A2S 254
9535A4S 254
9535A5M 254
9535A6S 254
9535A8S 254
9535B0M 254
9535B0S 254
9535B2S 254
9535B4S 254
9535B5M 254
9535B6S 254
9535B8S 254
9535C0M 254
9535C0S 254
9535C2S 254
9535C4S 254
9535C5M 254
9535C6S 254
9535C8S 254
9535D0M 254
9535D0S 254
9535D2S 254
9535D4S 254
9535D5M 254
9535D6S 254
9535D8S 254
9535E0M 254
9535E0S 254
9535E2S 254
9535E4S 254
9535E8S 254
9535F0M 254
9535F2S 254
9535F6S 254
9535G0S 254
9535G4S 254
9535G8S 254
9535J2S 254
953801 338
953923 338
9543MR 219
9563MR 207
9563MR01 207

9-5 XXXX

9-5575MR 110
9-55VE01MRV 78

9-6 XXXX

9-6010MR 128
9-6010MR01 128
9-6314MRV 66
9-6414MP 124
9-6414MPV 75
9-6414SP 124

96 XXXX

9634-001MR04 93
9634-010MRV 56
9634-010MRV-B ... 56
9634-010MRV-G ...56
9634-011MRV 57
9634-011MRV-B 57
9634-011MRV-G ...57
9634-019MRV 58
9634-019MRV-B ... 58
9634-019MRV-G ...58
9634-235MRV 55
9634-235MRV-B ... 55
9634-235MRV-G ...55
9644-101MR 90

9-7 XXXX

9-7069CR 105
9-7069CR01 105
9-7069CRV 63
9-7078CR 105
9-7078CR01 105
97121PQ 437
9-7128PR 121
9-7128PRV 71
9-7537MR 110
9-7541MR 110
9-7560MRV01 74
9-7576MR 120

97 XXXX

976204 184
976265 184
979491 184

98 XXXX

9868 253
9868P 253

9-9 XXXX

9-9003MRV01 66
9-90103PP 116
9-90103PP01 116
9-90103PP02 116
9-90103RR 116
9-90104GP 125
9-90106SR02 116
9-90109MN 114
9-90111MR 128
9-90113MA 126
9-90114MR 123
9-90115MR 127
9-90118PRV 83
9-90119MRV 76
9-90120MR 127
9-90121MR 125
9-90125MR 127
9-90126MR 125
9-90128SR 106
9-90129CR 107
9-90129CRV 65
9-90131MR 111
9-90135MRV 82
9-90135SRV 82
9-90138CR 107
9-90145CRV 65
9-90154CR 108
9-90154CR01 108
9-90205GN 115
9-90205GN01 115
9-90217GRV 68
9-90220MR 107
9-90220MR01 107
9-90305TQV 83
9-90305TQV01 83
9-90310MR 117
9-90315MR 113
9-90329CR 107
9-90408TQ 120
9-9040SRV 74
9-90413TQV 69
9-9077CRV 63
9-90VE09CRV 79
9-91016MR 123
9-91026PR 118
9-91113SRV 84
9-91120MR 114
9-91122MRV 68
9-91124MRV 69
9-91126SRV 65
9-91131MRV 65
9-91190CRV 77
9-91215MRV 67
9-91217MRV 69
9-93523MR 110
9-94435MP 120
9-94437MRV 67
9-99430MFV 66
9-99430MFV01 66

9A XXXX

9A05-062MR 97
9A05-062MR-KB ...97
9A05-065MR 98
9A05-065MR-KB ...98
9A05-068MR 98
9A05-068MR-KB ...98
9A05-084MR01 99
9A05-084MR01-KB99
9A05-084SR 99
9A05-084SR-KB ... 99
9A05-089MR01 ...100
9A05-089MR01-KB 100
9A05-103MR 100
9A05-103MR-KB .100
9A05-109MR 101
9A05-109MR-KB .101
9A05-132CR 101
9A05-132CR-KB . 101
9A05-164MR 97
9A05-164MR-KB ...97
9AA11 537
9AA13 537
9AA15 538
9AA16 537
9AA17 538
9AA21 537
9AA25 538
9AA31 538
9AA32 538
9AB11 539
9AB12 539
9AC 540
9AC125-32 540
9AC125-40 540
9AC175-32 540
9AC175-40 540
9AC175-66 540
9AC231-54 540
9AD11 540
9AE0 546
9AE0-6414 546
9AE0-7414 546
9AE1 543
9AE2 543
9AE2002 544
9AE2004 544
9AE2016 545
9AE2-10615 545
9AE2-10616 543
9AE2-10815 543
9AE2-10815 545
9AE2-10818 543
9AE2-10818 545
9AE221 545
9AE221 548
9AE221 549
9AE2-6514 543
9AE2-6514 544
9AE2-6567 543
9AE2-6567 544
9AE2-6606 543
9AE2-6606 544
9AE2-6606 545
9AE2-7476 543
9AE2-7476 545
9AE2-7608 543
9AE2-7608 544
9AE2-7608 545
9AE2-7612 543
9AE2-7612 545
9AE2-7614 543
9AE2-7614 544
9AE2-7614 545
9AE2-8616 543
9AE2-8616 545
9AE2-8618 543
9AE2-8618 545
9AE2-9210 543
9AE2-9210 545
9AE2-9315 543
9AE2-9315 544
9AE2-9315 545
9AE2-9345 543
9AE2-9345 545
9AE2-9618 543
9AE2-9618 545
9AE31 540
9AE31-111 540
9AE31-121 540
9AE31-134 540
9AE31-73 540
9AE31-85 540
9AE31-95 540
9AE31X 541
9AE31X-135 541
9AE31X-145 541
9AE32 541
9AE32-110 541
9AE32-155 541
9AE33 541
9AE33-155 541
9AE42 549
9AE423 545
9AE43 549
9AE433 548
9AE433 549
9AE52 549
9AE52-110 549
9AE53 549
9AE53-115 549
9AE6 546
9AE6 547
9AE6002 547
9AE6030 548
9AE6-10015 547
9AE6-10015 548
9AE6-10615 547
9AE6-10615 548
9AE6-10815 547
9AE6-10815 548
9AE6-10818 547
9AE6-10818 548
9AE6-6514 546
9AE6-6514 547
9AE6-6514 548
9AE6-6514A 546
9AE6-6567 546
9AE6-6567 547
9AE6-6567 548
9AE6-6606 546
9AE6-6606 548
9AE6-6814 546
9AE6-6814 548
9AE6-7314 546
9AE6-7314 548
9AE6-7414 546
9AE6-7415 546
9AE6-7415 548
9AE6-7476 546
9AE6-7476 548
9AE6-7577 546
9AE6-7577 548
9AE6-7608 546
9AE6-7608 548
9AE6-7612 546
9AE6-7612 548
9AE6-7614 546
9AE6-7614 548
9AE6-7630 546
9AE6-7630 548
9AE6-7815 546
9AE6-7815 548
9AE6-8015 546
9AE6-8015 548
9AE6-8082 546
9AE6-8082 548
9AE6-8414 546
9AE6-8616 546
9AE6-8616 548
9AE6-8618 547
9AE6-8618 548
9AE6-9015 547
9AE6-9015 548
9AE6-9210 547
9AE6-9210 548
9AE6-9315 547
9AE6-9315 548
9AE6-9336 547
9AE6-9336 548
9AE6-9345 547
9AE6-9345 548
9AE6-9515 547
9AE6-9515 548
9AE6-9618 547
9AE6-9618 548
9AE71 550
9AE71-115 550
9AE71-140 550

9AE71-90 550
9AE72 550
9AF11 550
9AF11-15 550
9AF113 550
9AF11-30 550
9AF11-60 550
9AG11 551
9AG13 551
9AH025 552
9AH0311 552
9AH0321 553
9AH0331 553
9AH12 552
9AH31 552
9AH41 553
9AJ017 554
9AJ3122 553
9AJ3122A 554
9AJ3127 554
9AJ3222 554
9AJ3322 554
9AJ4122 554
9AJ4227 554
9AJ4229 554
9AJ4322 553
9AK11-1 553
9AK11P01 553
9AK11P02 553
9AK11P03 553
9AK21 555
9AL 555
9AL11 555
9AL12 555
9AM01 555
9AM010 555
9AM011 555
9AM012 555
9AN021 551
9AN4128 554
9AN4227 554
9AN43 554
9AP 556
9AP100 556
9AP120 556
9AP160 556
9AR11 556
9AR21 556
9AR29-S 556
9AS11 556
9AT1007E 531
9AT1018E 517
9AT1026E 523
9AT1103E 528
9AT1108E 517
9AT1112E 520
9AT1202 520
9AT1202 532
9AT1406E 523
9AT1506E 535
9AT1-A01 530
9AT1-A02 519
9AT1-A03 527
9AT1-A04 531
9AT1-E01 522
9AT1-E01 524
9AT2004E 533
9AT2008E 525
9AT2008E 527
9AT2008E 532
9AT2010E 528
9AT2012E 529
9AT2107E 518
9AT2-A01 524
9AT2-A01 526
9AT2-A01 532
9AT2-A01 521
9AT2-A01 522
9AT2-C01 522
9AT2-C01 530
9AT2-D01 519
9AT2-D01 525
9AT2-D01 533
9AT2-E01 533
9AT3-A01 534
9AT3-A02 534
9AT3-A03 526
9AT3-A04 534
9AT3-B01 535
9AT3-E01 524
9AT3-E02 521
9AT3-E02 522
9AT3-E02 526
9AT3-F01 535
9AT3-F02 534
9AW4901 558
9AW4901 558
9AW4911 558

9B XXXX

9BA01 472
9BA02 473
9BA03 473
9BA11 558
9BA21 472
9BA21P01 472
9BA21P02 472
9BA22 472
9BA22P01.....472
9BA31 473
9BA32 473
9BA33 474
9BA41 559
9BB11.....559
9BB12 559
9BB13 560
9BB31 560
9BB42 560
9BC11 561
9BC121 561
9BC124 561
9BC21 561
9BC22 561
9BC23 562
9BC24A 562
9BC251 563
9BC251A01 563
9BC26 562
9BC32 563
9BC32P021 564
9BC4A05MP 252
9BC5001MR 564
9BC5107M 564
9BC5108M 564
9BC5109M 564
9BC5110M 564
9BC5111M 564
9BD101 564
9BE11 565
9BE21 565
9BE4 565
9BE41 565
9BE42 565
9BE43 565
9BE44 565
9BE45 565
9BE51 566
9BE52 566
9BE62 566
9BE63 566
9BF11 567
9BF21 567
9BF31 567
9BF33 568
9BG11 567
9BK11 568
9BK31 568
9BK32 568
9BK41 568
9BK41-20 568
9BK41-28 568
9BK41-38 568
9BK41-53 568
9BK41-65 568
9BK41-73 569
9BK43 568
9BK43-65 568
9BK7008 574
9BK7009 574
9BK711 574
9BK72 574
9BK72-12 574
9BK72-13 574
9BK72-14 574
9BK72-16 574
9BK72-22 574
9BK72-28 574
9BK73 574
9BK73-14 574
9BK73-22 574
9BM120 569
9BM2-01 276
9BM2-01 570
9BM2-02 276
9BM2-02 570
9BM2110 276
9BM2110 570
9BM2111 276
9BM2111 570
9BM2210 276
9BM2210 570
9BM2210A 276
9BM2210A 570
9BM2211 276
9BM2211 570
9BM2211A 276
9BM2211A 570
9BM811 569
9BP11 560
9BP21 560
9BQ01 577
9BQ11 577
9BT2 577
9BT2100 577
9BT250 577
9BU11 575
9BU111 575
9BU111T 575
9BU112 575
9BU112T 575
9BU11T 575
9BU1432T 575
9BU143T 575
9BU2 576
9BU241 576
9BU241T 576
9BU242 576
9BU242T 576
9BU251 576
9BU251T 576
9BU252 576
9BU252T 576
9BU2T 576
9BU41 577
9BU8109 274
9BU8109 576
9BU8112 274
9BU8112 576
9BU8209 274
9BU8209 576
9BU8212 274
9BU8212 576
9BV1420 273
9BV1420T 274
9BW0120 571
9BW0220 571
9BW4501 573
9BW4502 573
9BW4801 571

9C XXXX

9CD14 582
9CD21 582
9CD31 583
9CF-107 579
9CF110 578
9CF110 579
9CF120 578
9CF120 579
9CF130 578
9CF130 579
9CF131 578
9CF131 579
9CF132 578
9CF132 579
9CF-207 579
9CF210 578
9CF210 579
9CF220 579
9CF230 579
9CF240 579
9CF241 579
9CF-307 579
9CH01 580
9CH212 580
9CI016 582
9CJ013 582
9CJ023 582
9CJ033 582
9CJ072 581
9CJ1112 580
9CJ1112 582
9CJ1120 580
9CJ1120 582
9CJ1130 581
9CJ1130 582
9CJ2112 581
9CJ2112 582
9CJ2120 581
9CJ2120 582
9CJ2212 581
9CJ2212 582
9CJ3104 581
9CJ3104 582
9CJ3105 581
9CJ3105 582
9CJ3106 581
9CJ3106 582
9CJ61-40 581
9CJ7416 581
9CJ7432 581
9CK-101 588
9CM01 580
9CM11 580
9CM2 580
9CM209 580
9CM212 580
9CW01 583
9CW21 583
9CW22 583
9CZ101 588
9CZ201 483
9CZ201-S 483

9D XXXX

9DA022 584
9DA103 584
9DA104 584
9DB201 584
9DC22 585
9DC23 584
9DC242 585
9DC243 585
9DC51 586
9DD21 586
9DD22 586
9DH11 586
9DM1361 440
9DM1381 440
9DM1A1 586
9DM2351 441
9DN12 443
9DP1101 587
9DP130 587
9DP1301 587
9DP1302 587
9DP2301 587
9DP3201 588
9DT11 588
9DT11-1 588
9DT11-10 588
9DT11-11 588
9DT11-12 588
9DT11-2 588
9DT11-3 588
9DT11-4 588
9DT11-5 588
9DT11-6 588
9DT11-7 588
9DT11-8 588
9DT11-9 588

9H XXXX

9HBE083 566
9HBE4 565
9HBE4-30 565
9HBE4-39 565
9HBE4-47 565
9HBE4-58 565
9HBE4-62 565
9HBE4-67 565
9HBE81 566
9HBL 570
9HBL11-05 570
9HBL12-05 570
9HBN01 567

9S XXXX

9SQ-011MRV-BKN. 13
9SQ-011MRV-BK . 57

9T XXXX

9TA242 499
9TA242A 499
9TA242B 499
9TA242D 499
9TA251 500
9TA251A 500
9TA251B 500
9TA251D 500
9TA261 500
9TA261A 500
9TA261B 500
9TA261D 500
9TA267W 497
9TA268 501
9TA268A 501
9TA268B 501
9TA268D 501
9TA271 496
9TA271/271S N19
9TA28 506
9TA281 507
9TA331 501
9TA331 .....N20
9TA34 502
9TA34A 502
9TA34B 502
9TA34D 502
9TA34P01 502
9TA421 511
9TA421A 510
9TA421A N21
9TA42A 513
9TA42B 513
9TA42D 513
9TA44W 498
9TA45 509
9TA45A 509
9TA46 513
9TA46A 513
9TA471 .....N22
9TA471 511
9TA48 513
9TA491 512
9TA491 .....N23
9TA52 504
9TA52A 504
9TA52B 504
9TA52D 504
9TA53 505
9TA54 503
9TA56 504
9TA71W 498
9TB225 589
9TB500 589
9TBA600 589
9TBA650 589
9TC101 589
9TD014MR 486
9TD033MR 486
9TD034MR 486
9TD035MR 486
9TD036MR 486
9TD062 485
9TD063 485
9TD064 485
9TD164MR 487
9TD165MR 487
9TD401-06M 486
9TD401-08M 486
9TD401-10M 486
9TD401-12M 486
9TD403-10M 486
9TD403-12M 486
9TD403-13M 486
9TD403-14M 486
9TD403-17M 486
9TD403-19M 486
9TD403-21M 486
9TD403-22M 486
9TD403-23M 486
9TD403-24M 486
9TD403-27M 486
9TD404-0619M ...485
9TD406 487
9TD601 485
9TD602 485
9TD603 485
9TD604 485
9TE11 479
9TE41 237
9TG11 596
9TG12 596
9TG21 596
9TH21XL 480
9TH41-L 480
9TH41-XL 480
9TH42-XL 480
9TH42-XXL 480
9TH43-XL 480
9TH43-XXL 480
9TH44-XL 480
9TH44-XXL 480
9TH45-XL 480
9TH45-XXL 480
9TK014 590
9TK024 590
9TK034 590
9TK1 590
9TK108 590
9TK112 590
9TK118 590
9TK124 590
9TK2 590
9TK225A 590
9TK225B 590
9TK236A 590
9TK236B 590
9TK3 590
9TK306 590
9TK312 590
9TK316 590
9TK320 590
9TP11 597
9TP12 598
9TP22 598
9TQ02 594
9TQ11 594
9TQ12 594
9TQ21 593
9TT11-18 598
9TT21-03 598
9TT31-20 598
9TU11 600
9TU11-20 600
9TU21 600
9TU21-20 600
9TV13 599
9TV13-100 599
9TV21-09 599
9TW21 600
9TW21-20 600
9TZ11-04 483
9TZ11-05 483
9TZ11-06 483
9TZ11-08 483
9TZ11-10 483
9TZ11-12 483

9X XXXX

9XAH1 551

A5 XXXX

A535041M 255
A535046M 255
A535050M 255
A535051M 255
A535055M 255
A535057M 255
A535060M 255
A535065M 255

A535070M 255
A535075M 255
A535076M 255
A535076S 255
A535077M 255
A535078S 255
A535080M 255
A535080S 255
A535082S 255
A535084S 255
A535085M 255
A535086M 255
A535088S 255
A535090M 255
A535090S 255
A535094S 255
A535095M 255
A535096S 255
A535100M 255
A535100S 255
A535105M 255
A535108S 255
A535110M 255
A535112S 255
A535115M 255
A535120M 255
A535120S 255
A535124S 255
A535125M 255
A535126S 255
A535130M 255
A535132S 255
A535135M 255
A535136S 255
A535138S 255
A535140M 255
A535144S 255
A535145M 255
A535148S 255
A535150M 255
A535155M 255
A535156S 255
A535160M 255
A535160S 255
A535164S 255
A535165M 255
A535168S 255
A535170M 255
A535172S 255
A535175M 255
A535180M 255
A535180S 255
A535184S 255
A535185M 255
A535188S 255
A535190M 255
A535192S 255
A535196S 255
A535200M 255
A535200S 255
A535204S 255
A535208S 255
A535210M 255
A535212S 255
A535215M 255
A535216S 255
A535220S 255
A535224S 255
A535225M 255
A535235M 255
A535240S 255
A535244S 255
A535252S 255
A535256S 255

A- XXXX

A-9CW11 583

AD XXXX

ADCV-01 612
ADCV-02 612
ADFLAG 612
ADFLAG1 612
ADFLAG2 612
ADSTK21KT 612
ADSTK22KT 612
ADSTK23KT 612
ADSTK31KT 612
ADSTK-C1 612
ADSTK-H2 612
ADVT-031 614
ADVT-032 614
ADVT-033 614
ADVT-034 614
ADVT-035 614
ADVT-036 614
ADVT-037 614
ADVT-038 614
ADVT-039 614
ADVT-03X 614
ADVT-04 615
ADVT-05 615

BS XXXX

B535105M 256
B535110M 256
B535115M 256
B535120M 256
B535125M 256
B535130M 256
B535132S 256
B535135M 256
B535136S 256
B535140M 256
B535140S 256
B535144S 256
B535145M 256
B535148S 256
B535150M 256
B535152S 256
B535156S 256
B535160M 256
B535160S 256
B535164S 256
B535165M 256
B535168S 256
B535170M 256
B535172S 256
B535175M 256
B535176S 256
B535180M 256
B535180S 256
B535184S 256
B535185M 256
B535188S 256
B535190M 256
B535192S 256
B535196S 256
B535200M 256
B535200S 256
B535204S 256
B535208S 256
B535210M 256
B535212S 256
B535215M 256
B535216S 256
B535220S 256
B535224S 256
B535225M 256
B535228S 256
B535232S 256
B535235M 256
B535236S 256
B535240S 256
B535244S 256
B535248S 256
B535252S 256
B535256S 256
B535260S 256
B535264S 256
B535268S 256
B535272S 256
B535276S 256
B535280S 256
B535284S 256
B535M 256
B535S 256

SC XXXX

SC7010MR 605
SC7083MR 603
SC7096MR 604
SC7396MR 603
SC7510MR 605
SC7583MR 603
SC7596MR 604
SC9043MR 606
SC9543MR 606

ST XXXX

ST112012MR 607
ST112014MR 607
ST112017MR 607
ST112019MR 607
ST1120MR 607
ST114512MR 607
ST114514MR 607
ST114517MR 607
ST114519MR 607
ST1145MR 607
ST20109MR 607
ST20203MR 607
ST20203SR 607
ST20208MY 607
ST20209MR 607
ST20213MR 607
ST20219MR 607
ST20419PR 607
ST2346MR 602
ST4028MR 602
ST4028SR 602
ST4528MR 602
ST4528SR 602

SY XXXX

SY-210H 278
SY-210M 278
SY-211F 278
SY-211H 278
SY-211M 278
SY-220H 278
SY-221F 278
SY-221H 278
SY-221M 278
SY-230M 278
SY-231F 278
SY-231M 278
SY-260M 278
SY-310H 278
SY-311H 278
SY-320H 278
SY-321H 278
SY-410H 278
SY-411H 278
SY-421M 278

TS XXXX

TSOO108 609
TSOO208 609

WS XXXX

WSB01 572
WSB012802-5 572
WSB013006-5 572
WSB02 572
WSB022701-5 572
WSN04 572
WSN043601-5 572
WSN043602-5 572
WSN14 572
WSN143601-5 572
WSN143602-5 572

ZS XXXX

ZS104 610
ZS108 610
ZS109 610
ZS110 610
ZS112 610
ZS115 612
ZS115-1 612
ZS116 611
ZS119 611
ZS120-S 611
ZS141 610
ZS142B 610
ZS142W 610
ZS155 611
ZS155A 611
ZS156 611
ZS306 610
ZS402 610
ZS408 610
ZS409 610
ZS417 611
ZS418K 610
ZS511 611
ZS514 611
ZS517 610
ZS522 611
ZS524 611
ZS533 611
ZS540 611
ZS541 611
ZS606 611

ZV XXXX

ZV011 306
ZV011A 306
ZV011B 306
ZV011D 306
ZV012 306
ZV012A 306
ZV012B 306
ZV012D 306
ZV013 306
ZV013A 306
ZV013B 306
ZV013D 306

Notes .....

40th

http://www.kingtony.com
service@kingtony.com.tw

facebook YouTube
king tony

Instagram
kingtonytools

CAT2025-0